
COMPACT INTERFACE REPAIR | S12 MECHANICAL PROTOTYPE

Equal scale 1:1 at A3. Dimensions mm. Sections of saved CAD, neutral collar. Not a manufacturing or electrical release.

Stationary mains/PE; only isolated LV rotates. Actual source boards unchanged. Body profiles are saved allocations; supplier detail remains open.

LONGITUDINAL SECTION | Z0

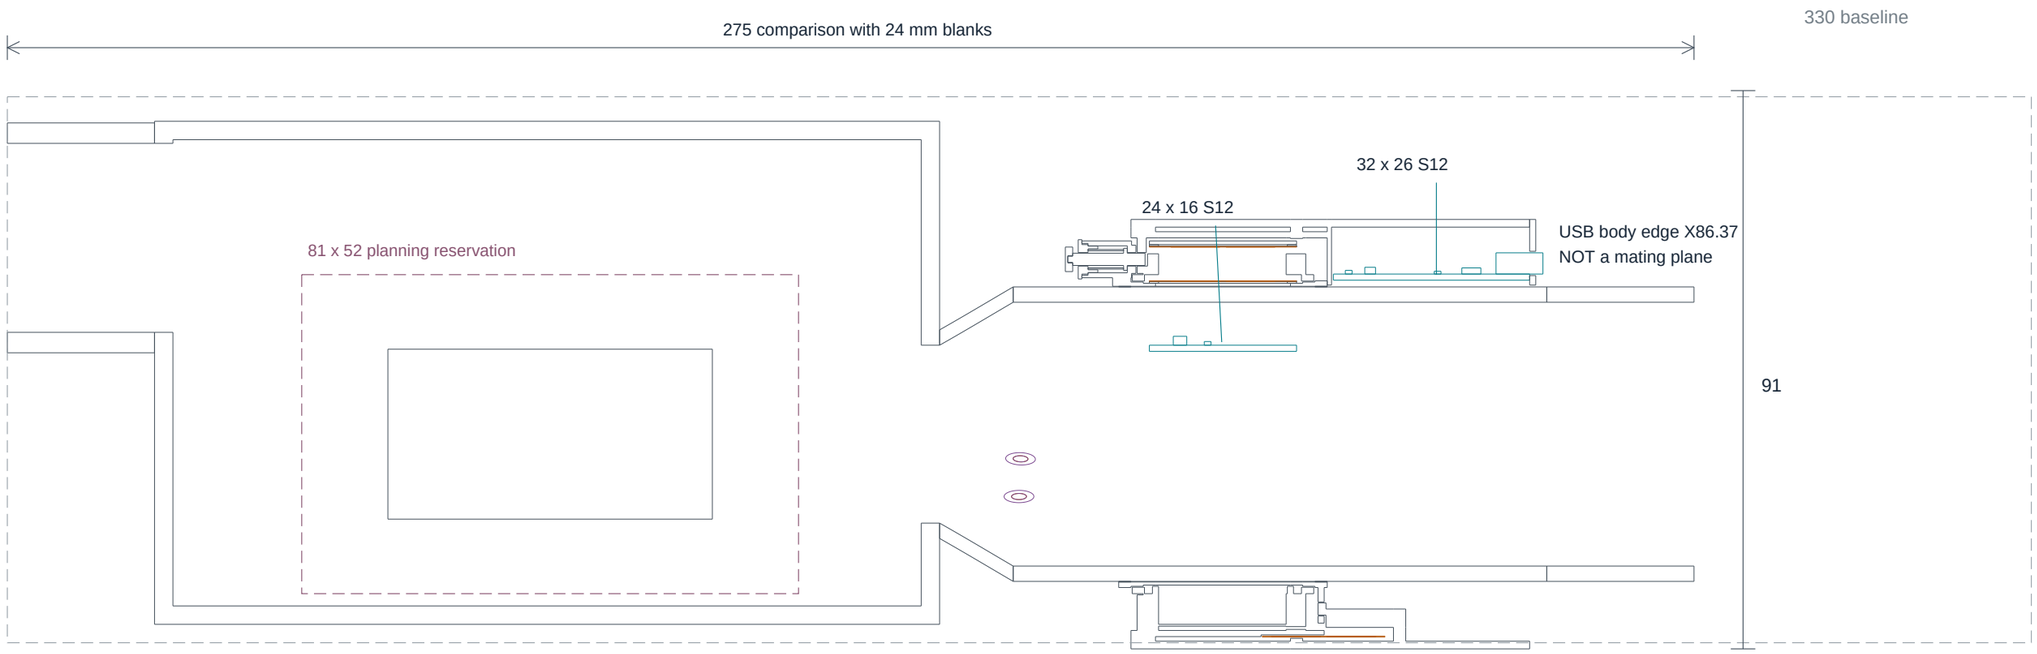


24 mm input blank

87 core allocation

Sourcepod / carrier construction UNMET


24 mm output blank

A-A | X34.2 | FIXED INTERFACE

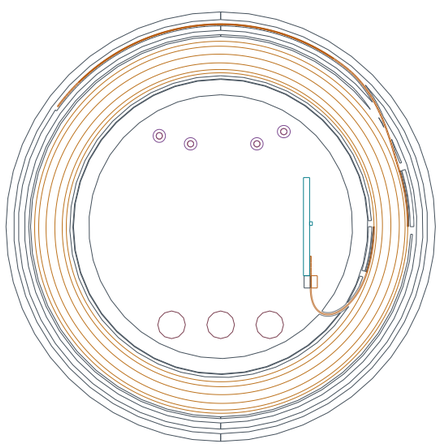

Active centerline shown; 0.16 mm stack allocation

B-B | X63.2 | SOURCE BAY

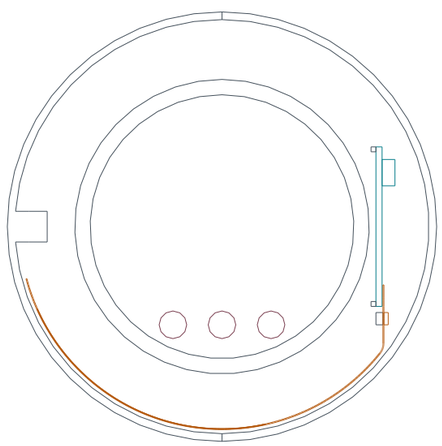

New return bridge outside developed fanout

Geometry comparison only: 275 x 91 x 74.
330 x 89 x 72 baseline is also unaccepted.
Actual end assemblies add unknown space.
Bare rear-depth deltas: +12.8 classic,
+16.0 TRUE1, +40.9 NEMA; before wires/tools.
NEMA flange diameter63.5 also changes fit.
No installed mating/latch/hand envelope.

Minco-compatible construction is a capability,
not approval of this stack or formed geometry.
S12 remains UNROUTED and unqualified.
Read receipt.json for actual check outcomes.
No torque, flex-life, thermal or safety rating.