
CONSTANT-LENGTH ROTARY COLLAR / NON-ACCEPTED CANDIDATE


Stationary core Ø48 × 142 mm; trial shell Ø66 mm; ±90° geometric paths. No assembled mechanism acceptance.

-90 degrees / active ribbon end view

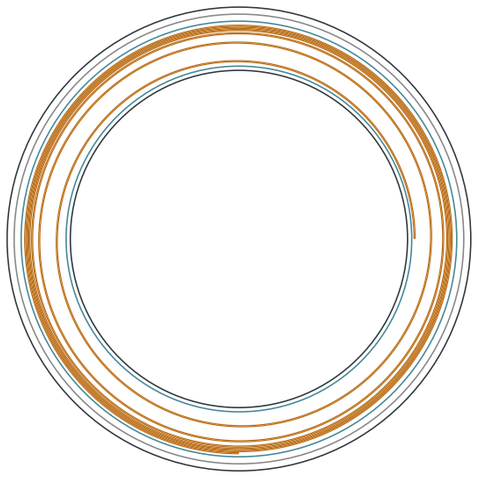


Ø66 outer / Ø48 core; 3 drawing units/mm

+0 degrees / active ribbon end view

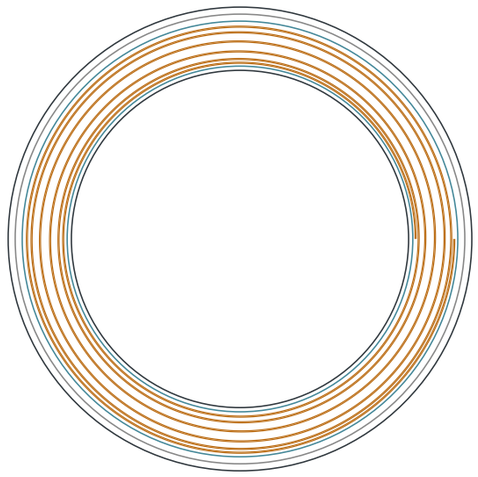


Ø66 outer / Ø48 core; 3 drawing units/mm

+90 degrees / active ribbon end view

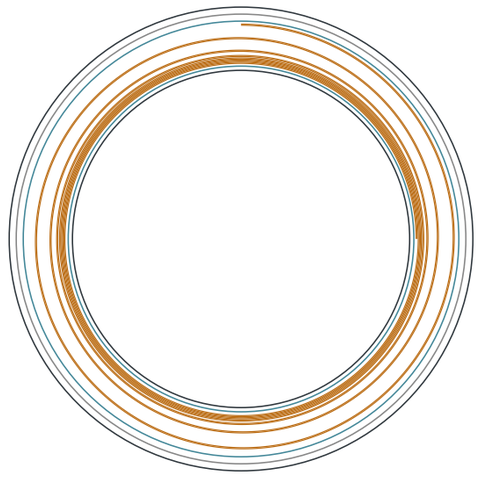


Ø66 outer / Ø48 core; 3 drawing units/mm

AXIAL SECTION — X along core; radial section at USB. Board bay shifted +1.8 mm past fixed stop.

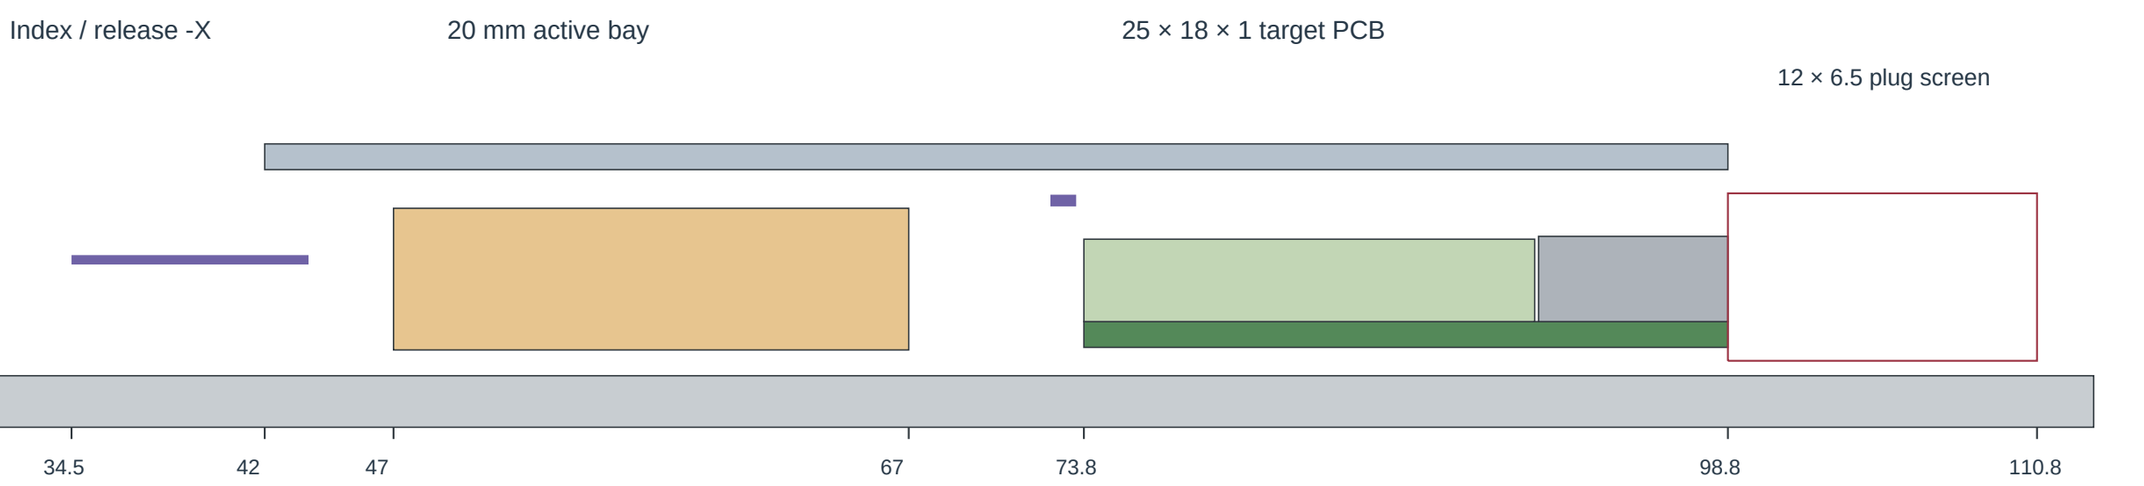

X / mm (11 drawing units/mm). Core continues X0..142; complete stationary connector endcaps not represented.

FIXED-TAIL CLAMP COMPLETION FAIL

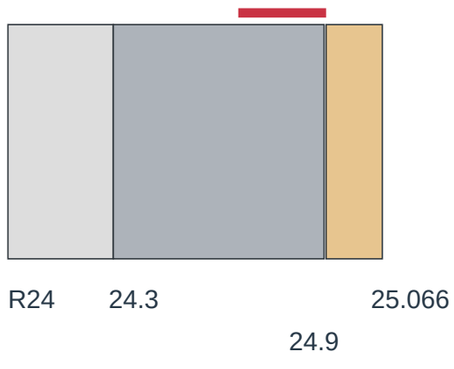

150 drawing units/mm; proposed stiffener + gap shown in red.

Only 0.005676 mm behind fixed tail; 0.20 mm stiffener + 0.05 gap needs another 0.244324 mm.

CAD also retains unfinished retention passages and a disconnected backing island.

Locked trial envelope: Ø66 × 64.3 mm. Released pin sweep: X30.3..98.8 (68.5 mm).

USB4105 body: 8.94 × 7.35 × 3.31 mm nominal; GF-A-060 stake option proposed.

Finite plug screen is engineering geometry, not universal cable acceptance.

No elastic equilibrium, clamp force, fatigue, thermal, mains or fixture validation.

Drawings are diagnostic. See cad-checks.json for every retained collision; not production surfaces or released assembly drawings.