CYL-R1: one cylindrical allocation screen — HOLD

Not an assembly drawing; no retained carrier, qualified terminals, or final product envelope.

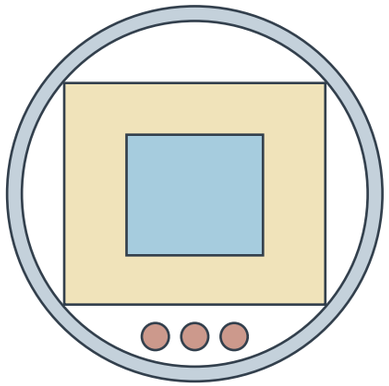

Cross-section: 2 drawing points/mm (PDF 0.706:1)

OD76.2 / ID70.2; proposed 3 mm wall, bore allowance -0.2 mm

81 x 52 x 44 inherited reservation +0.5 mm per face (tan)

Maximum module 52.9 x 27.7 x 24.5; pins 4.5 mm max

3 x OD5.5 trunk screens; wire family/bend qualification OPEN

0.1365 mm allocated corner clearance; support structure NOT included

Axial lower planning allocation: all rectangles at the same 2 points/mm scale

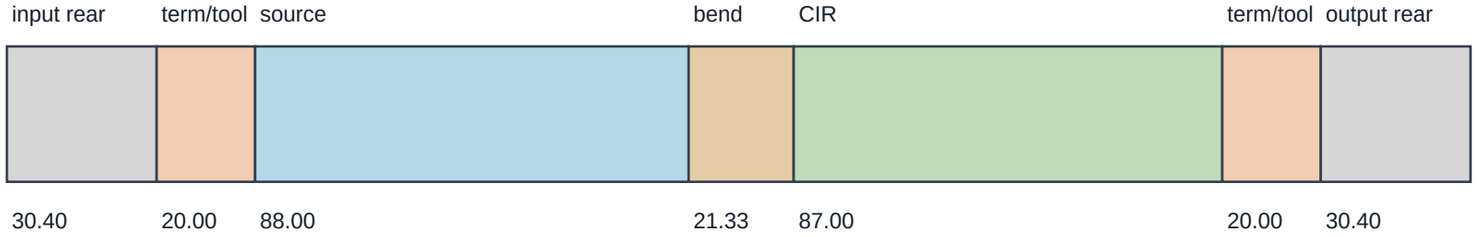

Classic 297.13 x 76.2 x 76.2: 6.84% less box-volume but 22.13 mm longer than CIR275.

TRUE1 panel allocation300.33 mm. Flanged NEMA comparison325.23 mm is NOT molded-cord selection.

Rear depths are bare panel-shoulder dimensions. Front projections, mates, latch and hand envelopes excluded.

R12 continuous trunk transition: 21.3307 mm run; trial conical bore interference0.03948 mm.

Film corner fails -0.2 mm bore allowance by0.0258 mm; retention/branches/secondary connections OPEN.

No new CAD/STEP assembly issued. Frozen CIR/S12 are unchanged; this screen is not a manufacturing limit.