CYL-R2 | constructed partial assembly — qualification HOLD

CAD-derived sections; all at 2.5 drawing points/mm (PDF 0.882:1). All dimensions mm. No finished variant envelope.

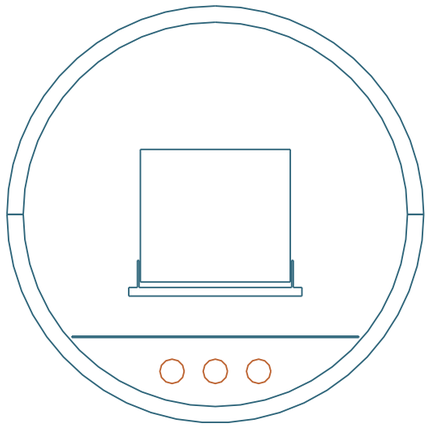

A-A source centre X=-71: OD77 / ID71

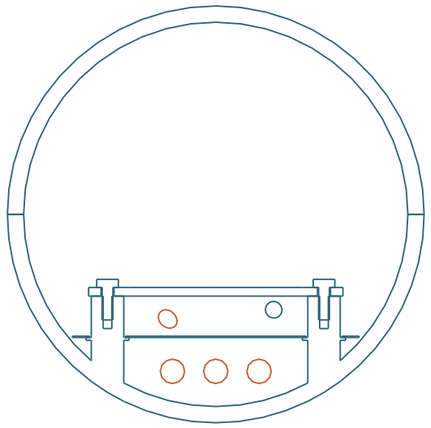

B-B carrier post X=-99.5: real post/ear/screw

Source bay: X -115..-27 (88 long); neck -27..0 (27 long)

81x52x44 reservation +0.5/face; source translated +4.5X/-2Z

Film nominal clearance0.574; with bore allowance0.374

Four carrier posts/ears; M2 pilot engagement4.4

Four shell M2 closures; pilot engagement4.0

Module side/top play0.25; no clamp-load or creep rating

Posts/ribs/screws cross insulation reservation: UNQUALIFIED

C-C longitudinal Y=0; constructed source/neck and continuous trunk (CIR centre region is referenced, not sectioned here)

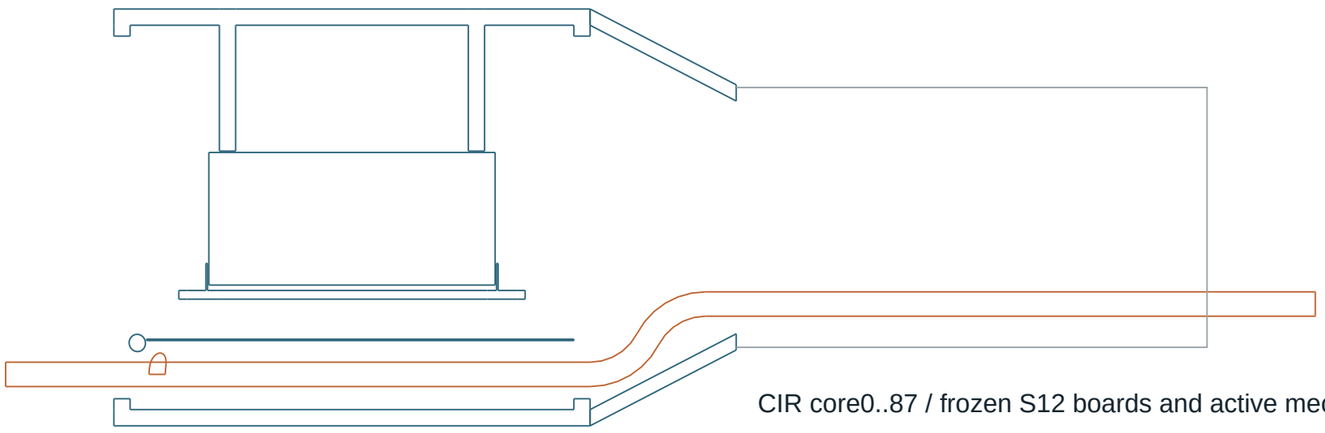

CIR core0..87 / frozen S12 boards and active mechanism

Classic matched planning: CIR327.8 x91 x74; CYL302.8 x77 x77 (nominal; not approved housing dimensions).

Both include60.8 rear +40 terminal/tool. 25 mm shorter /18.669% less box-volume, conditional on same access accounting.

Exact OD5.5 corridor BReps fit bore reduced0.2; R12 double bend +5.669 straight. Source/neck wall nominal3.

Lock-access relief leaves0.970 nominal local wall (0.670 allocated); strength and neck attachment remain OPEN.

Primary fuse has an explicit4 mm unconnected endpoint interface; no selected fuse/terminal or released mains construction.

Sourceboard circuits unchanged/unrouted. Neck/core joint, connector ends/mates, molded NEMA cord interfaces UNBUILT.

Film/lead passages and source mounting are drawn but not approved insulation construction. No thermal/endurance/USB claim.

Prototype.FCStd and STEP contain actual solids; supplier body profiles, tolerances, material allowables and physical assembly require qualification.