CAPTIVE INDEX LOCK / LOCKED AND RELEASED SECTIONS

Plunger axis at barrel radius28.5 mm; all dimensions mm; section scale32 drawing units/mm.

LOCKED: 1.3 engagement; flange on front shoulder

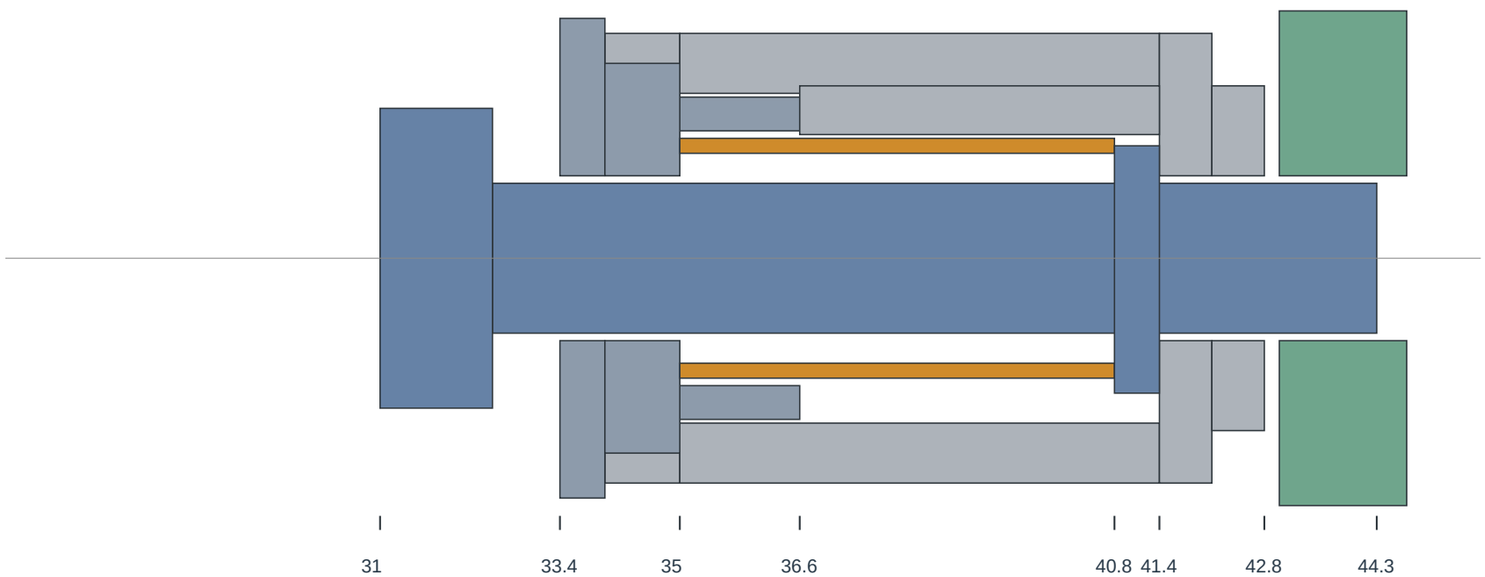

Carrier OD6 / nose OD4.6

Pin Ø2 / flange Ø3.6

Hole Ø2.2; 13 ×15° detents

Spring: free7; working5.8 /1.6

Solid1.4; target k0.114 N/mm

Return preload0.137 N nominal

No hold-open latch / no bypass

Cap includes removable rear stop

RELEASED: 4.2 stroke; flange on rear stop

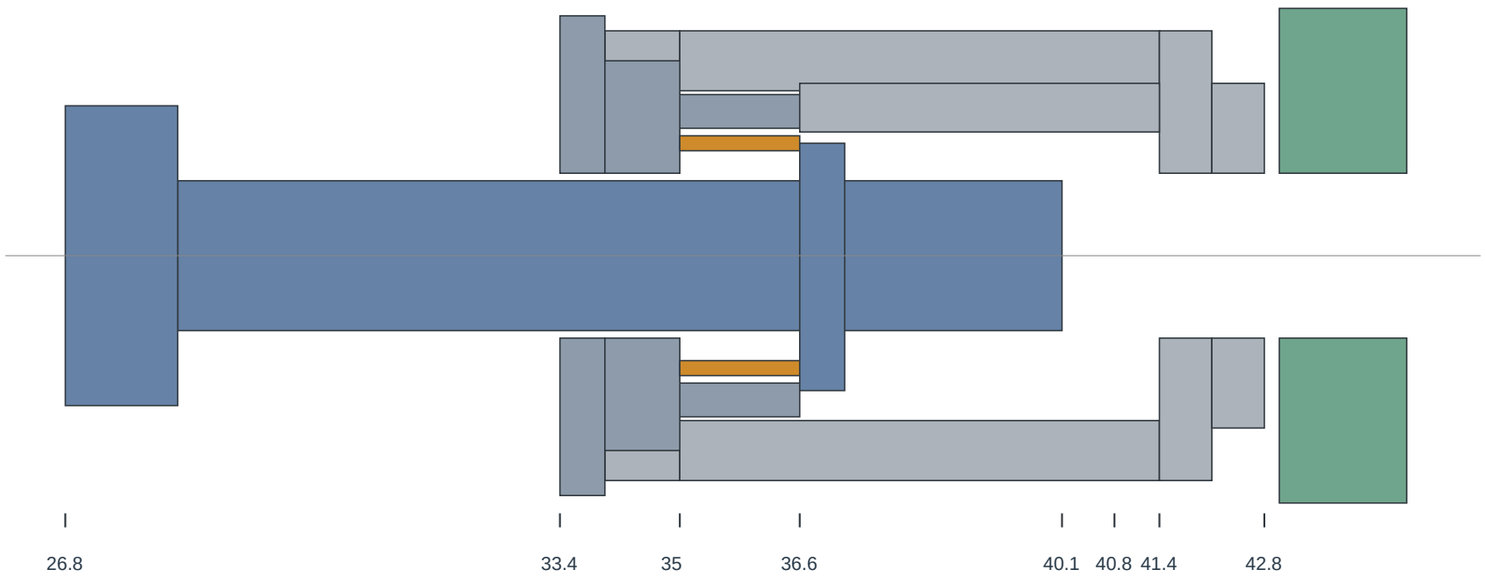

Carrier OD6 / nose OD4.6

Pin Ø2 / flange Ø3.6

Hole Ø2.2; 13 ×15° detents

Spring: free7; working5.8 /1.6

Solid1.4; target k0.114 N/mm

Return preload0.137 N nominal

No hold-open latch / no bypass

Cap includes removable rear stop

Orange: spring engineering envelope (not a solid spring). Proposed wire0.20 / mean coilØ3 /5 active +2 end coils.

Front and rear flange stops retain the pin. Release clearance to index:2.9 mm. Spring solid-height nominal margin0.2 mm.

Spring sourcing, return friction <0.08 N target, fatigue, thread locking and lock strength remain physical qualification gates.

Removable threaded knob: M1.2 envelope,0.8 engagement,0.6 wide face slot. D-flat flange/key restrains stem during service.