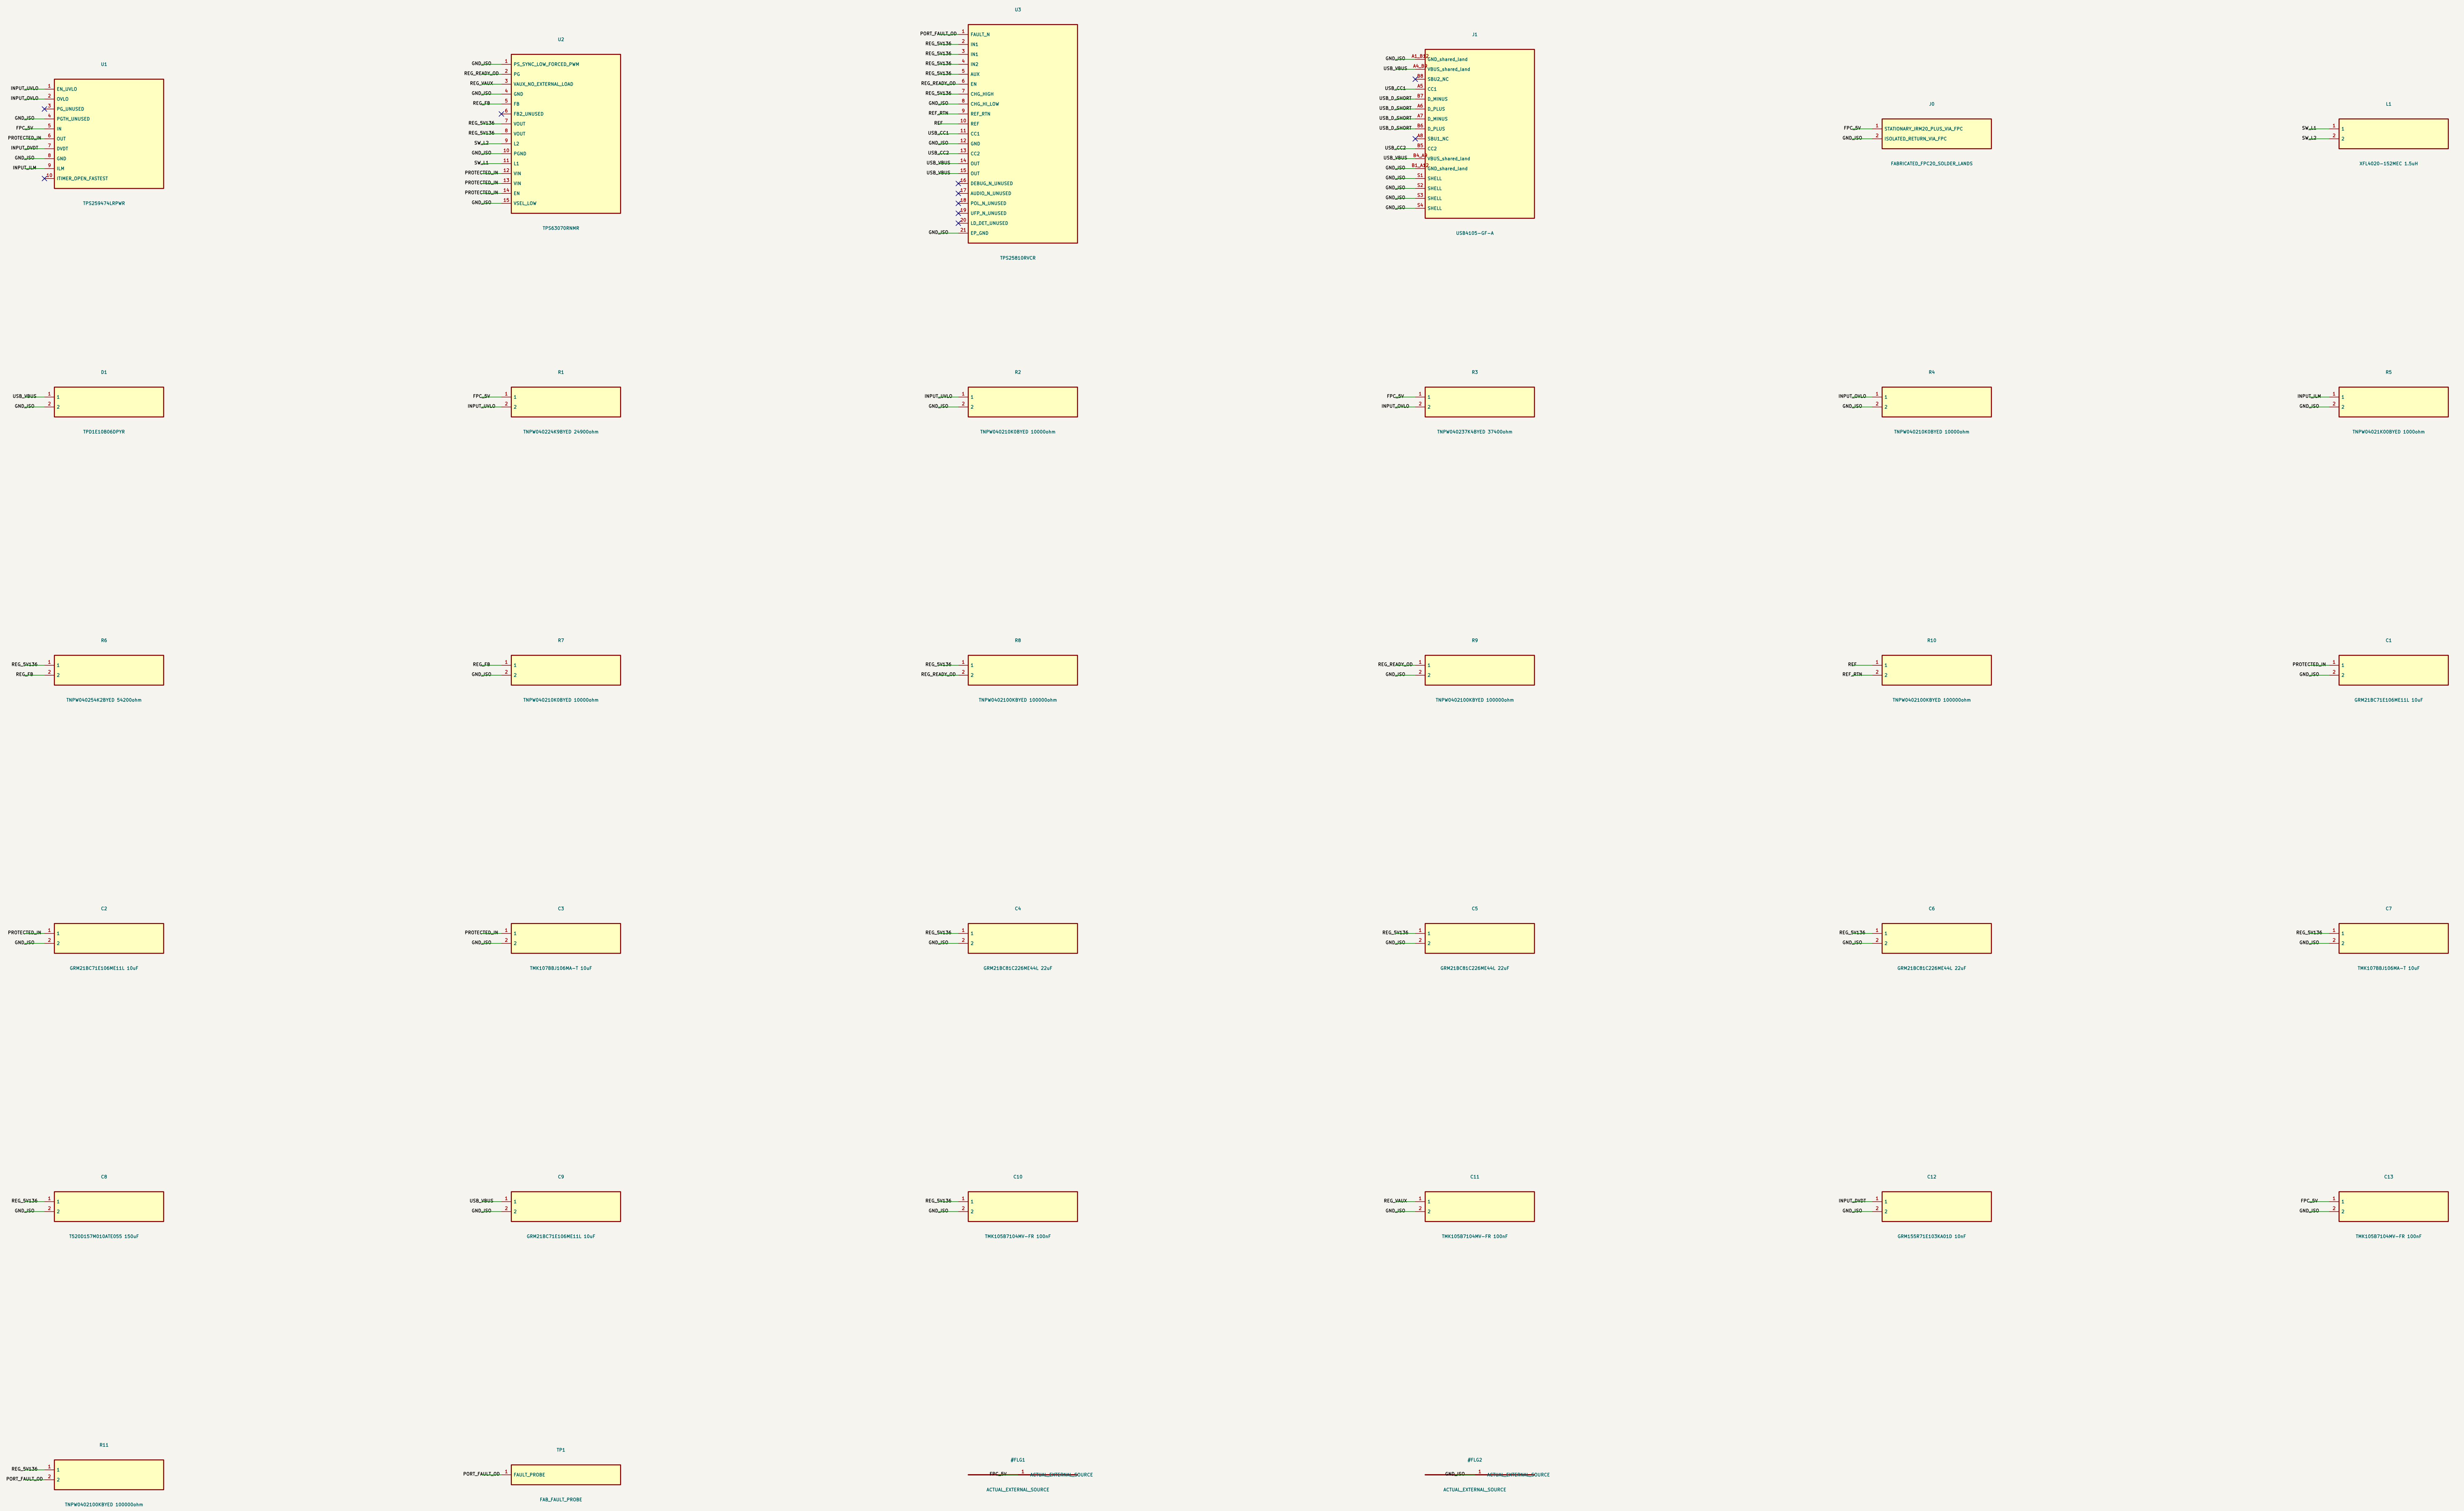

PROTOTYPE: stationaryIRM20-5/FPC input only. No mains/PE or module circuitry captured here. All physical source board parts shown.

U1 reverse-blocking input, UVLO/OVLO and latched circuit-breaker. U2 forcedPWM5.136V, PG enables U3 after unloaded startup; no firmware.

U3 CHG=REG5V, CHG_HI=GND:1.5A only. CC1/CC2 independent. No USBdata processing or PD voltage escalation.

J1 has16 contacts but12 shared signal lands +4shell stakes, per originalGCTB4. D+ and D- tied by copper; no invented separate ground/VBUS pads.

Bulk150uF+76uFceramic before cold socket switch. ESR/capacitance attemperature, startup/inrush/thermal/ripple/faults remain physical gates.

Shell tiedisolatedGND proposal. No rotatingPE; accessiblemetal bonding/mainsendcap/harness/safety remain parent scope.

Connector height3.31+/-0.15mm EXCEEDS3.2mm target. Placement is unrouted; no collar fit, USBcompliance or manufacturingrelease claim.

Sheet: /
File: regulated-source.kicad_sch

Title: NOVA rotating regulated 5V 1.5A source prototype

Size: A1	Date:	**Rev: RS-1**
KiCad E.D.A. 10.0.7		Id: 1/1