


DPUmesh control plane — authority follows the proxy across PCIe

The Pod's broker relays a signed identity; cluster placement is independently signed; the DPU enforces both.

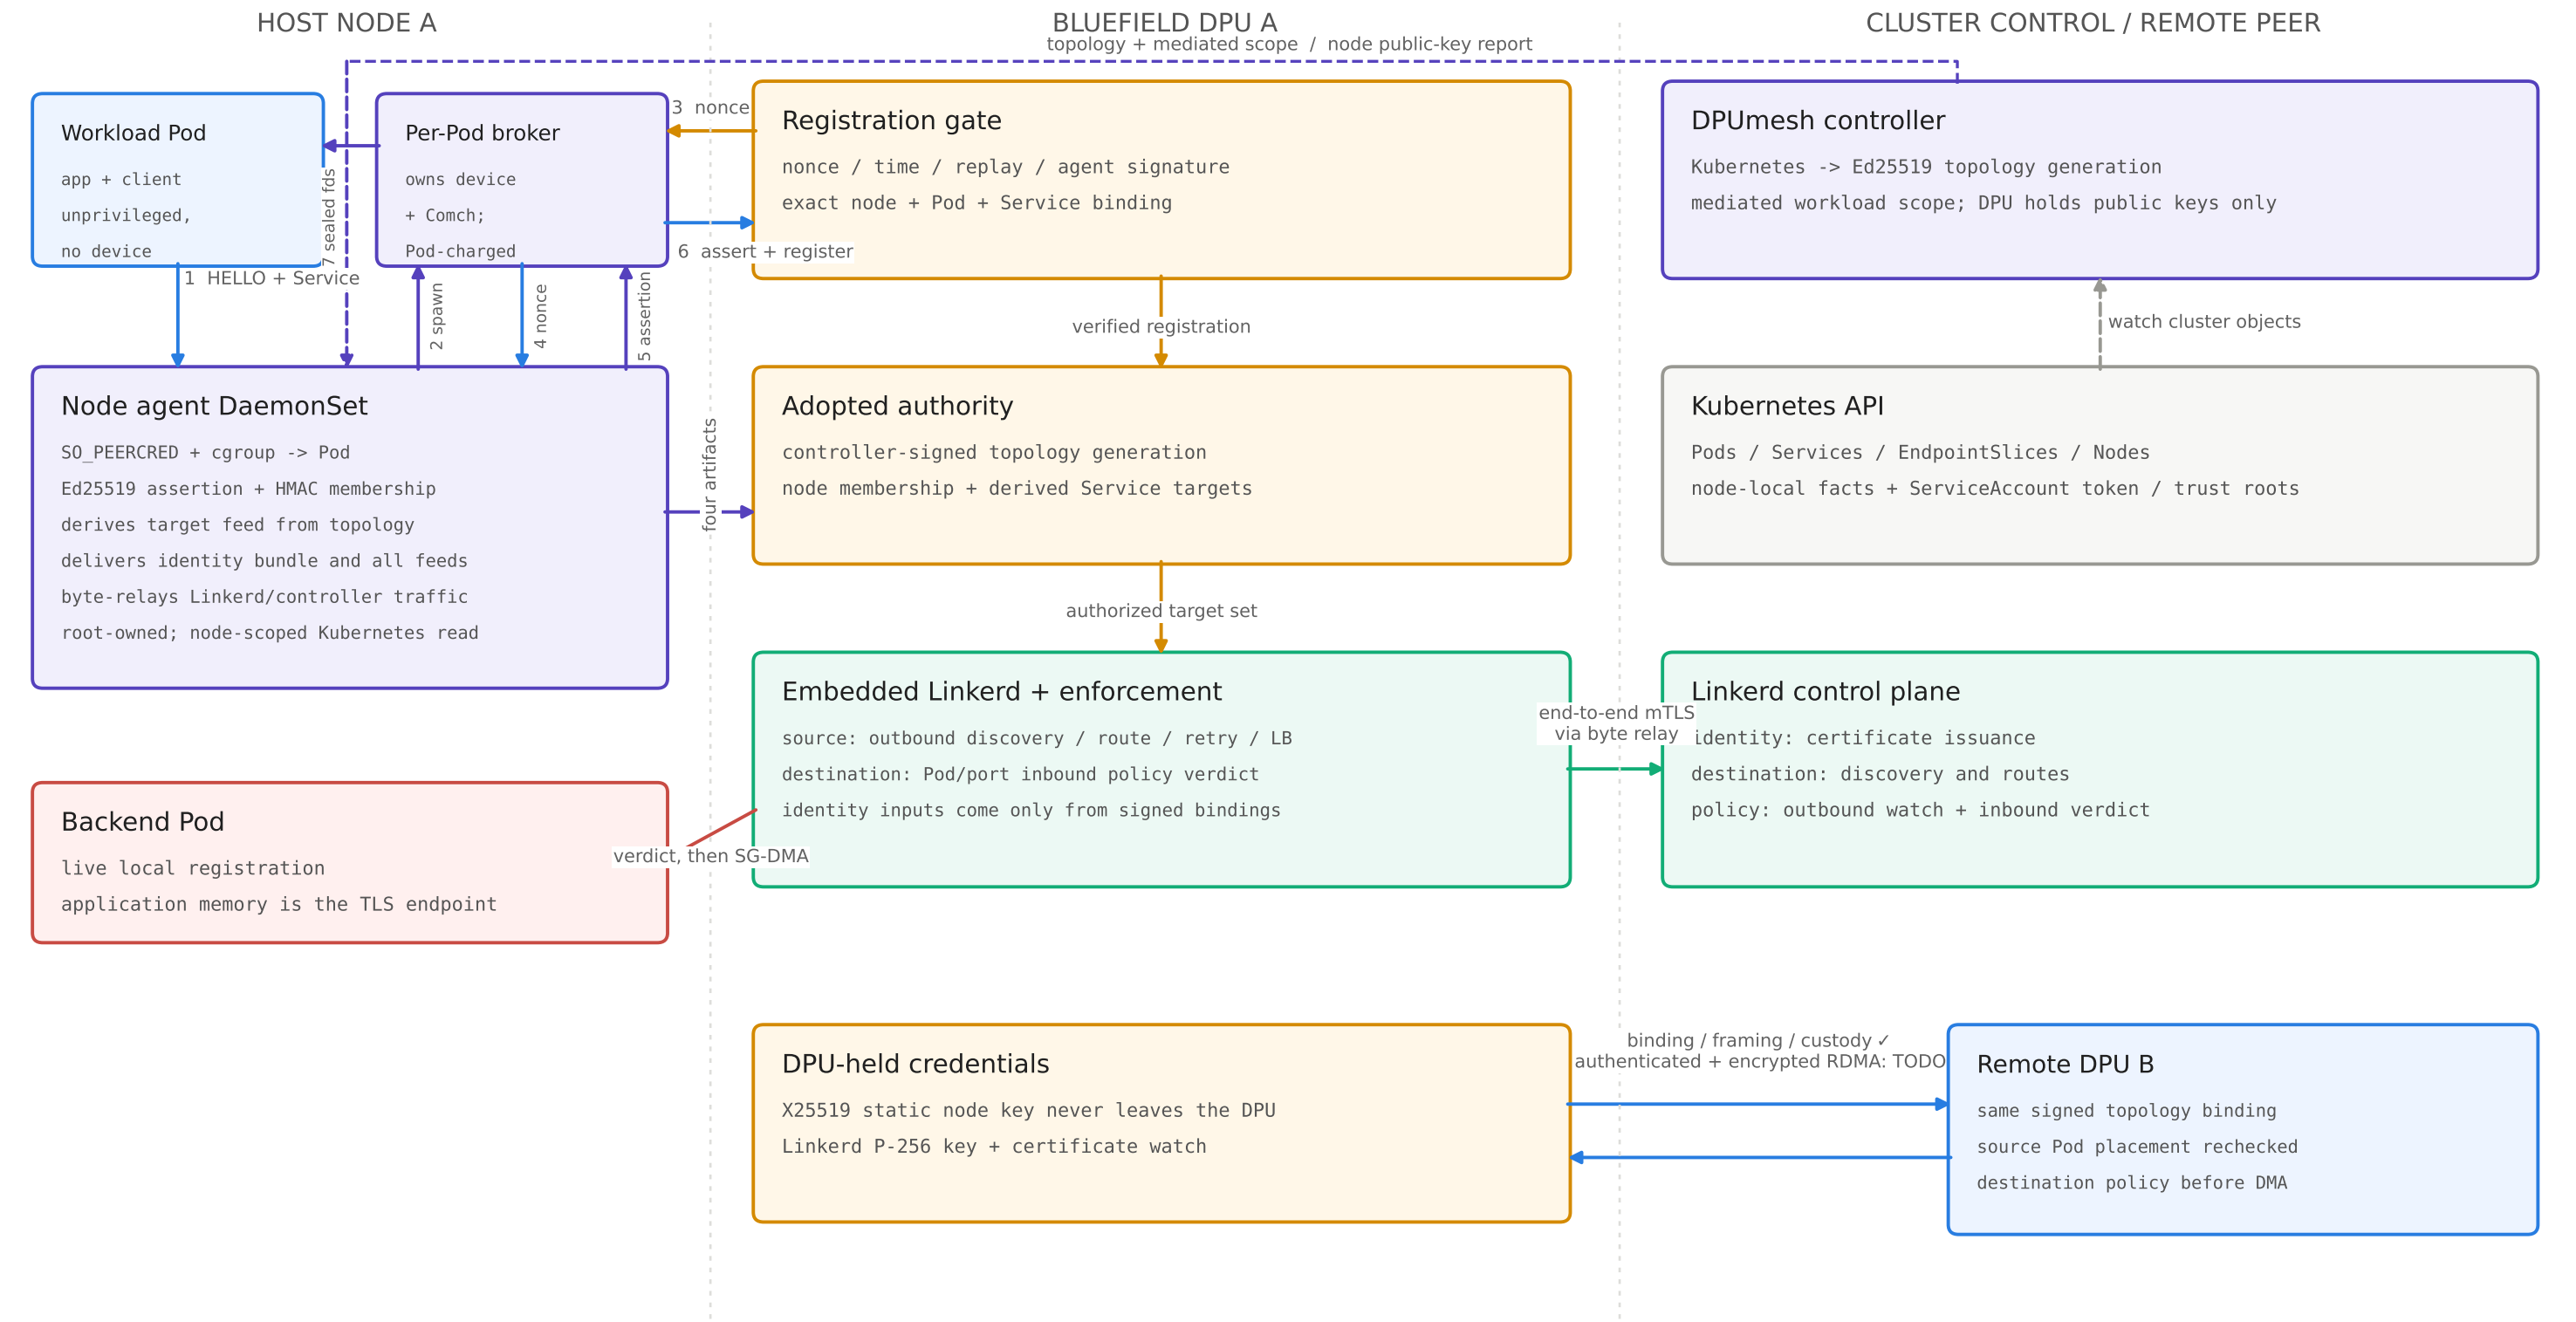

How to read this figure

assertion	node-agent-signed binding of one connection to a Pod and Service	workload identity	namespace, ServiceAccount, Pod IP from a signed binding
broker	per-Pod host process owning the device; the Pod maps sealed memory only	verdict	stock Linkerd inbound authorization evaluated at the DPU
topology	controller-signed cluster placement, peer keys and protection class	pair channel	one authenticated/encrypted node-pair channel with bounded streams
node feed	HMAC-signed membership or target snapshot for one node	fail-static	a rejected generation leaves the last fully verified one in force
relay	node-agent byte forwarding; it terminates no Linkerd TLS		