


Measure

Measure type: Show all

Length unit: Millimeter

Angle unit: Degree

Area: 50.18540 mm²

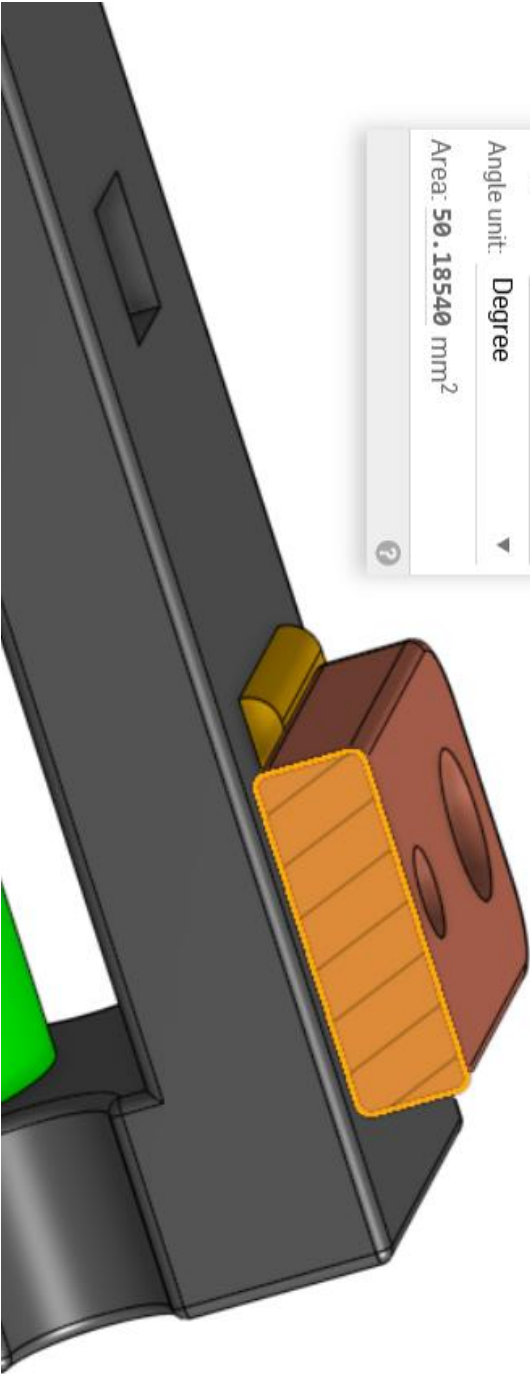

Load					
Load current		63 A			
Cable					
Live cable		25 mm ²			
Neutral cable		25 mm ²			
Earth cable		6 mm ²			
Live conductor		Copper Flexible			
Neutral conductor		Copper Flexible			
Earth conductor		Copper Flexible			
Current rating					
Rated current		133 A			
		Table 6, col. 12			
Operating temp.		56°C			
Max. operating temp.		110°C			
Voltage drop					
Voltage drop		0.1%, 0.2 V			
Voltage at load		453.4 V			
Max. distance		120 m for 3%			
Impedance -live and neutral					
Resistance per cable		0.903 Ω/km			
		60°C, Table 37, col 3			
Impedance per cable		0.903 Ω/km			
Impedance -earth					
Resistance per cable		3.82 Ω/km			
		60°C, Table 37, col 3			
Impedance per cable		3.82 Ω/km			

Active Size mm ²	Earth Size mm ²	Current Rating A	Volt Drop %
☐ 1	2.5	21	1.5
☐ 1.5	2.5	25	1
☐ 2.5	2.5	33	0.6
☐ 4	2.5	45	0.4
☐ 6	2.5	56	0.3
☐ 10	4	77	0.1
☐ 16	6	102	0.1
☒ 25	6	133	0.1
☐ 35	10	167	0
☐ 50	16	207	0

Show more