


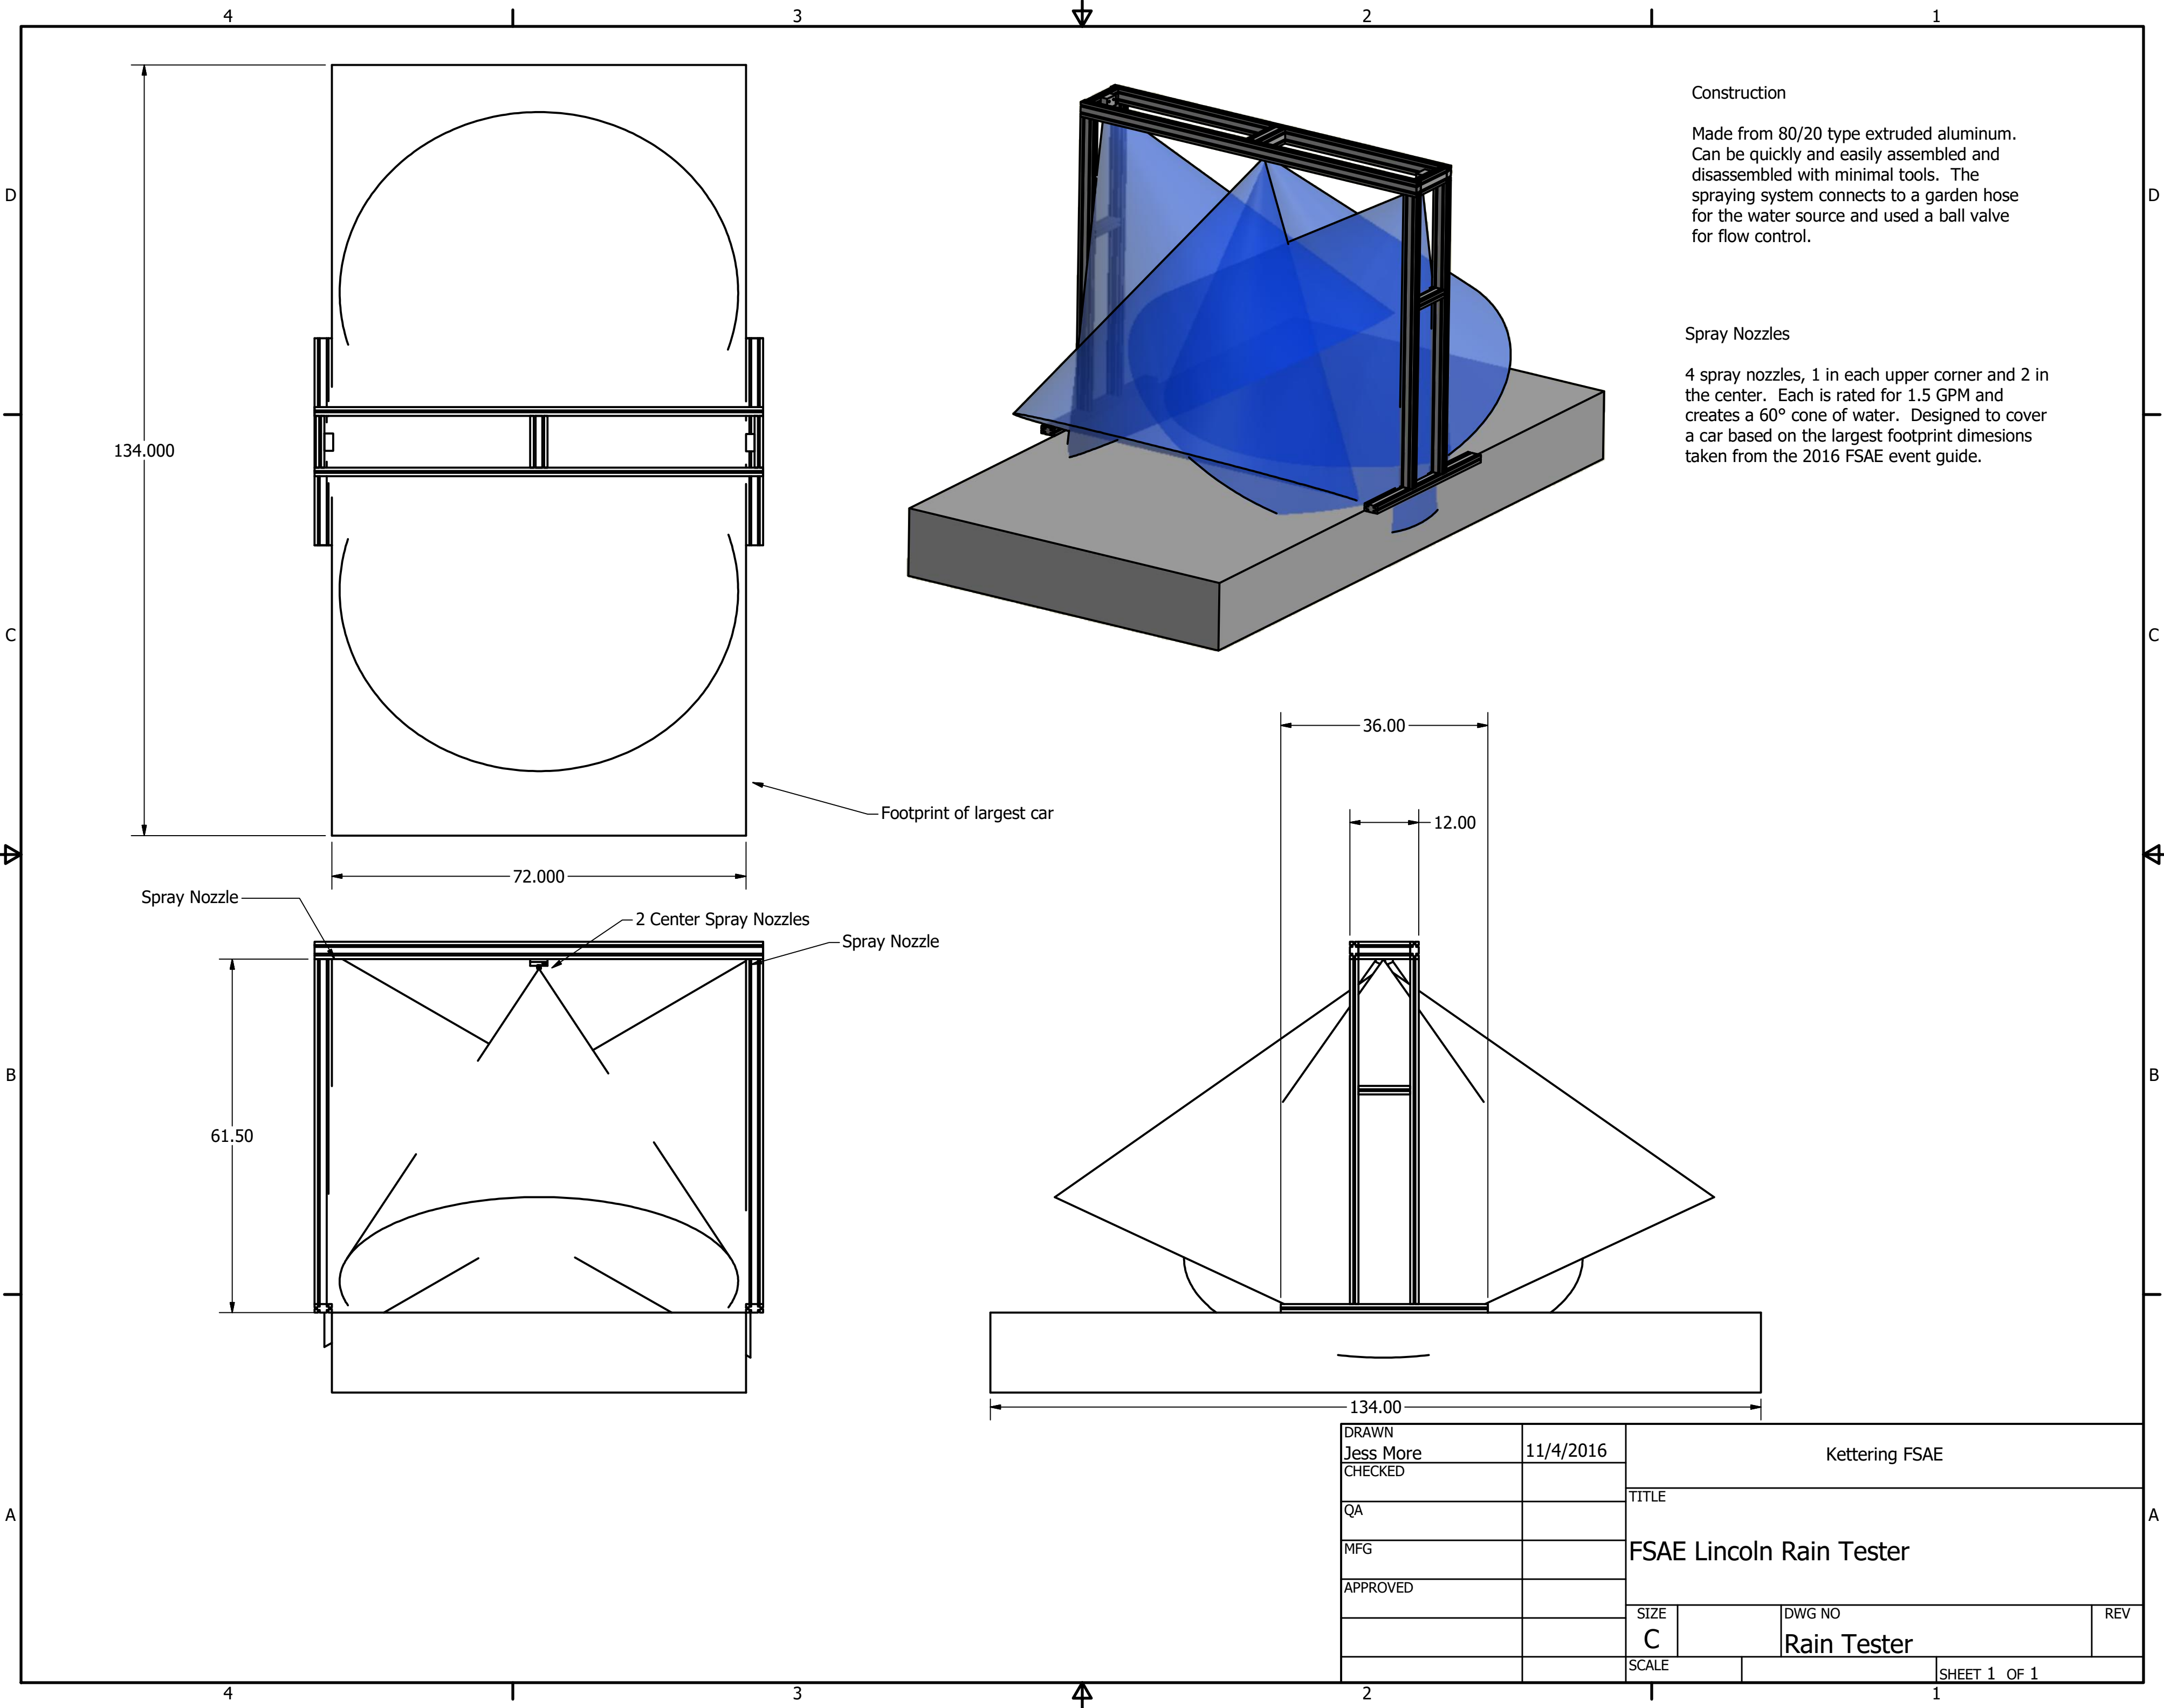

Construction

Made from 80/20 type extruded aluminum. Can be quickly and easily assembled and disassembled with minimal tools. The spraying system connects to a garden hose for the water source and used a ball valve for flow control.

Spray Nozzles

4 spray nozzles, 1 in each upper corner and 2 in the center. Each is rated for 1.5 GPM and creates a 60° cone of water. Designed to cover a car based on the largest footprint dimesions taken from the 2016 FSAE event guide.

|          |           |           |                          |              |     |
|----------|-----------|-----------|--------------------------|--------------|-----|
| DRAWN    | Jess More | 11/4/2016 | Kettering FSAE           |              |     |
| CHECKED  |           |           | TITLE                    |              |     |
| QA       |           |           | FSAE Lincoln Rain Tester |              |     |
| MFG      |           |           |                          |              |     |
| APPROVED |           |           |                          |              |     |
|          |           |           | SIZE                     | DWG NO       | REV |
|          |           |           | C                        | Rain Tester  |     |
|          |           |           | SCALE                    | SHEET 1 OF 1 |     |