



TSAL GLV SIDE


TSAL Green

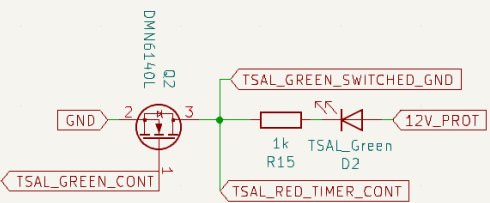

TSAL Red

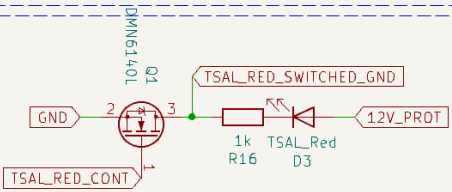


TSAL Red Control

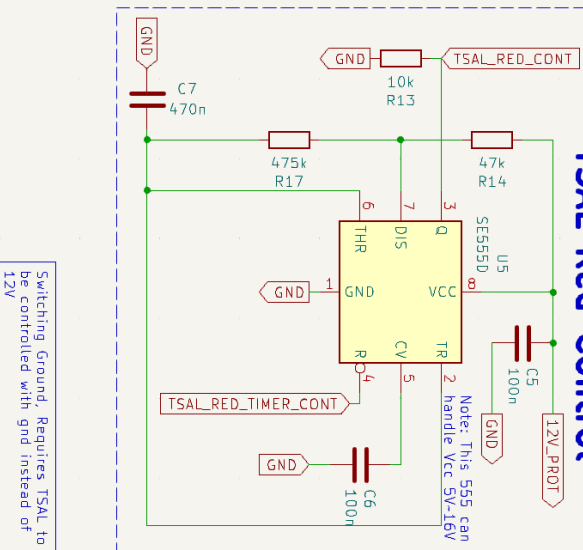

Switching Ground. Requires TSAL to be controlled with gnd instead of 12V

TSAL HV Detector


When Op-Amp output is HIGH, Octocoupler LED is off and VH = 0

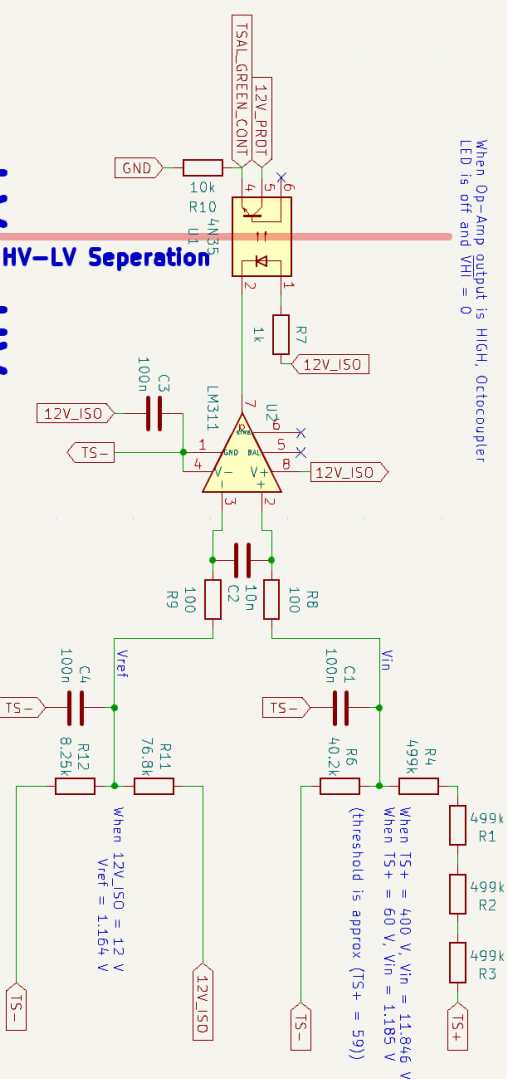

HV-LV Separation

This block compares the HV voltage divider to a reference voltage which is based on when HV is at 60V. This block will output a value when HV is above 60V

LV Circuit Protection and Iso Power

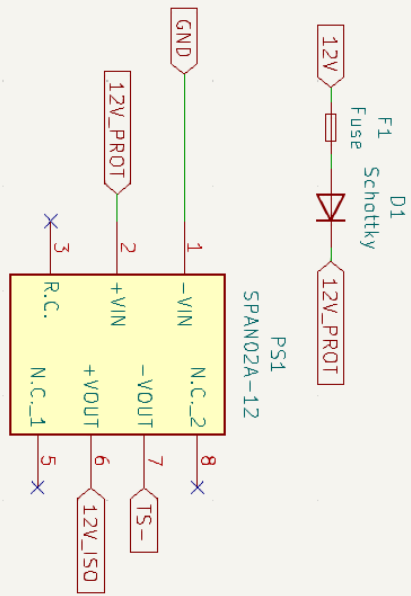

NU Racing

Sheet: /
File: TSAL_DISCHARGE_V3.kicad_sch

Title: TSAL DISCHARGE Breakout

Size: A3
Date: 2024-02-19
KiCad E.D.A. 8.0.1

Rev: 1.1
Id: 1/1

