

2025 Formula SAE-A Technical Inspection Sheet

MECHANICAL INSPECTION (ALL CLASSES)

Initial Presentation Scrutineer Name:		Initial Presentation Lane Number:	
1st Reinspection Scrutineer Name:		1st Reinspection Lane Number:	
2nd Reinspection Scrutineer Name:		2nd Reinspection Lane Number:	
3rd Reinspection Scrutineer Name:		3rd Reinspection Lane Number:	

PERSONNEL				Inspection #			
Teams are required to have an Electrical Safety Officer				Initial ins.	1st reins.	2nd reins.	3rd reins.
MI.1.1	Only team members involved in technical inspection can be in the technical inspection bay	Ask for non-essential people to leave the area					

INSERT VEHICLE (EV & AV CLASSES ONLY)				Inspection #			
The Vehicle must be in a condition which prevents unexpected energization of the HV electrical systems or movement of the tractive system For ICE Class vehicles, mark as "N/A"				Initial ins.	1st reins.	2nd reins.	3rd reins.
MI.1.2	Disable the HV Systems – Manual Service Disconnect (MSD)	Check the MSD is disconnected					
MI.1.3	Disable the HV Systems - Tractive System Master Switch (TSMS) Lock	Check the TSMS Lock is fitted and effective					
MI.1.4	(AV and Dual Purpose only) Disable the ASMS - Autonomous System Master Switch (ASMS) Lock	Check the ASMS Lock is fitted and effective					

DO NOT PROCEED WITH TECHNICAL INSPECTION IF MSD IS INSTALLED OR THE TSMS LOCK IS MISSING

INSTRUCTIONS FOR SCRUTINEERS

This section applies to all vehicle classes.

If an item is acceptable, initial the "Passed" column.

If an item is unacceptable, initial the "Reinspect" column and inform the team members they have not meet the requirements for that item.

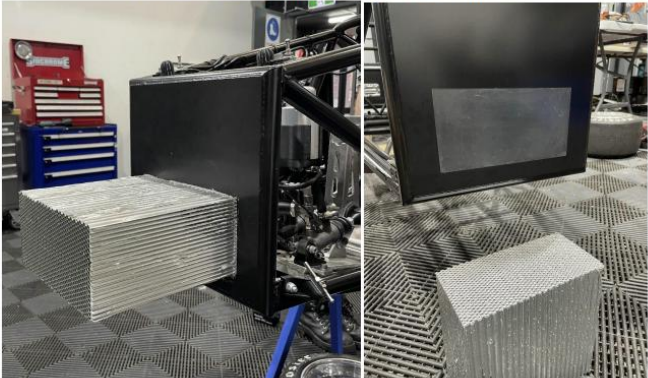
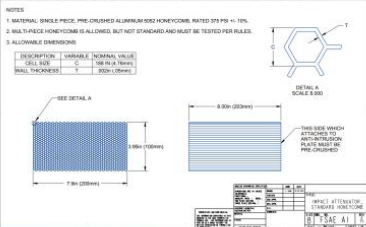
Teams are allowed to take their vehicle away from technical inspection and address any issues before representing for reinspection.

Scrutineers may continue with the inspection when unacceptable items are found, provided it is safe to do so.

Teams are required to pass all items before the vehicle can proceed to the Brake Test or compete in Dynamic Events.

Scrutineers reserve the right to refuse to proceed with Technical Inspection if a sufficiently serious issue which might jeopardize the safety of the technical inspection team, event personal or any other persons is found at any time.




☐ 2.5mm ☐ 5mm Allen Key ☐ 7mm Socket ☐ 10mm Ratchet Spanner ☐ Drill & 4.5mm Bit ☐ Centre Punch ☐ 300mm Ruler ☐ Vernier Calipers ☐ Level ☐ Tape Measure ☐ Impact & 21mm Socket ☐ Car & Push Bar ☐ red toolbox ☐ tools above ☐ 1kg fire extinguisher ☐ Percy & Cockpit Templates ☐ 4 Wet Tyres ☐ Driver box ☐ Body kit stands ☐ Car stands ☐ Short & Tall Driver in Gear ☐ 3x Mech Tech sheet ☐ Hard Copy of Standard Mech Sheet ☐ Mech Tech Drawings ☐ Mech Tech Data Sheets ☐ Egress Times ☐ MSD Out & TSMS Lock In ☐ Spare IA

MECHANICAL INSPECTION				Reinspect	Passed																	
PRE-REGISTRATION																						
MI.2.1	Team completed inspection records	Teams must have self-completed the Technical Inspection Checklist and present a hardcopy	Ask for hardcopy of TI inspection sheet																			
MI.2.2		Teams must provide evidence of egress times achieved by all drivers	Ask for hardcopy record of egress times																			
MI.2.3	Impact Attenuator	Teams must present a sample of their tested Impact Attenuator, or detailed photographs. (Including Standard IA if required due to Bulkhead configuration.) Display Image Standard Honeycomb IA, bonded on centreline, 147mm above top of lower SIS PRE-REGISTRATION, IMPACT ATTENUATOR, MI.2.3  EQ Ground clearance under lowest part of Lower SIS, setup ride height: 51.3 mm EQ F&E.4.b F&S.6.a IA lower leading edge < 150mm above lower SIS: 144.88 mm EQ F&S.2 IA to AI plate mounting method: Bonded EQ N/A N/A Adhesive brand and name: Loctite Epox Weld EQ F&S.3.b Minimum bond shear Requirement: 3.95E+04 N EQ Minimum shear / peel strength of adhesive: 19.9 N/mm^2 EQ F&S.3 50% adhesive reduction for safety factor: 9.95 N/mm^2 EQ F&S.3.c Minimum bond area: .0093 mmm^2 EQ Calculated bond strength: 9.95E+04 258.42N EQ F&E.1 Nothing should be in front of the AISI in front view except the IA. This, non-structural nosecones, attachment tabs, struts, and fastener ends a F&E.2.a The front wing and mounts must have a path around or below it F&E.2.b Keep wing mounts outside and behind the Front Bulkhead in FrC Calculation much other than fastener shear may be entered as an image: F&S.2 FEA is not an accepted calculation for mount failure force or any Aluminum, Sandblasted: 24 hour cure: 2924 ± 42 psi (20.2 ± 0.3 N/mm^2) 7 day cure: 2860 ± 151 psi (19.7 ± 1.0 N/mm^2) 28 day cure: 2928 ± 178 psi (20.2 ± 1.2 N/mm^2) 7 day cure, 7 day water immersion: 2788 ± 145 psi (19.2 ± 1.0 N/mm^2) NOTES 1. MATERIAL: SINGLE PIECE, PRE-CORROSDED ALUMINUM BEE HONEYCOMB, RATED 375 PSI @ 100°. 2. SINGLE-PIECE HONEYCOMB IS ALLOWED, BUT NOT STANDARD HONEYCOMB BE TESTED PER RULES. 3. ALLOWABLE DIMENSIONS <table><tr><th>DESCRIPTION</th><th>VARIABLE</th><th>NOMINAL VALUE</th></tr><tr><td>(SEE DETAIL A)</td><td>WING PLATE THICKNESS</td><td>.075 IN (+/- .005)</td></tr><tr><td>(SEE DETAIL A)</td><td>BODY CORNER</td><td>R.0031 IN (+/- .0005)</td></tr></table>  <table><tr><td>DESCRIPTION</td><td>UNIT</td><td>VALUE</td></tr><tr><td>WING PLATE THICKNESS</td><td>IN</td><td>.075 (+/- .005)</td></tr><tr><td>BODY CORNER</td><td>IN</td><td>R.0031 (+/- .0005)</td></tr></table> THREE SIDE BRANCH AUTOMATICALLY PLATE MOUNT OR PRE-CORRODED Ask to see the sample impact attenuator or photos.	DESCRIPTION	VARIABLE	NOMINAL VALUE	(SEE DETAIL A)	WING PLATE THICKNESS	.075 IN (+/- .005)	(SEE DETAIL A)	BODY CORNER	R.0031 IN (+/- .0005)	DESCRIPTION	UNIT	VALUE	WING PLATE THICKNESS	IN	.075 (+/- .005)	BODY CORNER	IN	R.0031 (+/- .0005)		
DESCRIPTION	VARIABLE	NOMINAL VALUE																				
(SEE DETAIL A)	WING PLATE THICKNESS	.075 IN (+/- .005)																				
(SEE DETAIL A)	BODY CORNER	R.0031 IN (+/- .0005)																				
DESCRIPTION	UNIT	VALUE																				
WING PLATE THICKNESS	IN	.075 (+/- .005)																				
BODY CORNER	IN	R.0031 (+/- .0005)																				



MECHANICAL INSPECTION					
TECHNICAL INSPECTION STICKER AND COMPETITION SPONSOR STICKERS				Reinspect	Passed
MI.3.1	Technical Inspection Vehicle Panel	The Technical Inspection Sticker must be installed on the top surface of the nose of the vehicle on the vehicle centerline. The Technical Inspection Sticker must be used as provided and not modified. The Technical Inspection Sticker must be clearly visible.	Visual Check		
MI.3.2	Competition Sponsor Stickers	The Competition Sponsor Sticker must be installed on the top surface of the nose of the vehicle on the vehicle centerline. The Competition Sponsor Sticker must be used as provided and not modified. The Competition Sponsor Sticker must be clearly visible.	Visual Check		

WHEELS & TYRES				Reinspect	Passed
Teams are required to bring a sample of each dry and rain tyre for use. Teams are allowed ONE SET of each type of tyre. Teams may have different tire sizes front and rear, but left and right tires must be identical. Teams may replace damaged tires but need to re-present to TI and demonstrate they are identical to the make size and compound listed below.					
MI.4.1	Dry Tyres	Inspector to record tyre make, size and compound. Make: Hoosier Size: 16 x 7.5 - 10 Compound: LC0 Apply tamper proof sticker to tire and wheel rim	Visual Check		
MI.4.2	Rain Tyres	Inspector to record tyre make, size and compound. Minimum tread depth of 2.4mm Prepare Rain Tyre Make: Hoosier Size: 16 x 7.0 - 10 Compound: W3 Apply tamper proof sticker to tire and wheel rim	Visual Check		
MI.4.3	Wheels	Four wheels not in a line. 203.2 mm (8 inch) minimum diameter. A single wheel nut must have positive retainer. Check correct wheel nuts, tapered nuts, washers and spacers. Prepare Tapered Wheel Nut Sample	Visual Check		

MECHANICAL INSPECTION																										
DRIVER'S EQUIPMENT					Reinspect	Passed																				
Driver's equipment must be in good useable condition and conforming to the standards listed below																										
MI.5.1	Helmets	Must comply with Motorsport Australia, Technical Appendix, Schedule D, 2.1 Helmet standards A and B as listed Prepare Helmets Standard A, FIA 8859-2015 (Zak) 2. APPAREL STANDARDS 2.1 HELMET <table><thead><tr><th>Standards</th><th>Example Label</th><th>FHR Compliant</th></tr></thead><tbody><tr><td>A Note: For International Competition, only a helmet as specified in FIA Technical List No. 25 (Recognised Standards for Helmets) shall be accepted.</td><td></td><td></td></tr><tr><td>FIA 8860-2018 and 8860-2018-ABP</td><td></td><td>Yes</td></tr><tr><td>FIA 8860-2010 <i>(Not valid since after 31/12/2020)</i></td><td></td><td>Yes</td></tr><tr><td>FIA 8859-2024 and 8859-2024-ABP</td><td></td><td>Yes</td></tr><tr><td>FIA 8859-2015</td><td></td><td>Yes</td></tr><tr><td>Snell SA2020 and SA2015 and FIA 8858-2010 (to other anchors)</td><td></td><td>Yes</td></tr></tbody></table> Standard B, AS/ NZS 1698 (Alec, Cooper, & Holly) Standard B, ECE 22-05 (Jethro) Standard B, ECE 22-06 (Hugh) Standard B, ECE 22/ E1 (Tim) Standard B, ECE 22/ E11 (Cameron)	Standards	Example Label	FHR Compliant	A Note: For International Competition, only a helmet as specified in FIA Technical List No. 25 (Recognised Standards for Helmets) shall be accepted.			FIA 8860-2018 and 8860-2018-ABP		Yes	FIA 8860-2010 <i>(Not valid since after 31/12/2020)</i>		Yes	FIA 8859-2024 and 8859-2024-ABP		Yes	FIA 8859-2015		Yes	Snell SA2020 and SA2015 and FIA 8858-2010 (to other anchors)		Yes	Visual Check		
		Standards	Example Label	FHR Compliant																						
A Note: For International Competition, only a helmet as specified in FIA Technical List No. 25 (Recognised Standards for Helmets) shall be accepted.																										
FIA 8860-2018 and 8860-2018-ABP		Yes																								
FIA 8860-2010 <i>(Not valid since after 31/12/2020)</i>		Yes																								
FIA 8859-2024 and 8859-2024-ABP		Yes																								
FIA 8859-2015		Yes																								
Snell SA2020 and SA2015 and FIA 8858-2010 (to other anchors)		Yes																								

		<table><tr><td>B</td><td>Includes a Helmet of the Level A Standard</td><td></td><td></td></tr><tr><td></td><td>FIA 8860-2004 If used with FHR only fitted with compliant FHR tether anchors – FIA 8858-2002 or FIA 8858-2010. Snell SA2010 and SAH2010 and either FIA 8858-2002 or FIA 8858-2010 tether anchors (No. etched on the tether anchor)</td><td> </td><td>Yes</td></tr><tr><td></td><td>Snell SA2005 If used with FHR only fitted with compliant FHR tether anchors – FIA 8858-2002 or FIA 8858-2010. BS 6658-85 A/FR If used with FHR only fitted with FHR tether anchors from the manufacturer. SFI 31.1, SFI 31.1A, SFI 31.2A, SFI 31.2 (youth helmet standard) Level A Standard</td><td>  </td><td>Yes</td></tr><tr><td></td><td>Snell SA2000</td><td></td><td>No</td></tr><tr><td></td><td>AS/NZS1696 and updates Label may vary depending on approval body.</td><td></td><td>No</td></tr><tr><td></td><td>ECE 22 (with 03, 04, 05 or 06 amendments) Label may be on the helmet strap and consist of the E mark with a number which defines the country of origin.</td><td> </td><td>No</td></tr><tr><td></td><td>C Full Face Helmet of the Level A Standard Full Face Helmet of the Level B Standard Full Face Helmet of Snell M2000, M2005, M2010, M2015, M2020D/R standard (valid for Superkart competition only)</td><td></td><td>No</td></tr><tr><td></td><td>D</td><td>Not Mandatory</td><td></td></tr></table>	B	Includes a Helmet of the Level A Standard				FIA 8860-2004 If used with FHR only fitted with compliant FHR tether anchors – FIA 8858-2002 or FIA 8858-2010. Snell SA2010 and SAH2010 and either FIA 8858-2002 or FIA 8858-2010 tether anchors (No. etched on the tether anchor)	 	Yes		Snell SA2005 If used with FHR only fitted with compliant FHR tether anchors – FIA 8858-2002 or FIA 8858-2010. BS 6658-85 A/FR If used with FHR only fitted with FHR tether anchors from the manufacturer. SFI 31.1, SFI 31.1A, SFI 31.2A, SFI 31.2 (youth helmet standard) Level A Standard	  	Yes		Snell SA2000		No		AS/NZS1696 and updates Label may vary depending on approval body.		No		ECE 22 (with 03, 04, 05 or 06 amendments) Label may be on the helmet strap and consist of the E mark with a number which defines the country of origin.	 	No		C Full Face Helmet of the Level A Standard Full Face Helmet of the Level B Standard Full Face Helmet of Snell M2000, M2005, M2010, M2015, M2020D/R standard (valid for Superkart competition only)		No		D	Not Mandatory			
B	Includes a Helmet of the Level A Standard																																			
	FIA 8860-2004 If used with FHR only fitted with compliant FHR tether anchors – FIA 8858-2002 or FIA 8858-2010. Snell SA2010 and SAH2010 and either FIA 8858-2002 or FIA 8858-2010 tether anchors (No. etched on the tether anchor)	 	Yes																																	
	Snell SA2005 If used with FHR only fitted with compliant FHR tether anchors – FIA 8858-2002 or FIA 8858-2010. BS 6658-85 A/FR If used with FHR only fitted with FHR tether anchors from the manufacturer. SFI 31.1, SFI 31.1A, SFI 31.2A, SFI 31.2 (youth helmet standard) Level A Standard	  	Yes																																	
	Snell SA2000		No																																	
	AS/NZS1696 and updates Label may vary depending on approval body.		No																																	
	ECE 22 (with 03, 04, 05 or 06 amendments) Label may be on the helmet strap and consist of the E mark with a number which defines the country of origin.	 	No																																	
	C Full Face Helmet of the Level A Standard Full Face Helmet of the Level B Standard Full Face Helmet of Snell M2000, M2005, M2010, M2015, M2020D/R standard (valid for Superkart competition only)		No																																	
	D	Not Mandatory																																		
MI.5.2	Frontal Head Restraint	Not compulsory - FIA 8858-2010, 8858-200 Not Used	Visual Check																																	
MI.5.3	Suits	Single piece - FIA 8856-2018, FIA 8856-2000, FIA 1986, SFI 3.2A/5 or superior SFI standard. Prepare Suits FIA 8856-2000	Visual Check																																	
MI.5.4	Underwear	Not compulsory - recommended. FIA 8856-2000, 8856-2018 Not Used	Visual Check																																	

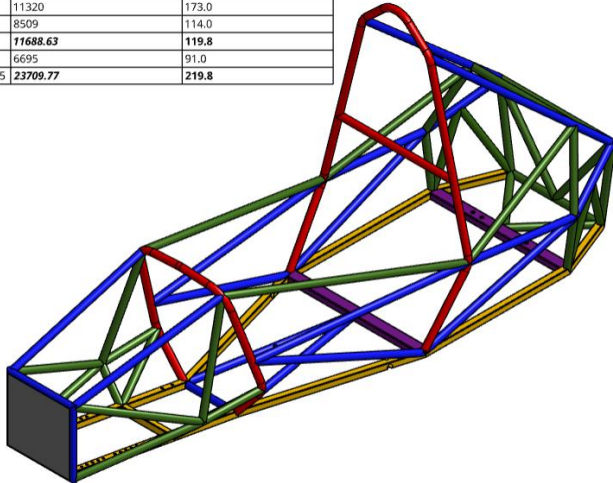
MI.5.5	Balaclava – hair cover	FIA 8856-2000, FIA 8856-2018 Prepare Balaclava FIA 8856-2018	Visual Check		
MI.5.6	Socks	FIA 8856-2000, FIA 8856-2018 Prepare Socks FIA 8856-2000	Visual Check		
MI.5.7	Shoes	FIA 8856-2000, FIA 8856-2018, SFi 3.3 or shoes with leather uppers. Prepare Shoes FIA 8856-2000/ 2018 & SFi 3.3/5 (Zak)	Visual Check		
MI.5.8	Gloves	FIA 8856-2000, FIA 8856-2018 or leather. Prepare Gloves FIA 8856-2018	Visual Check		
MI.5.9	Arm Restraints	SFi 3.3 Prepare Arm Restraints SFi 3.3	Visual Check		

MECHANICAL INSPECTION					
DRIVER'S COMMUNICATION				Reinspect	Passed
MI.6.1	Interconnected to vehicle	If part of driver's equipment, then it must not be attached to driver's helmet unless fitted by helmet OEM. Not Used	Visual Check		
MI.6.2	Telemetry	If fitted, may only be used to monitor vehicle state Data Sheet in folder Telemetry only used to transmit NOT to receive. Green light shows transmitting whereas red shows receiving. Can demonstrate green light only in LV 	Visual Check		

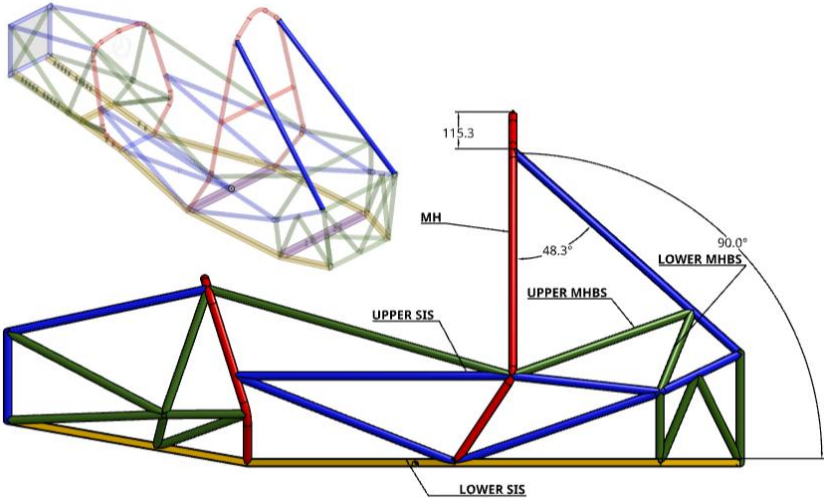
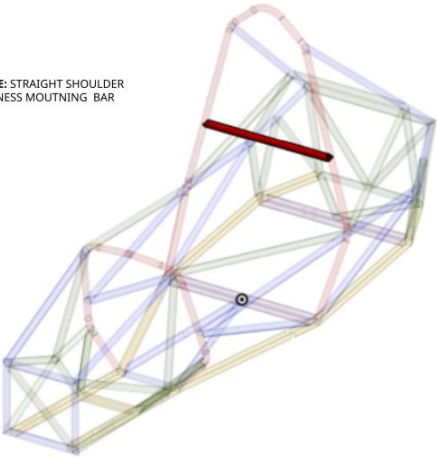
MECHANICAL INSPECTION					
EXTERIOR GENERAL – VEHICLE ID & EQUIPMENT				Reinspect	Passed
MI.7.1	Fire extinguishers	Two hand-held, 0.9kg (2lb) minimum, dry powder, dry chemical, must see both. One extinguisher mounted on Push Bar. Portable fire extinguishers must not be mounted to the vehicle. Dedicated On-board extinguishing systems encouraged Prepare Extinguishers No on board extinguishing (Priority is the driver not the car in the event of a fire) Push bar mounted – AS/ NZS 1841.5 – 1A:20B:E (Dry Powder) Separate – AS/ NZS 1841.5 – 2A:10B:E (Dry Powder)	Visual Check		
MI.7.2	Push Bar	Push bar with car, detachable, push and pull for 2 people standing behind car. Visual Check Prepare & Demonstrate Push Bar	Visual Check		
MI.7.3	Jacking point	Must have an exposed tube 30cm long, 2.5-2.9cm OD. Painted Orange. Rear wheels must come off the ground using Quick-jack (200mm lift) VE.2.1.2 The Jacking Point must be: - Capable of supporting the vehicle weight and of engaging the Quick Jacks shown on the FSAE Online website - Visible to a person standing 1 m behind the vehicle Color: Orange - Oriented laterally and perpendicular to the centerline of the vehicle - Made from round, 25 - 30 mm OD aluminum or steel tube - Exposed around the lower 180° of its circumference over a minimum length of 280 mm - Access from the rear of the tube must be unobstructed for 300 mm or more of its length - The height of the tube must allow 75 mm minimum clearance from the bottom of the tube to the ground - When the vehicle is raised to where the bottom of the tube is 200 mm above ground, the wheels do not touch the ground when they are in full rebound	Visual Check		
MI.7.4	Body and Styling	Open wheeled, open cockpit, formula styled body. Vertical keep out zones 75mm in front & behind tyres, no aero exceptions, tyres unobstructed from sides.	Visual Check		
MI.7.5	Car Numbers	Numbers must appear on front (upper surface of the nose, on centerline) and both sides. Not obscured. Min height 150mm with 25mm spacing from edges. Helvetica Bold. In Dayglo Yellow. Black background - Round, Oval, Square or Rectangle. Prepare Ruler	Visual Check		
MI.7.6	School Name and Other Decals	School name or initials, min height 50mm on both sides in Roman letters. Prepare Ruler	Visual Check		
MECHANICAL INSPECTION					

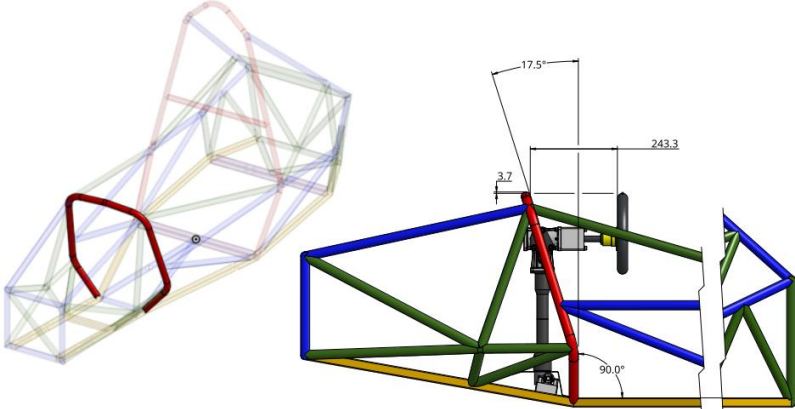
EXTERIOR GENERAL – BODYWORK & AERODYNAMICS				Reinspect	Passed
MI.8.1	Wings	Securely mounted, should not wiggle when gently touched, especially side to side. If in question inform chief. Affix inspection sticker/s to front and /or rear wings/ aerodynamic devices.	Visual / Physical Check		
MI.8.2	Wing Edges	Horizontal leading edges min 5mm radius, vertical forward facing edges min 3mm radius. Radius must be part of structure or permanently attached.	Physical check with radius gauge		
MI.8.3	Bodywork	Minimum 38mm radius on nose, no large openings in bodywork entering into driver compartment in front of or alongside driver. 75mm clearance Front and Back of tyres viewed from above. Prepare Gauge & Demonstrate	Physical check with radius gauge		
MI.8.4	Wheelbase	Minimum 1525mm (60 inch) Prepare Tape & Demonstration from Front of Rim 1550 mm	Physical check with tape measure		
MI.8.5	Aerodynamics	All Aero devices, wings, undertrays, splitters, max 70cm forward of front tyres, max 250mm rearward of rear tyres. Front wings no wider than outside of front tyres. Rear wings no wider than inside of rear tyres. Under trays no wider than line between front and rear tyres. No power ground effects.	Physical Check with Gauges		
MI.8.6	Aero Vertical Height	Rear wing max 1200mm above ground (inc end plates). Front wing max 250mm above ground. No bodywork or aero higher than 500mm between axles (except centre 800mm of car, ie, cockpit panels)	Physical Check with Gauges		
MI.8.7	Cameras	If >0.25kg, must be secured by two points. No cameras mounted on helmets. Display Image 192 grams	Visual Check		

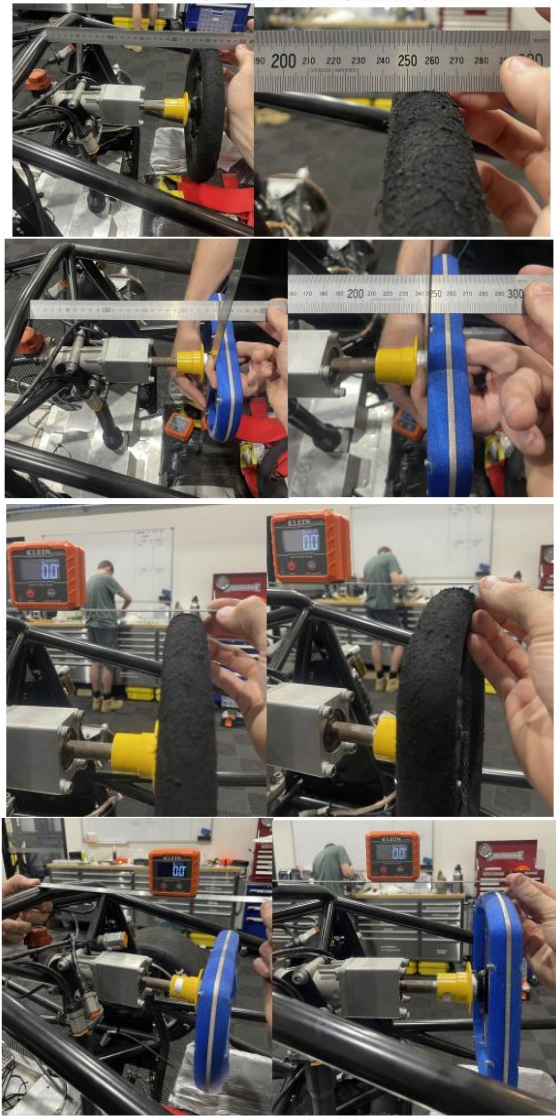


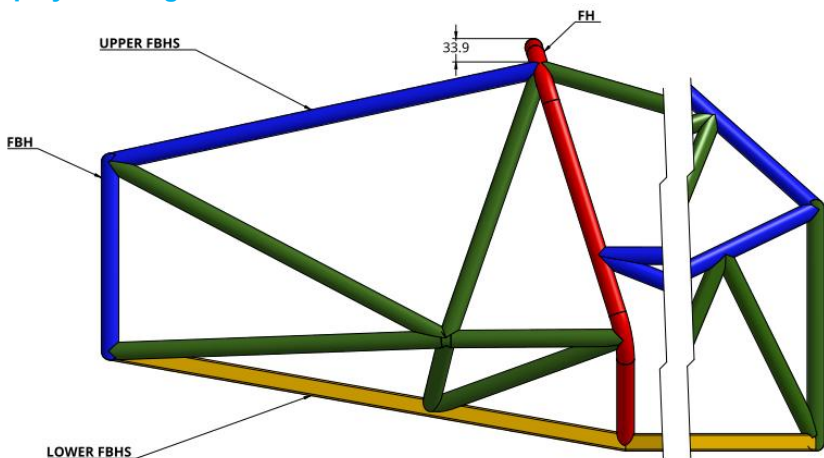
MECHANICAL INSPECTION																																										
EXTERIOR GENERAL – CHASSIS & STRUCTURAL					Reinspect	Passed																																				
MI.9.1	Alternative frame	If alternative tube size/material, approved Structural Equivalency Sheet (SES) required. If using Alternative Frame Rules, no titanium or magnesium in primary structure. Display Drawing <table><thead><tr><th colspan="5">NU25 (E03) CHASSIS MEMBER KEY</th></tr><tr><th>CATEGORY</th><th>SIZE (mm)</th><th>SIZE (Inches)</th><th>Area Moment of Inertia (mm^4)</th><th>Cross Sectional Area (mm^2)</th></tr></thead><tbody><tr><td></td><td>25.4 x 2.41</td><td>1 x 0.095</td><td>11320</td><td>173.0</td></tr><tr><td></td><td>25.4 x 1.65</td><td>1 x 0.065</td><td>8509</td><td>114.0</td></tr><tr><td></td><td>25.4 x 25.4 x 1.24</td><td>1 x 1 x 0.049</td><td>11688.63</td><td>119.8</td></tr><tr><td></td><td>25.4 x 1.24</td><td>1 x 0.049</td><td>6695</td><td>91.0</td></tr><tr><td></td><td>25.4 x 44.5 x 1.65</td><td>1 x 1.75 x 0.065</td><td>23709.77</td><td>219.8</td></tr></tbody></table> 			NU25 (E03) CHASSIS MEMBER KEY					CATEGORY	SIZE (mm)	SIZE (Inches)	Area Moment of Inertia (mm^4)	Cross Sectional Area (mm^2)		25.4 x 2.41	1 x 0.095	11320	173.0		25.4 x 1.65	1 x 0.065	8509	114.0		25.4 x 25.4 x 1.24	1 x 1 x 0.049	11688.63	119.8		25.4 x 1.24	1 x 0.049	6695	91.0		25.4 x 44.5 x 1.65	1 x 1.75 x 0.065	23709.77	219.8	Visual / Physical Check		
NU25 (E03) CHASSIS MEMBER KEY																																										
CATEGORY	SIZE (mm)	SIZE (Inches)	Area Moment of Inertia (mm^4)	Cross Sectional Area (mm^2)																																						
	25.4 x 2.41	1 x 0.095	11320	173.0																																						
	25.4 x 1.65	1 x 0.065	8509	114.0																																						
	25.4 x 25.4 x 1.24	1 x 1 x 0.049	11688.63	119.8																																						
	25.4 x 1.24	1 x 0.049	6695	91.0																																						
	25.4 x 44.5 x 1.65	1 x 1.75 x 0.065	23709.77	219.8																																						
MI.9.2	Inspection holes	Inspector may use ultrasound to measure wall thickness and/or ask 4.5mm hole be drilled. FH & MH Pre Drilled			Visual / Physical Check																																					
MI.9.3	Main hoop	MUST BE STEEL. 1.00" OD x 0.095" wall or 25mm OD x 2.5mm wall. Must be 1 piece & extend to lowest frame member. 380mm apart (inside dim.) where attaches to bottom tubes of the Major Structure. Above Major Structure, must be within 10° of vertical. No part angled rearwards more than 10° from vertical. Smooth bends with no wrinkles. Attachment to Monocoque/Composite must be mechanically affixed. Display Drawing Vertical above major structure, angled rearward below			Visual / Physical Check																																					

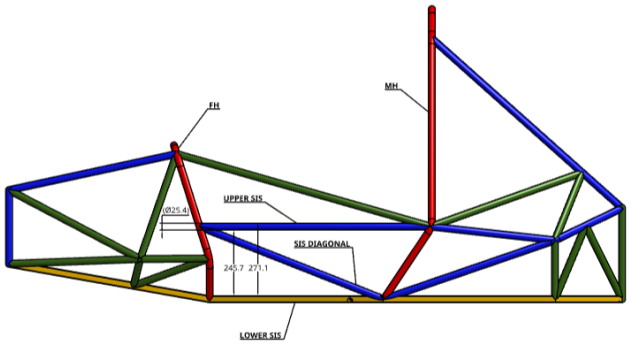
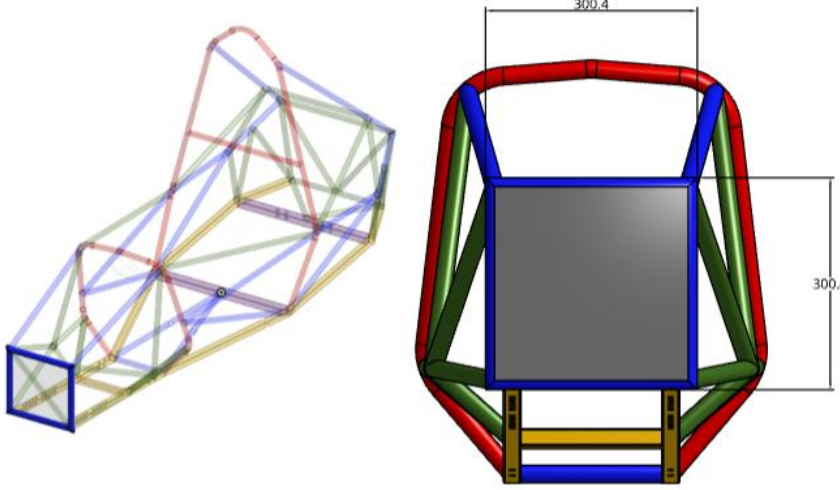
MI.9.4	Main hoop bracing	MUST BE STEEL. One brace each side, 1.00" x 0.065" or 25mm x 1.6mm minimum, attached within 16cm of top. Minimum 30 deg. included angle with hoop. If main hoop is not vertical, bracing must not be on same side of vertical as main hoop. No bends. No rod-ends. Proper construction for removable braces (capping etc.) on BOTH ENDS. Must take load back to bottom of main hoop and node of upper side-impact tube thru proper triangulated structure. If any item which is outside the envelope of the Primary structure is attached to the Main Hoop braces not at a node, additional bracing must be added to prevent bending loads in the braces in any rollover attitude. (eg.. suspension mounts, radiators or wings). Display Drawing	Visual / Physical Check		

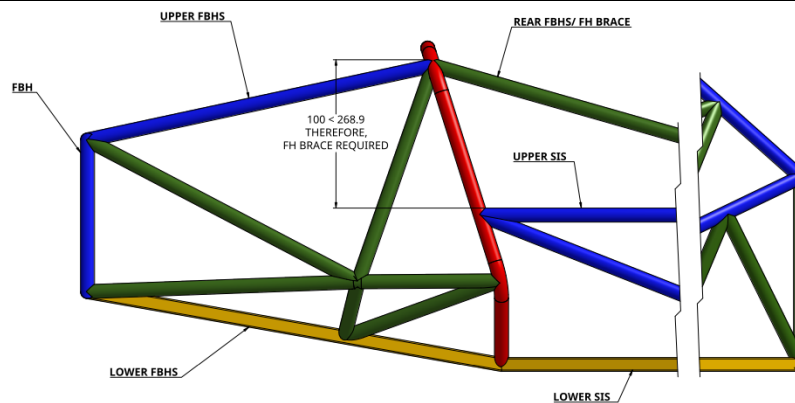
					
MI.9.5	Bolted joints	Edge of any bolt hole located > 1.5 x hole diameter from nearest edge of the material (Primary structure joints only)	Visual / Physical Check		
MI.9.6	Shoulder harness mounting bar	1.00" OD x 0.095" wall or 25mm OD x 2.5mm wall steel or equiv. Gussets or braces if not straight to main hoop Display Drawing NOTE: STRAIGHT SHOULDER HARNESS MOUNTING BAR 	Visual / Physical Check		

MI.9.7	Front hoop	Must be closed section metal tube. 1.00" OD x 0.095" wall or 25mm OD x 2.5mm wall steel, or equiv. Can be multi-piece. Must extend down to lowest frame member. Maximum 20 deg. to vertical. No lower than top of steering wheel. Maximum 250mm horizontal distance to steering wheel. Display Drawing & Images Prepare Second Steering Wheel Two steering wheels are used 3mm Below FH for both wheels (blue at 90 degrees) 245mm From FH for both wheels 	Visual / Physical Check		
--------	------------	--	-------------------------	--	--

		EXTERIOR GENERAL, CHASSIS & STRUCTURAL, FRONT HOOP, MI.9.7 			
--	--	---	--	--	--


MI.9.8	Front hoop bracing	Two forward facing braces, 1.00" OD x 0.065" or 25mm OD x 1.6mm steel or equivalent, attached within 5cm of top. Extra rearward bracing required if Front Hoop leans backwards more than 10 degrees. Display Drawing 	Visual / Physical Check		
MI.9.9	Other side tubes	Design prevents driver's neck hitting bracing or other side tubes.	Visual Check		
MI.9.10	Side impact protection	Comprised of 3 or more tube members on each side. Must connect to main and front hoops. Lower tube to bottom of both hoops. Lower tube can be lower frame member. Upper tube must be in a zone parallel to ground between 240mm and 320mm above the lowest point of the top surface of the Lower side impact member. At least one diagonal per side must connect the upper and lower members between the main and front hoops. All tubes to be 1.0" OD x 0.065" wall or 25mm OD x 1.6mm wall steel or equivalent. If Upper Side Impact tube is multi piece or bent, must have triangulating supporting tube from the furthest part of deviation from the straight line, back to a node on the chassis and the bent tube and support must be minimum 35mm x 1.2mm; Display Drawing	Visual / Physical Check with gauge.		

					
MI.9.11	Front bulkhead	1.0" OD x 0.065" wall, or 25mm x 1.6mm wall, steel tube or equiv. No non-crushable objects forward of bulkhead. Display Drawing 	Visual Check		
MI.9.12	Front bulkhead support	Support back to front roll hoop; minimum 3 tubes per side, all 1.00" OD x 0.049" wall steel tube or equivalent 1 bottom; 1 top within 50mm of top of bulkhead, and connecting within 4" above and 2" below upper side impact support (SIS) tube; 1 or more node-to-node diagonal to completely triangulate connections to upper and lower side impact support (SIS) tubes. (25mm x 1.5mm and 26mm x 1.2mm metric tubes OK) Display Drawing & Table	Visual / Physical Check		

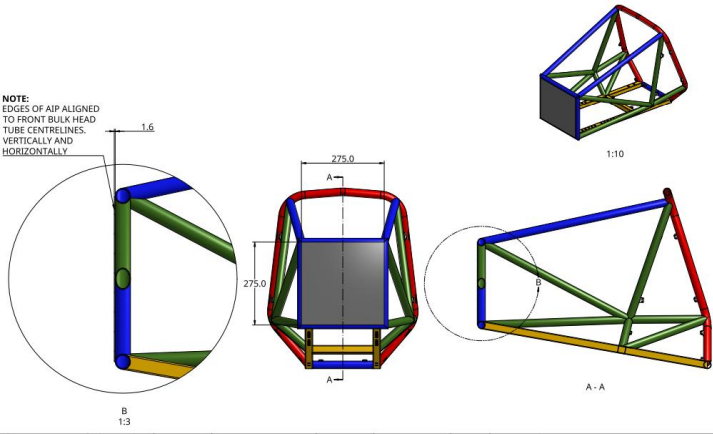


F.6.2 Front Bulkhead Support

- F.6.2.1 Frame Members of the Front Bulkhead Support system must be constructed of closed section tubing meeting **F.3.2.1.b**
- F.6.2.2 The Front Bulkhead must be securely integrated into the Frame.
- F.6.2.3 The Front Bulkhead must be supported back to the Front Hoop by a minimum of three Frame Members on each side of the vehicle; an upper member; lower member and diagonal brace to provide Triangulation.
- The top of the upper support member must be attached 50 mm or less from the top surface of the Front Bulkhead, and attach to the Front Hoop inside a zone extending 100 mm above and 50 mm below the Upper Side Impact member.
 - If the upper support member is further than 100 mm above the top of the Upper Side Impact member, then properly Triangulated bracing is required to transfer load to the Main Hoop by one of:
 - the Upper Side Impact member
 - an additional member transmitting load from the junction of the Upper Support Member with the Front Hoop
 - The lower support member must be attached to the base of the Front Bulkhead and the base of the Front Hoop
 - The diagonal brace must properly Triangulate the upper and lower support members

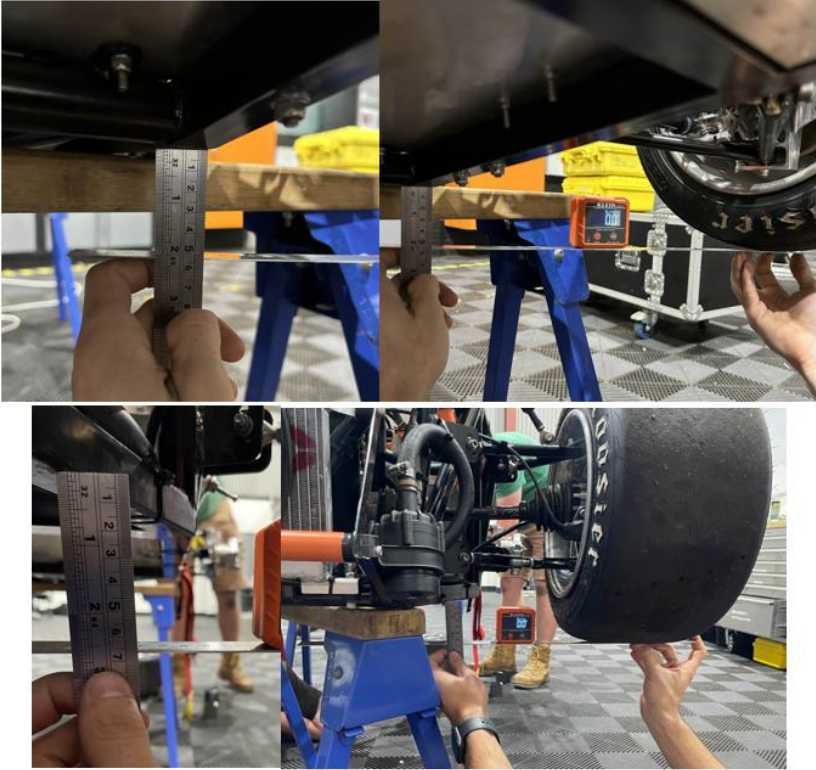


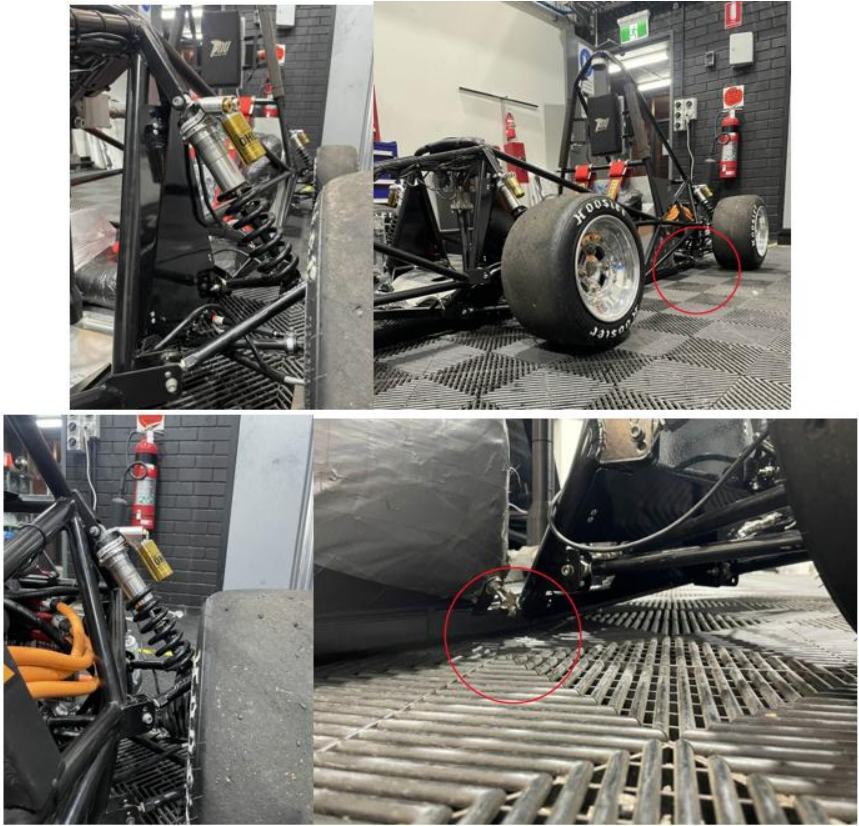
Rectangle Tube Properties Calculator		
External Height, d =	25.4000	mm ▼
Internal height, k =	22.9200	mm
External Width, b =	25.4000	mm
Internal width, h =	22.9200	mm
Calculated Properties		
Area Moment of Inertia Section =	11688.6333	mm ⁴
Section Modulus =	920.3648	mm ³
Radius of Gyration =	9.8763	mm
Area =	119.8336	mm ²
y = (unit)	12.7000	mm

MI.9.13	Impact Attenuator	Impact Attenuator forward of bulkhead, 200mm long x 200mm wide x 100mm high. No wing supports through the IA. Bonded, or bolted to Plate with eight 8mm bolts plus additional support. Display Drawing & MI.2.3 Image Again	Visual / Physical Check		
MI.9.14	Impact Attenuator Mounting. Anti intrusion plate	All vehicles must have 1.5mm steel, 4mm Al, or approved equivalent IA anti-intrusion plate. Plate must be capable of taking transverse and vertical loads (welded or minimum eight 8mm bolts). Same size as outside dimensions of Front Bulkhead if bolted or to tube c/l if welded. If the outside profile of the Front Bulkhead is greater than 400 mm x 350 mm; or a Standard Impact Attenuator is used, requires diagonal brace unless test results provided to show Al plate deflection was less than 25 mm. The Standard IA must be attached only by bonding Display Drawing & Image 	Visual / Physical Check Team to present test results if required.		
MI.9.15	Monocoque / Composite	Must see laminate test specimens (2 or more) for both side impact support (SIS) and primary structure constructions. Steel backing plates (>2mm thick) used at attachment points.	Visual / Physical Check		
MI.9.16	Thermal Protection	Protection when entering or exiting vehicle, exhaust, coolant hoses or through seat or floor. All cooling rearward of firewall, No exhaust	Visual Check		

MECHANICAL INSPECTION					
VEHICLE CONTROLS – STEERING, SUSPENSION & BRAKES				Reinspect	Passed
MI.10.1	Ground clearance	Sufficient clearance so that no part of the car other than the tyres will contact the track surface. Prepare Ruler 34 mm to front accumulator bolts in race ready condition	Visual / Physical Check		

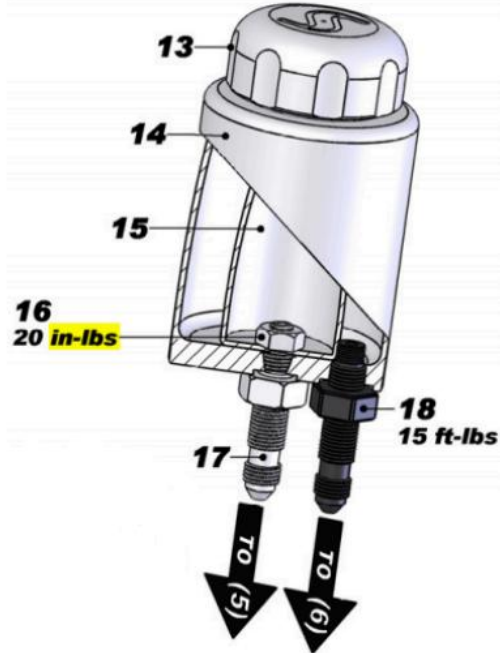
--	--	--	--	--	--	--

MI.10.2	Suspension	Fully operational with dampers front and rear; 50mm minimum wheel travel with driver in vehicle Display Images Data Sheet in folder 57mm in Damper – 53mm in suspension geometry VEHICLE CONTROLS, SUSPENSION ETC, MI.10.2 	Visual / Physical Check		
---------	------------	--	-------------------------	--	--

					
MI.10.3	Suspension pickup points	Inspected thoroughly for integrity. Fully welded perimeter, tested through >700km of driving, no failures or replacing	Visual / Physical Check		
MI.10.4	Brakes	Dual hydraulic system & reservoirs, operating all 4 wheels, (one brake on limited slip OK). System protected by structure/shields from d/train failure & minor collisions. No plastic brake lines or brake-by wire. No parts below chassis/tub in side view. Brake pedal (and seat) capable of 2000N (450 lbs-f) with no failures (tested only by organizers.) Data Sheet in folder	Visual / Physical Check		

Two master cylinders (front/ rear)
 Dual chamber master cylinder
 Steel braided brake lines above chassis
 Rear lines routed inside suspension envelope and tie up away from driveshafts

External Reservoir (not included w/ B3370NR)			
Item #	Part #	Qty.	Description
13	B3370E	1	Aluminum Reservoir Cap
14	B3370D	1	Primary Reservoir
15	B3363H	1	Secondary Reservoir
16	B3363K	1	1/4-20 Half Nut
17	B3363DC	1	Secondary Port Fitting
18	B3363D	1	Primary Port Fitting

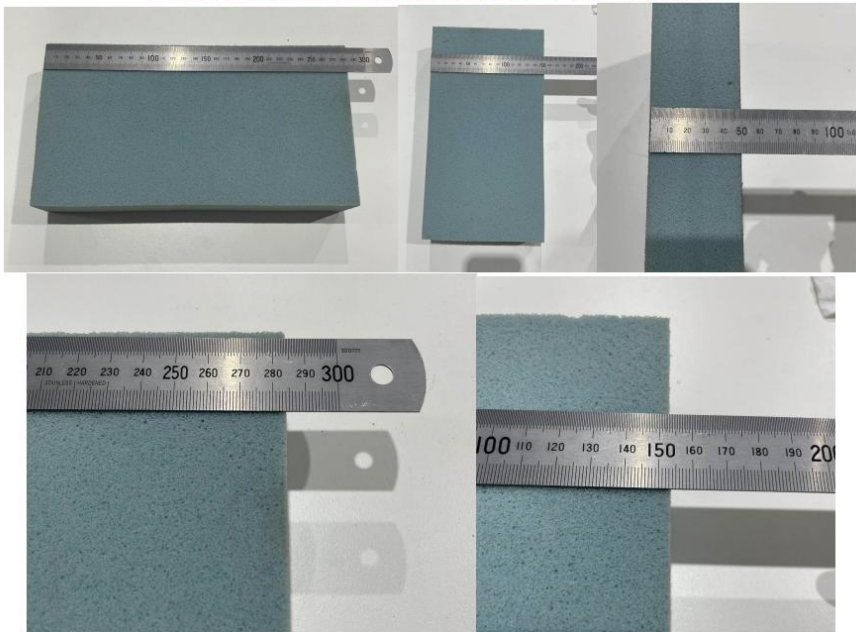


		T.3 BRAKES T.3.1 Brake System T.3.1.1 The vehicle must have a Brake System T.3.1.2 The Brake System must: - Act on all four wheels - Be operated by a single control - Be capable of locking all four wheels T.3.1.3 The Brake System must have two independent hydraulic circuits A leak or failure at any point in the Brake System must maintain effective brake power on minimum two wheels T.3.1.4 Each hydraulic circuit must have its own fluid reserve using separate reservoirs or an OEM style reservoir T.3.1.5 A single brake acting on a limited slip differential may be used T.3.1.6 "Brake by Wire" systems are prohibited T.3.1.7 Unarmored plastic brake lines are prohibited T.3.1.8 The Brake System must be protected with scatter shields from failure of the drive train (see T.5.2) or from minor collisions. T.3.1.9 In side view any portion of the Brake System that is mounted on the sprung part of the vehicle must not project below the lower surface of the chassis T.3.1.10 Fasteners in the Brake System are Critical Fasteners, see T.8.2			
MI.10.5	Brake Light	One (!) RED brake light, clearly visible from the rear; on vehicles centreline; height between wheel centreline & driver's shoulders. Round, triangle, or rectangular on black background. 15cm² minimum illuminated area. 19.0 x 3.0 = 57.0 cm²	Inspect		
MI.10.6	Steering wheel	Continuous perimeter, near round (no concave sections) with driver operable quick disconnect. 25cm max from Front Hoop Display MI.9.7 Image Again Prepare second steering wheel 245mm From FH For Both Wheels	Visual / Physical Check		
MI.10.7	Steering	All steerable wheels must have positive stops to prevent linkage lock-up or tyres contacting any part of the car. 7 degrees maximum free play at the steering wheel. NO STEER-BY-WIRE on front wheels. (AVs may have an actuator on the steering, but the steering wheel must be directly mechanically attached to the wheels.) Rear steer limited to 6° total, with mechanical stops. No bonded joints in column. Display Image Prepare Level – Turn one way and zero	Visual / Physical Check		



MI.10.8	Fasteners	Intake manifold, fuel rail, steering, braking, impact attenuator (IA), EV accumulator (battery), harness & suspension system use SAE Grade 5, Metric Grade 8.8 or higher (AN/MS) with visible positive locking mechanisms, no Loctite or lock washers. Minimum of 2 exposed threads. Rod ends in single shear are captured by a washer larger than the ball diameter. Adjustable rod ends have jam nuts to prevent loosening. No button head cap, pan head or round head screws in critical locations, e.g., cage structure or harness mount. Nylon locknuts not for use above 80°C, i.e., near exhaust. All socket head cap 12.9 (except MSD & Canamon) Powerbox & rotors safety wired & Jam nuts on rod ends. Rotors have only 2 threads showing	Visual / Physical Check		
---------	-----------	--	-------------------------	--	--

MECHANICAL INSPECTION					
VEHICLE CONTROLS – DRIVER ACCOMMODATION				Reinspect	Passed
MI.11.1	Lap belt mounting	Must pass over pelvic area at between 45-65 deg. to horizontal for upright driver, 60-80 deg. for reclined. Pivoting mounting with eye bolt or shoulder bolt attached securely to Primary Structure Ferg/ Zak Inside the car Prepare Level	Visual / Physical Check		
MI.11.2	Driver restraint harness	SFI 16.1, SFI 16.5 or FIA specs 8853/98 or 8853/2016 5, 6 or 7 point and be labelled. 50mm wide shoulder belts OK with FHR. 50mm lap belts OK for FIA & SFI 16.5, All lap belts must have Quick Adjusters. Reclined drivers must have 6 or 7 point, and Quick Adjuster sub-belts or 2 sets of sub belts. Sub belts cannot touch frame tubes or holes in seat. SFI Belts expire 2yr from manufacture date/month; FIA 8853/98 5 years after expiry year marked on label. 6 Point, FIA 8853-2016, Expire after 2025	Visual / Physical Check		
MI.11.3	Harness mounts	No belts can pass through a firewall. (Belts must mount on driver side of firewalls.) All belts attached securely to primary structure - 1.00" OD x 0.065" steel tube minimum. Any tabs to be 1.0" x 0.063" thick minimum. Double shear preferred. Bolt-on tabs use minimum of two 1/4" diameter Gr 5 bolts. Prepare Insert Sample Min Tube Size = B (Blue), Yellow meets min requirements	Visual / Physical Check		
MI.11.4	Firewall	Fire resistant material; must separate driver (line-of-sight up to mid-height of driver's helmet) from fuel, cooling & oil systems. Wire/cable pass-throughs OK with grommets. Multiple panels OK w/ gaps sealed. No gaps at sides or bottom	Visual / Physical Check		
MI.11.5	Floor closeout panel	Required from foot area to firewall; solid, non-brittle material; multiple panels are OK if gaps less than 3mm. System Sealing: 1 or 2 drain holes min 25mm must be provided in the structure or belly pan at locations, lowest point of chassis or rearward of driver position forward of any fuel or liquids. Display Image 26 mm drain hole	Visual / Physical Check		
MI.11.6	Belt attachment fasteners	Attachment bolt must be a minimum of 10mm Metric Grade 8.8 (3/8" SAE Grade 5). Applies to each belt.	Visual / Physical Check		

		Display Image 7/16 Inch UNF Eye bolt = 11.11 mm			
MI.11.7	Head restraint / head rest	Meets SFI or FIA listed materials. Min 38mm thick, min 15cm wide, min height 28cm. Max 25mm from helmet, Helmet contact point 50mm minimum from any edge. Adjustable or changeable for different drivers. Ferg/ Zak Inside the car WITH helmet Prepare Image - Data sheet in folder if required 153 x 284 x 50 mm CONFOR 45 Blue – Adjustment through different seats INTERIOR, DRIVER ACCOMODATION, HEAD RESTRAINT/ HEAD REST, MI.11.7 	Visual / Physical Check		
MI.11.8	Roll bar padding	Meets SFI or FIA listed materials. Rollbar or bracing that could be hit by driver's helmet must be covered with 12mm thick (hard) padding. Pipe insulation and foam not permitted Display Image Data Sheet in folder	Visual / Physical Check		

		SFI Spec 45.1 – Min Thickness 18mm			
MI.11.9	Vehicle controls	All controls, including shifter, must be inside cockpit. No hands, arms or elbows outside side impact system to actuate	Visual / Physical Check		
MI.11.10	Visibility	100 deg. minimum field either side. Head rotation OK or mirrors. If mirrors, must be firmly installed and adjusted Ferg/ Zak Inside the car WITH helmet	Visual / Physical Check		
MI.11.11	Drivers' foot protection	Feet must be rearward of the Front Bulkhead and no part of shoes or legs above or outside the Major Structure in side or front views when touching pedals. Ferg/ Zak Inside the car	Visual / Physical Check		
MI.11.12	Drivers' leg protection	Covers inside cockpit over sharp parts or moving suspension and steering components. Ferg/ Zak Inside the car	Visual / Physical Check		
MECHANICAL INSPECTION					
POWERTRAIN				Reinspect	Passed
MI.12.1	Scatter shield materials	For chains, 2.7mm minimum thick STEEL, 3 x chain width. For belts, 3mm minimum thick aluminium 6061-T6, 1.7 x belt width Prepare Calipers Prepare Chain sample	Visual / Physical Check		
MI.12.2	Scatter shields general	Required for clutches, chains, belts, CVT rotating parts, etc. No holes. 6mm diameter M8.8 or 1/4" diameter Grade 5 fasteners minimum. End parallel to lowest part of front and rear sprockets Prepare Calipers	Visual / Physical Check		
MI.12.3	Catch tanks	Coolant overflow, crankcase breather & lube system vents must have separate catch tanks. 1 qt minimum each. 100°C material. Behind firewall, below shoulder level. 3mm minimum diameter vent, away from driver. PCV OK if routed to intake sys upstream of restrictor. Cannot attach breather to exhaust. Trans or diff., unless sealed, require 50 mL catch bottle. 3104 aluminium (aluminium-magnesium-manganese alloy. Formability), tested with boiling water. ¼ inch barbs/ hose Cooling system capacity: 1060 mL (0.5L required). 1 qt = 0.95L, T.5.6.3 does not apply to EV	Visual / Physical Check		

		T.5.6 Catch Cans T.5.6.1 The vehicle must have separate containers (catch cans) to retain fluids from any vents from the powertrain systems. T.5.6.2 Catch cans must be: - Capable of containing boiling water without deformation - Located rearwards of the Firewall below the driver's shoulder level - Positively retained, using no tie wraps or tape T.5.6.3 Catch cans for the engine coolant system and engine lubrication system must have a minimum capacity of 10% of the fluid being contained or 0.9 liter, whichever is higher T.5.6.4 Catch cans for any vent on other systems containing liquid lubricant or coolant, including a differential, gearbox, or electric motor, must have a minimum capacity of 10% of the fluid being contained or 0.5 liter, whichever is higher T.5.6.5 Any catch can on the cooling system must vent through a hose with a minimum internal diameter of 3 mm down to the bottom levels of the Chassis.			
--	--	--	--	--	--

MECHANICAL INSPECTION					
SPECIALISED TESTS				Reinspect	Passed
MI.13.1	Driver template position PERCY	Seat adjusted to rear most position, pedals to forward most position, Bottom circle placed in seat bottom and between centre of circle and rear most face of the pedals is no less than 915mm. This dimension must be retained. If not it must comply before Dynamic events. Loss of points for Design Score. Prepare PERCY	Visual / Physical Check		
MI.13.2	Cockpit opening	Template passes down from above cockpit to 25mm below lowest point of the top of the Side Impact Structure to less than or equal to 320mm above the lowest point inside the cockpit. Steering wheel & column, seat & padding may be removed. No removing firewall. Fore/aft translation of template OK. Prepare Opening Template	Visual / Physical Check		
MI.13.3	Cockpit Internal cross section	Pedals in most forward position. Vertically and may be moved horizontally, Template to pass from cockpit to 100mm rear of pedals. Steering wheel and padding removable with no tools & with driver in seat. Seat remains, Steering wheel can be removed. Display Cross Section Template	Visual / Physical Check		

MECHANICAL INSPECTION		
NOTES	Reinspect	Passed
INSTRUCTIONS FOR SCRUTINEERS – END OF MECHANICAL INSPECTION (ALL CLASSES) If the team have passed all items in this section, go to the second page of this document and initial the relevant box, noting the date and time the team passed this section. - EV and dual purpose AV Classes, proceed with Driver Egress. - For ICE Class, proceed with ICE Class Inspection. If the team have items requiring reinspection (did not pass all items), go to the second page of this document and initial the relevant box noting the time and date the team was released from the inspection. The team will need to rectify the reinspection items and may return for reinspection when they are ready. Teams may proceed to ICE Class Inspection or Driver Egress if it is safe for them to do so. Reinspection is completed on a first come, first served basis, and is dependent on Technical Inspection Lane availability. Teams with Scheduled Inspections times will be given priority over teams presenting for reinspection. Once the team have been released from the inspection, make note of the team's progress on the central inspection record board		