Rating	30A
Insulation Resistance	DC 500V 100M Ω Min.
Dielectric Strength	AC 1500V 1 minute.
Operation Temperature	-20°C ~+80°C
Color	Red

Material:
Plug: nickel plated heat treated beryllium copper.
Frame: nylon#6,Red
Fits ø4mm banana plug or O.D.less than ø4mm wire by soldering.
Fits ø4mm standard banana socket.
European market not available.

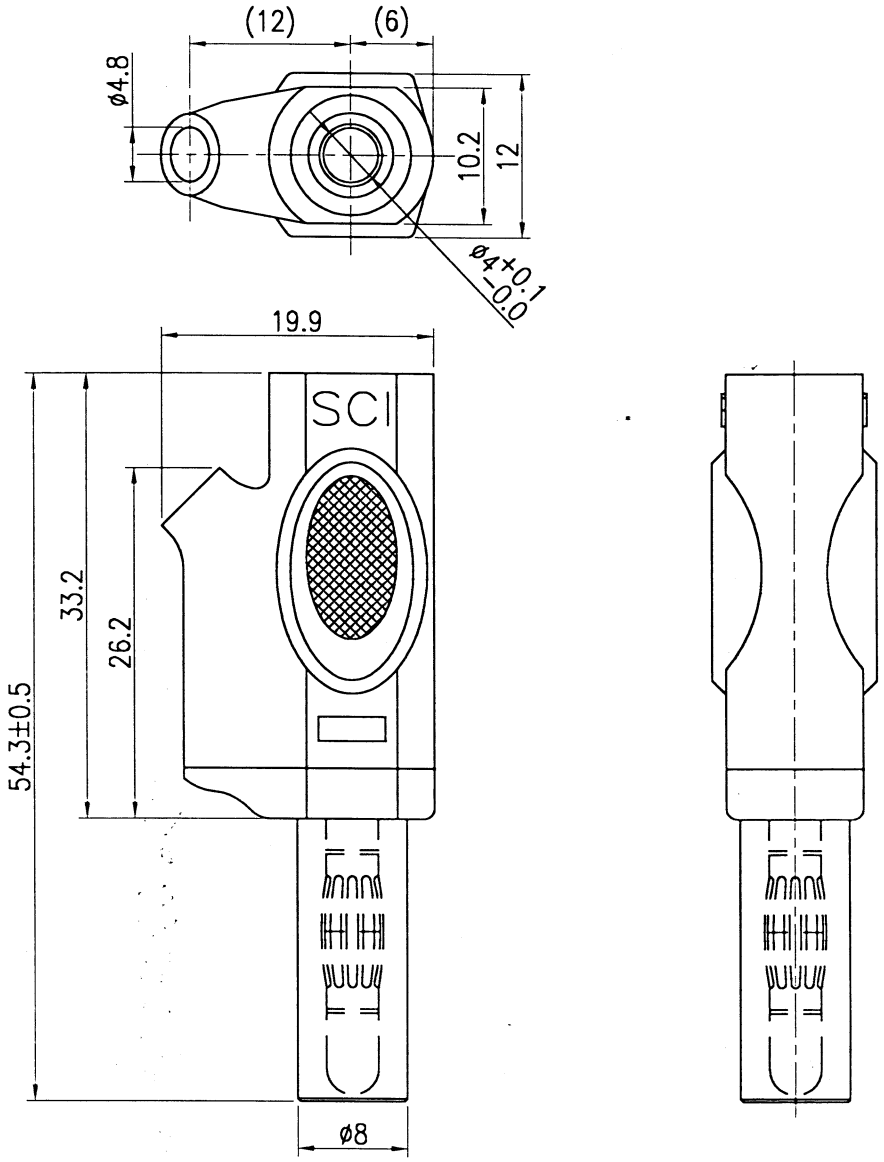

*組立不扣位

Tolerances ±0.3 Unless Otherwise Specified

							△
							△
Date	Name	Description					No.
Drawn	Checked	Approved	SCI BOM No.	1540291	Model Name	BANANA PLUGS	
柳新強		Smee	Customer No.		Model No.	PP0385	Rev.
07/24/'14		7/25-'14	Unit	mm	JAYCAR ELECTRONICS		X0