

Features: Compact moisture resistant package

Lowest "on" resistance

Low distortion

Ideal for Hi-Fi stereo applications

Storage Temperature: -30 to +80 °C

Operating Temperature: -30 to +80 °C

Soldering Temperature: 260 °C <10s

Isolation Voltage(peak): 2000V

➤ **Linear Output Type Light Sensor**




Symbol	Parameter	Min	Typ	Max	Units	Test Conditions
LED						
IF	Forward Current			40	mA	(Derate Linearly to 0 at 75°C)
VF	Forward Voltage			2.5	V	IF = 16 mA
IR	Reverse Current			100	μA	VR=3.8V
Cell						
VC	Maximum Cell Voltage			60	V	(Peak AC or DC)
PD	Power Dissipation			50	mW	(Derate Linearly to 0 at 75°C)
Coupled						
RON	On Resistance		100		Ω	IF = 10mA**
ROFF	Off Resistance		30		MΩ	10sec after I=0.3Vdc on cell
TR	Rise Time			1.0	msec	Time to 63% of final conductance @ IF = 16 mA ***
TF	Decay Time			1.5	sec	Time to 100KΩ after removal of input @ IF = 16 mA
	Cell Temp Coefficient		1.0		% °C	IF >5 mA

* 2mm from case for < 5 sec

** measured after a dark history of 1 week



*** Rise time is the time for the dark change in conductance to reach 63% of its final value

Output Resistance vs. Forward Current

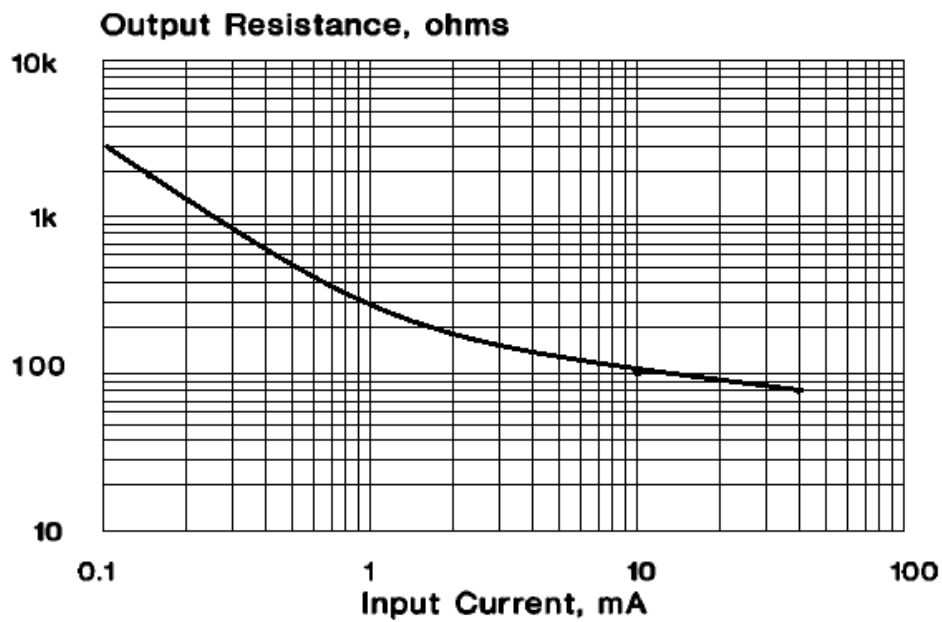

Rise/Fall Time vs. Load Resistance

LED Forward Current vs. Forward Voltage

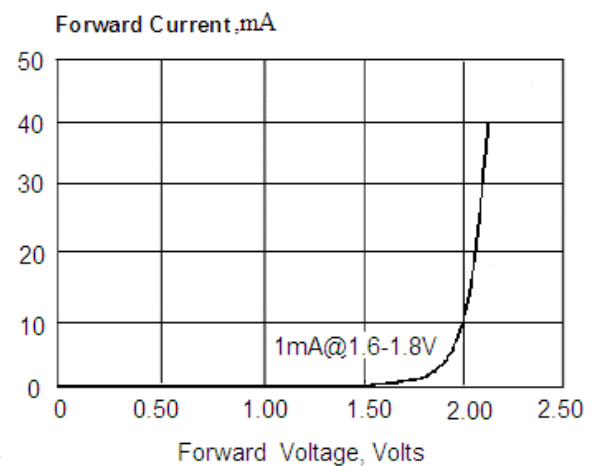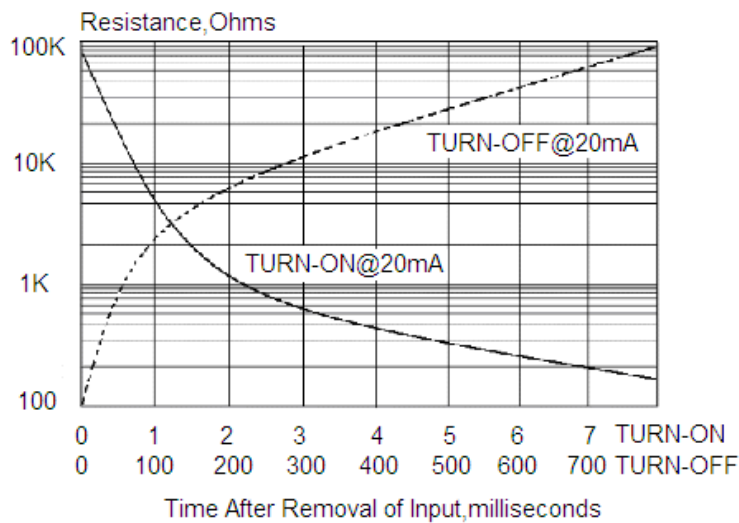

Dimensional Outline and Connection(Unit:mm)

