
Date: 8-18-09 **Ref.#:** TW-700180



9mm Snap-In Audio Potentiometer

317-2080F-1K, 317-2080F-2K, 317-2080F-5K, 317-2080F-10K, 317-2080F-50K, 317-2080F-100K, 317-2080F-500K, 317-2080F-1M

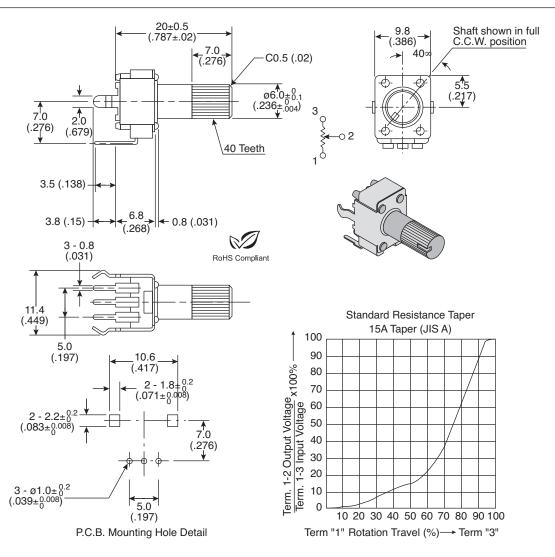

Dimensions mm (in.)

Specifications:

Value (Ω): 1K, 2K, 5K, 10K, 50K, 100K, 500K, 1M

Mechanical Characteristics:

Total rotational angle: 280°±5° Rotational torque: 10~100gf Shaft stop strength: 3 kgf Starting torque: 10~100gf-cm

Electrical Characteristics:

Tolerance: ±30% Rated wattage: 0.05W Electrical Characteristics:

Maximum working voltage: AC 50V, DC20V Noise (refer to JIS C6443): > 100 mV

Insulation resistance: $100M\Omega$ min. @ DC250 volts

Taper: Audio

V.R. life: 10,000 Cycles Click life: 5,000 Cycles

Note: Meet or exceed JISC 6443 Requirements

RoHS Compliant

Available from Mouser Electronics

www.mouser.com

(800) 346-6873