


Cisco Progressive Packet Tracer

“Basic” :

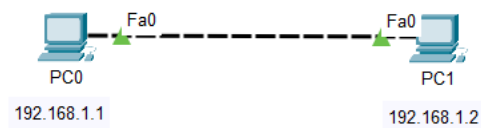

```
PC0
Physical Config Desktop Programming Attributes
Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Request timed out.
Request timed out.

Ping statistics for 192.168.1.3:
    Packets: Sent = 3, Received = 0, Lost = 3 (100% loss),

Control-C
^C
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time=7ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128


Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 7ms, Average = 1ms

C:\>
```

Pouvez-vous me dire quelle est la différence entre Fast Ethernet 0/1 et 1/1 ? :

- La différence réside dans la manière dont les modules ou emplacements sont numérotés, mais elles visent toutes deux à spécifier une interface particulière sur le dispositif.

“Switch” :

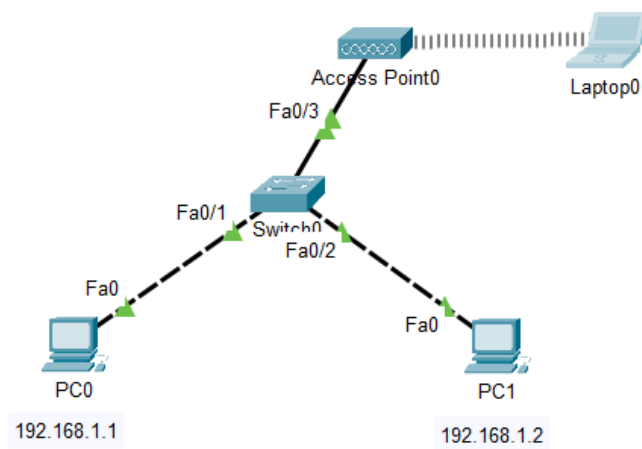

Laptop0

Physical Config Desktop Programming Attributes

Command Prompt

```
C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Ping statistics for 192.168.1.1:
    Packets: Sent = 1, Received = 0, Lost = 1 (100% loss),

Control-C
^C
C:\>ping 192.168.1.10

Pinging 192.168.1.10 with 32 bytes of data:

Ping statistics for 192.168.1.10:
    Packets: Sent = 1, Received = 0, Lost = 1 (100% loss),

Control-C
^C
C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Ping statistics for 192.168.1.1:
    Packets: Sent = 1, Received = 0, Lost = 1 (100% loss),

Control-C
^C
C:\>ping 192.168.1.1





Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time=49ms TTL=128
Reply from 192.168.1.1: bytes=32 time=32ms TTL=128
Reply from 192.168.1.1: bytes=32 time=14ms TTL=128
Reply from 192.168.1.1: bytes=32 time=22ms TTL=128


Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 14ms, Maximum = 49ms, Average = 29ms

C:\>
```


“Idoine” :

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete	
	Successful	Laptop0	PC0	ICMP		0.000	N	0	(edit)	(delete)	(delete)
	Successful	Laptop0	192.168.1.1	ICMP		5.000	Y	1	(edit)	(delete)	(delete)

“Multi-réseau”

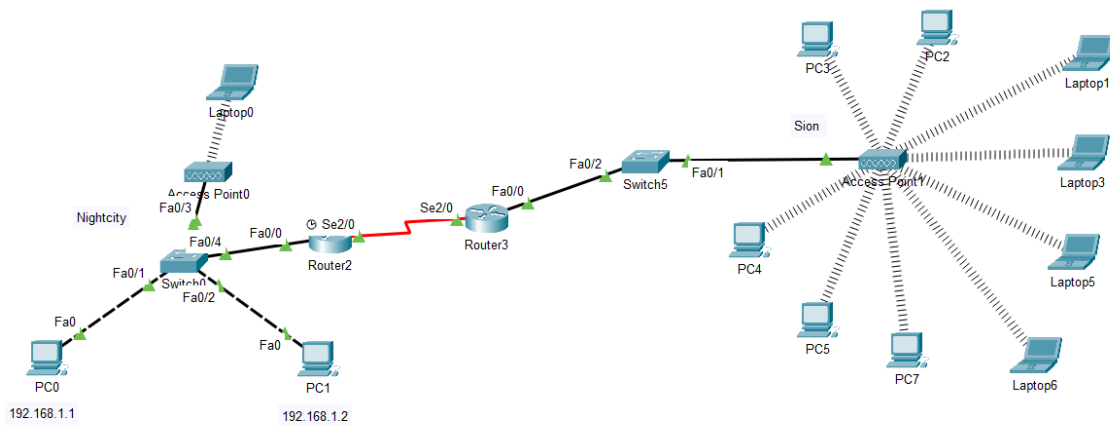

“Micro réseau” :

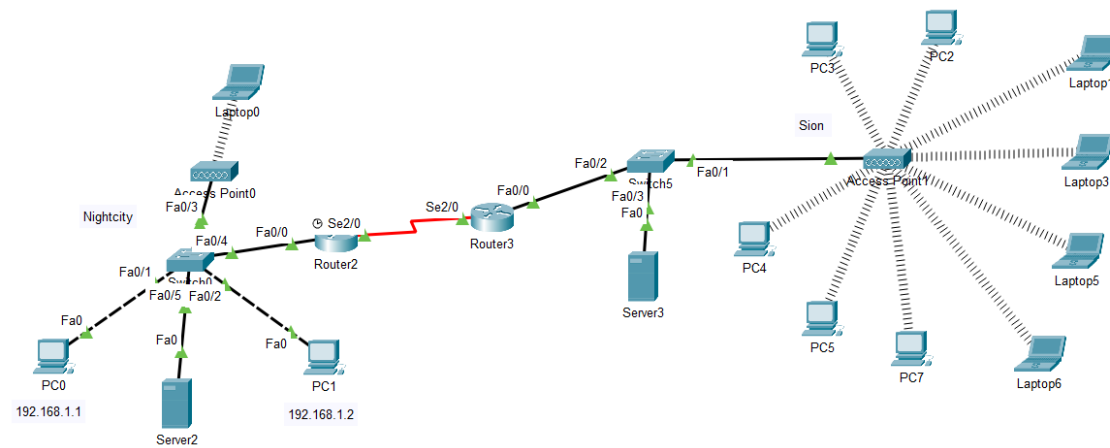

“À vos smarts” :

