



ORIGINAL PRUSA MK4S
ORIGINAL PRUSA MK4S

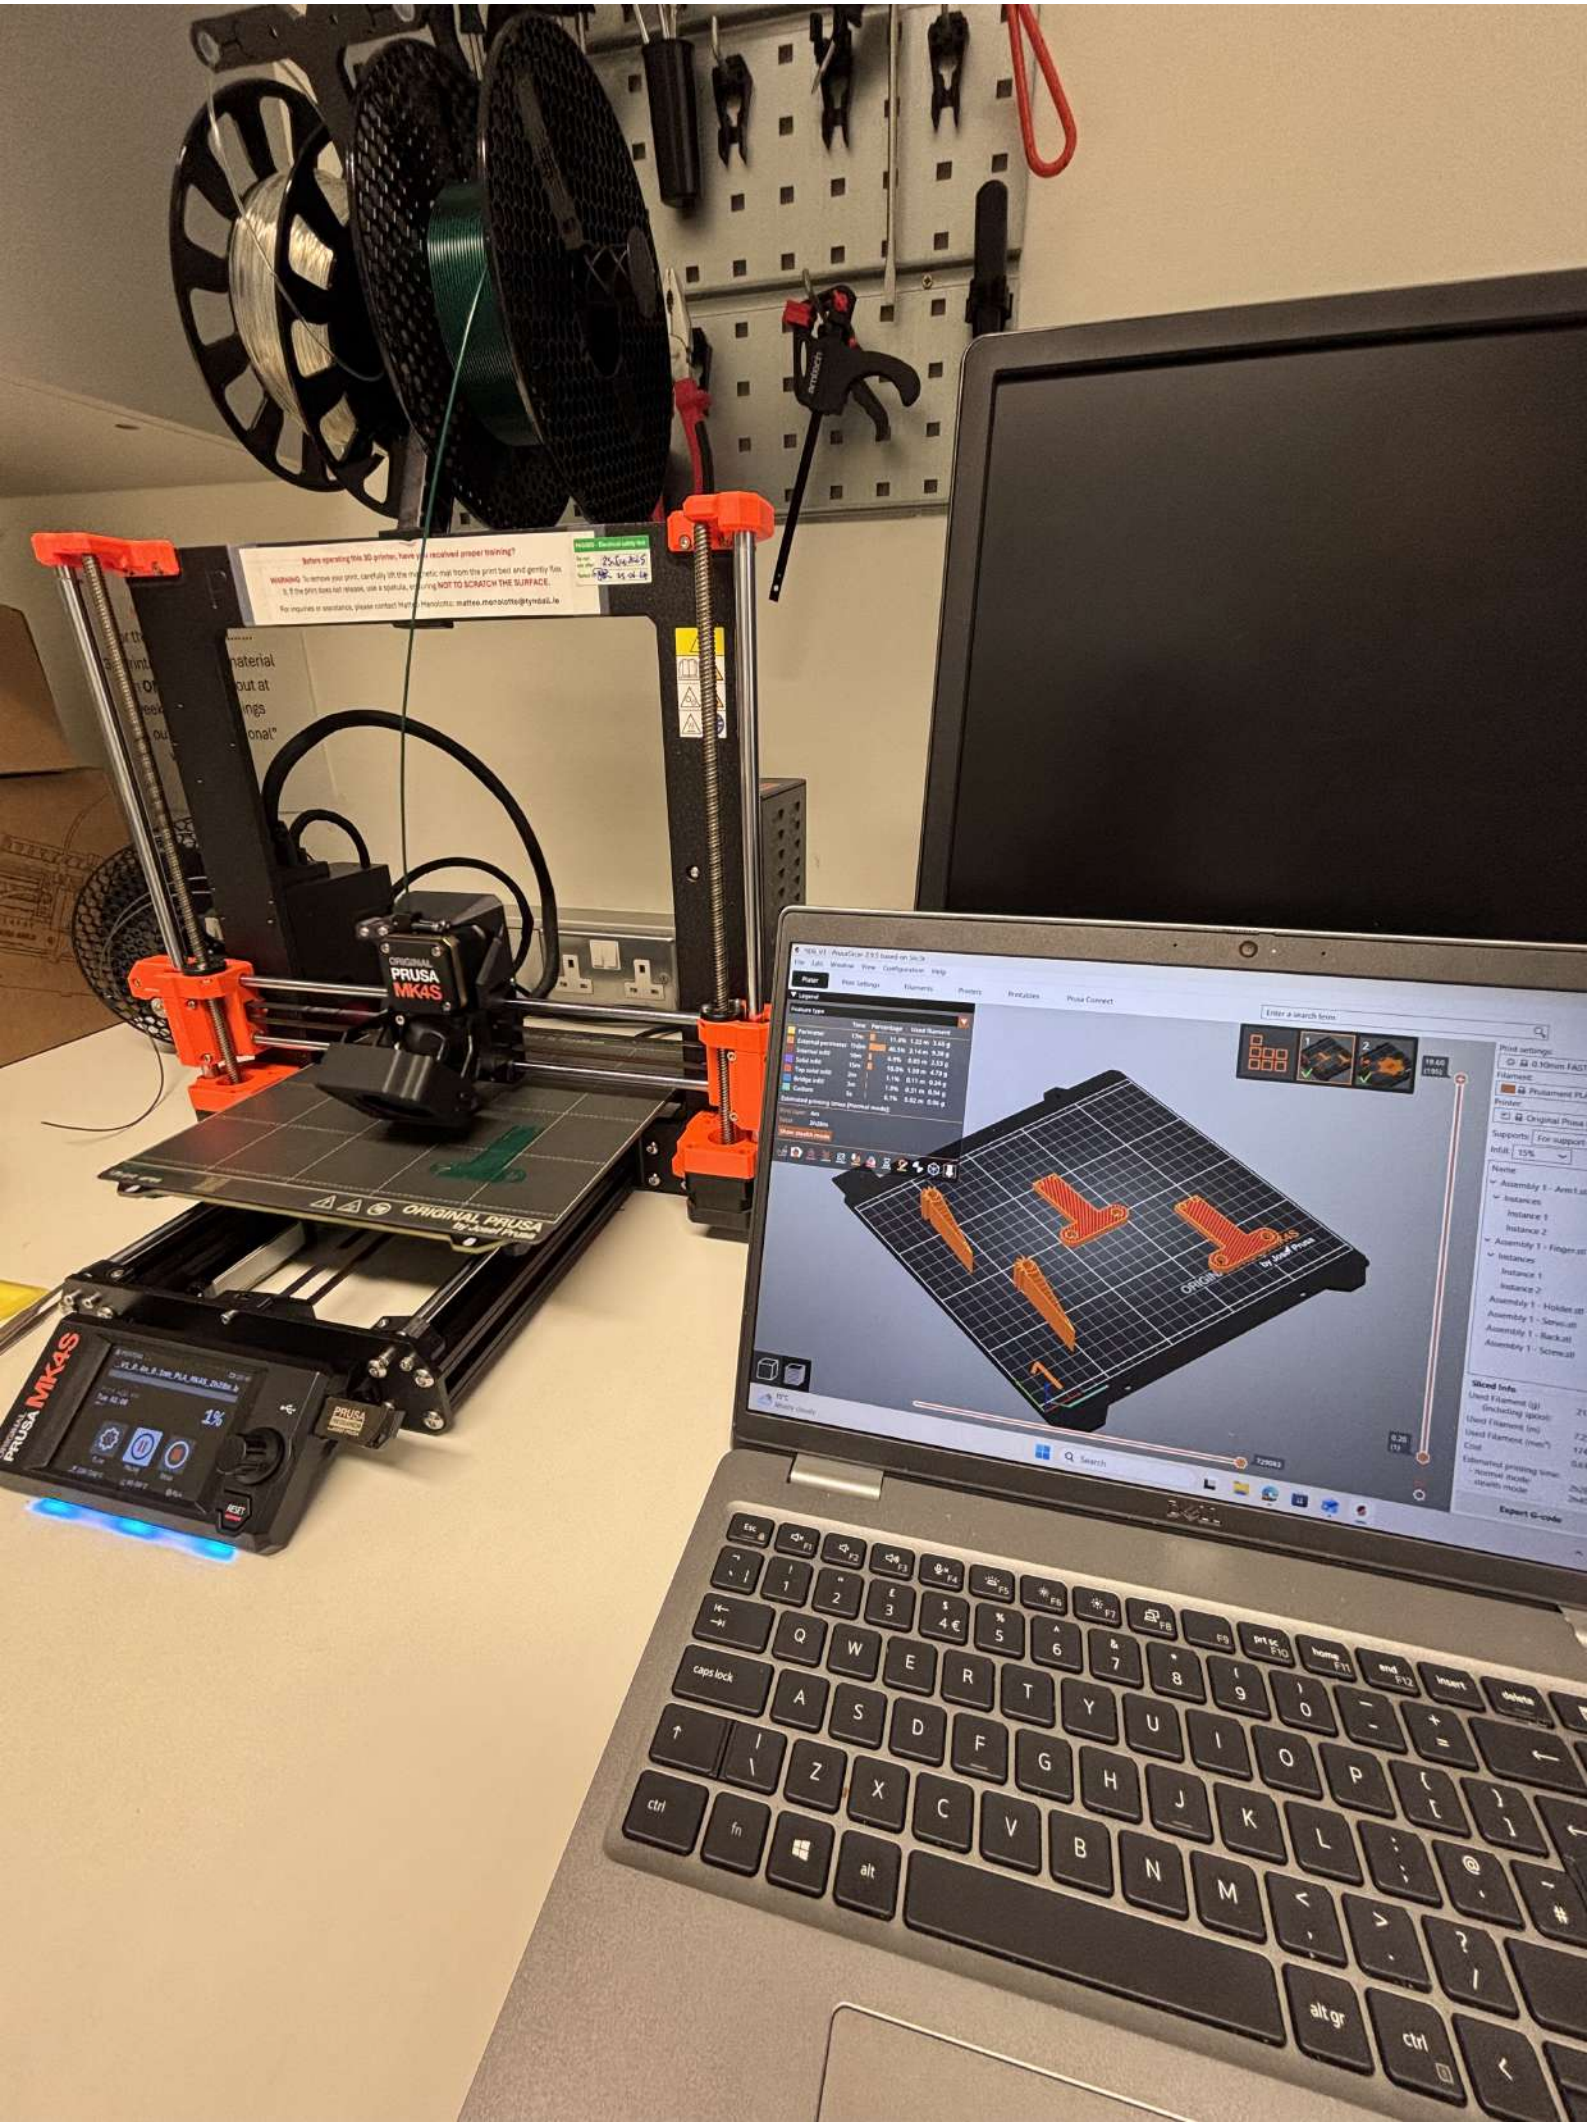


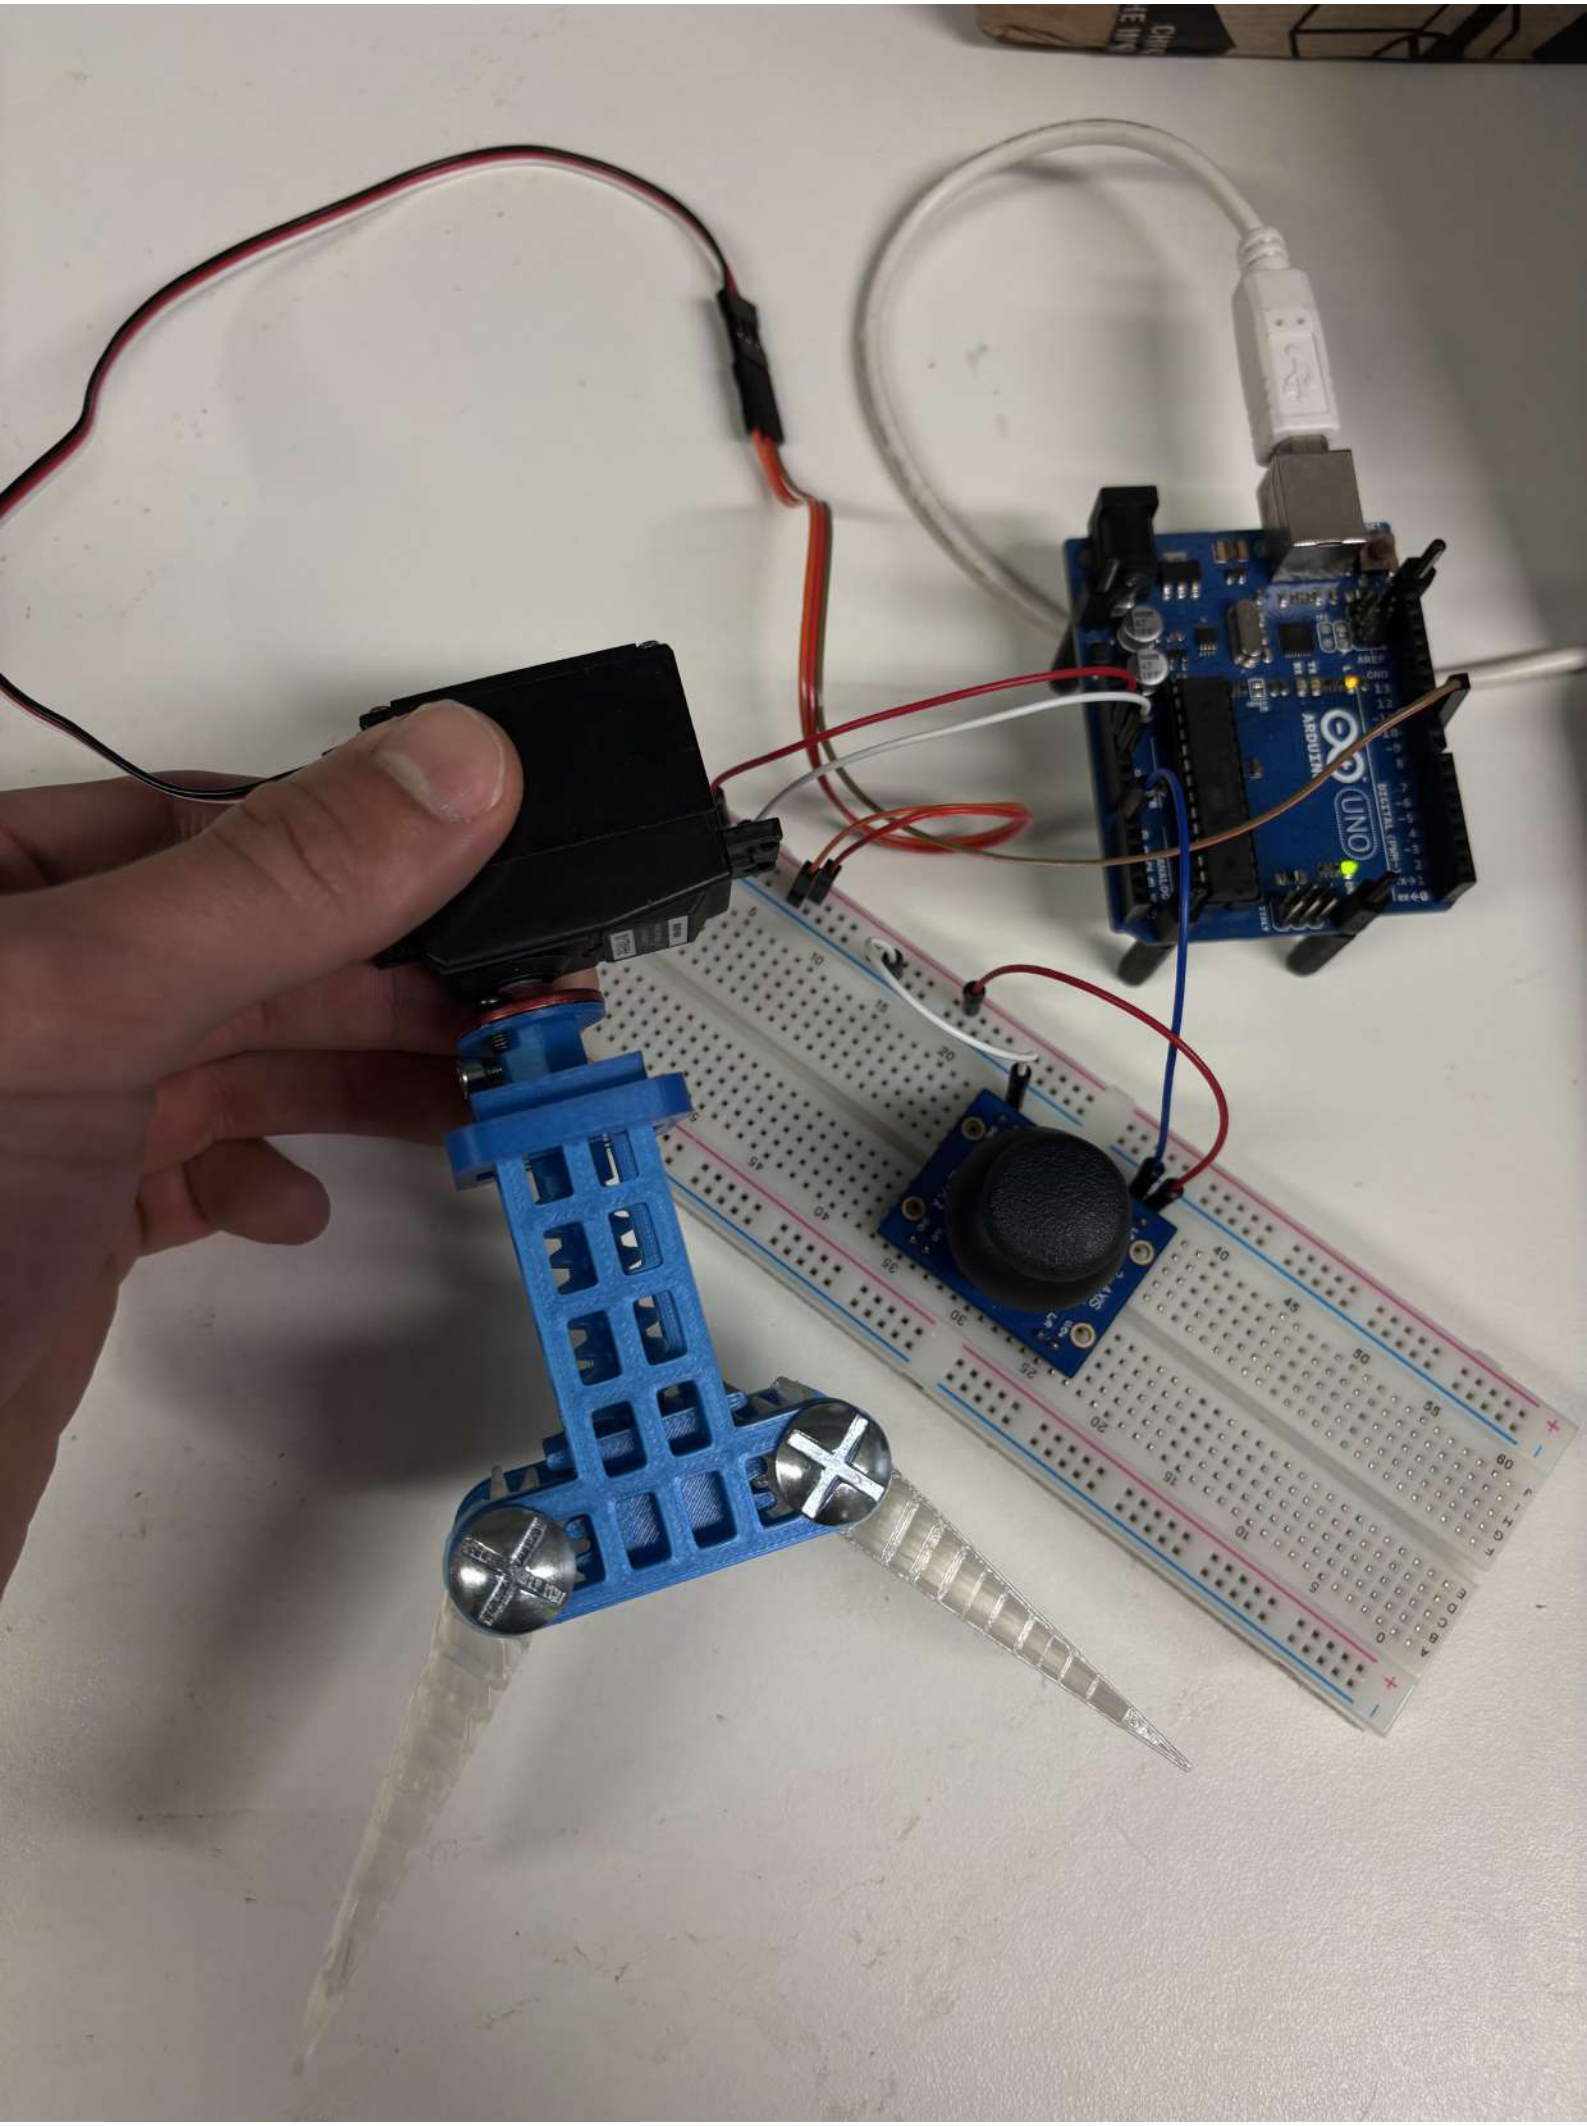

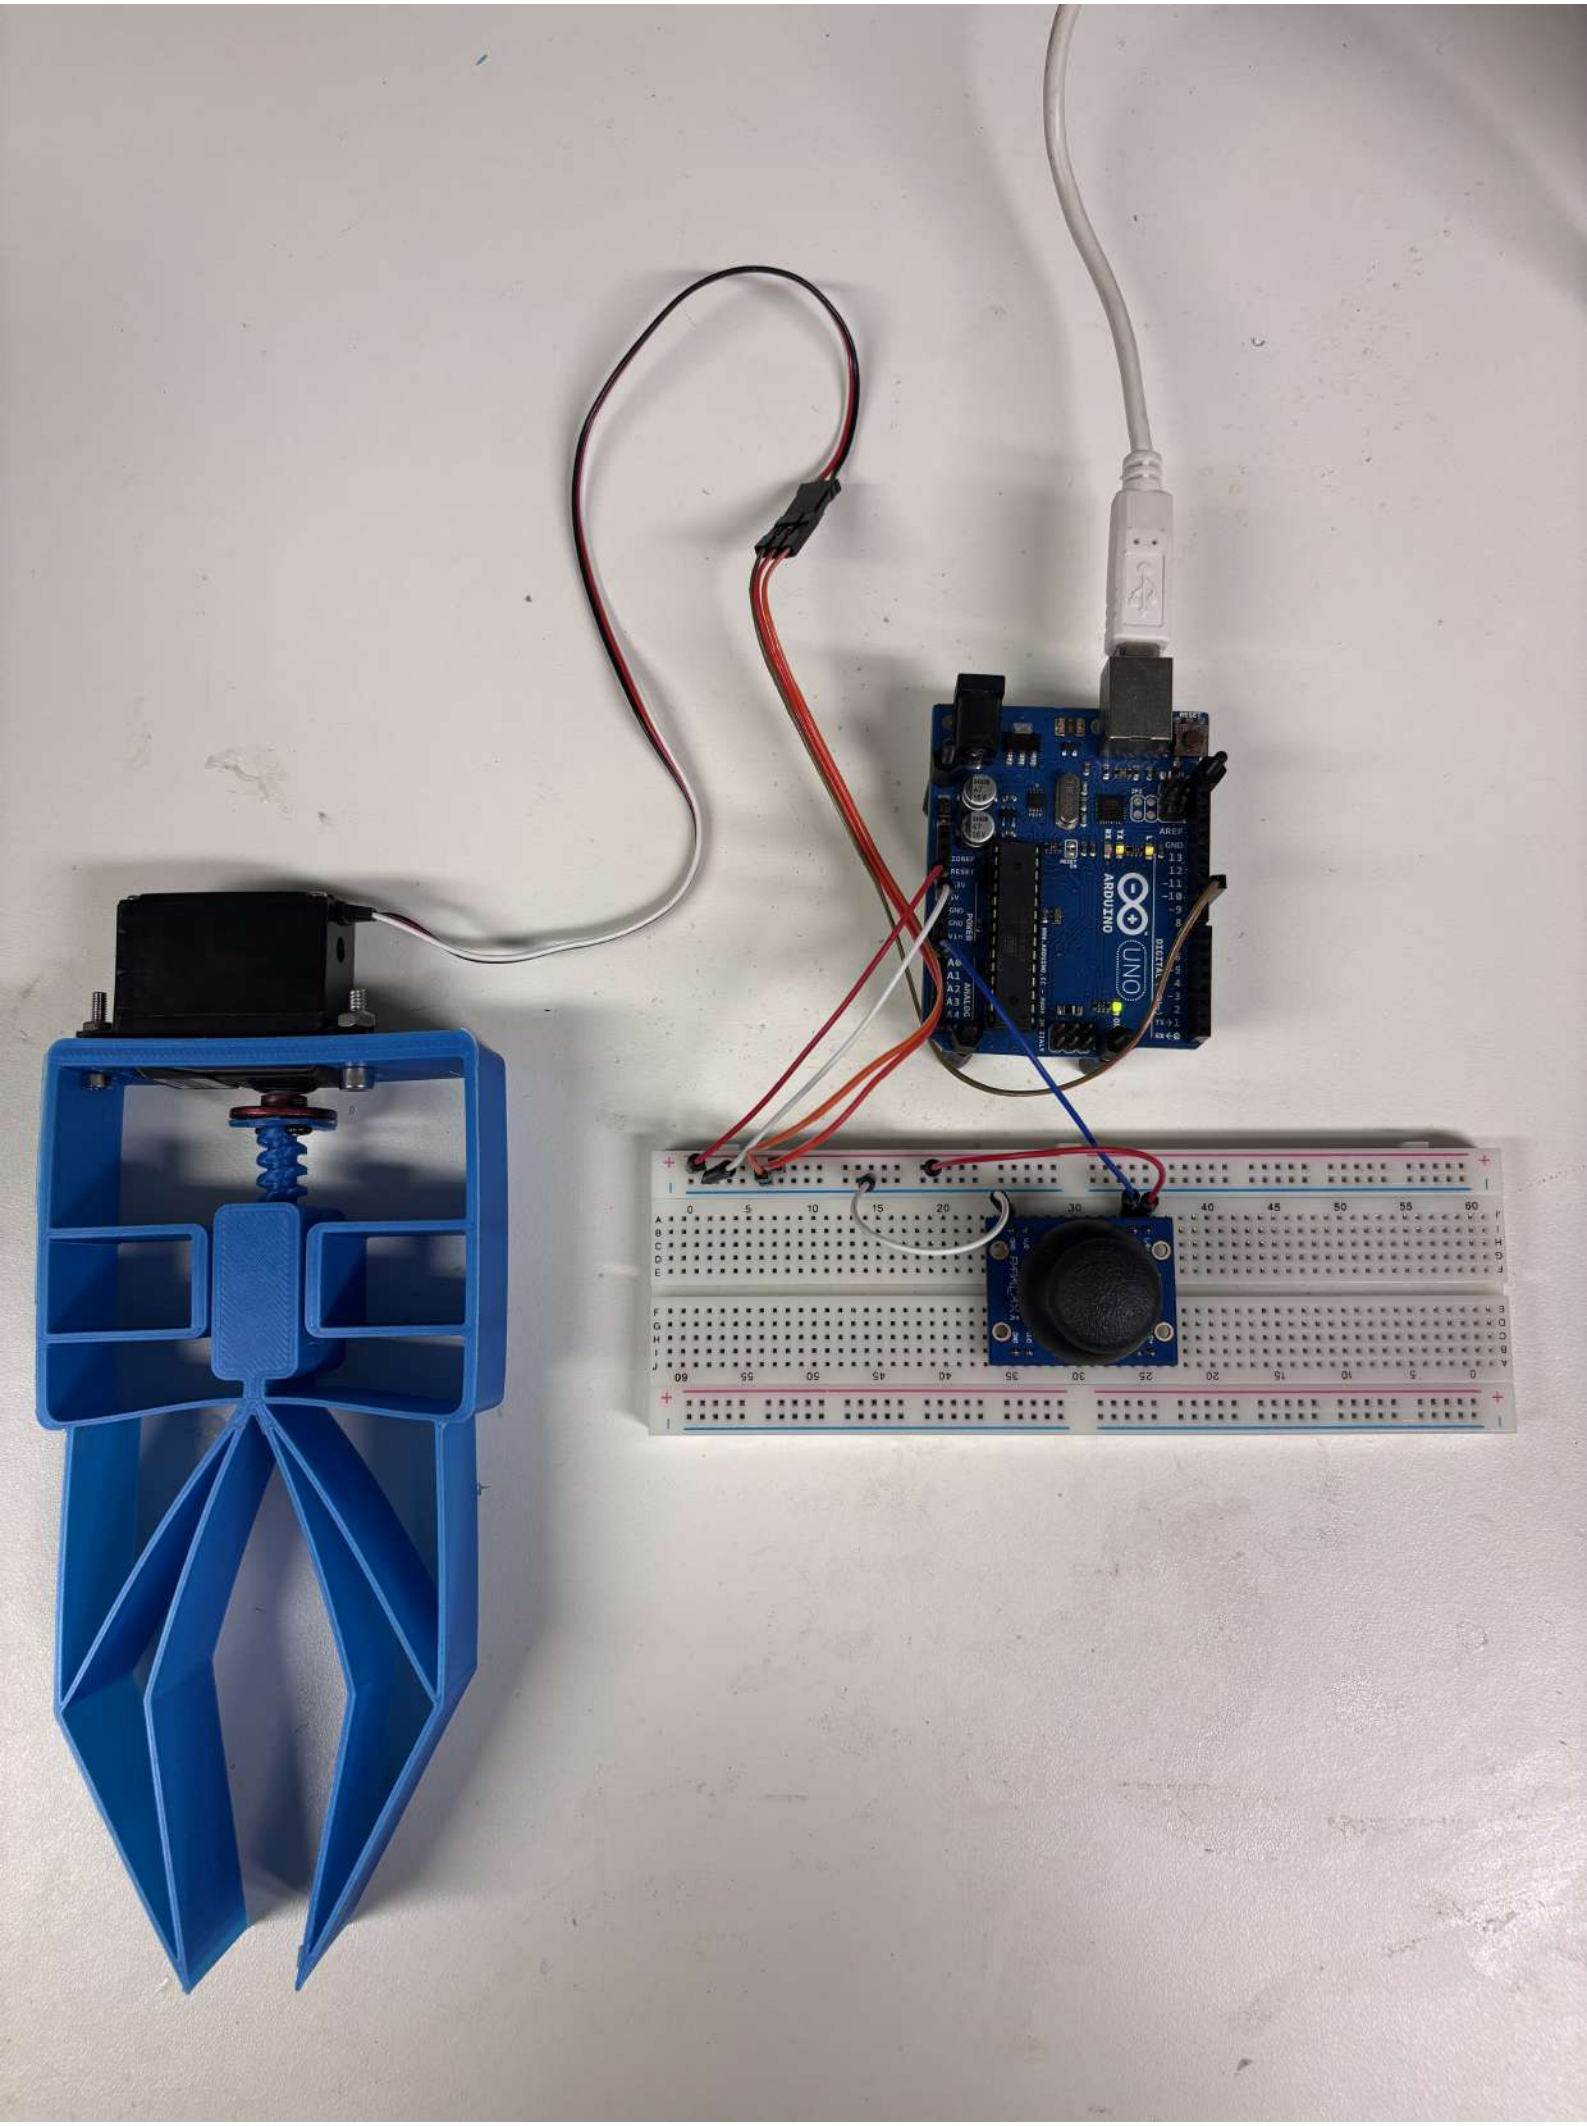




UNO
ARDUINO



ARDUINO
UNO

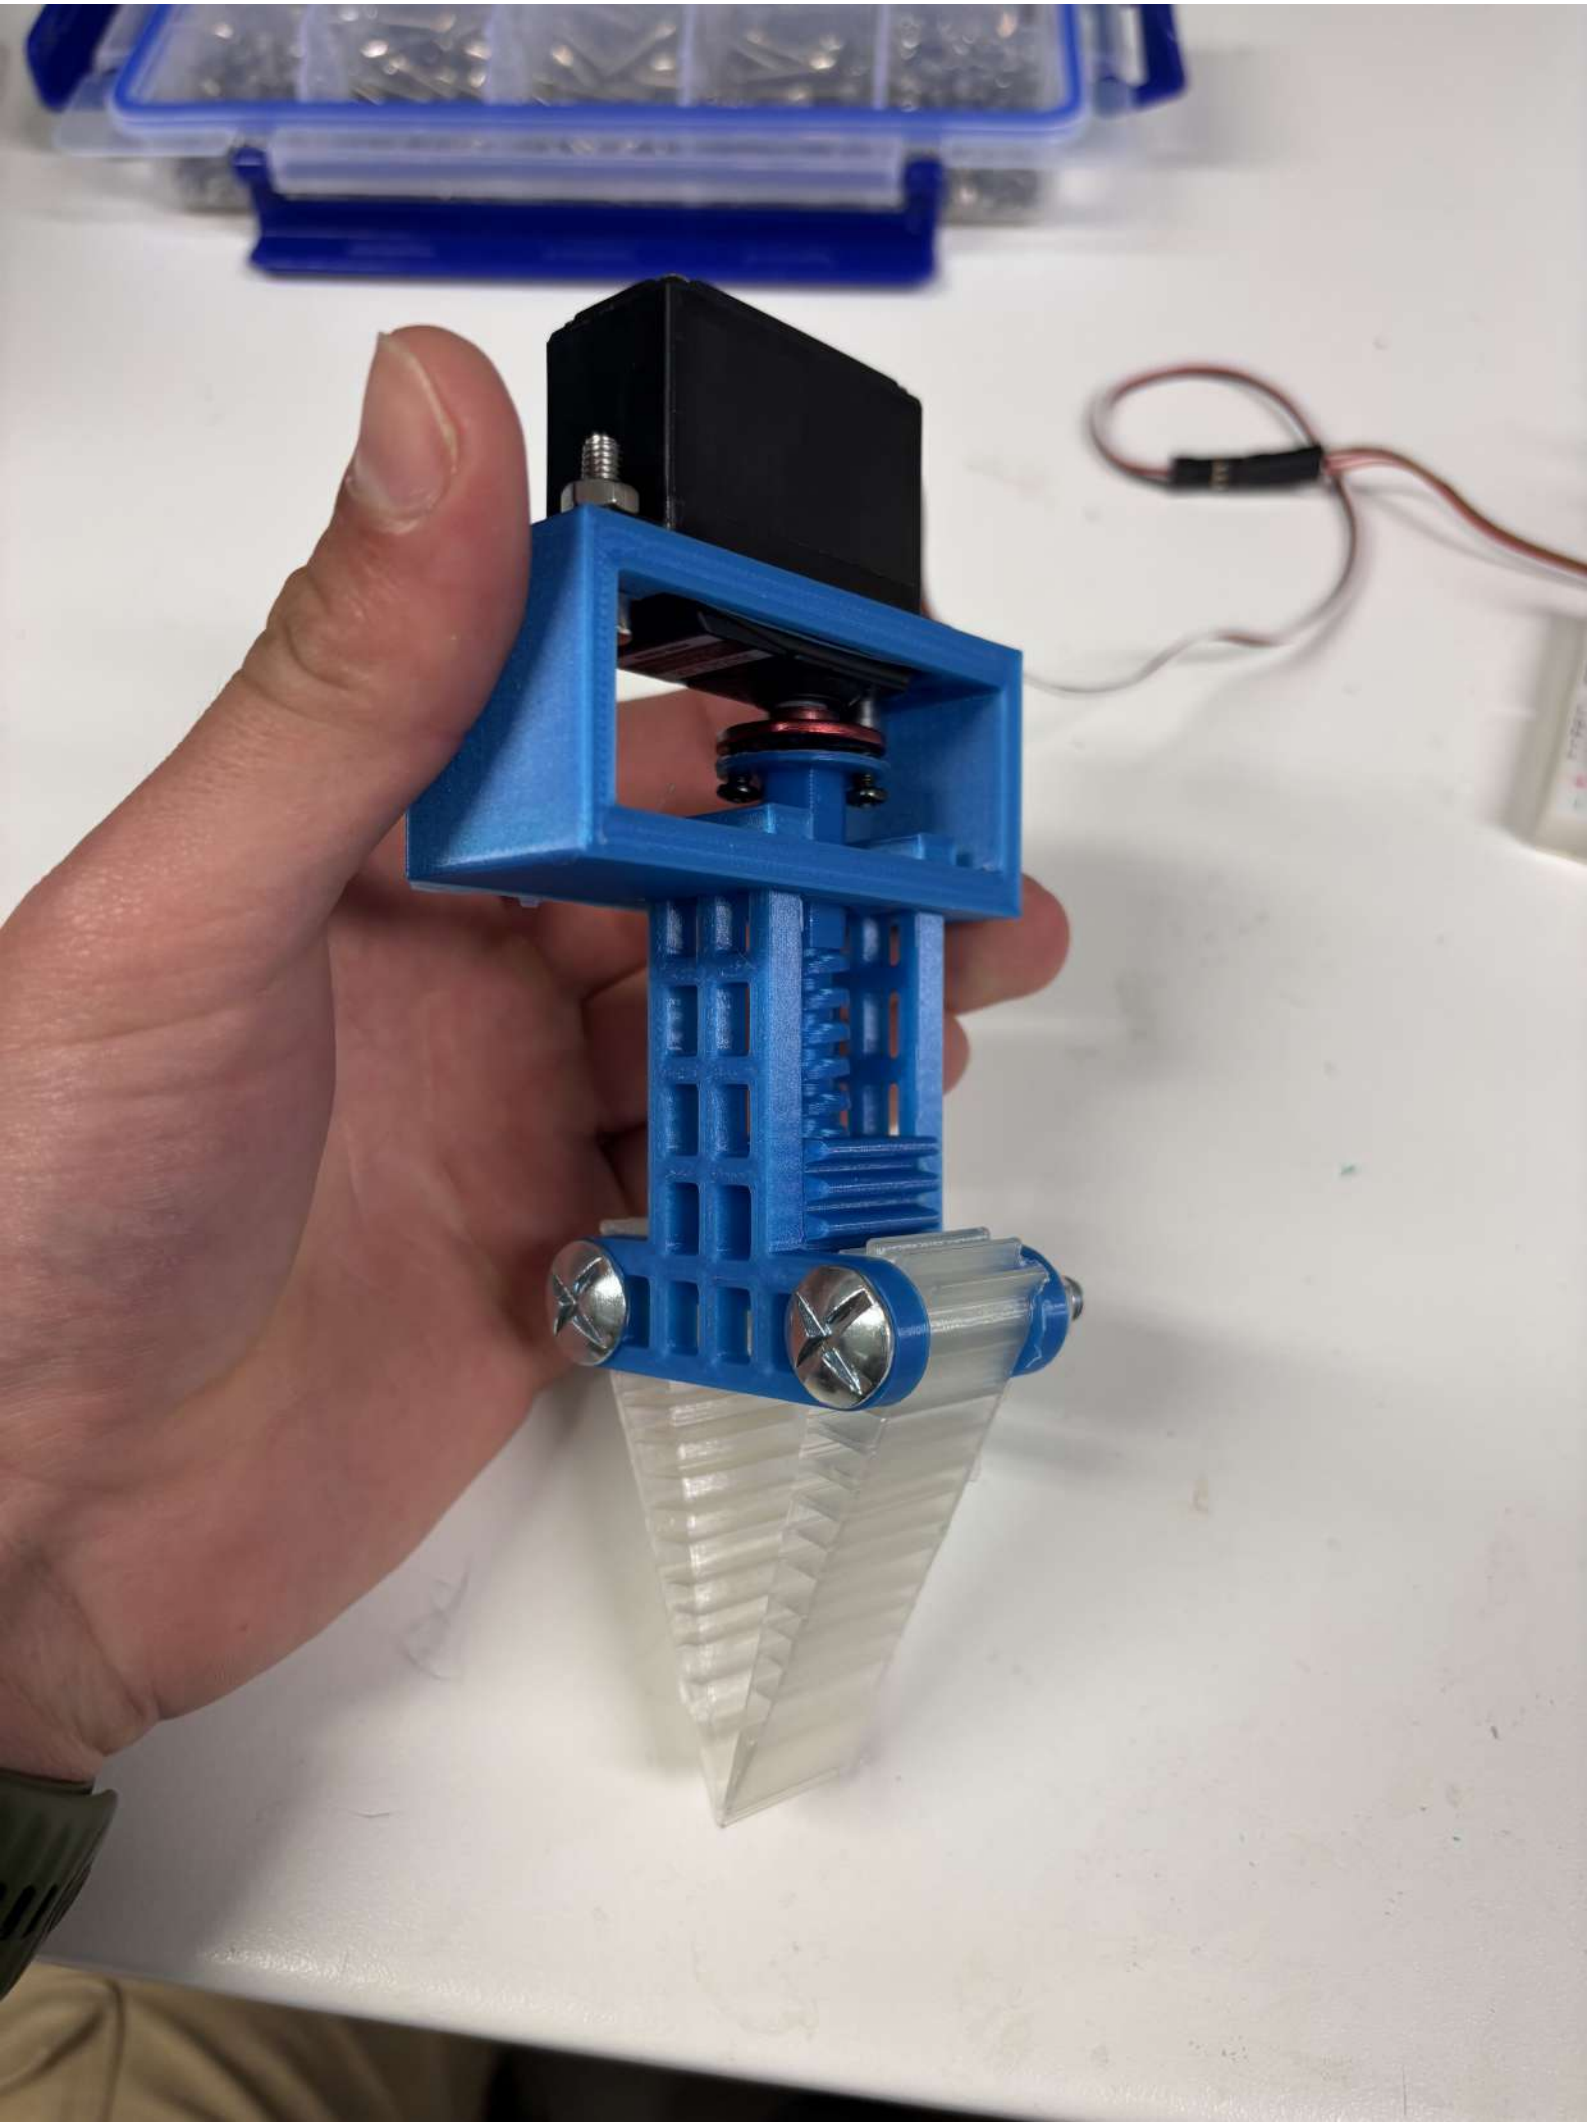




Non-invasive Assessment of Knee Condition Using Acoustic Emission Monitoring
Insight
Tyndall
Introduction
Methods
Results
Conclusion

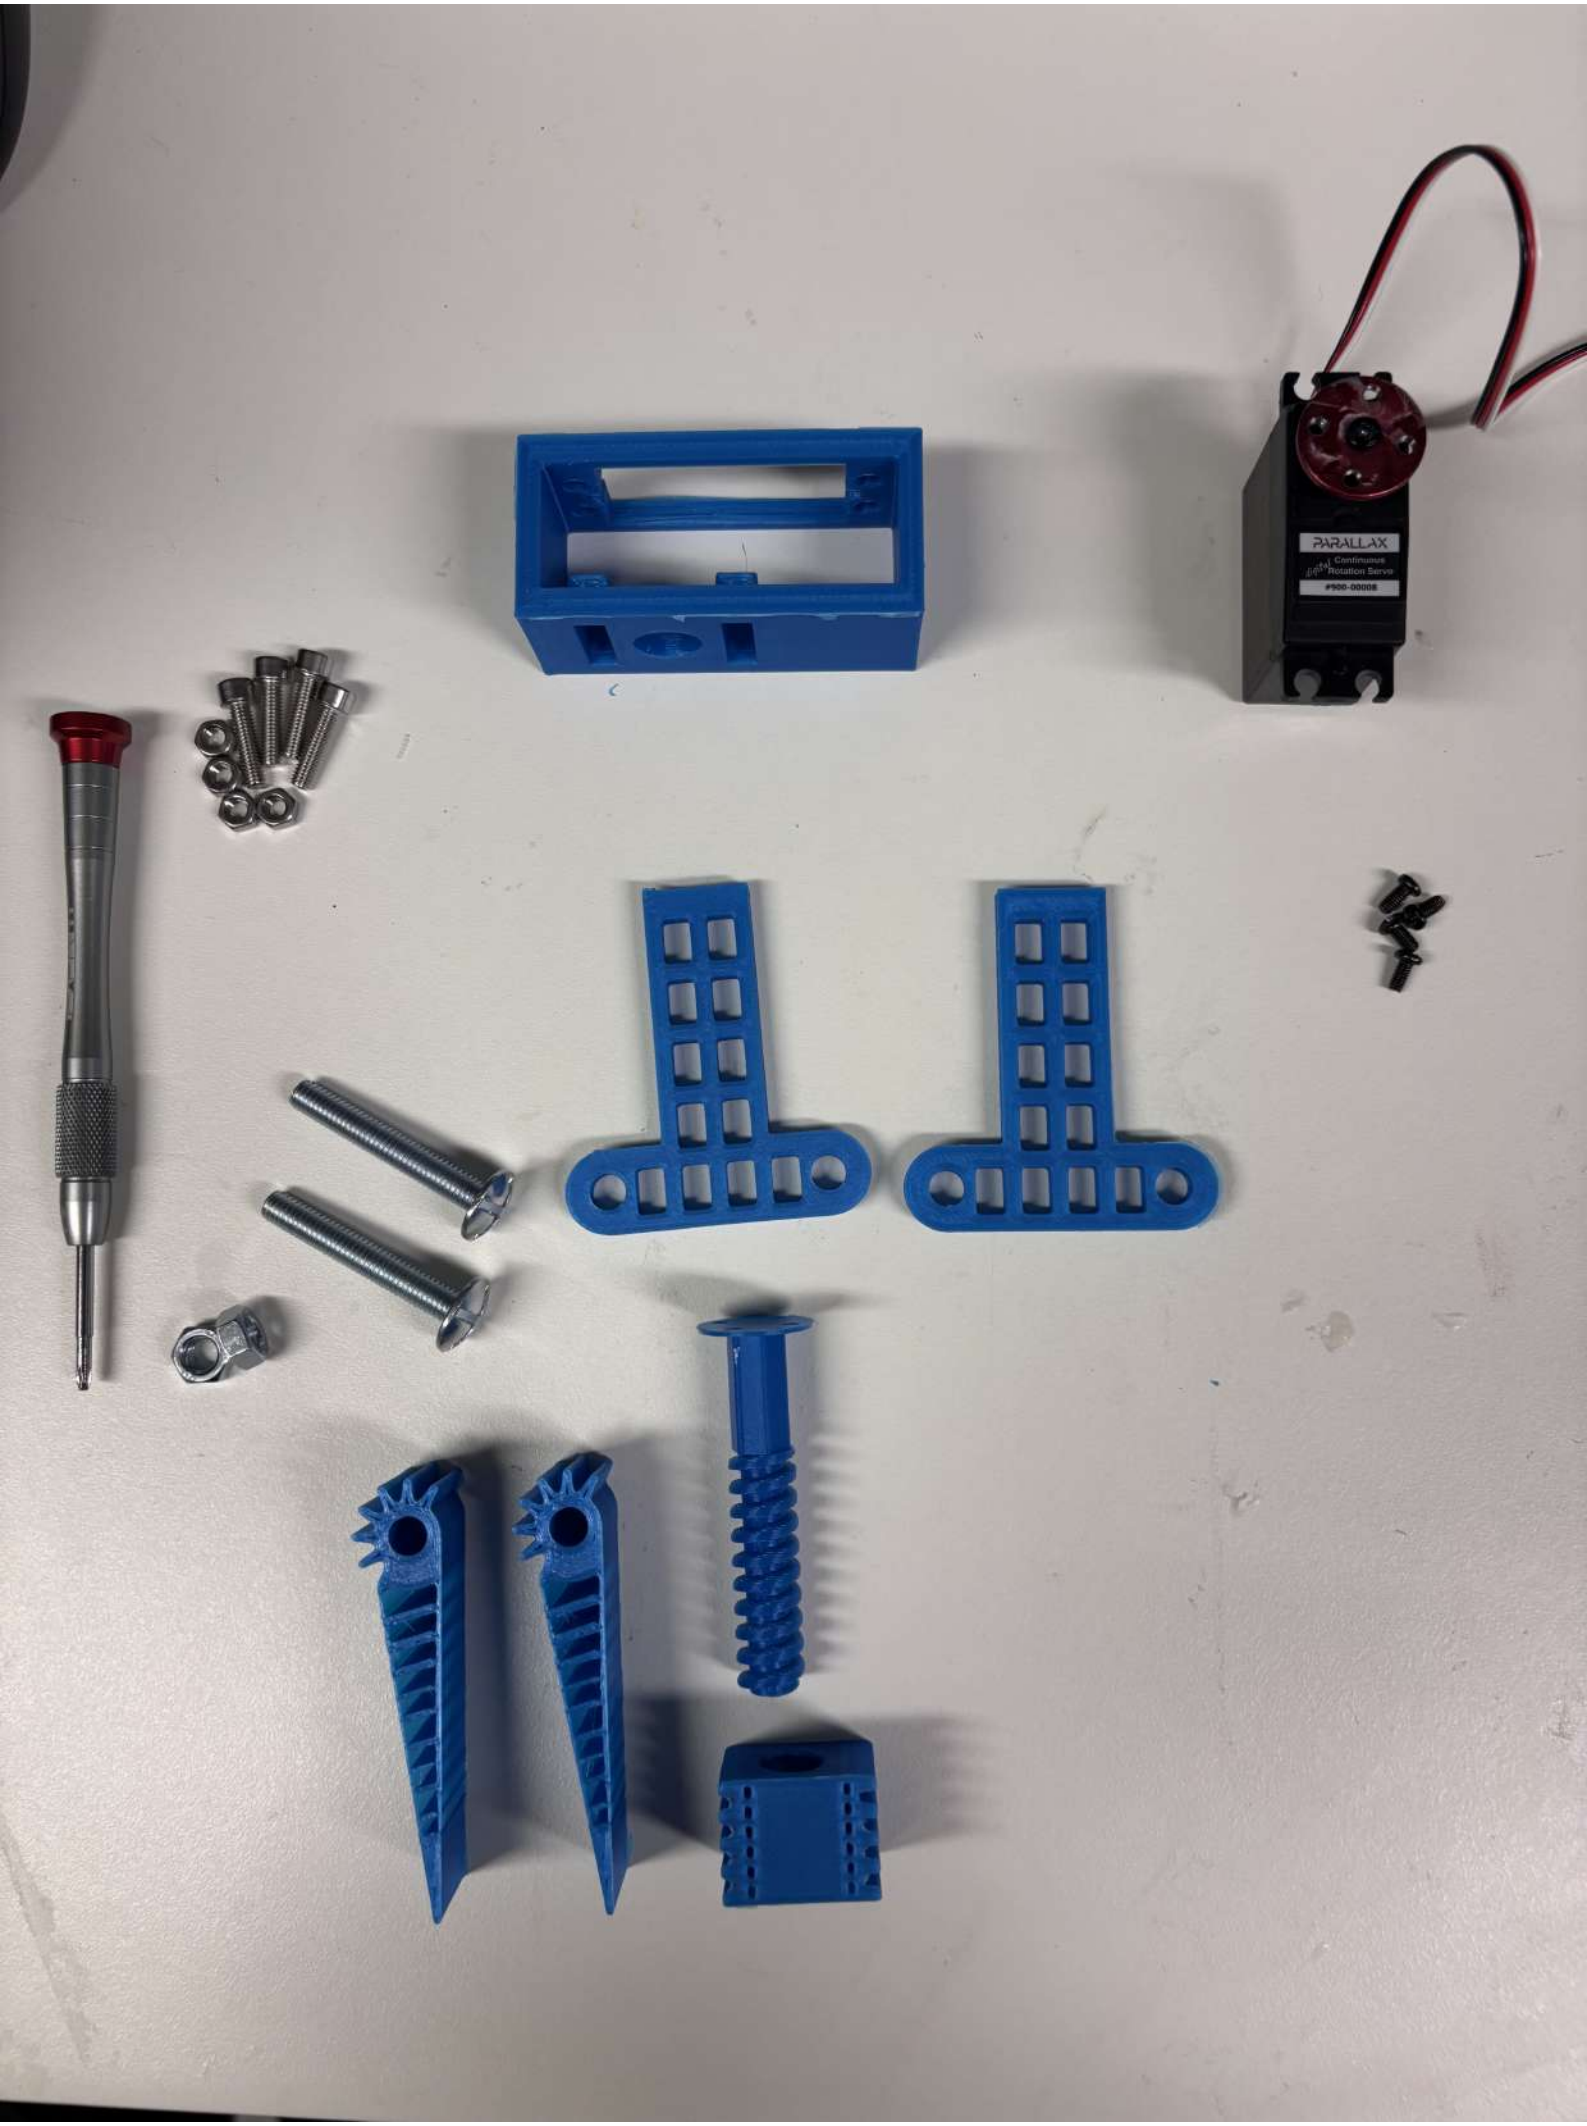

PARALLAX
Continuous
Rotation Servo

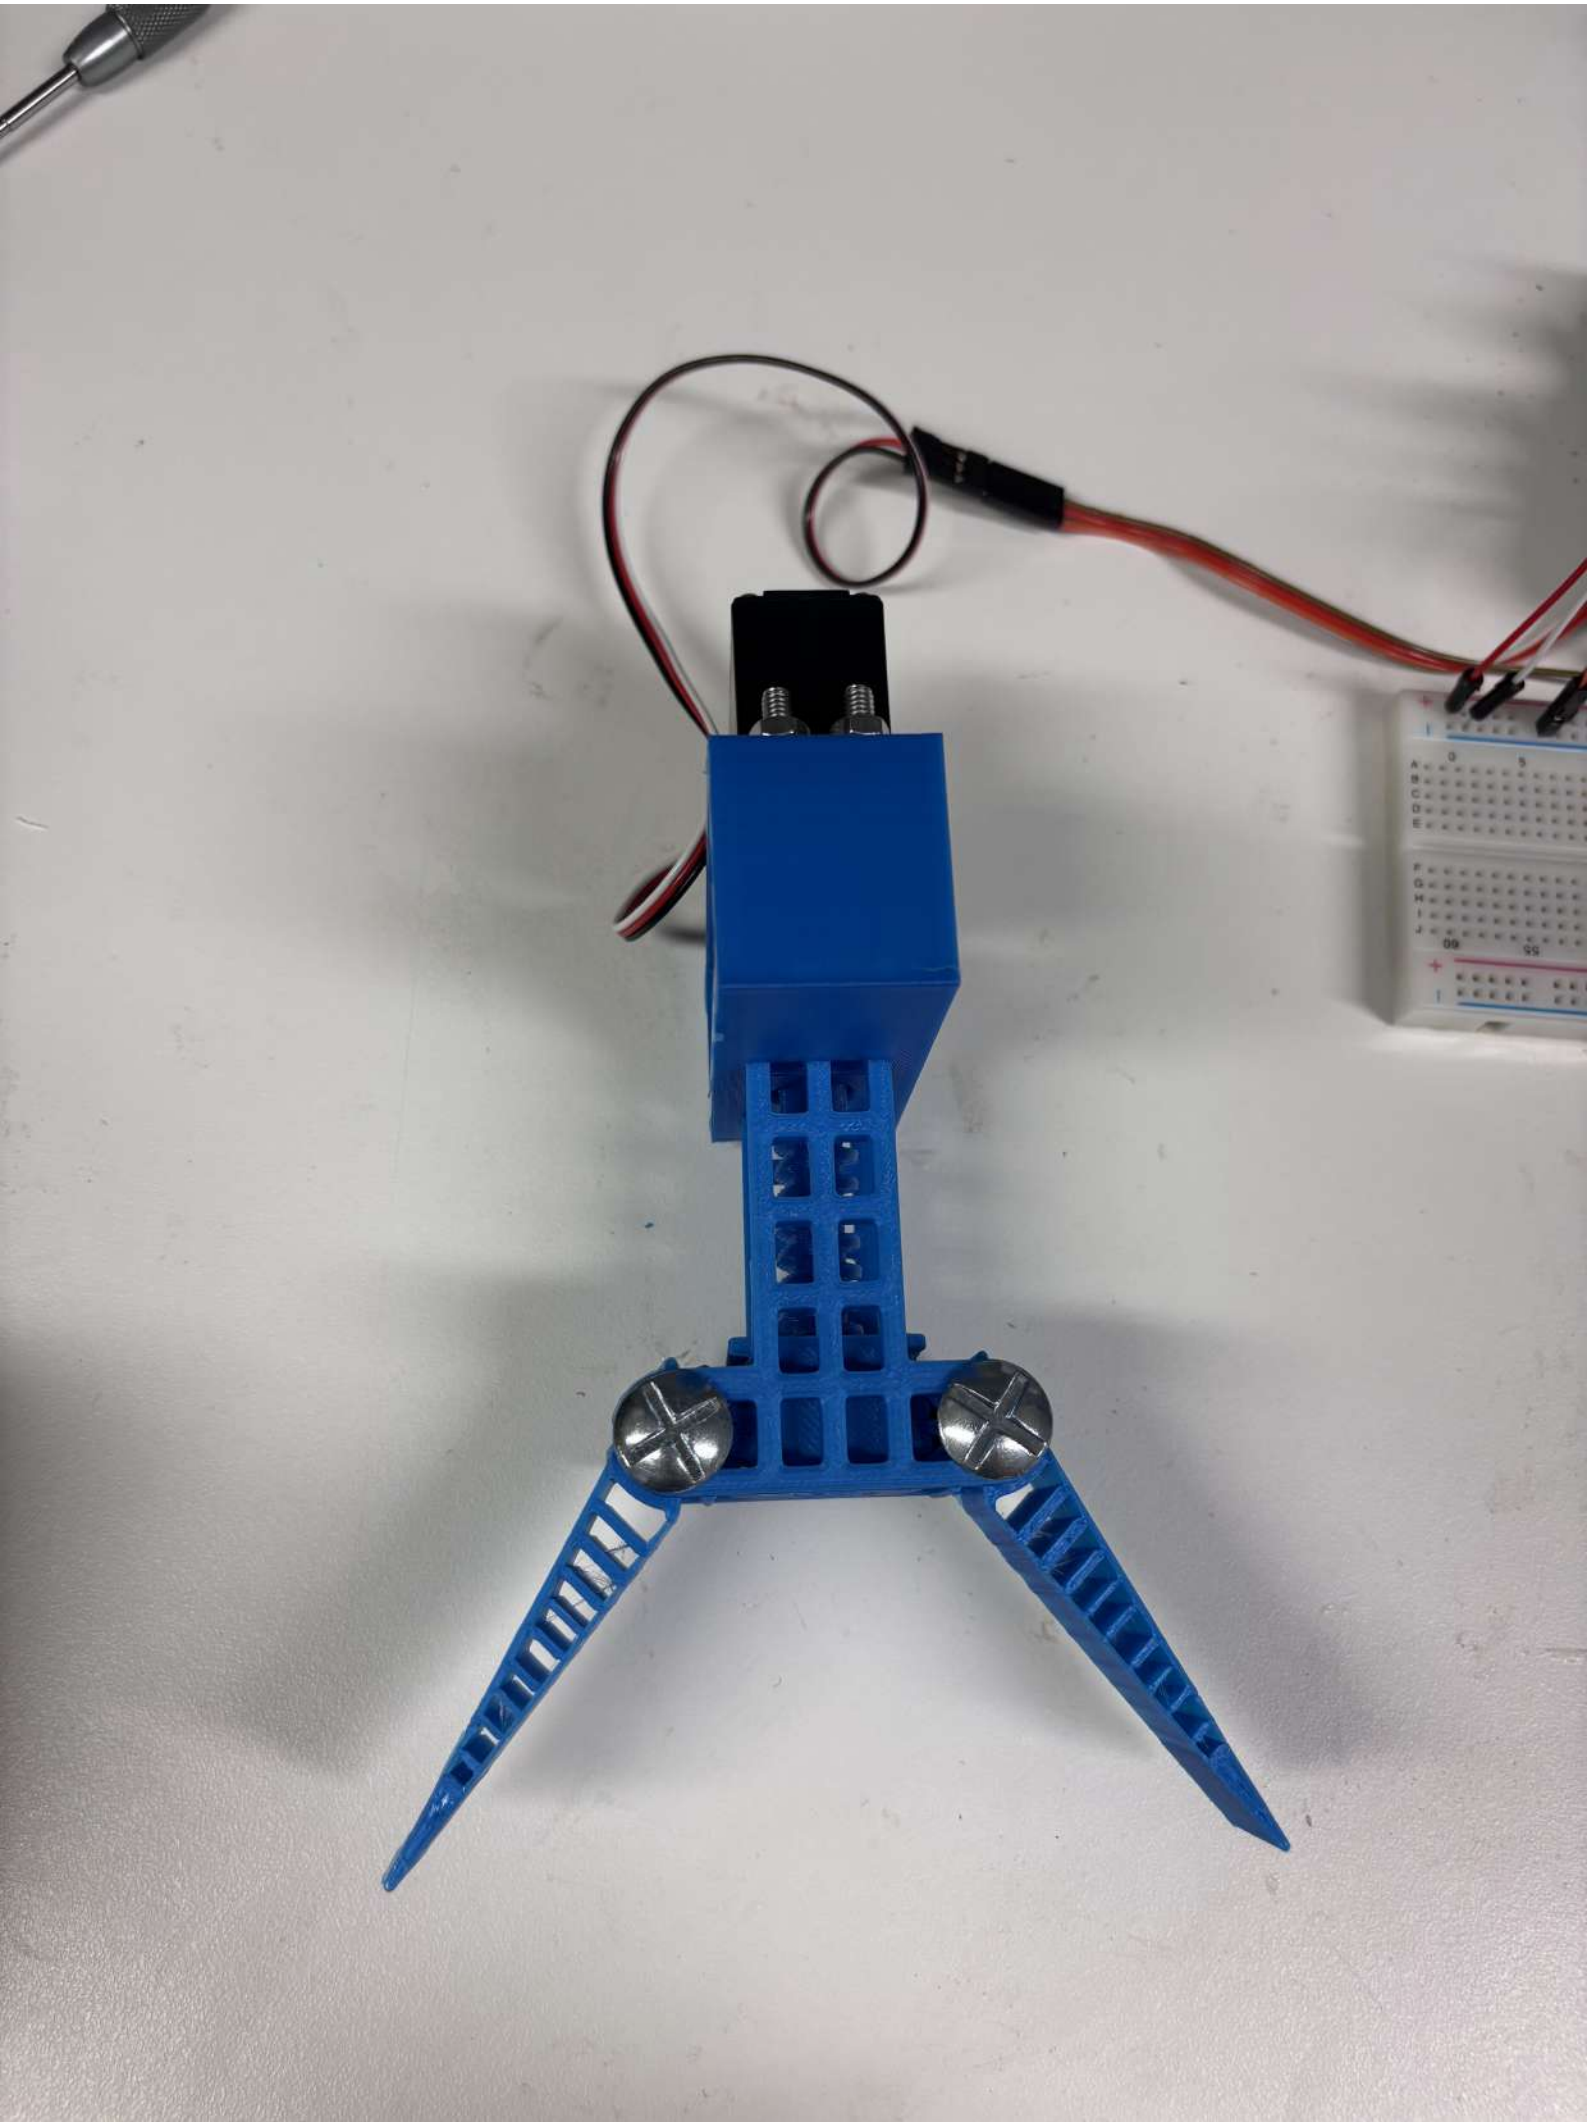

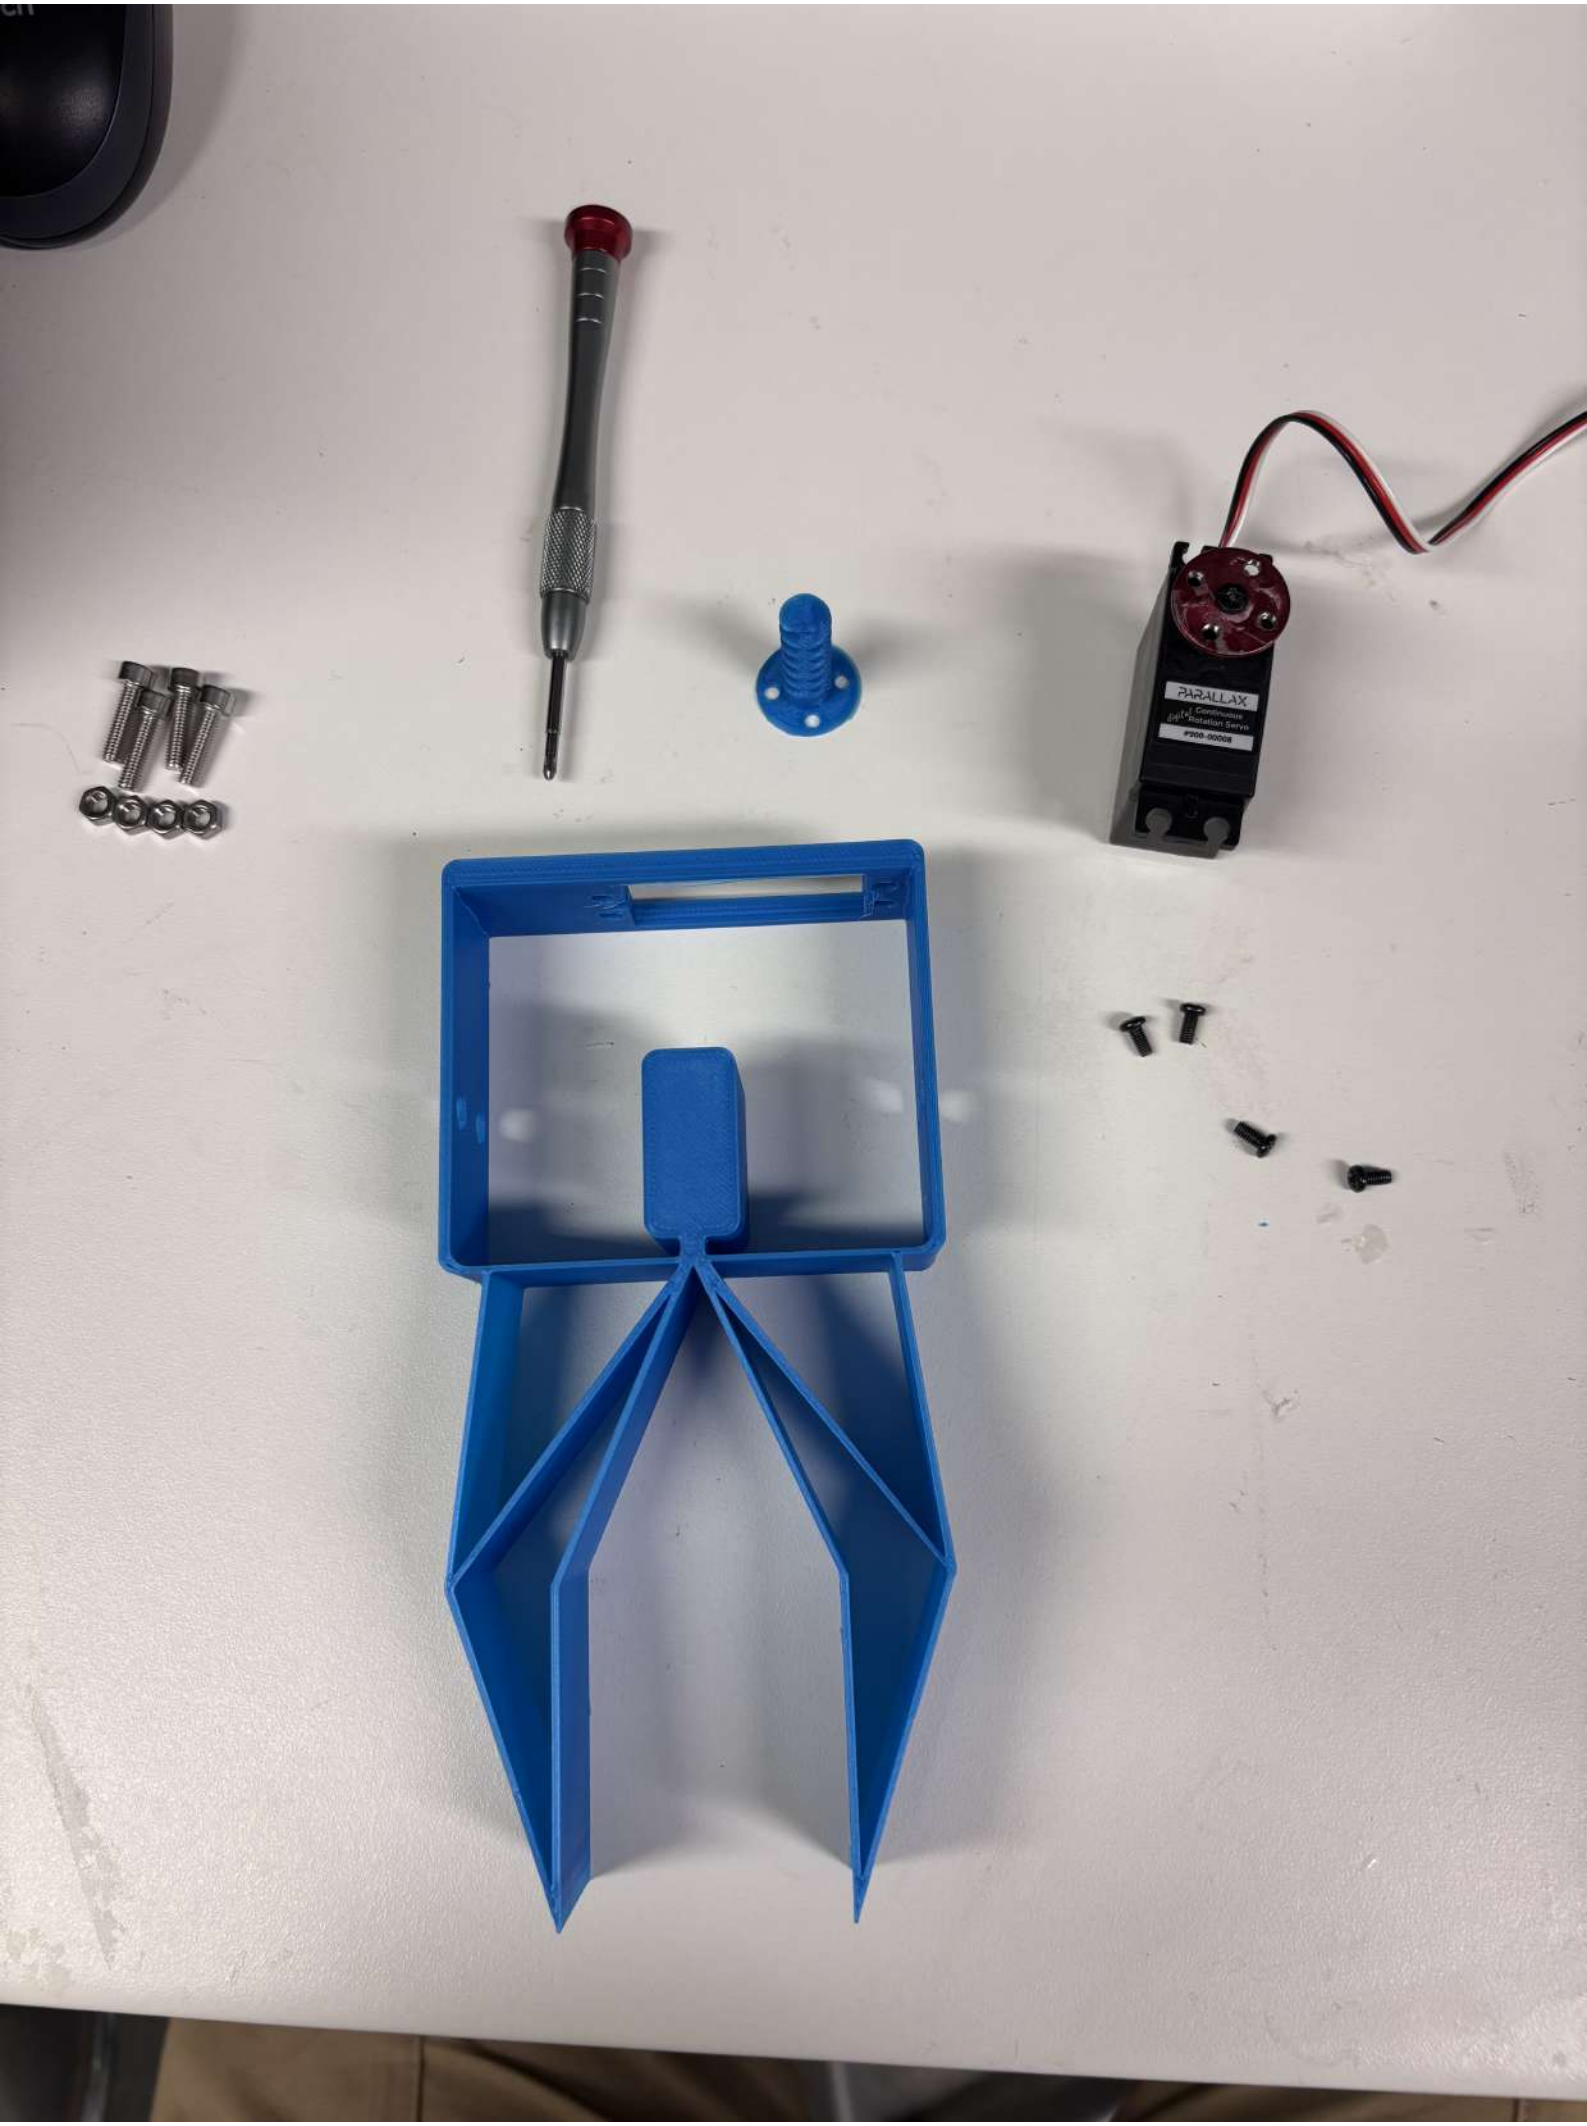

PARALLAX
Continuous
Rotation Servo
#900-00008

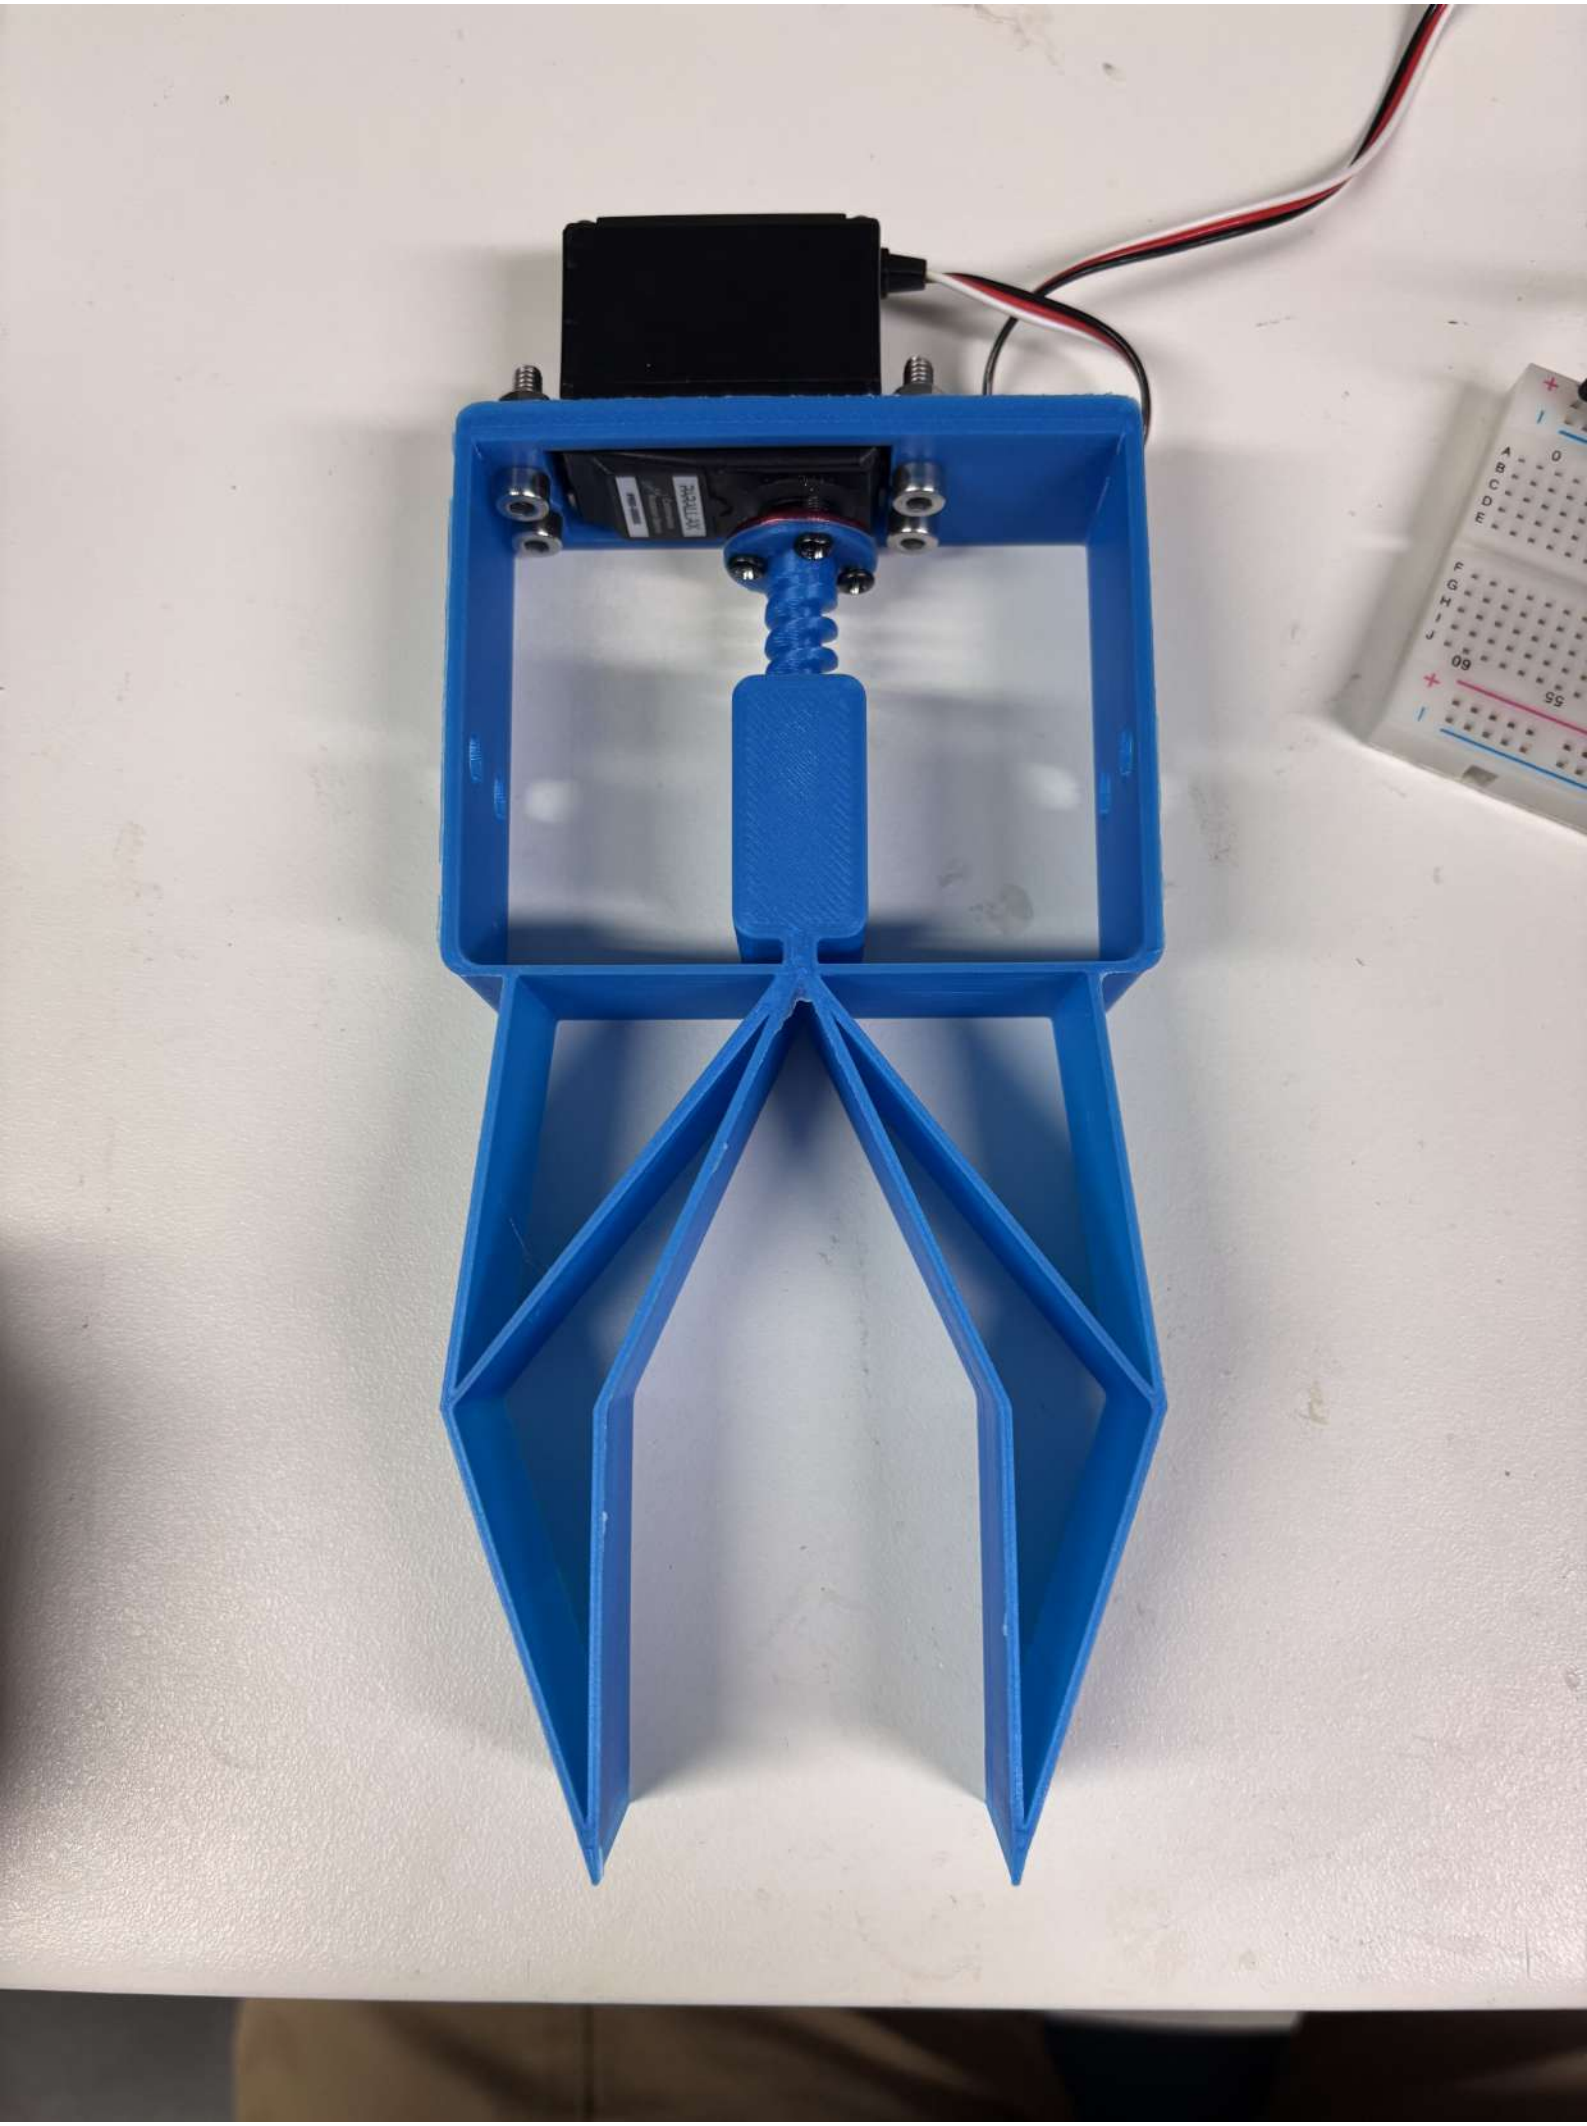


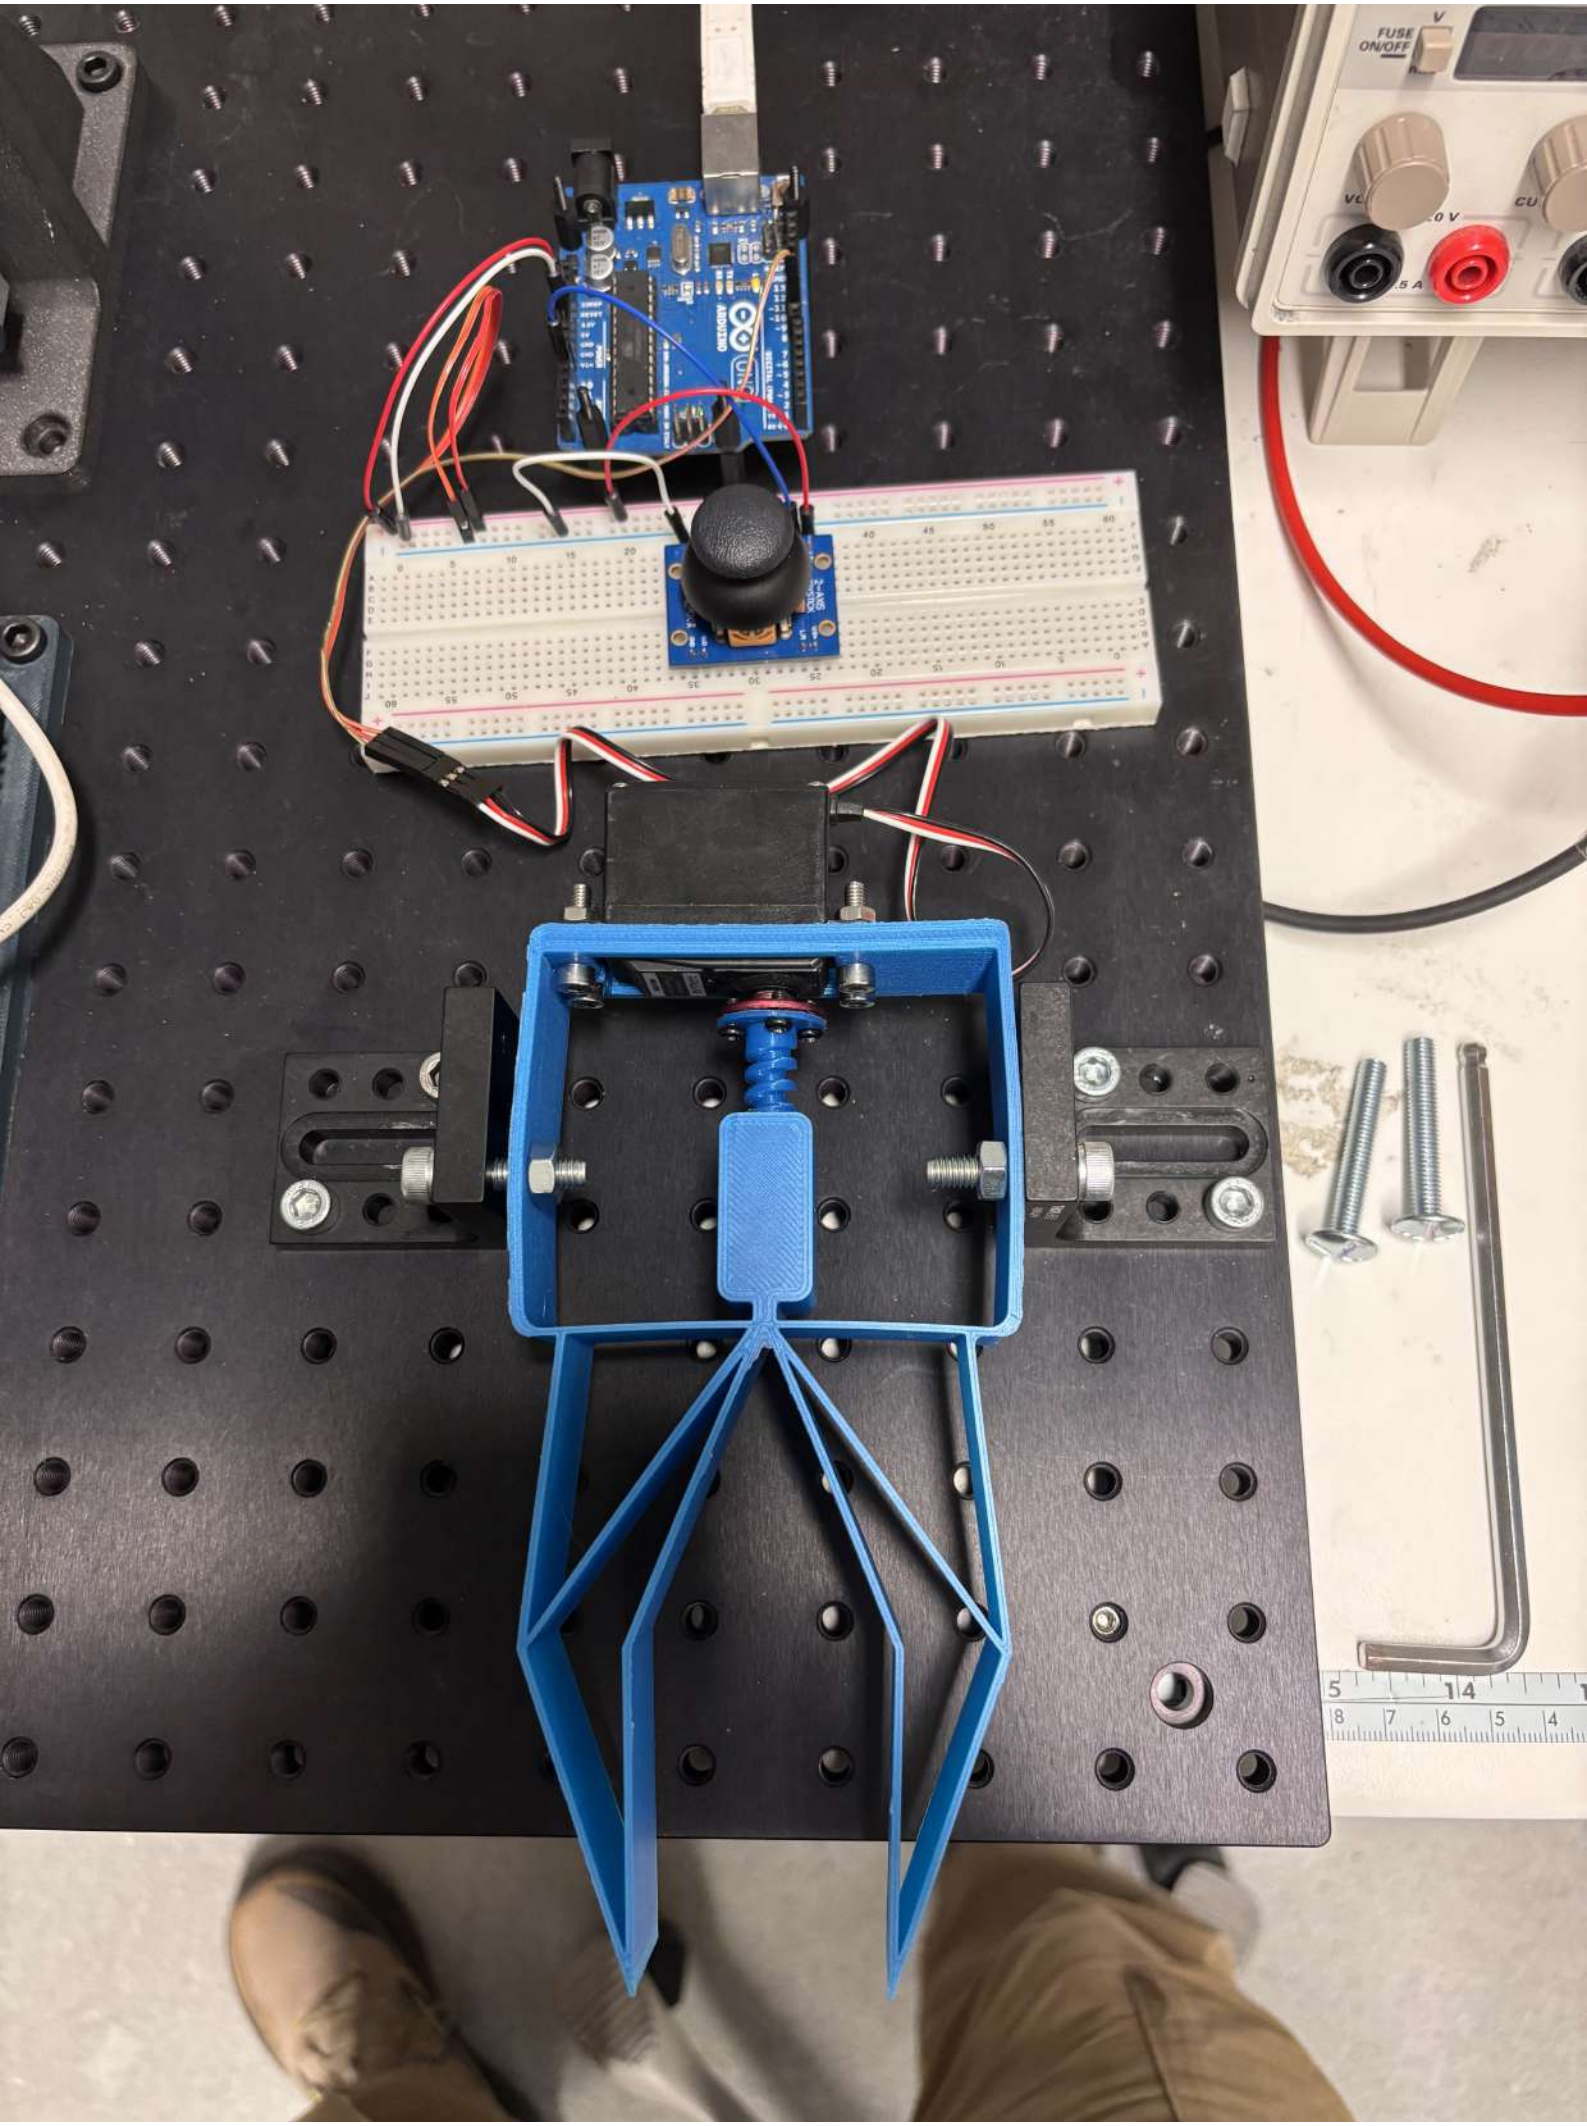

FUSE
ON/OFF
V

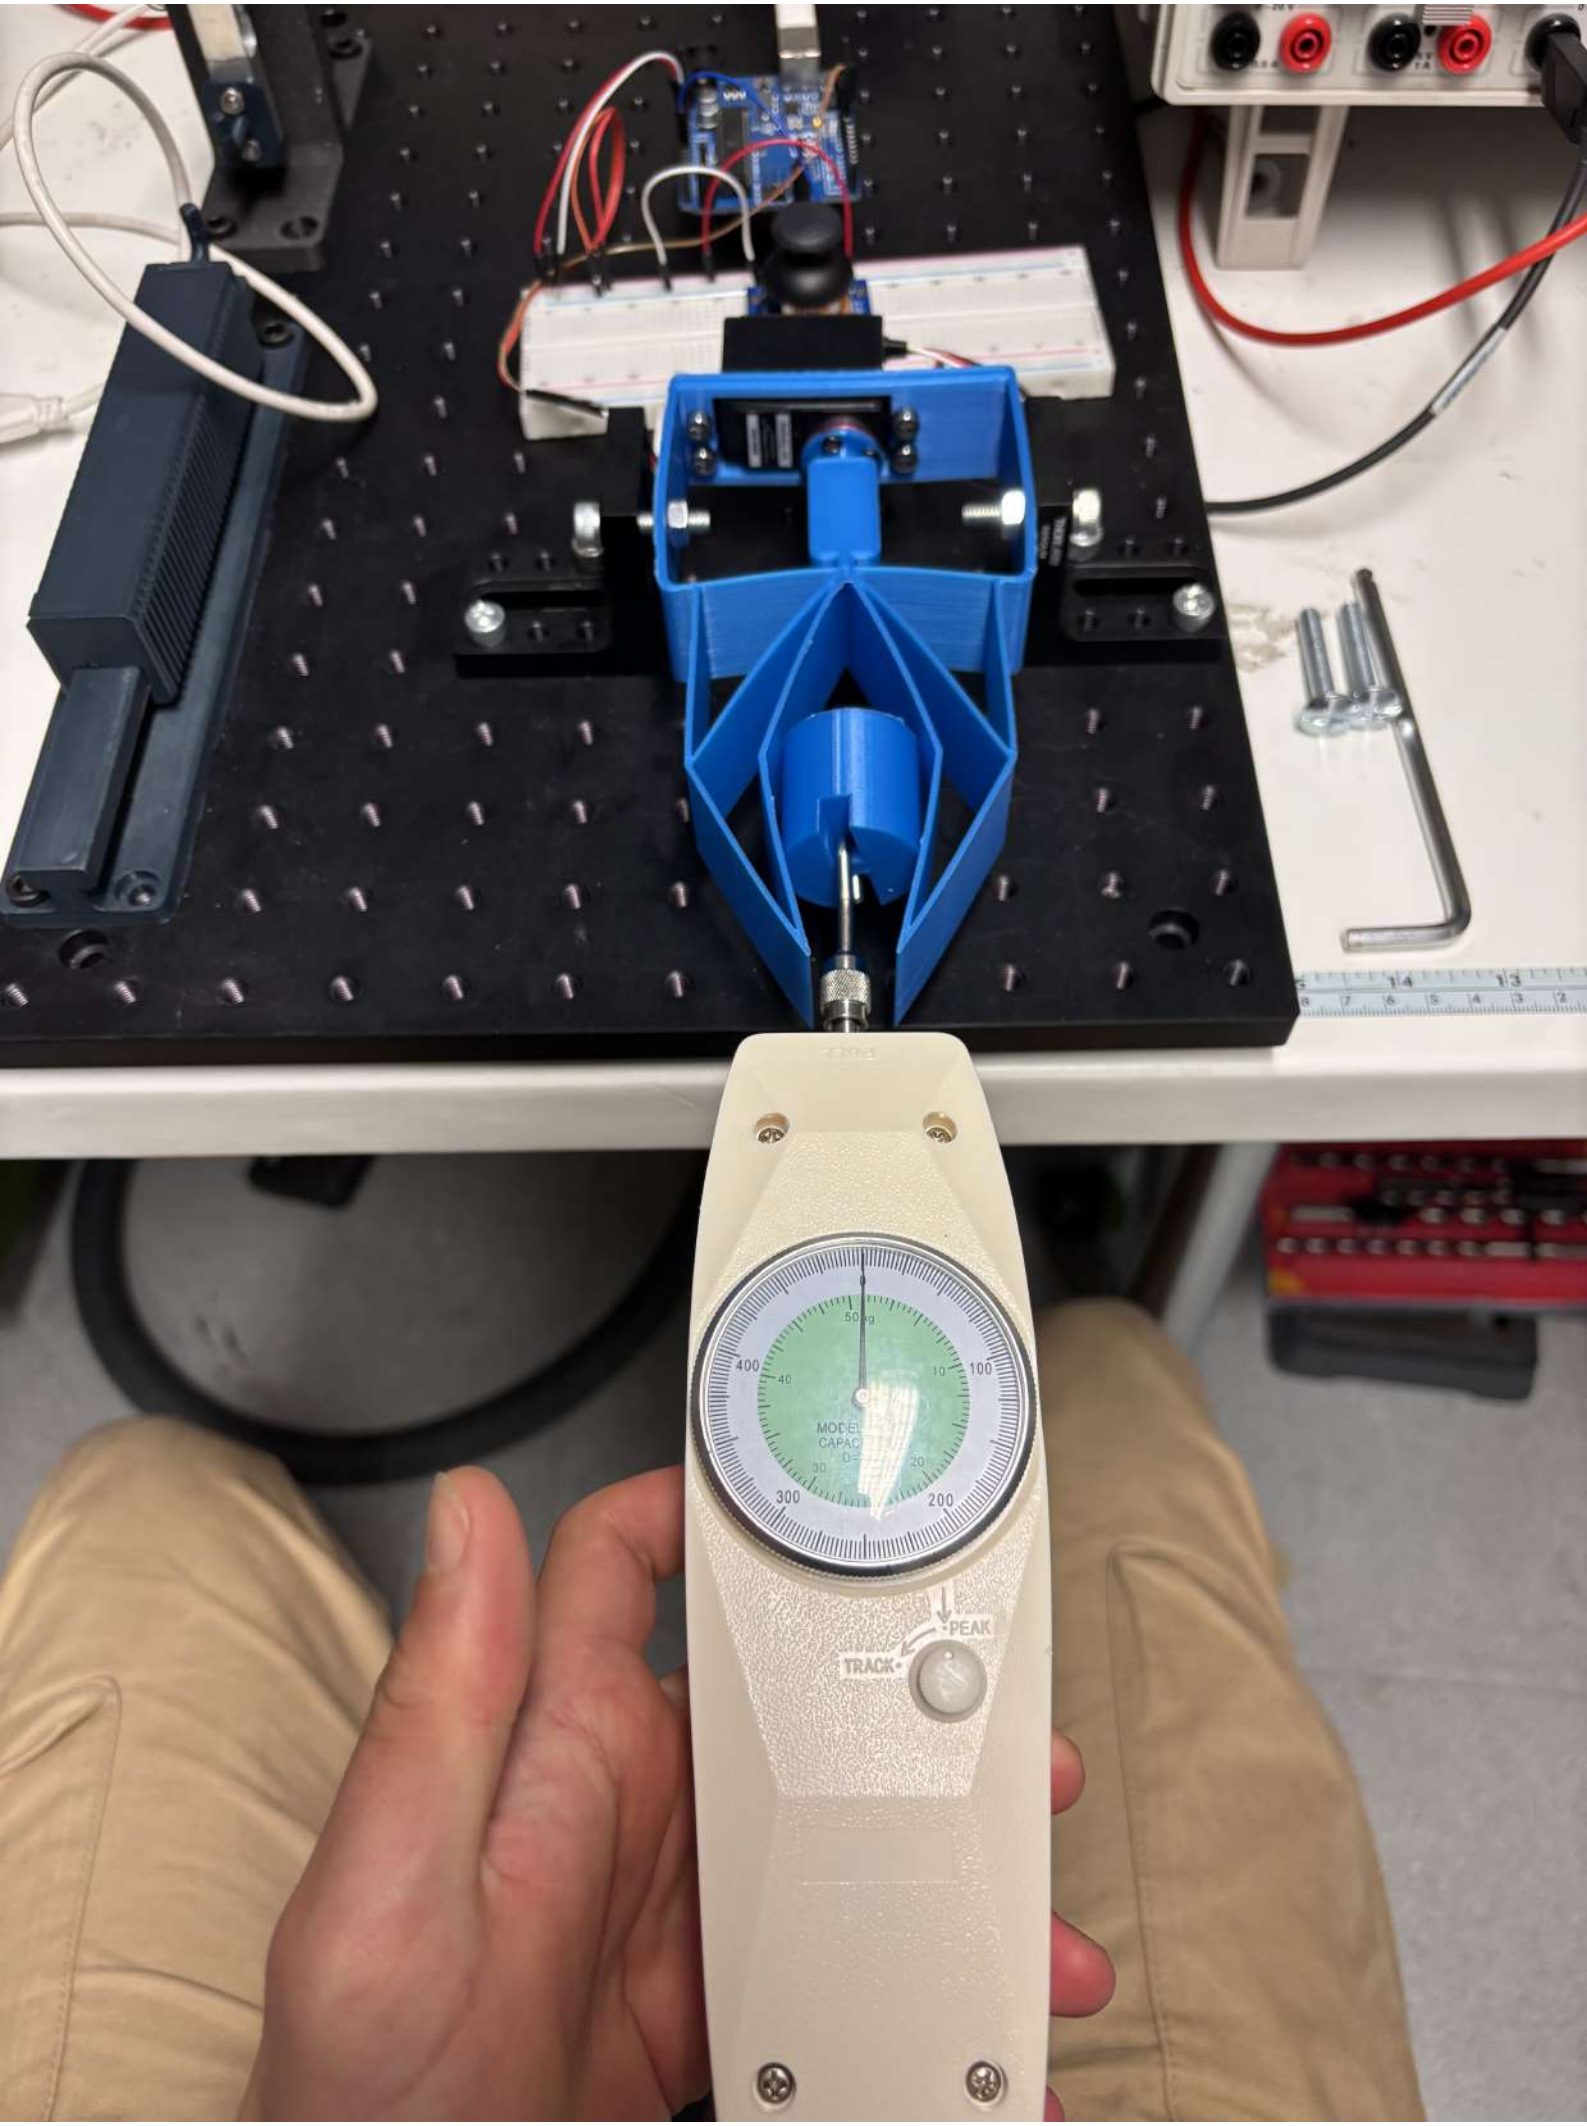

400
40
100
10
30
20
300
200
PEAK
TRACK




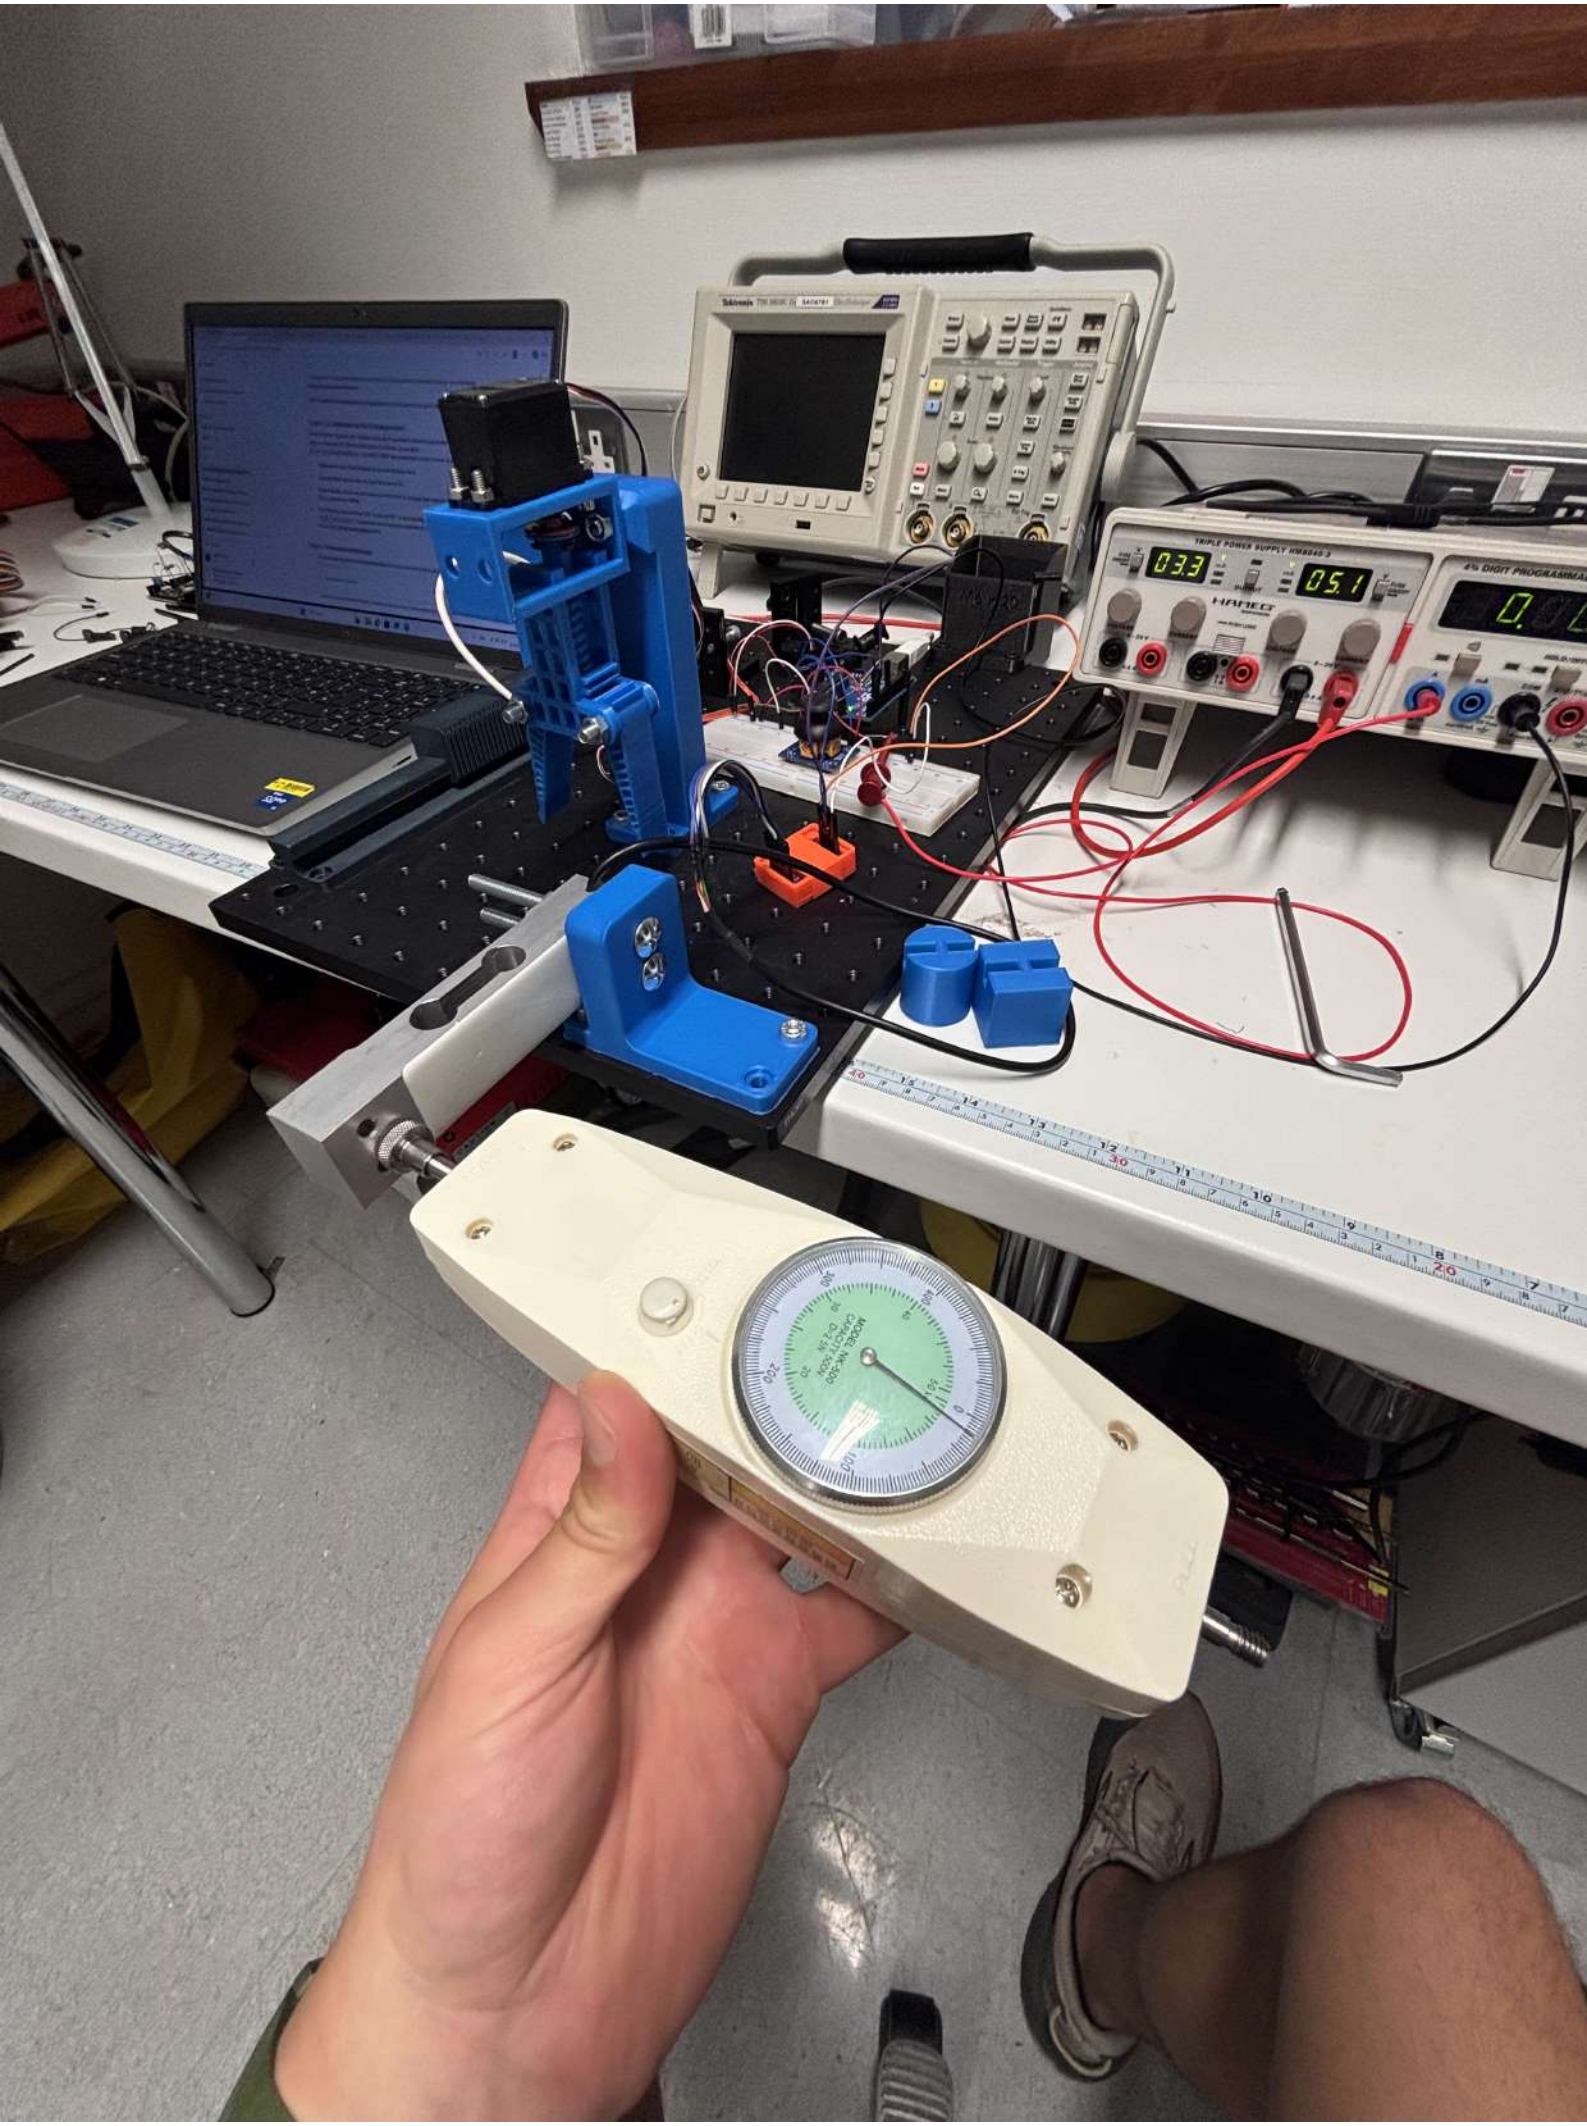


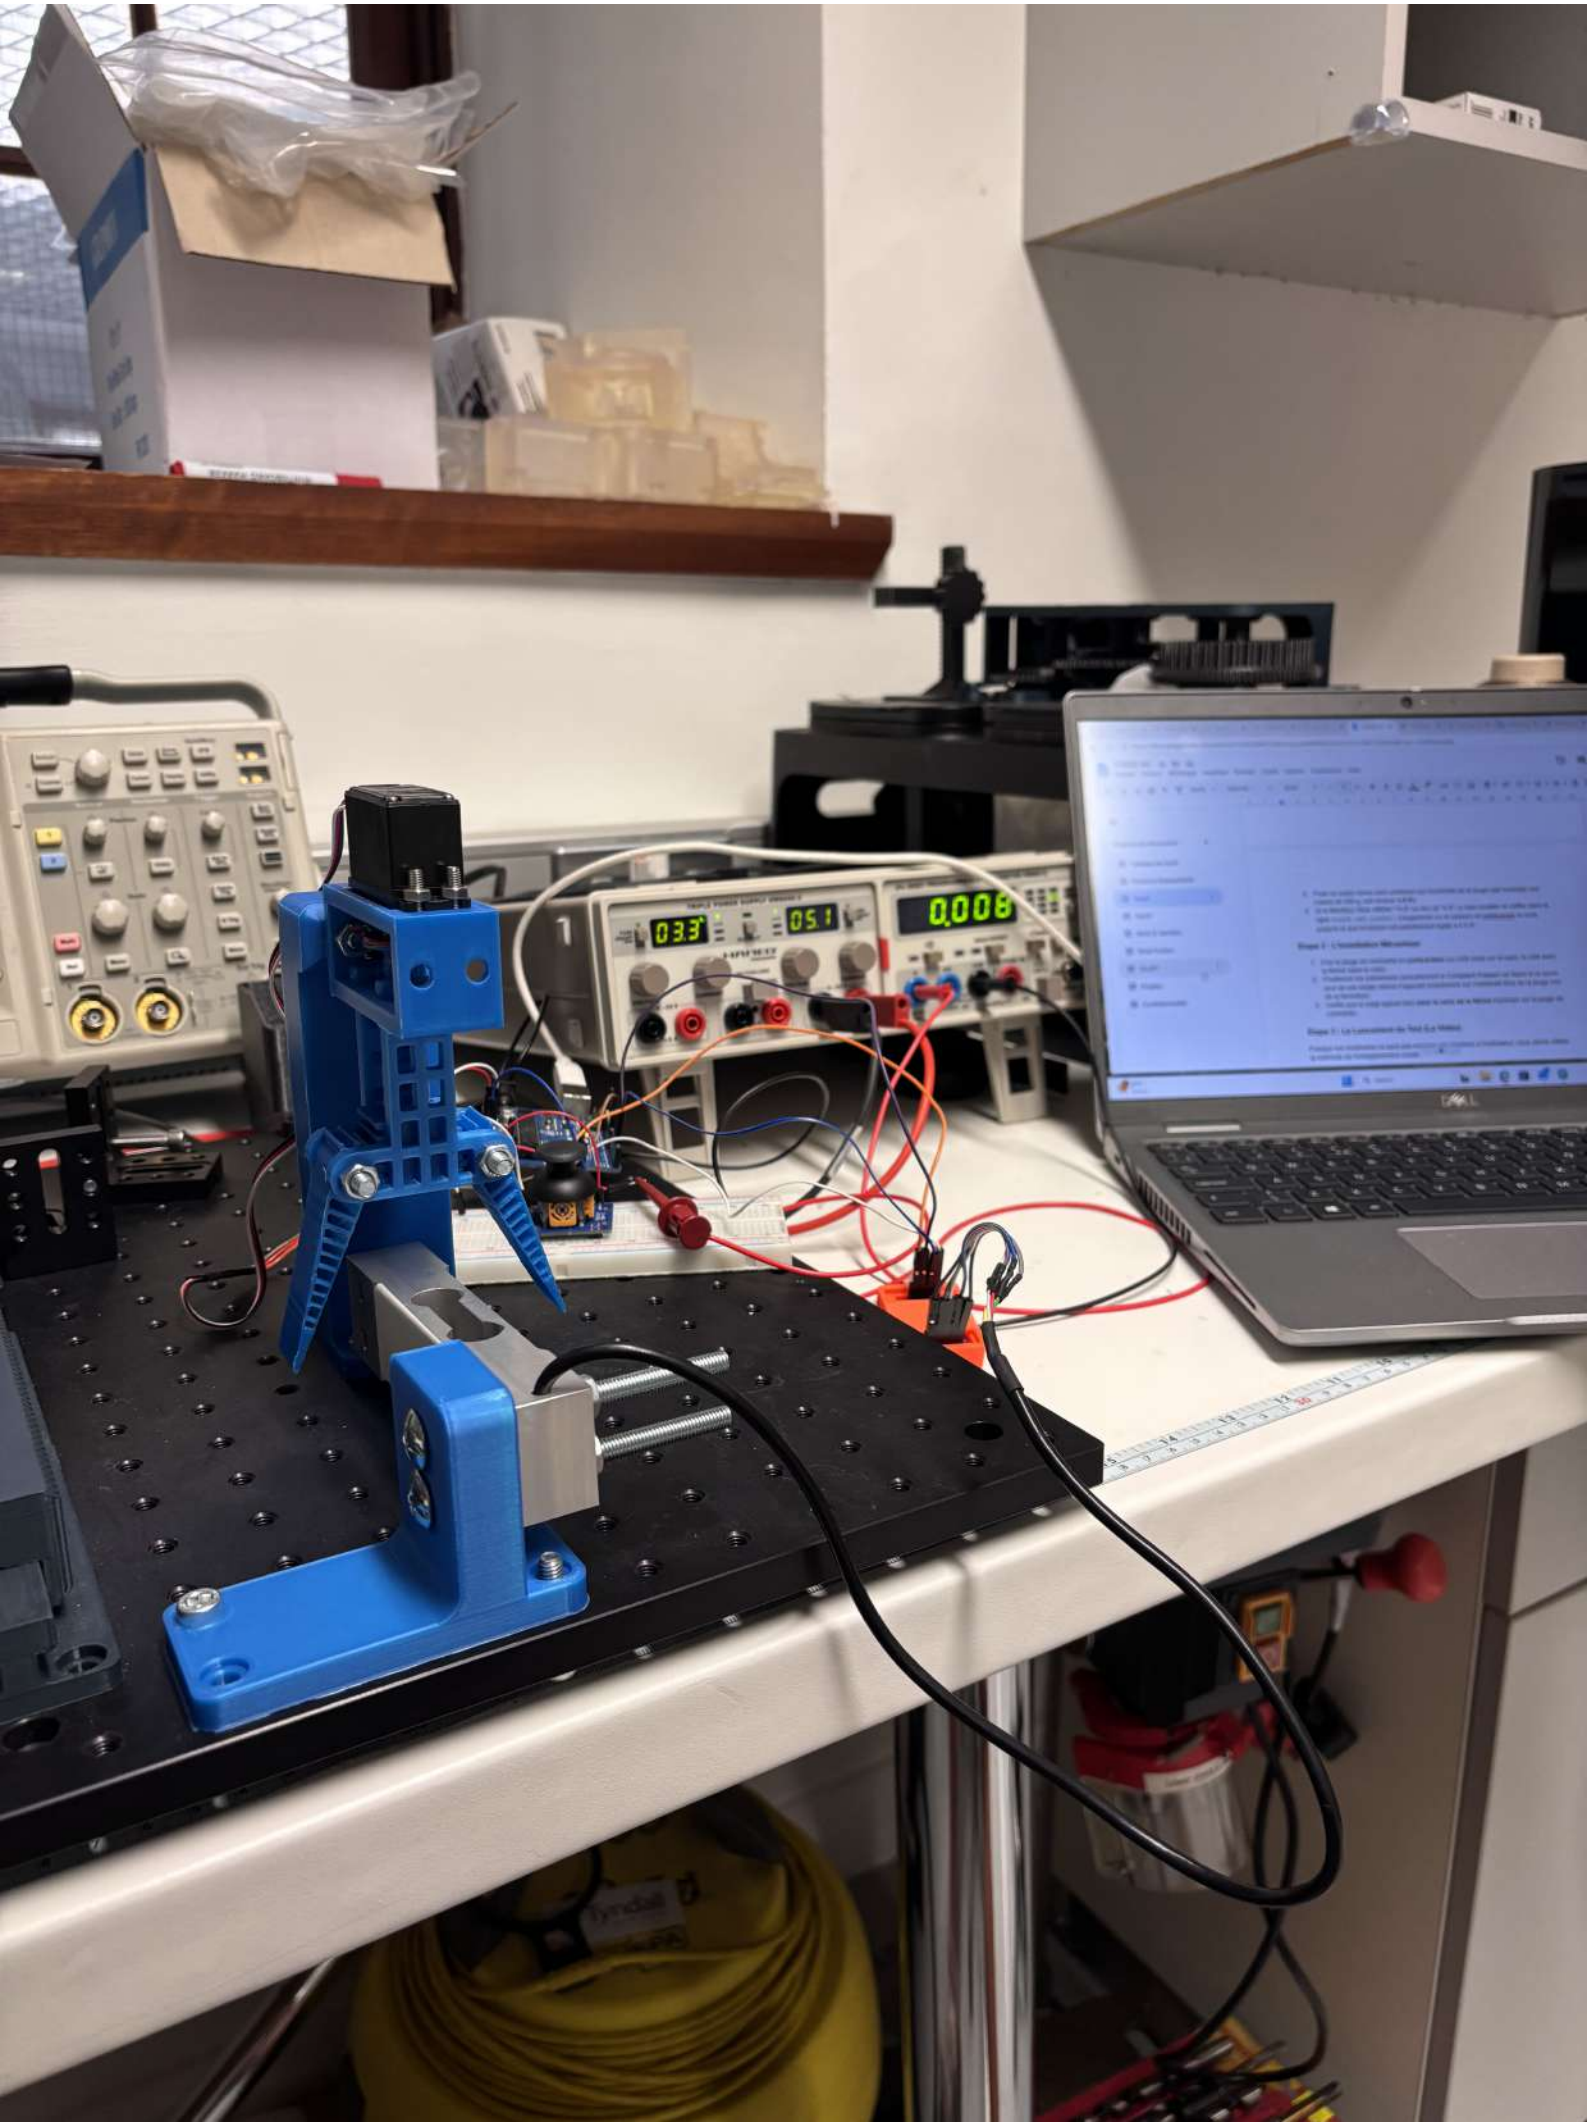


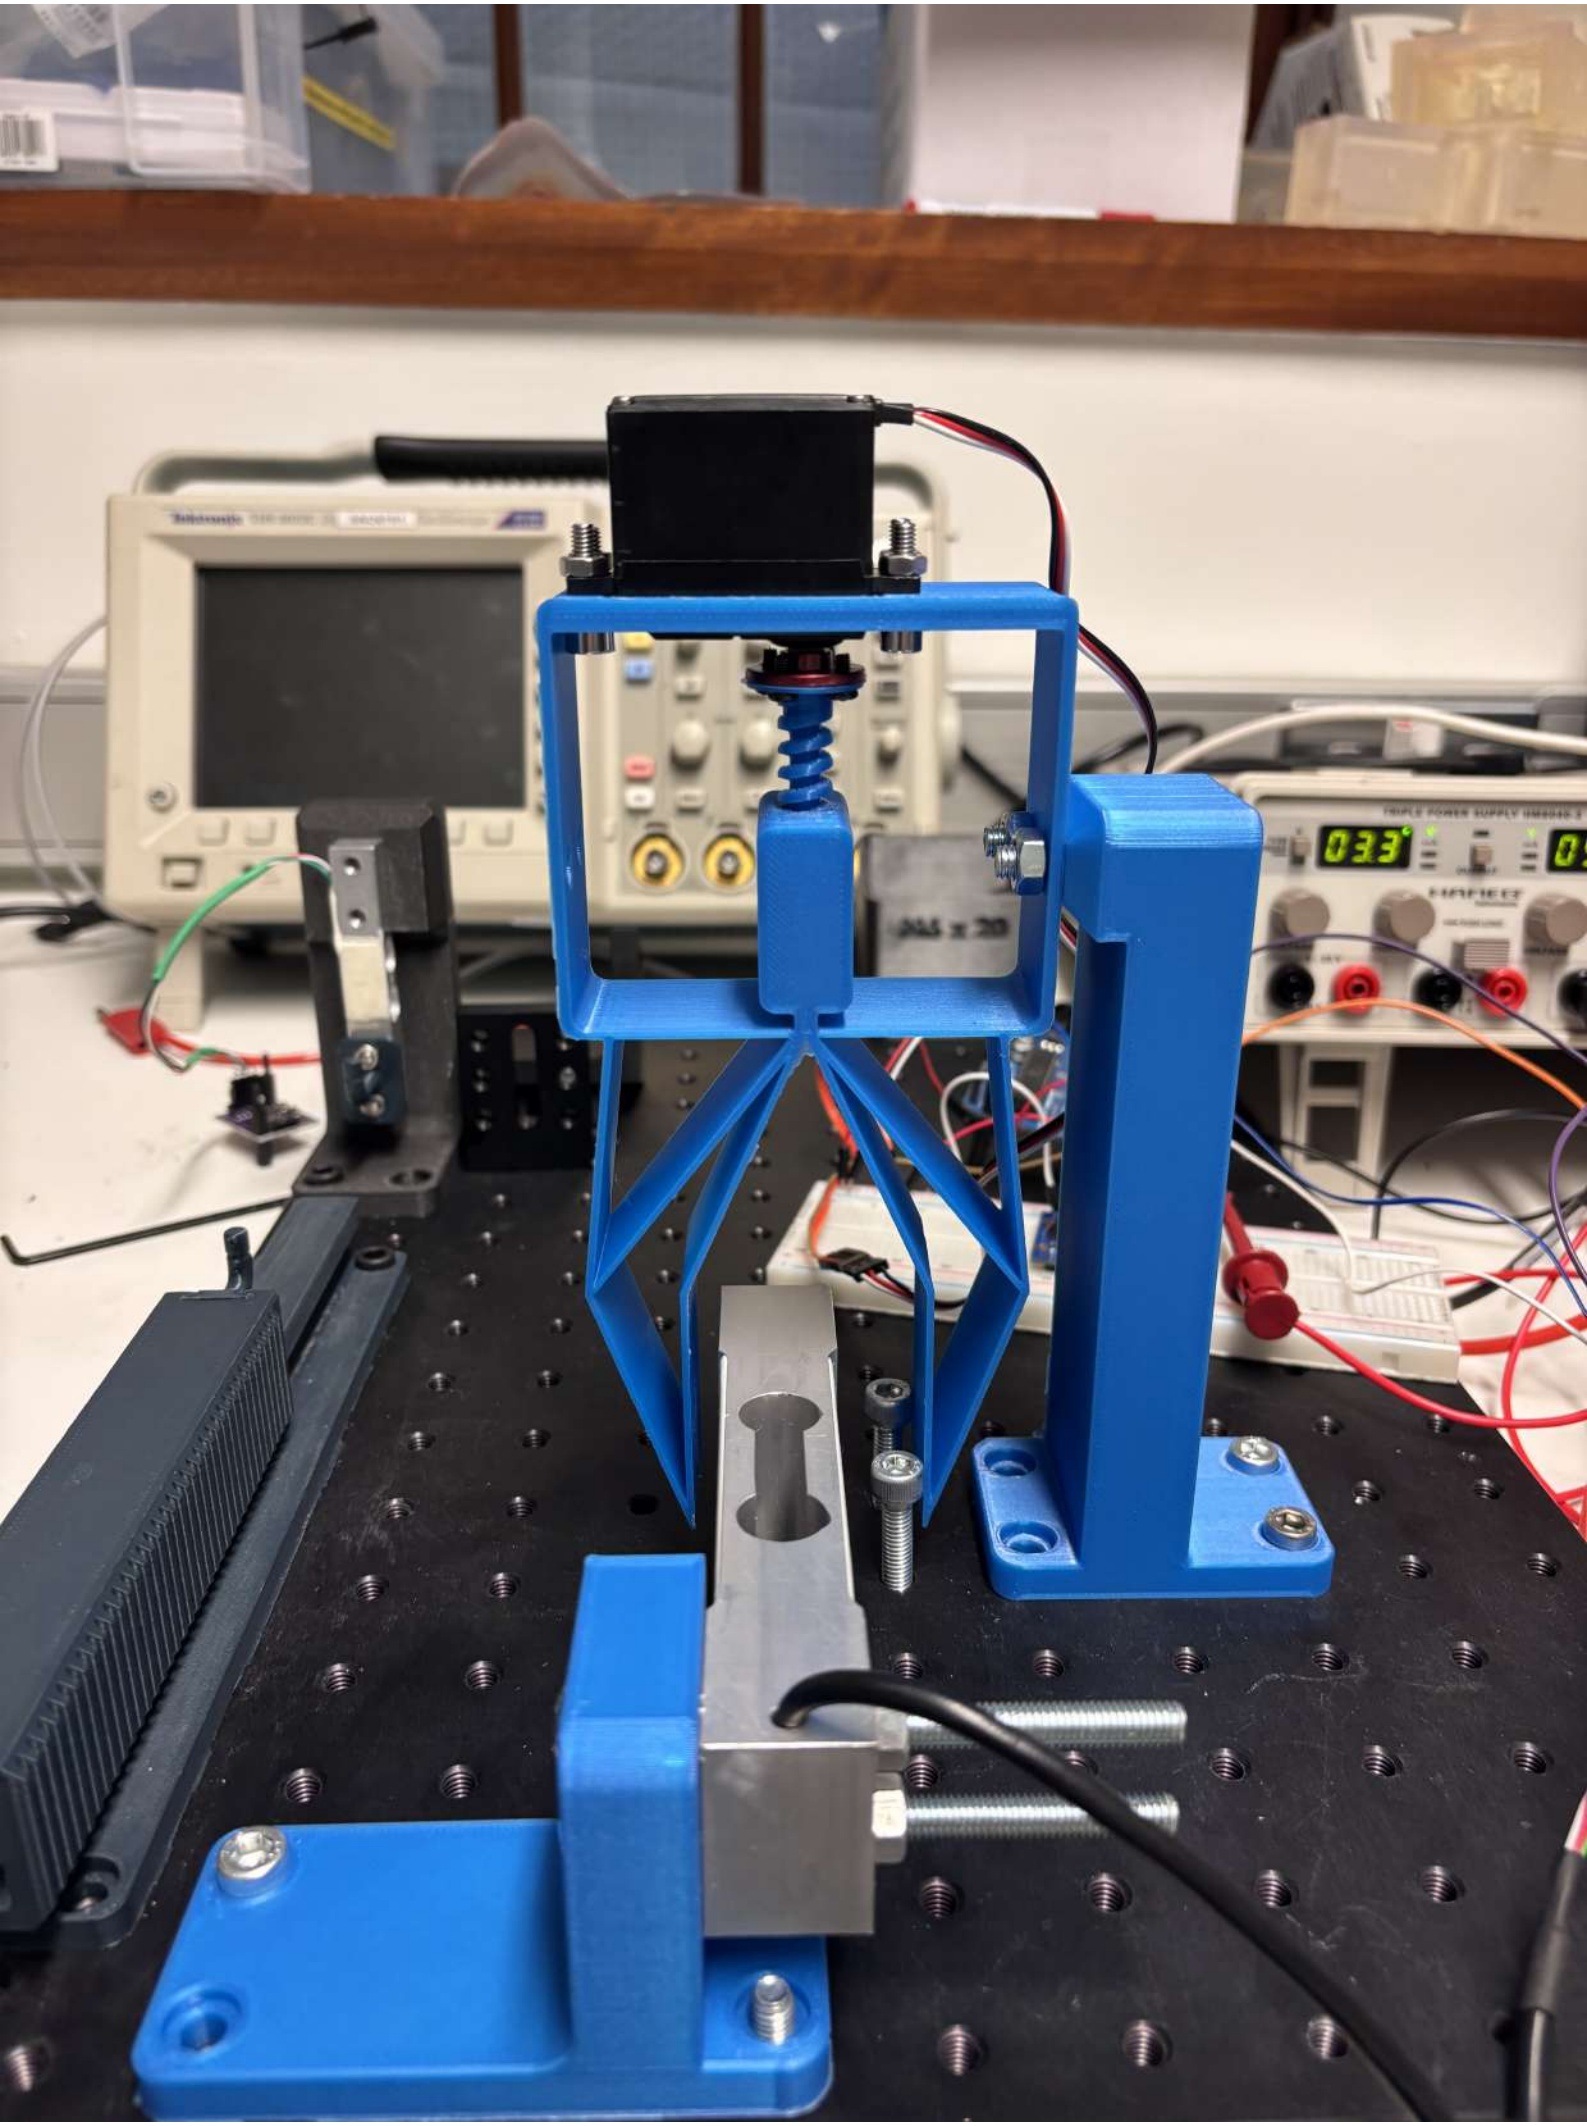

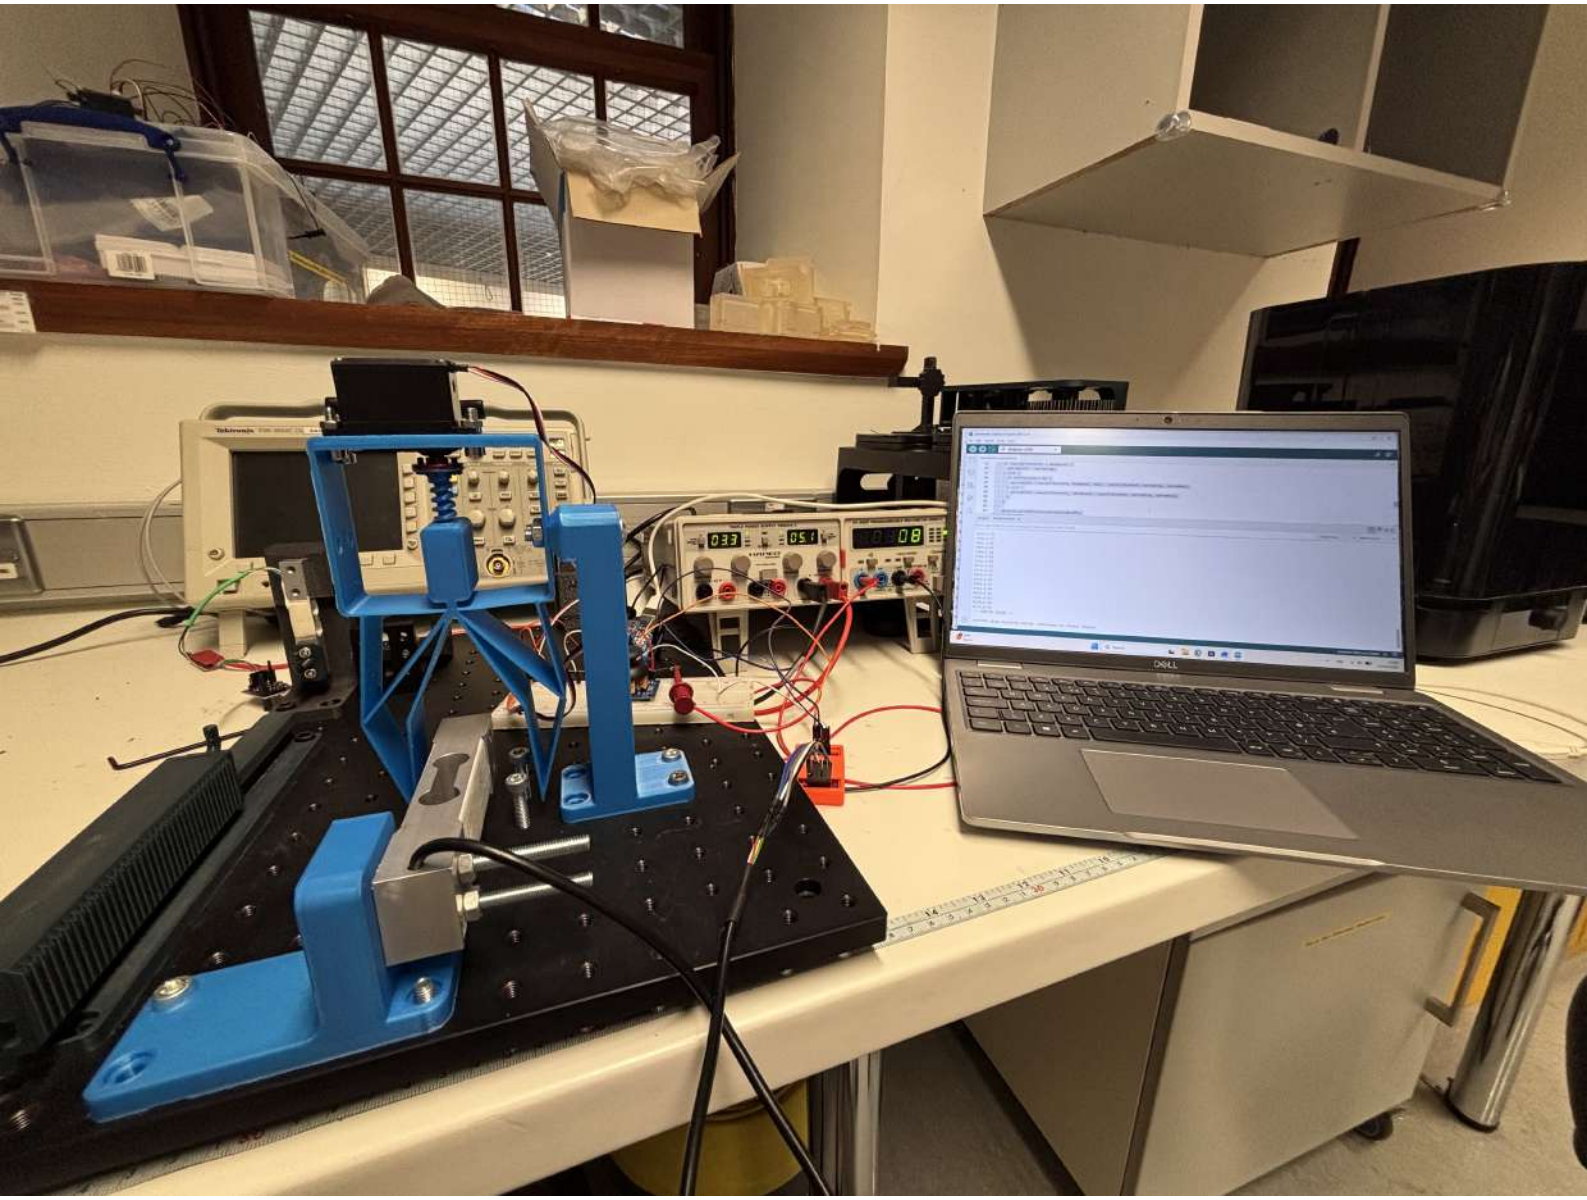


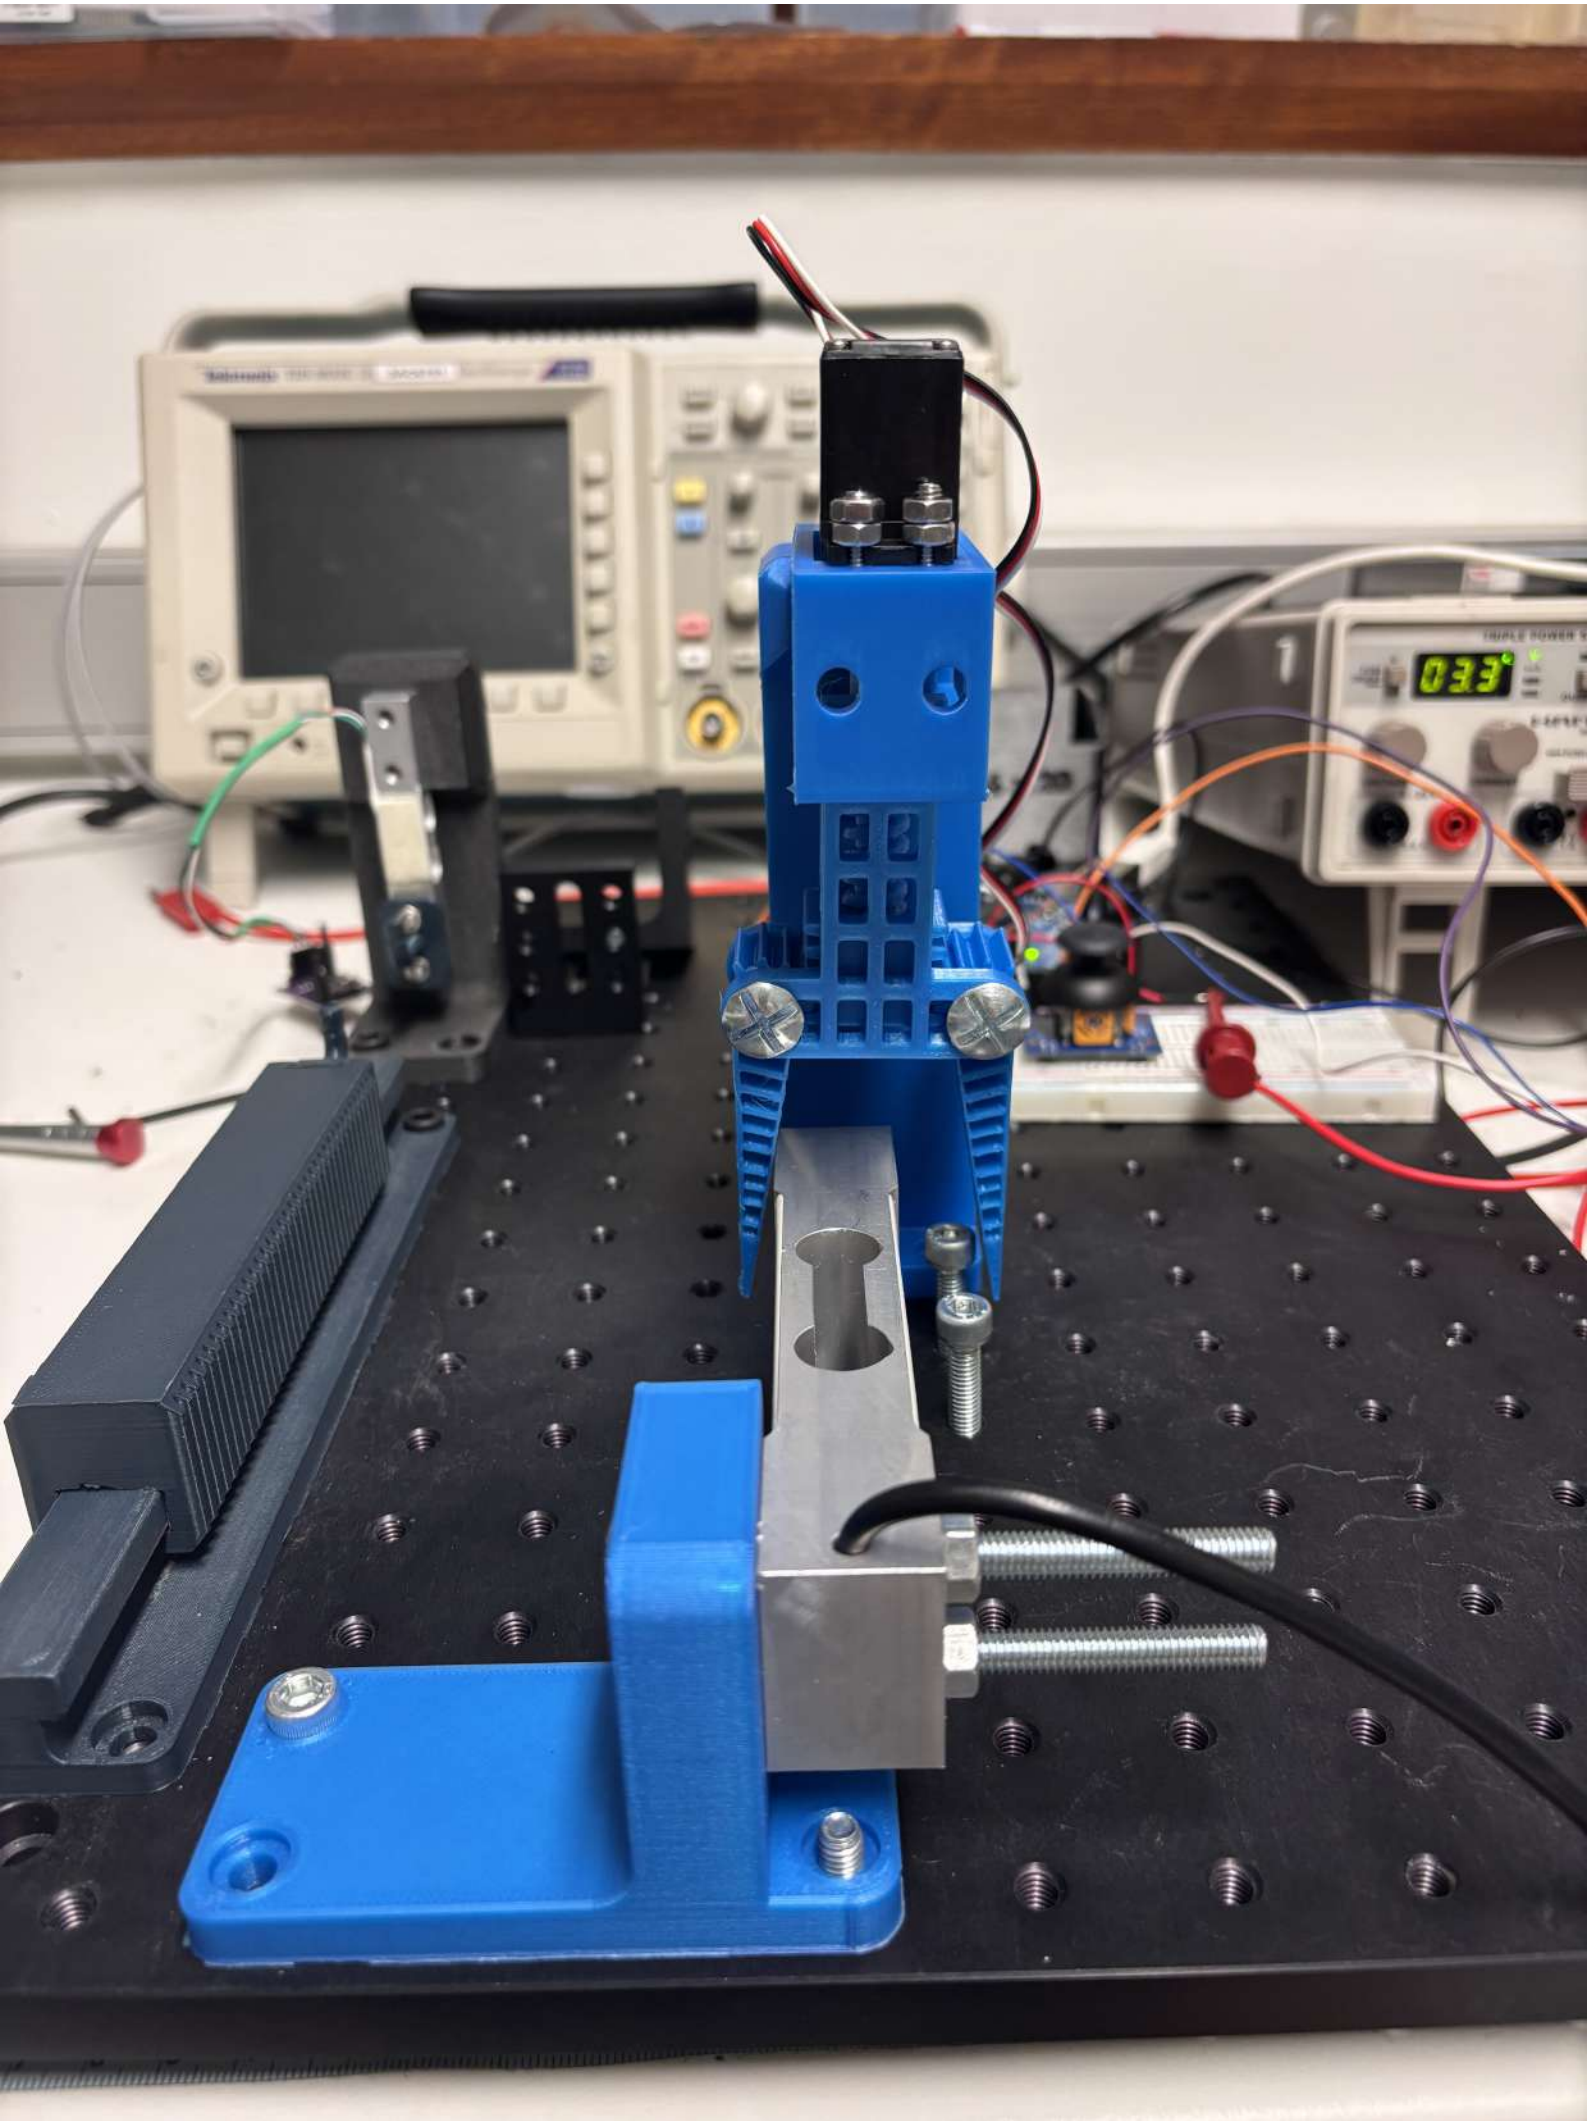


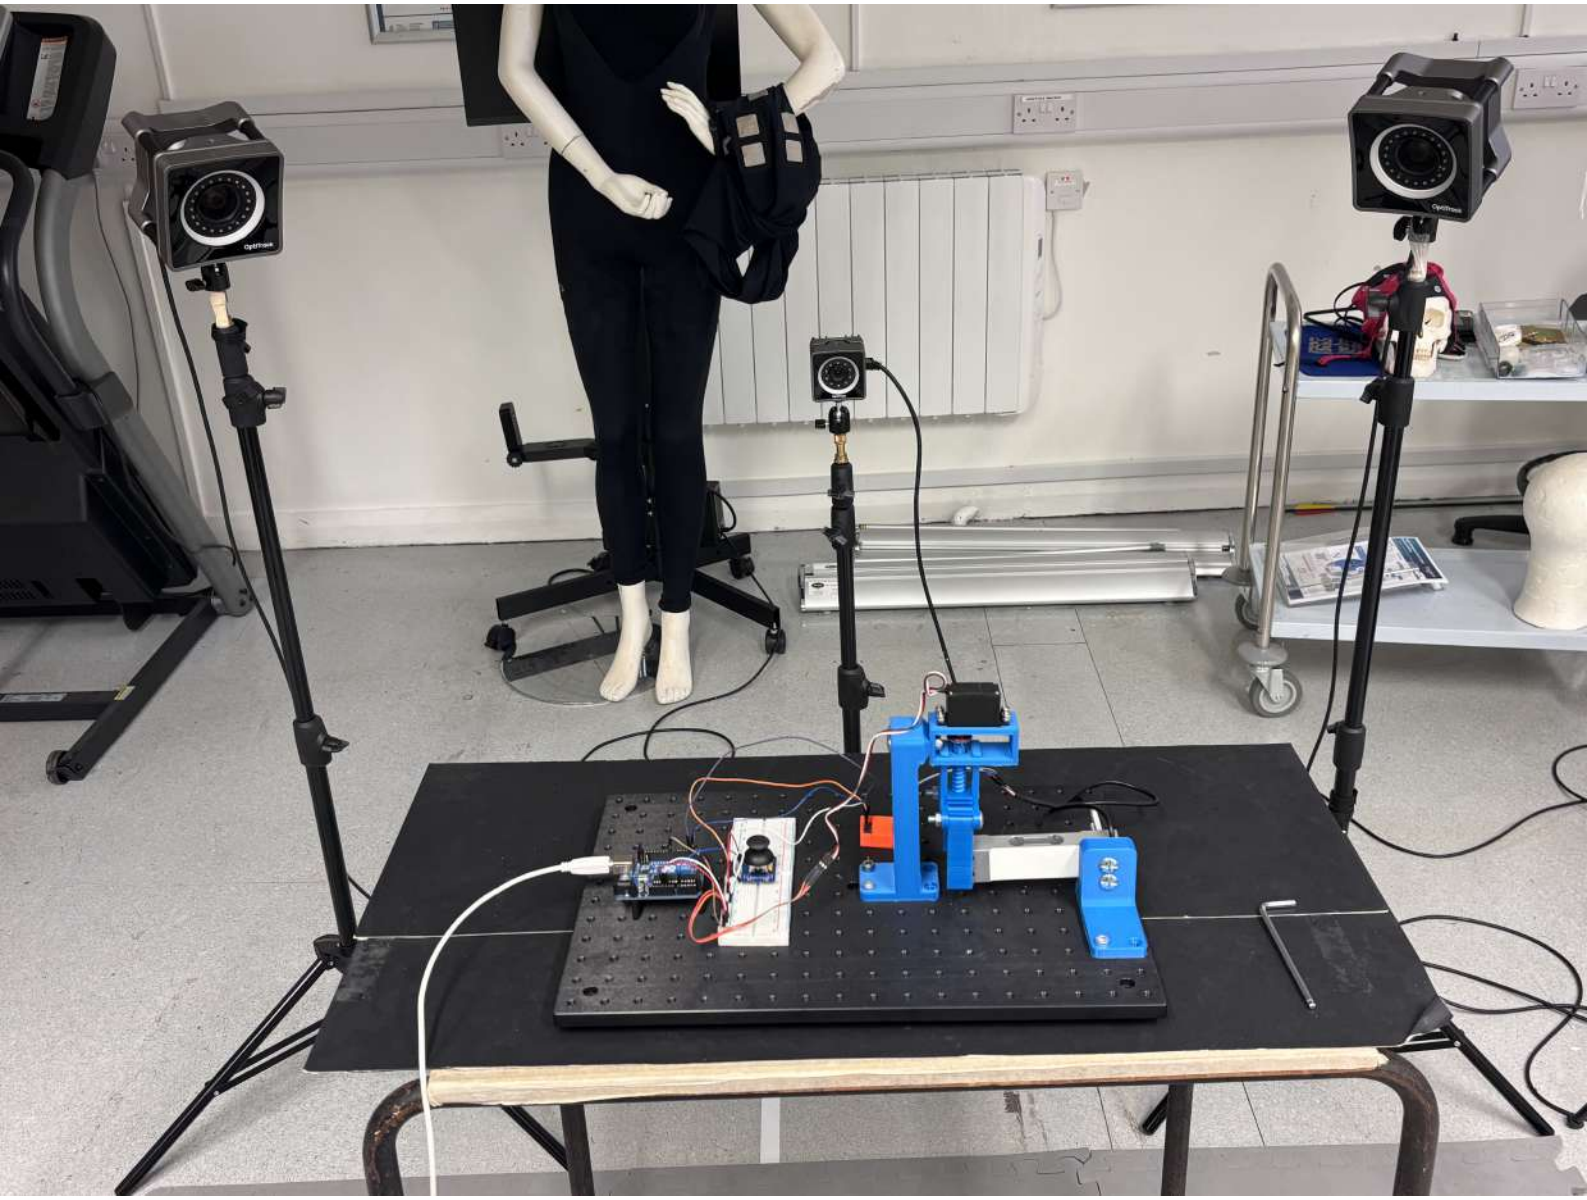


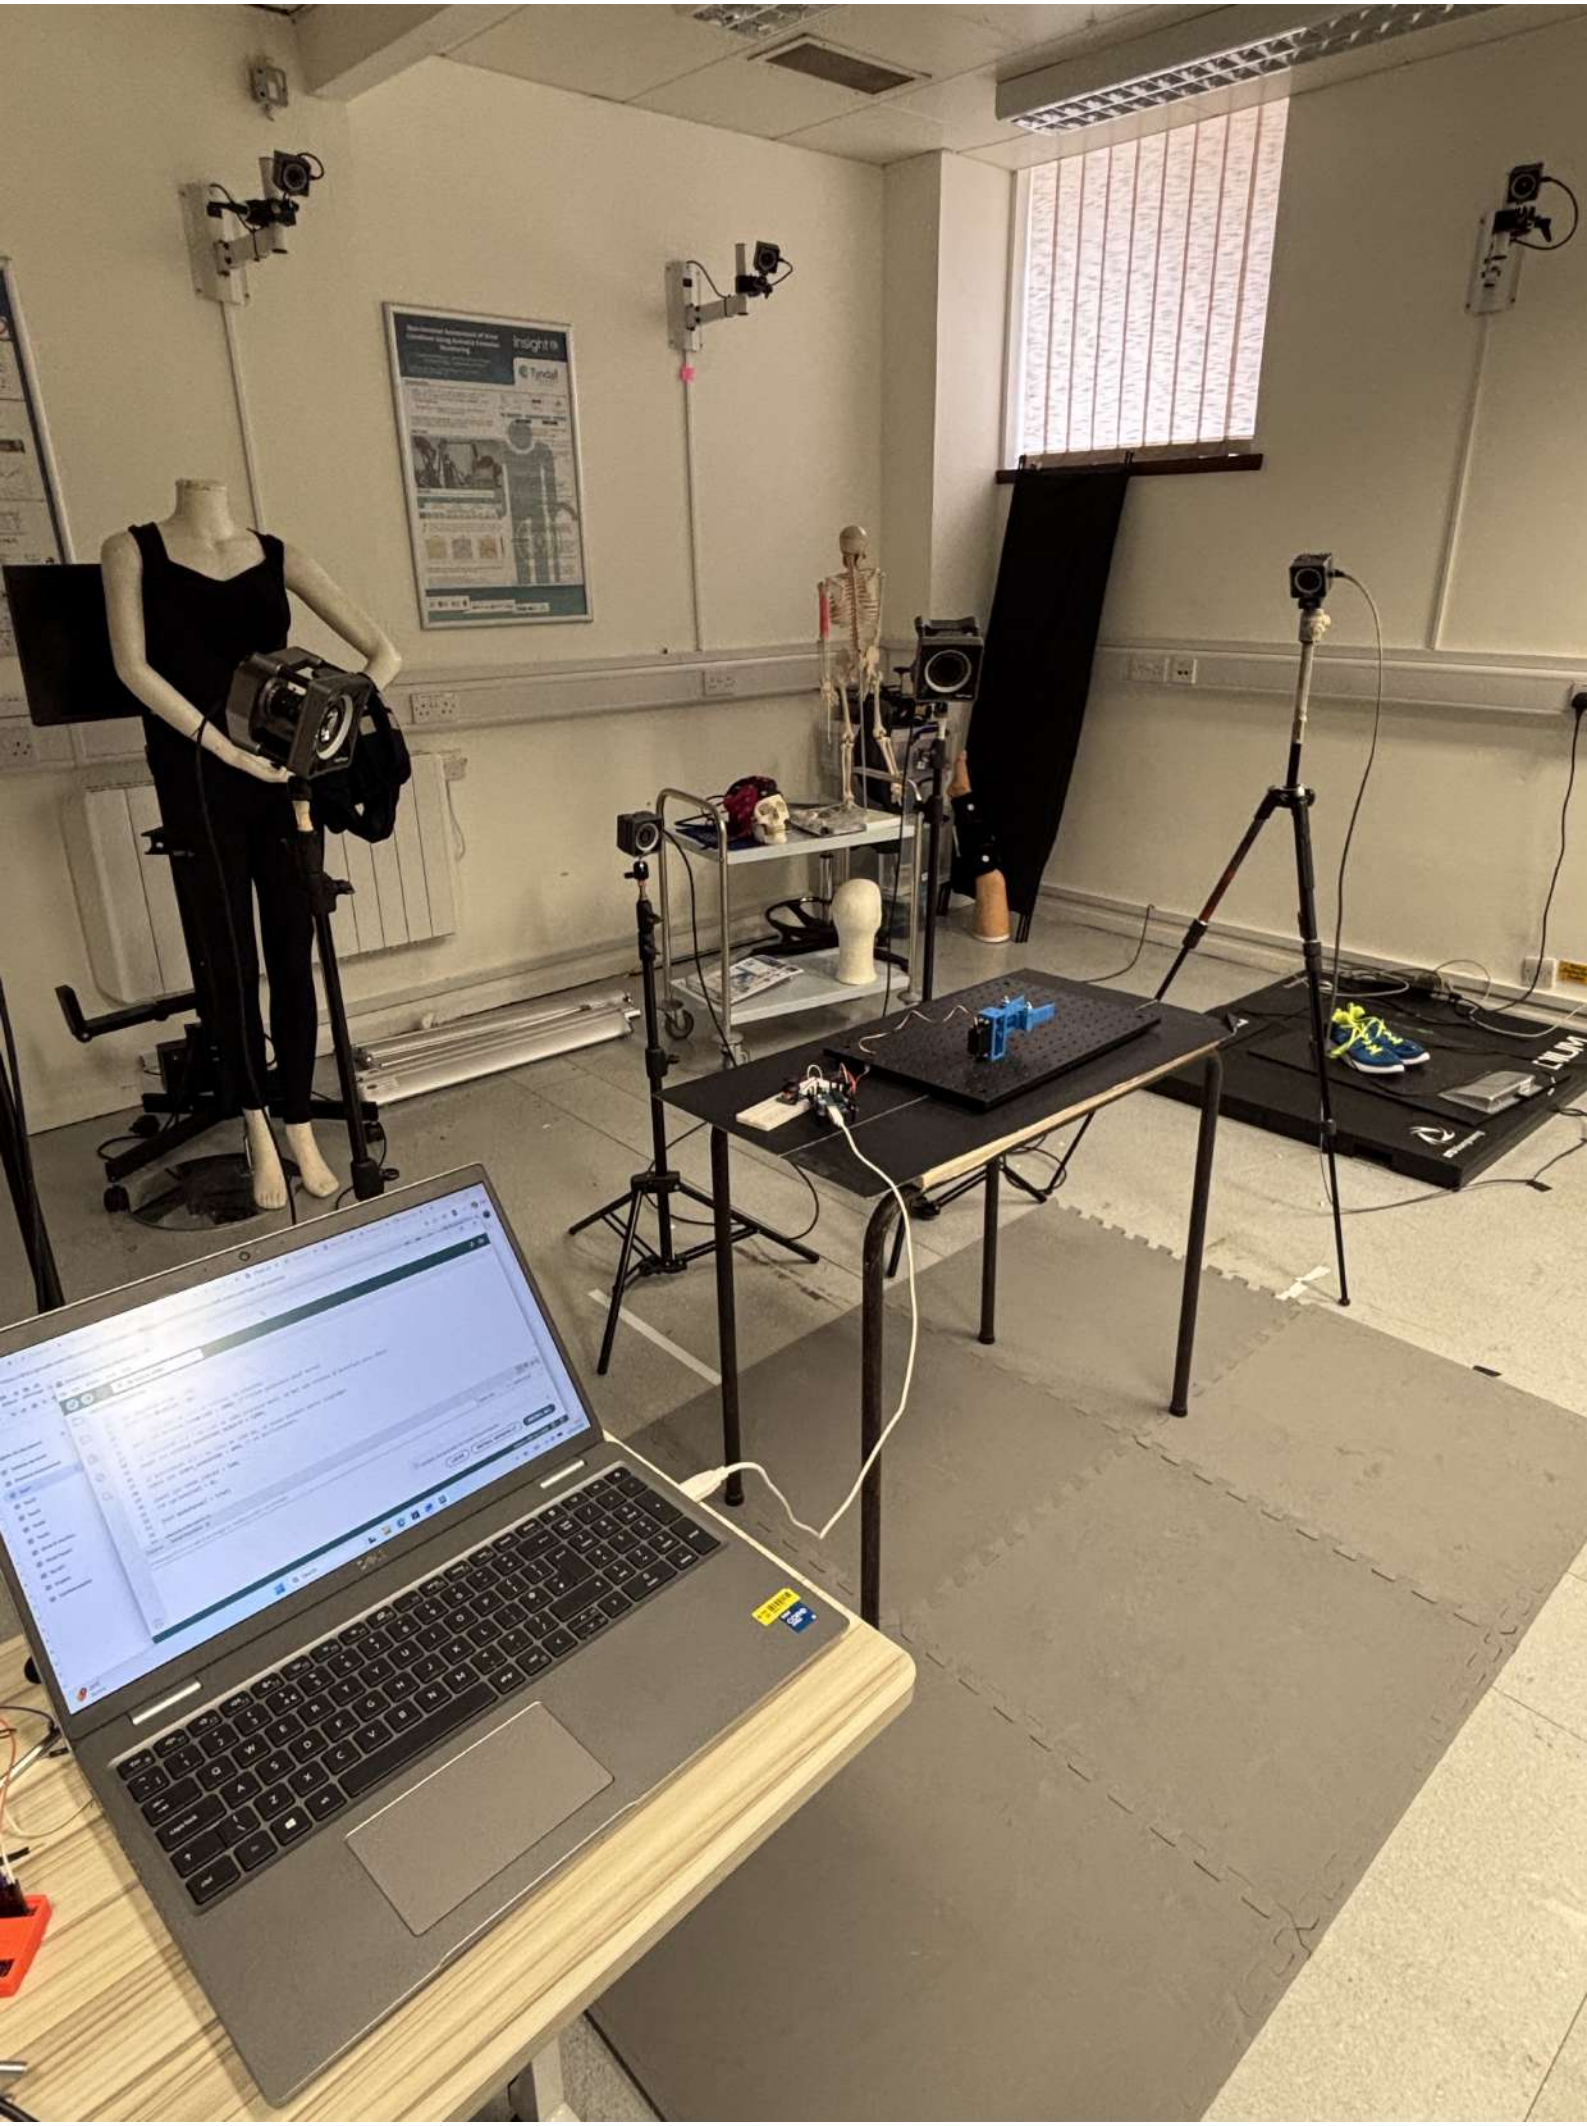




OptiTrack™
FACIAL MARKERS
50 pc. 3mm markers
50 pc. 4mm markers
Note: Facial markers adhere best when there is minimal oil on skin.
Copyright 2009 © NaturalPoint Inc.
www.NaturalPoint.com

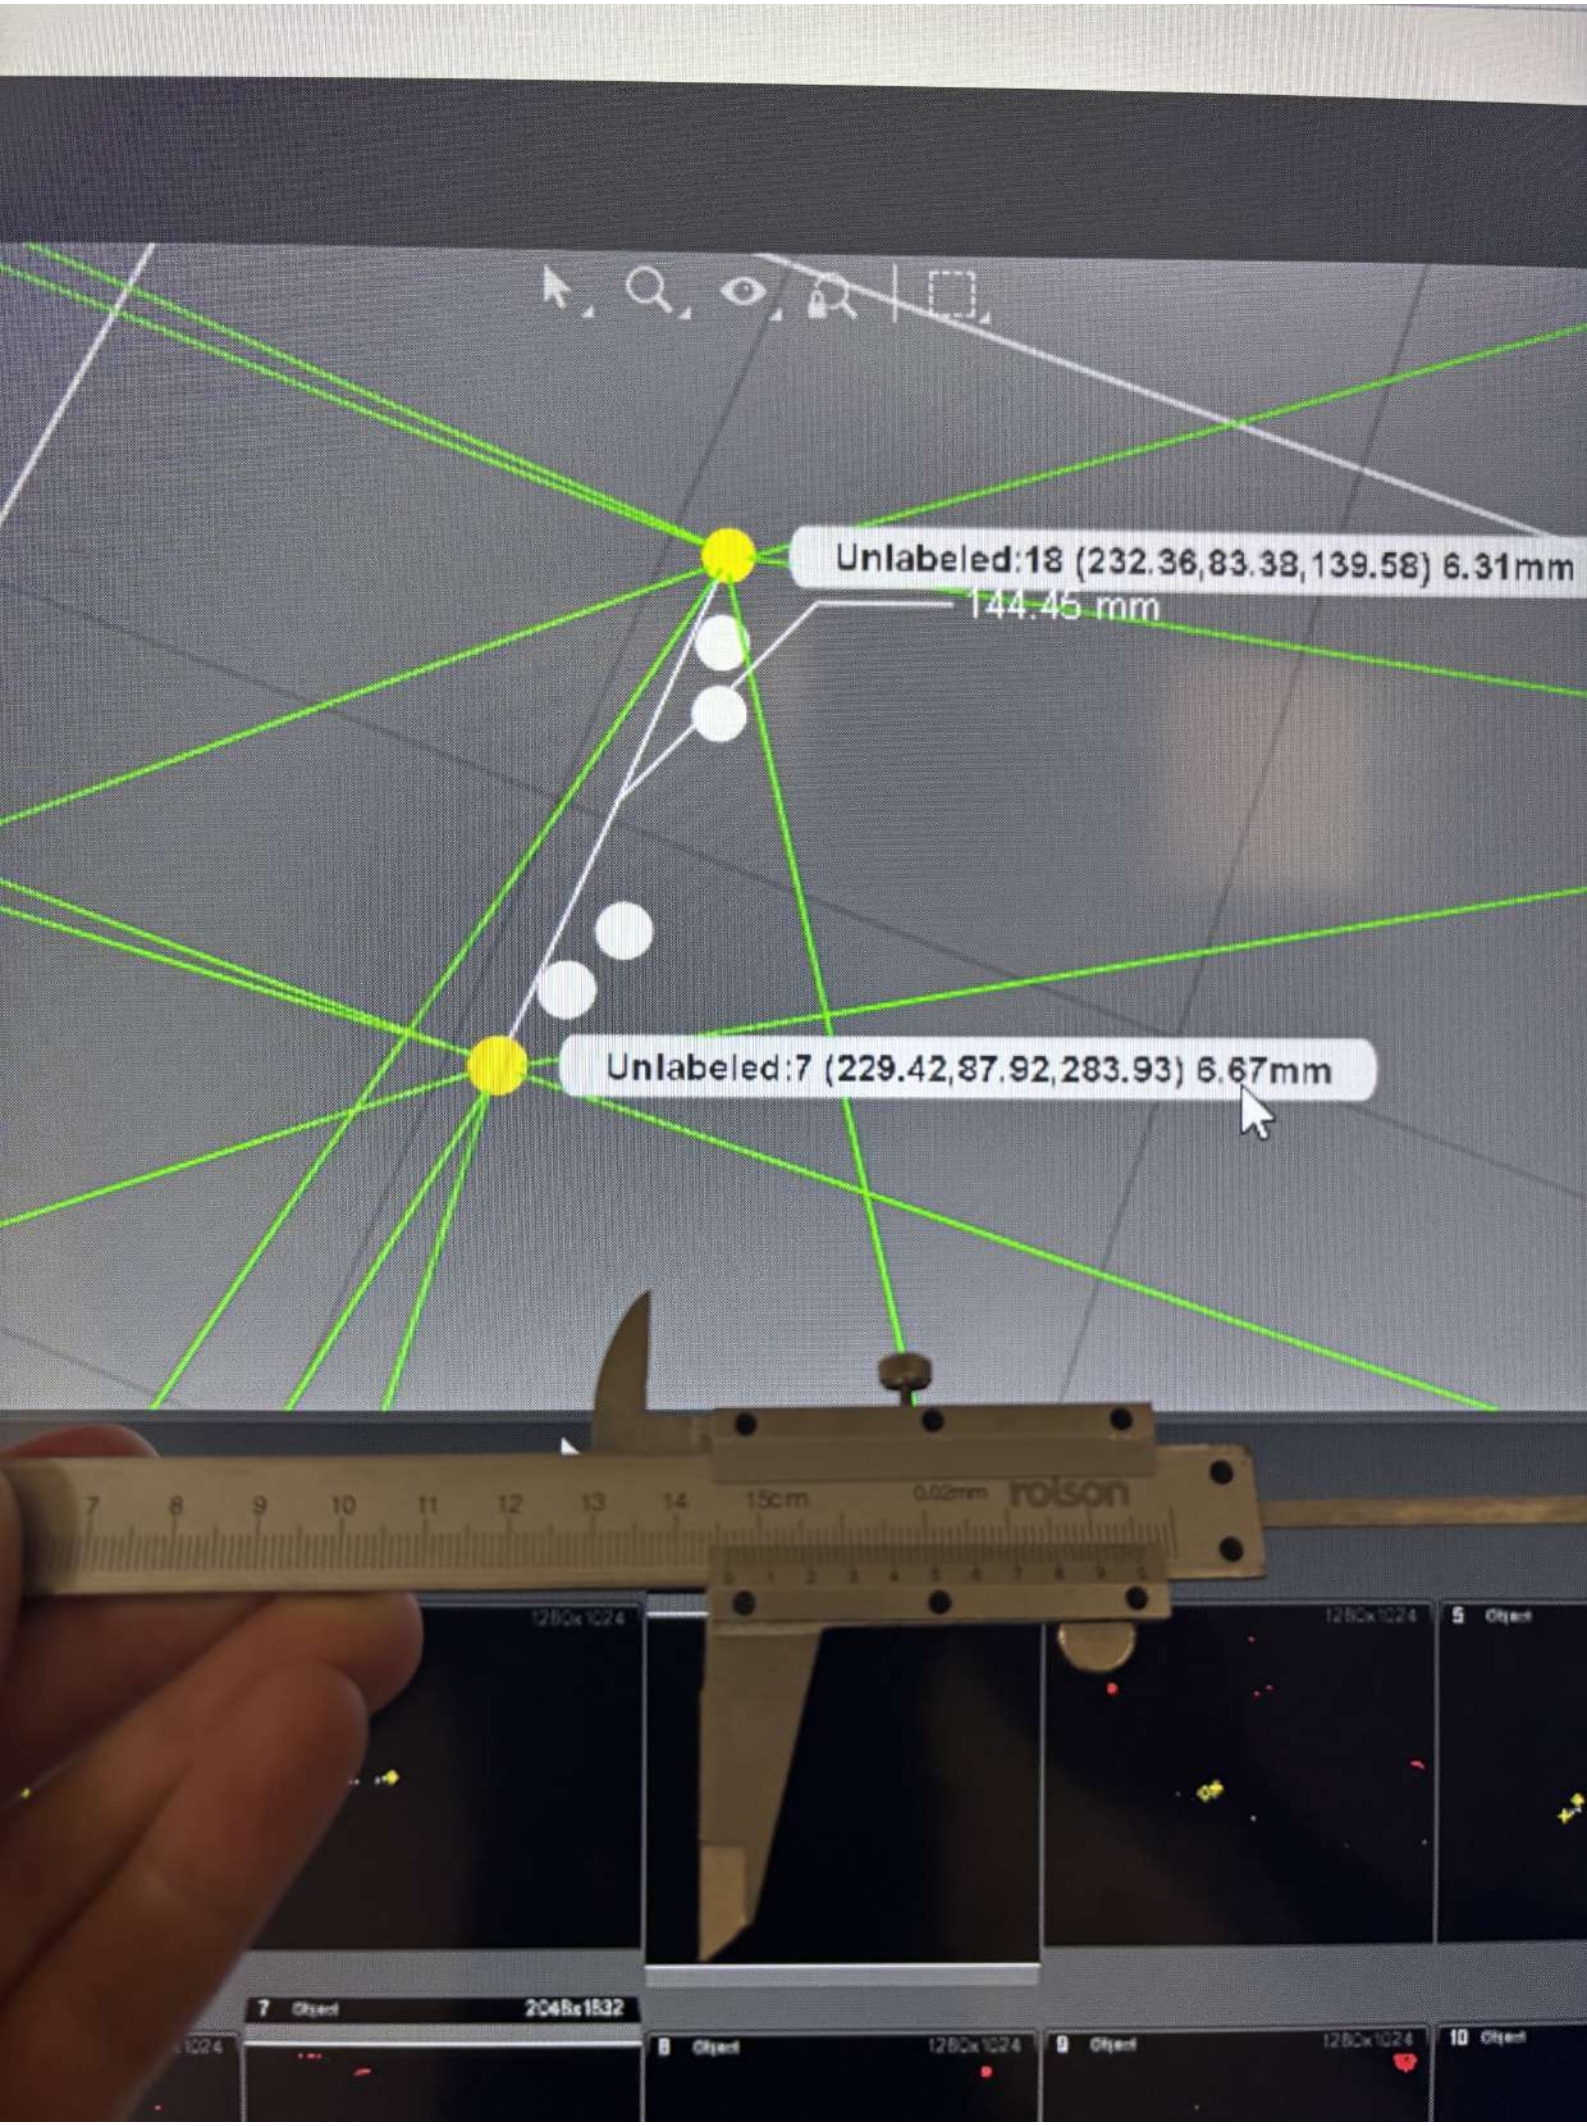

Unlabeled:18 (232.36,83.38,139.58) 6.31mm
144.45 mm
Unlabeled:7 (229.42,87.92,283.93) 6.67mm
rolson
15cm
0.02mm
2048x1532
1280x1024

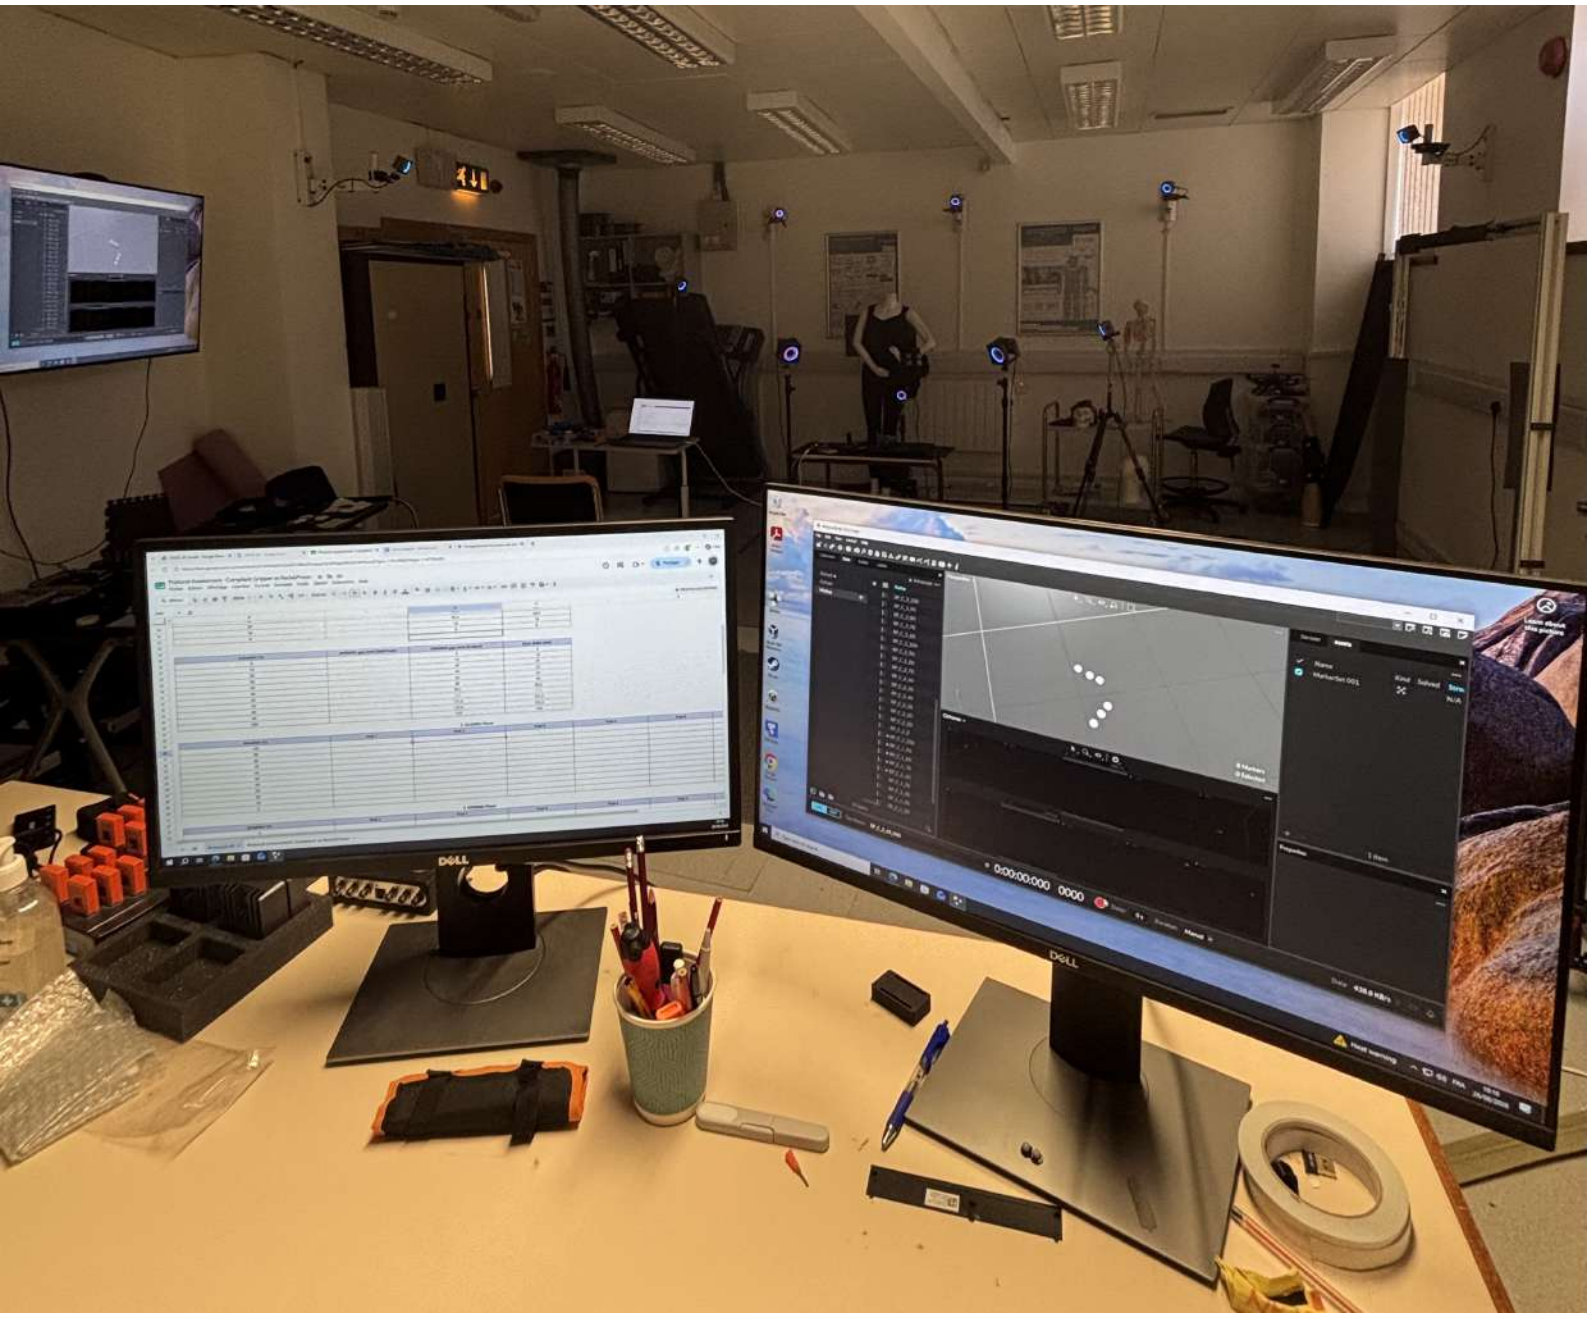

DELL
DELL

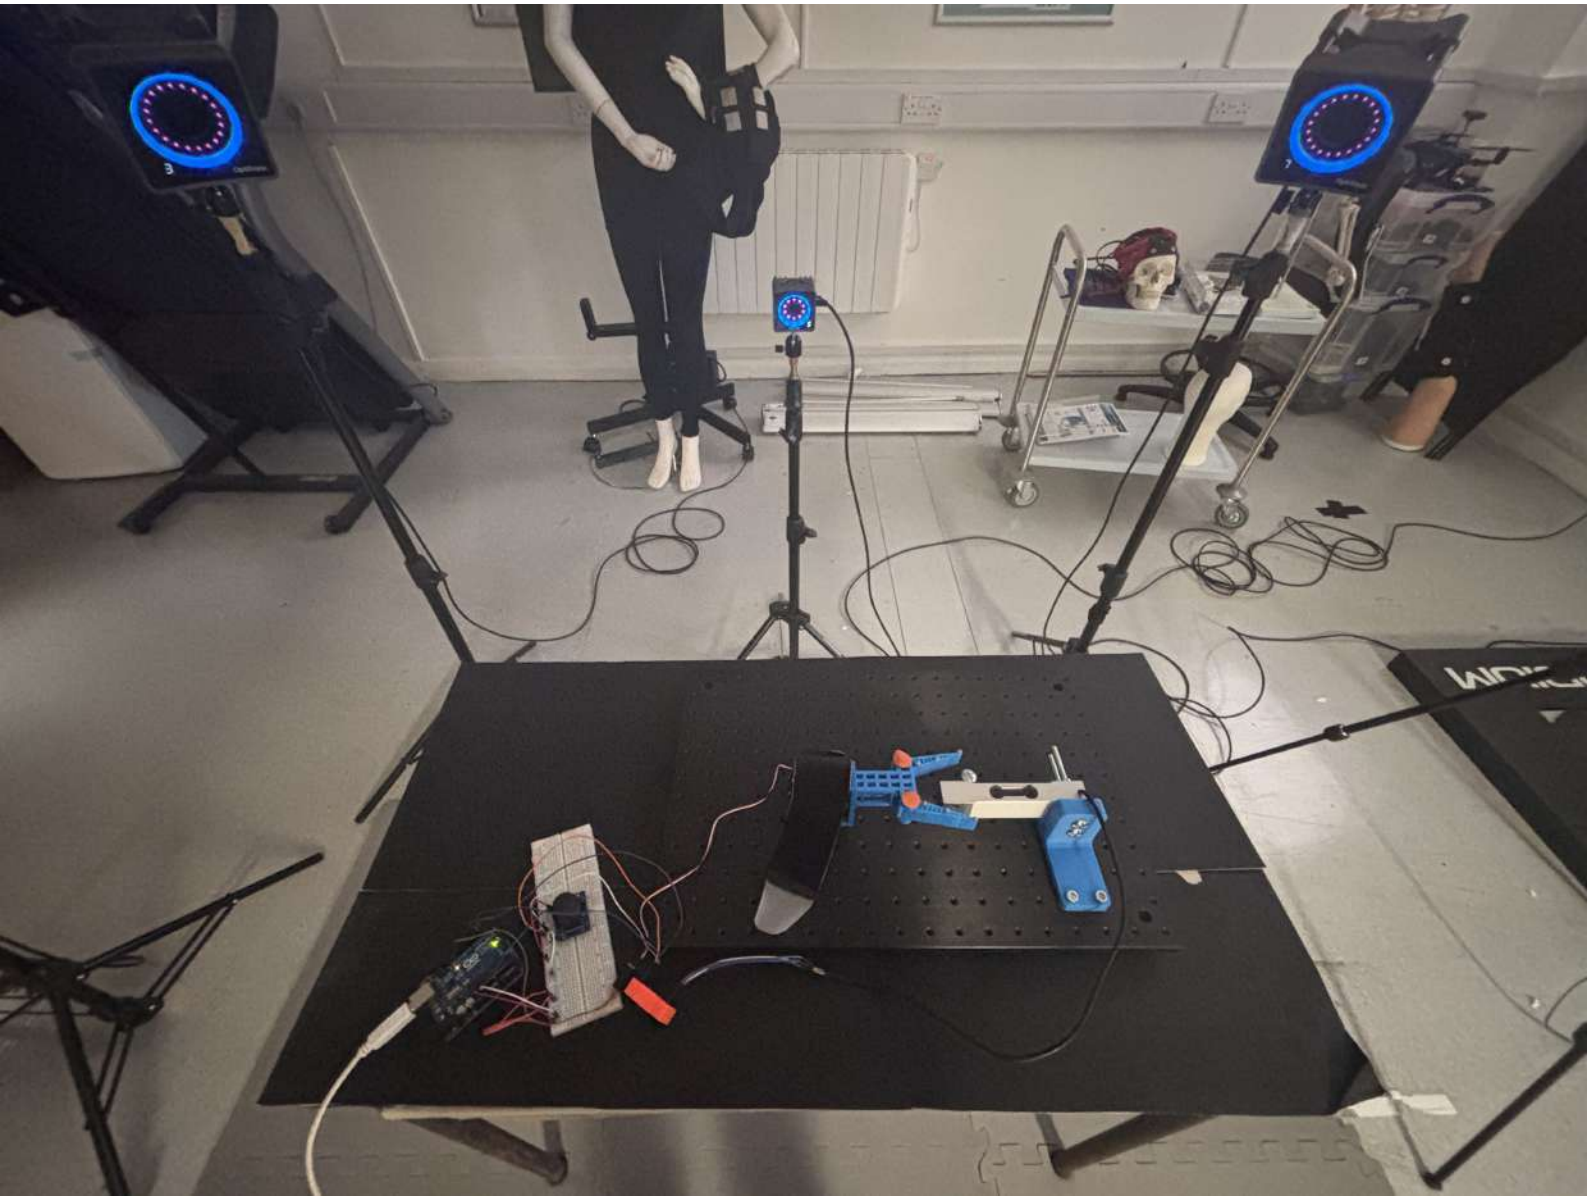


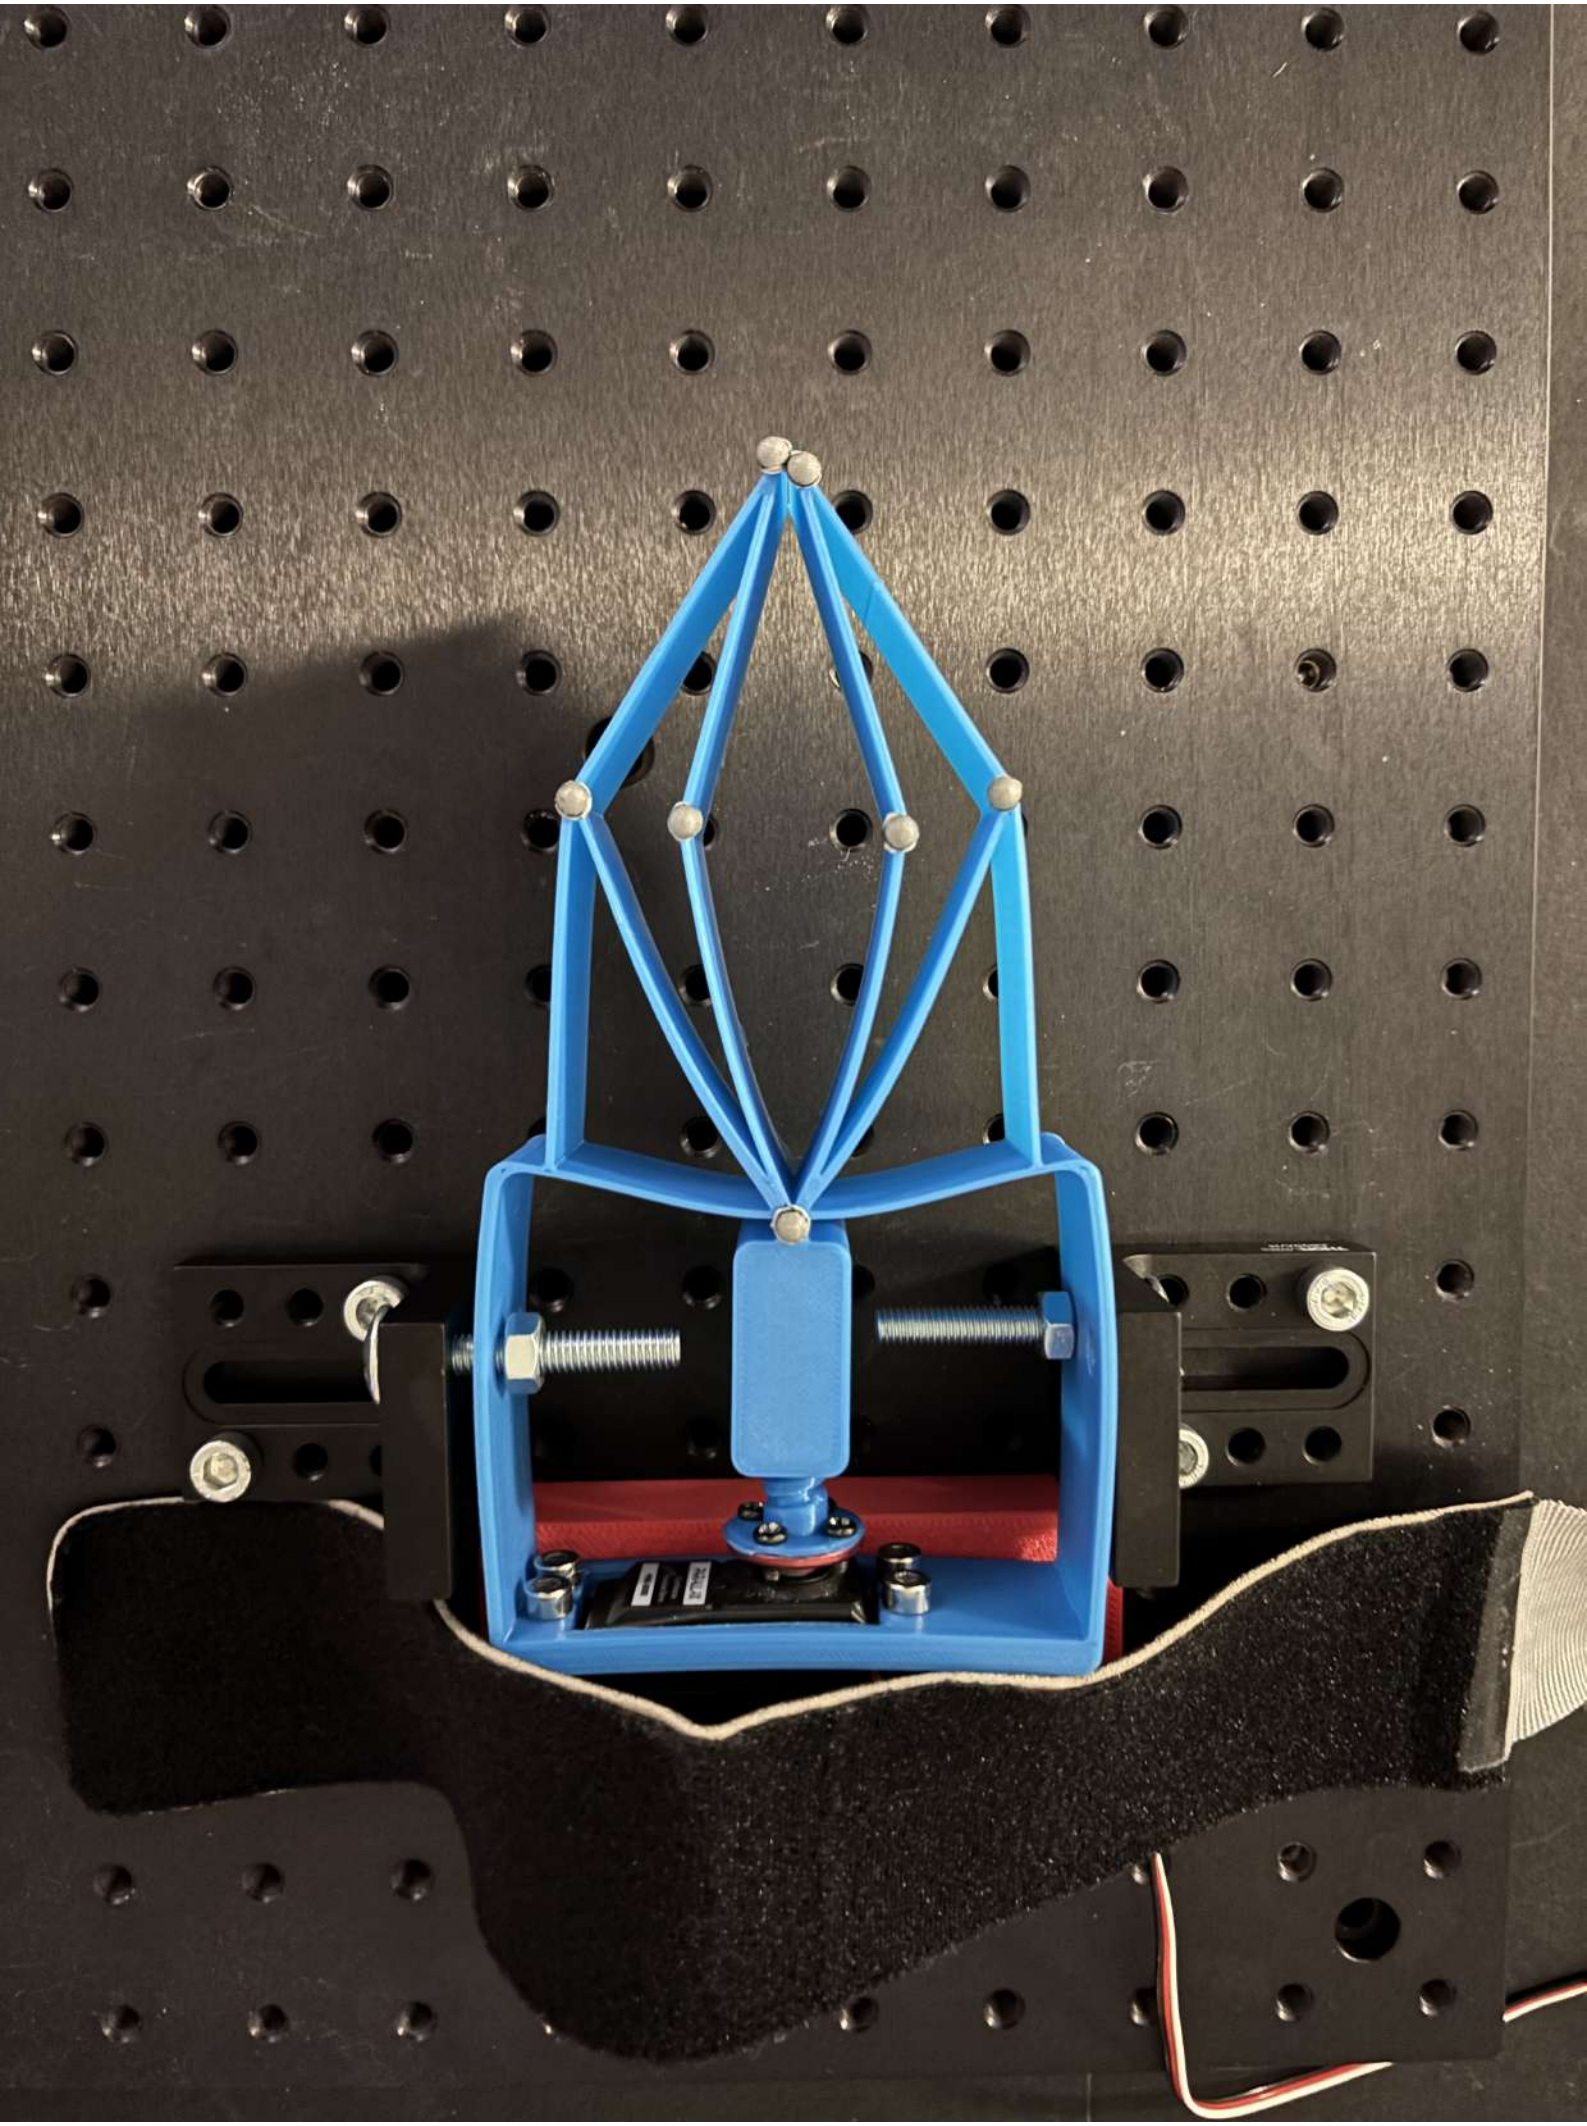


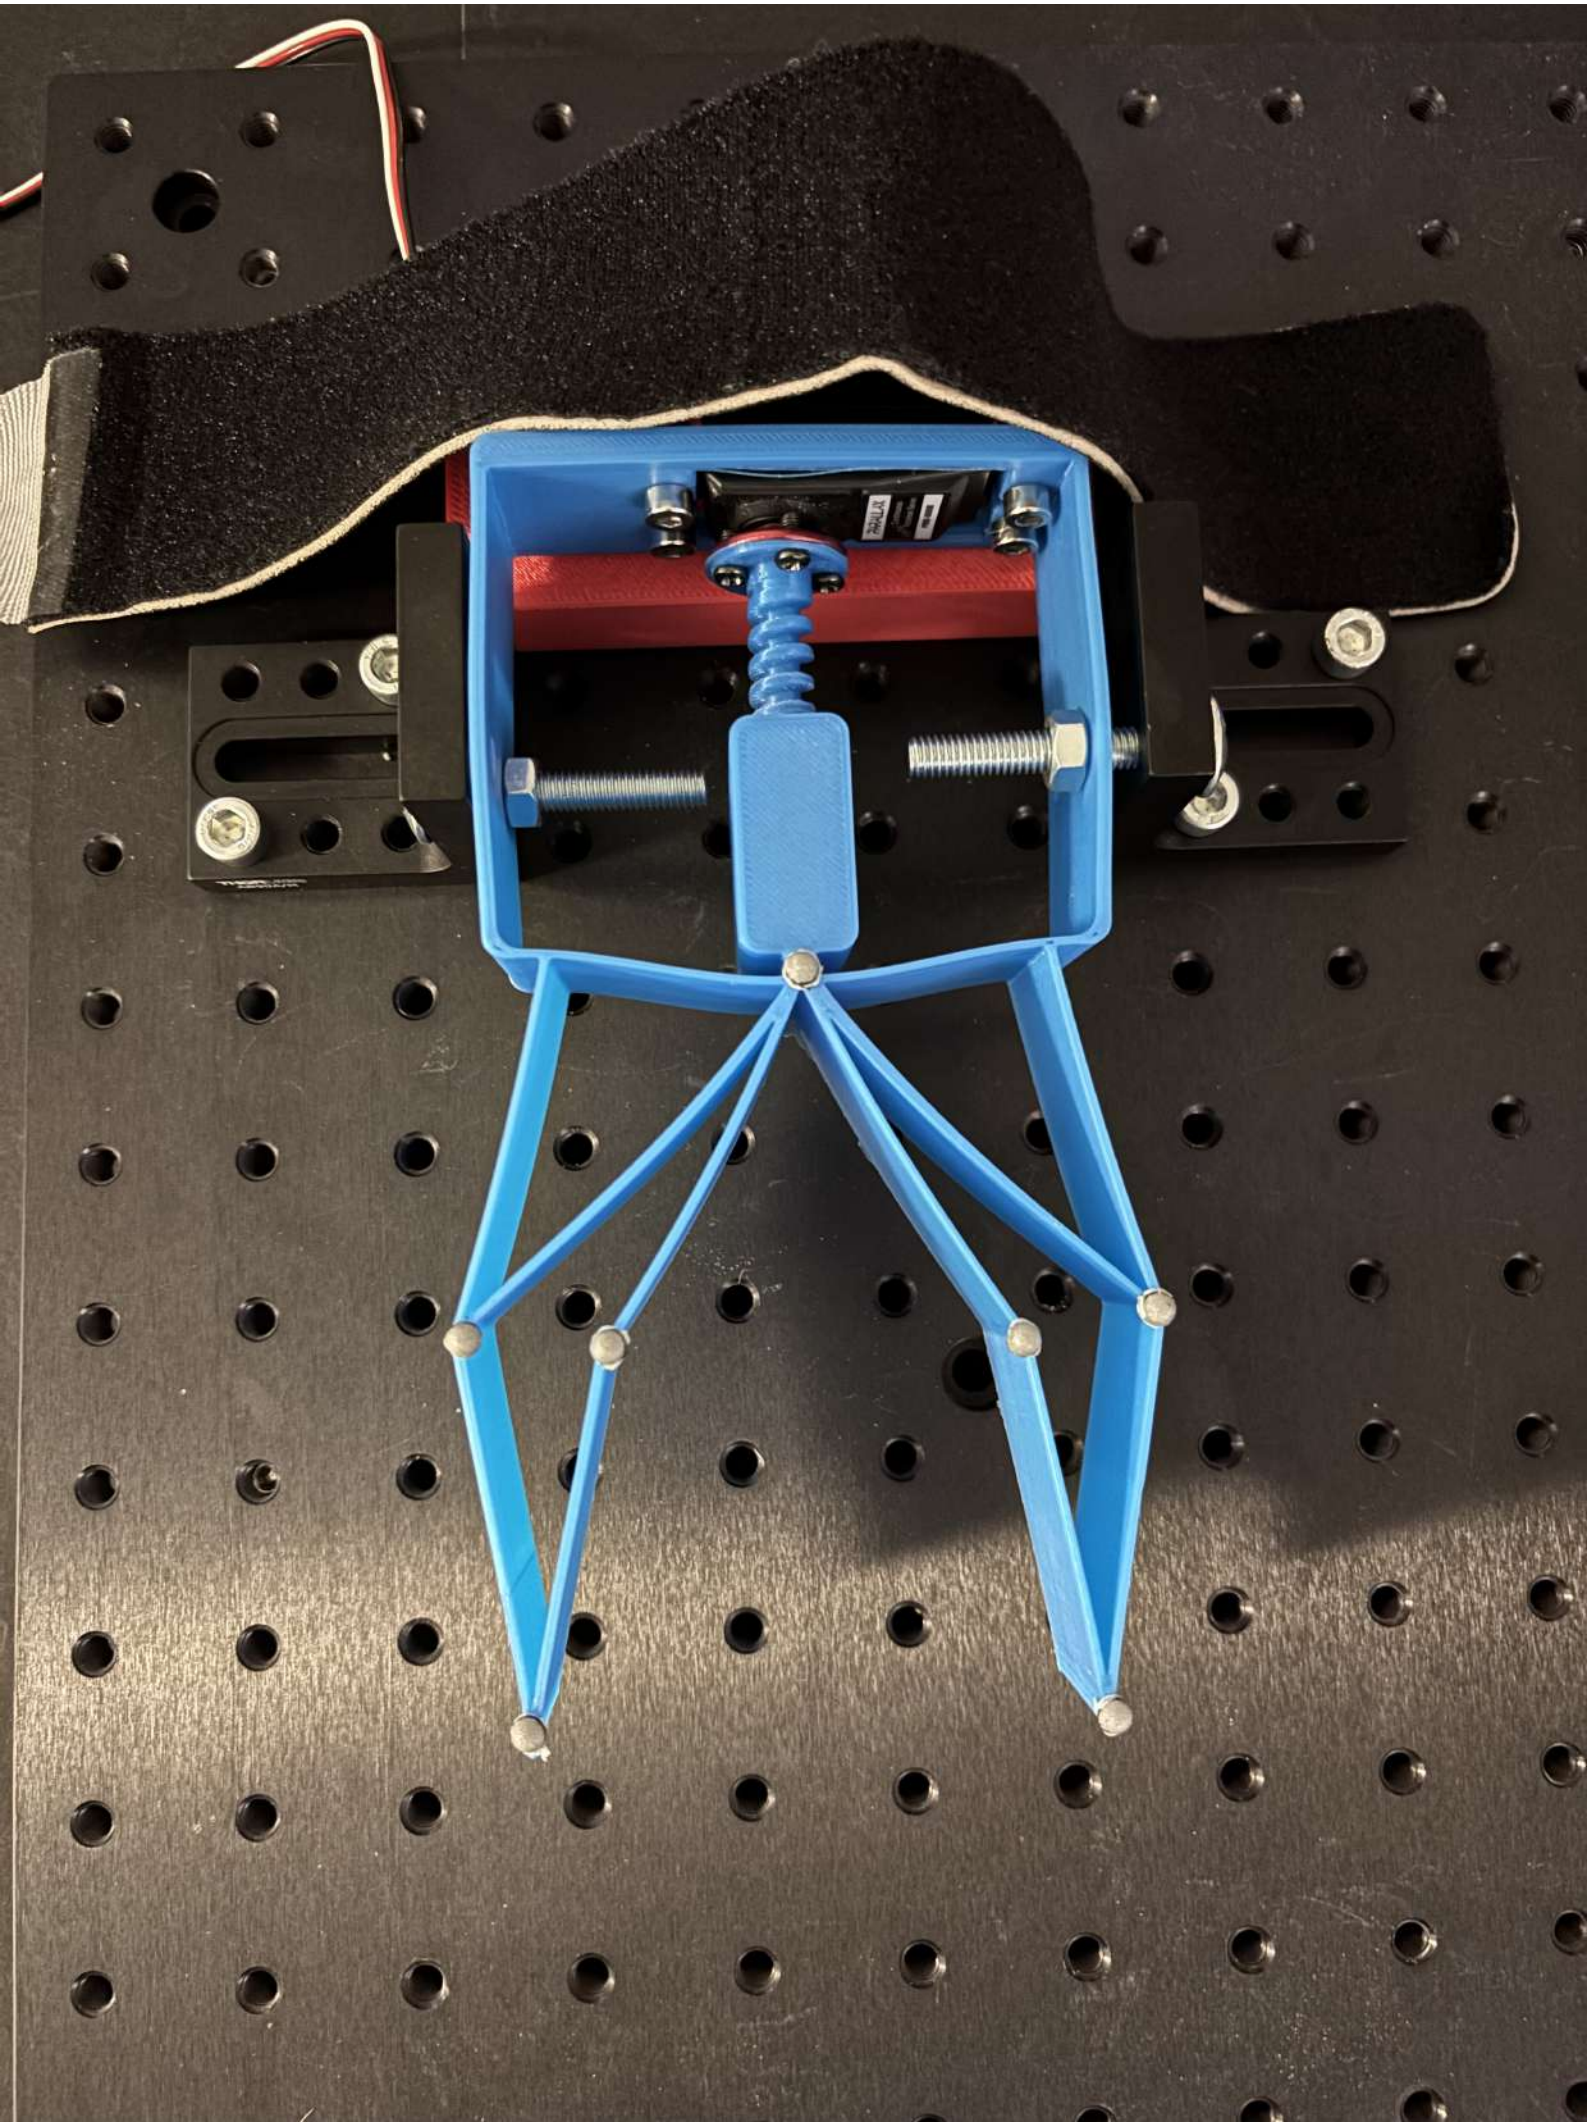


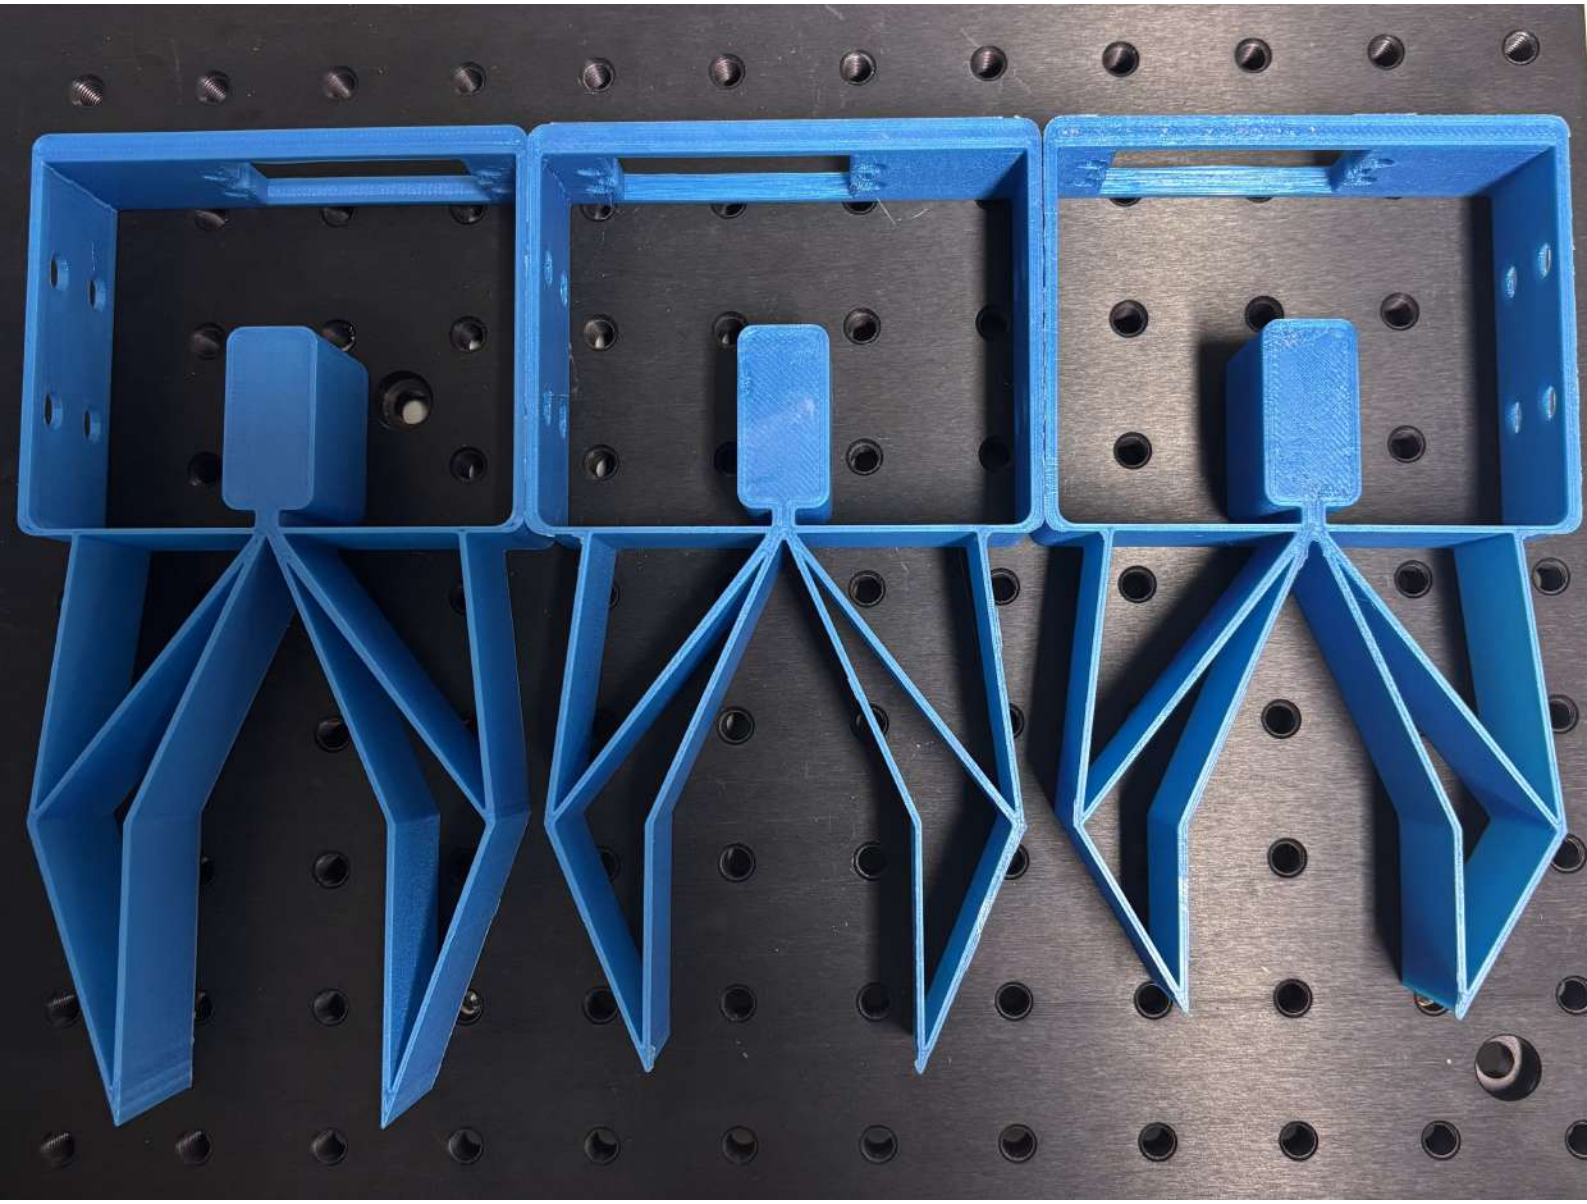


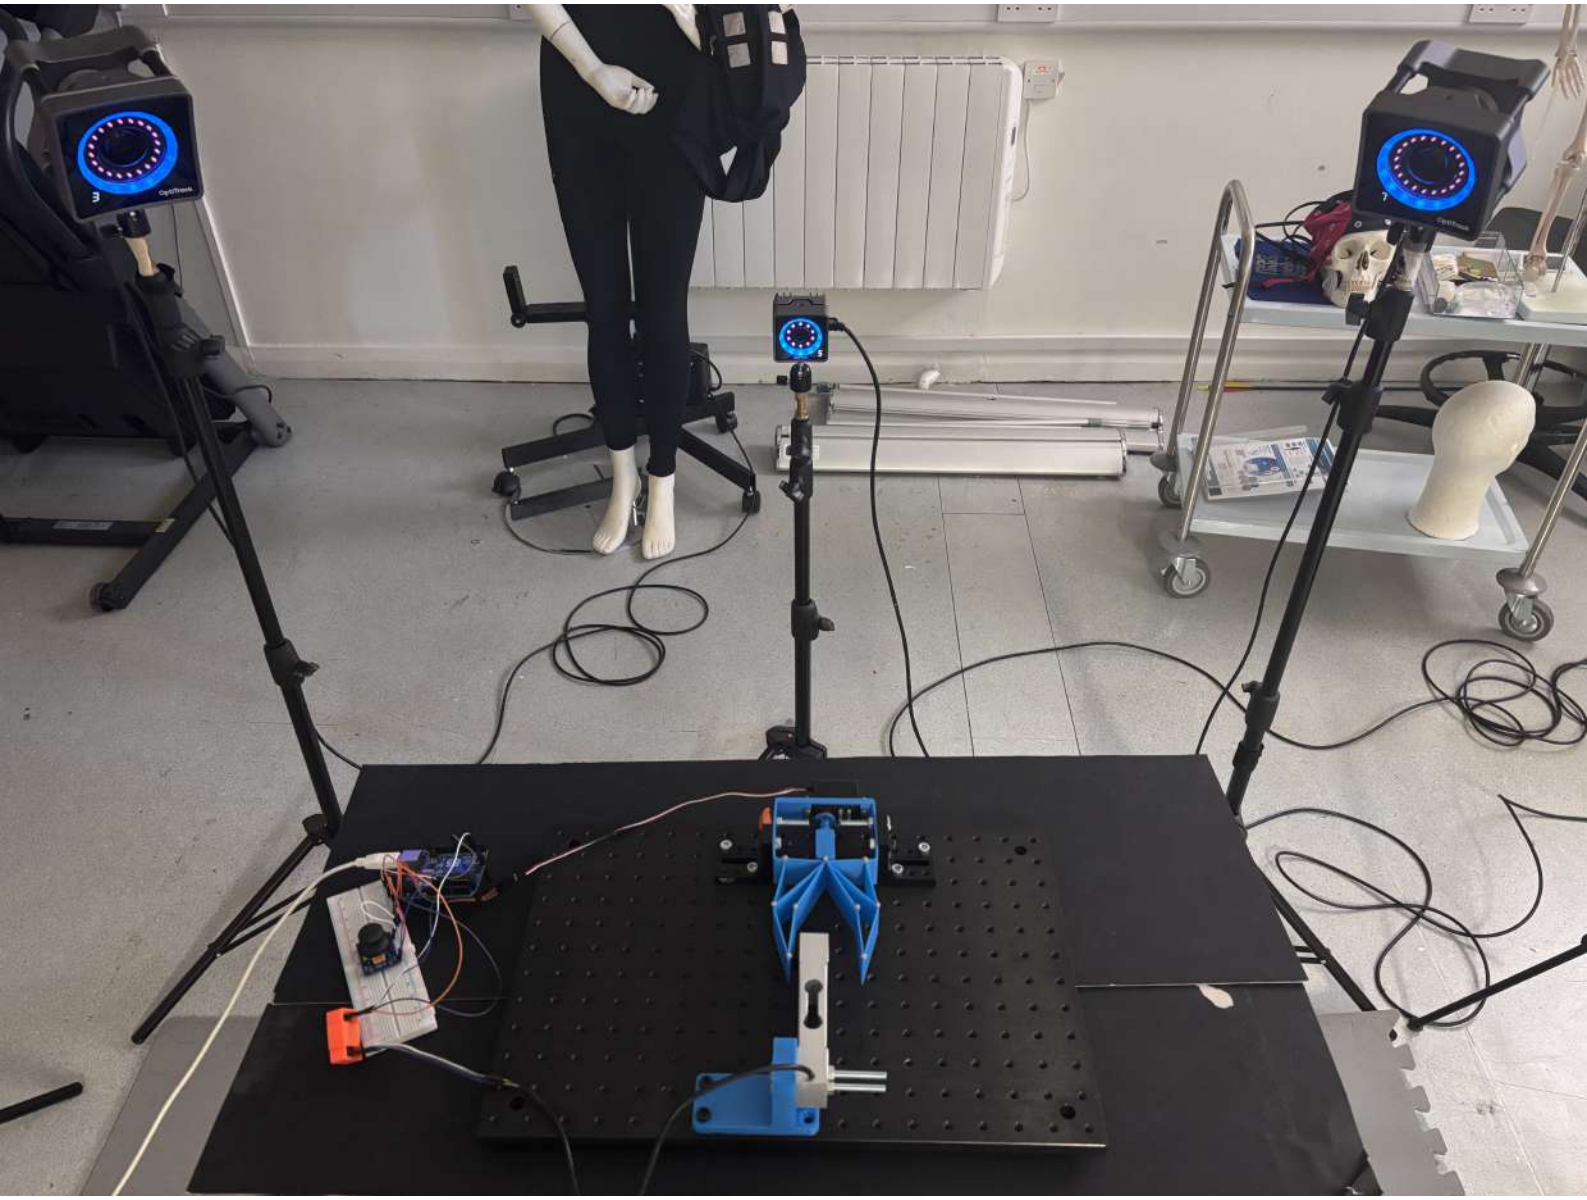


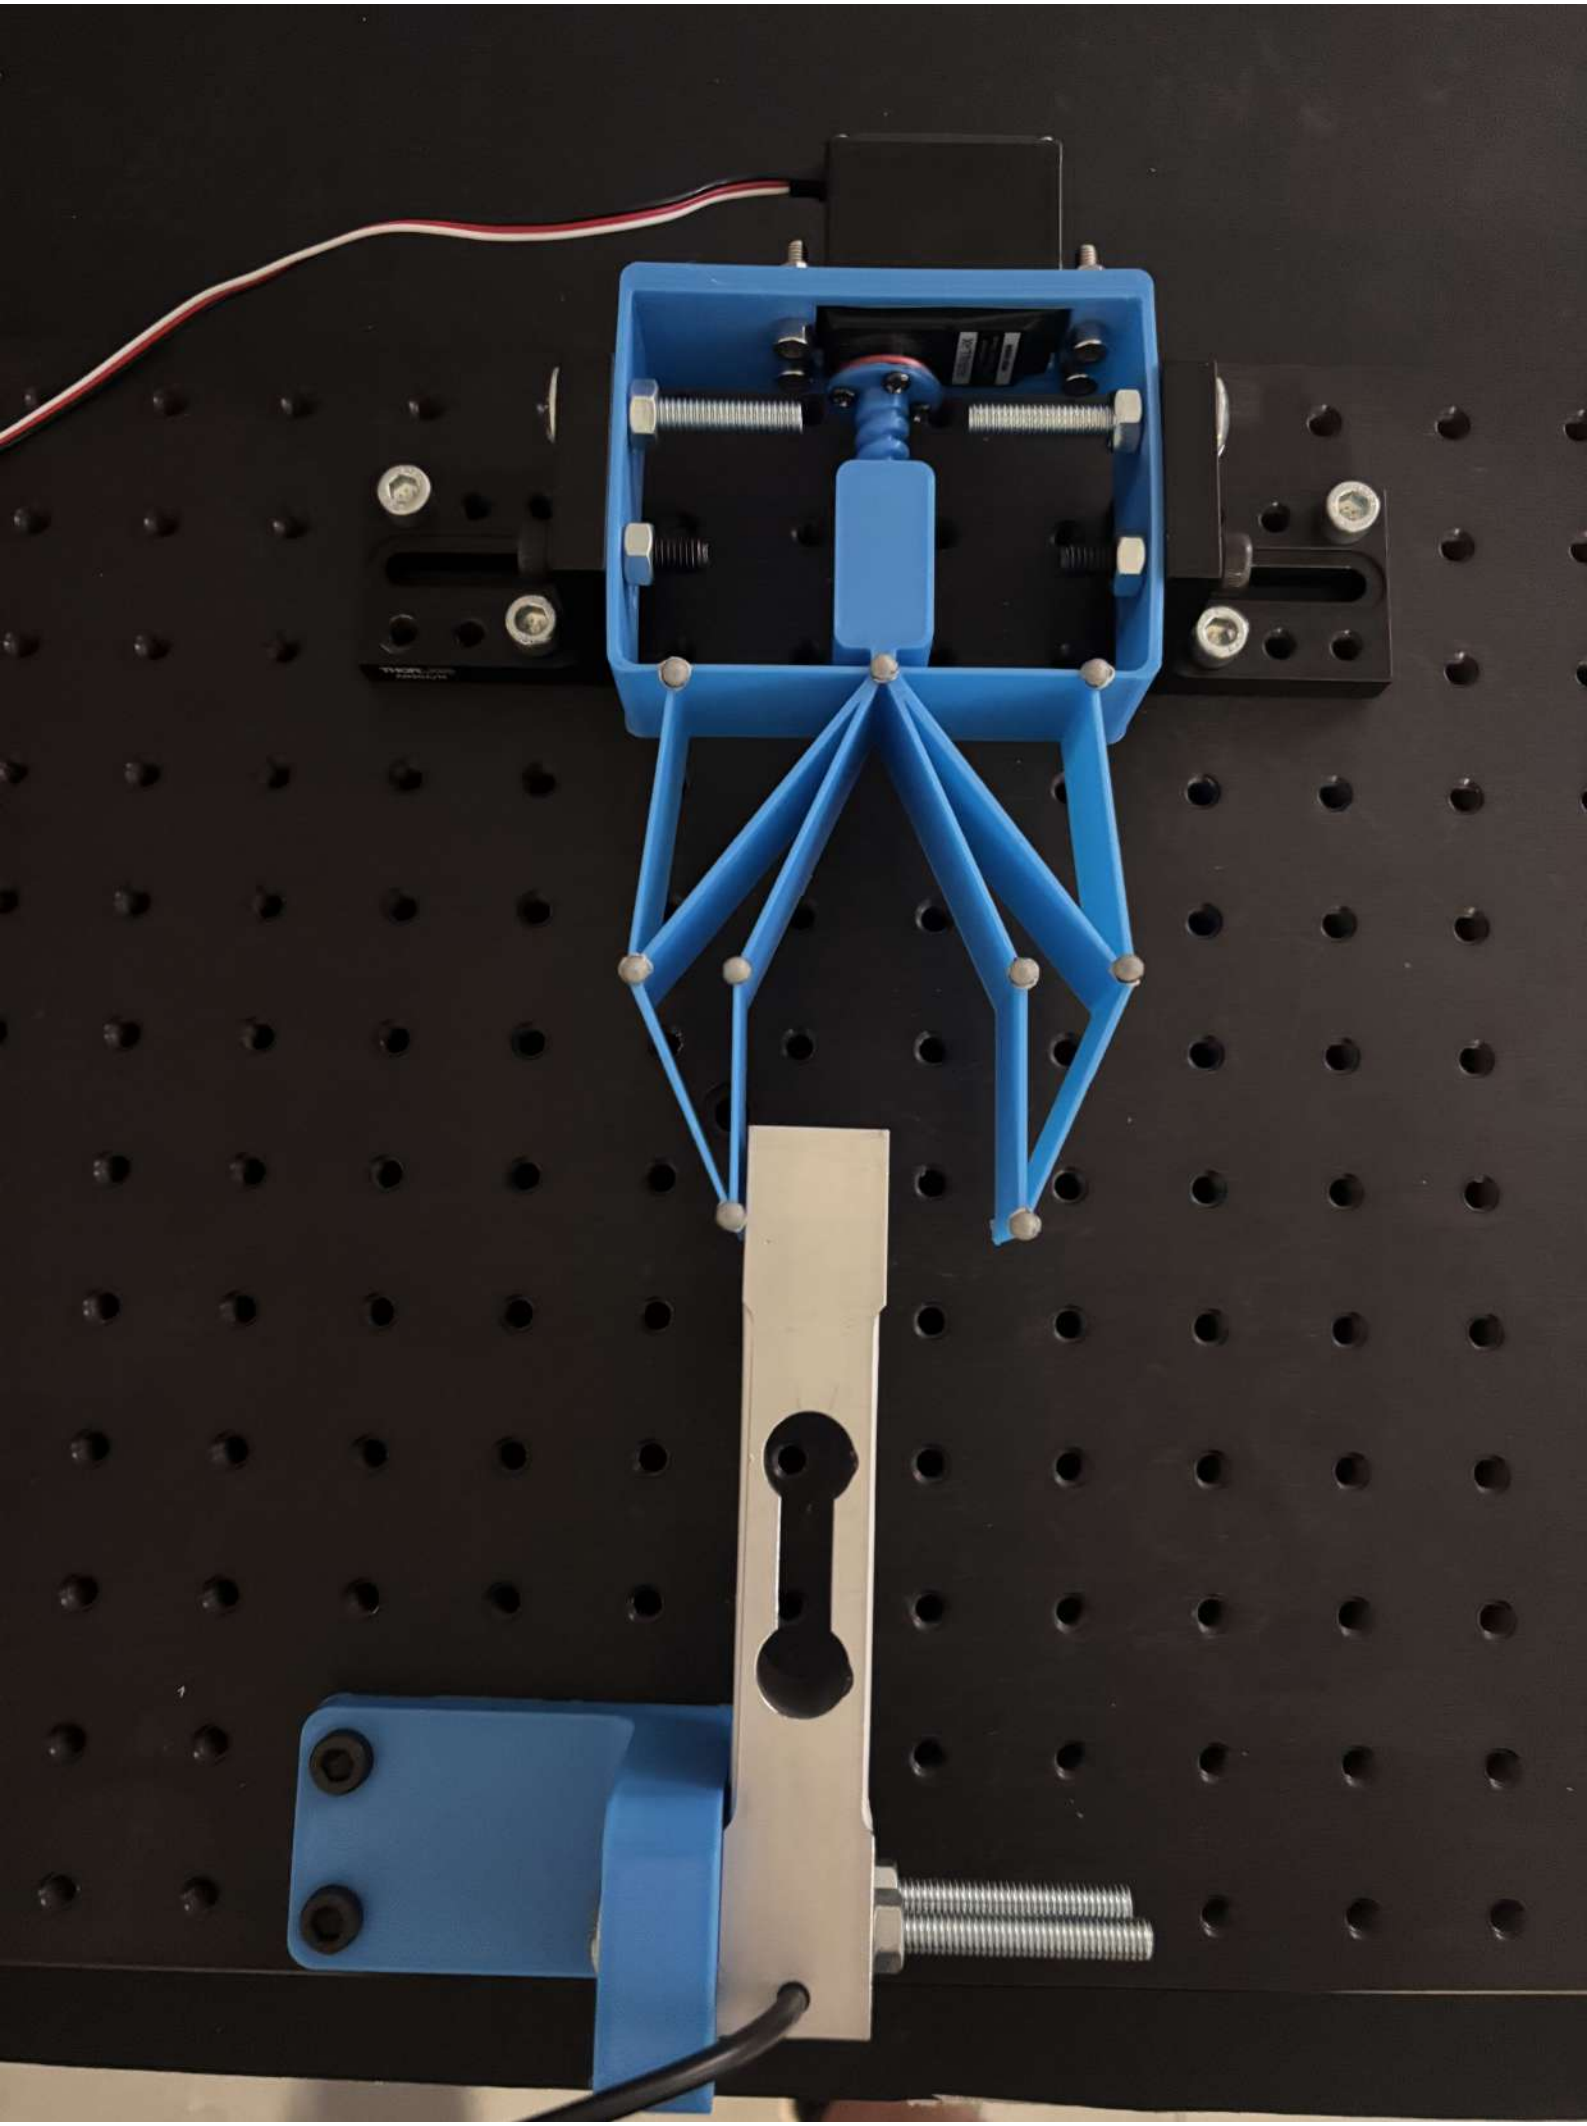


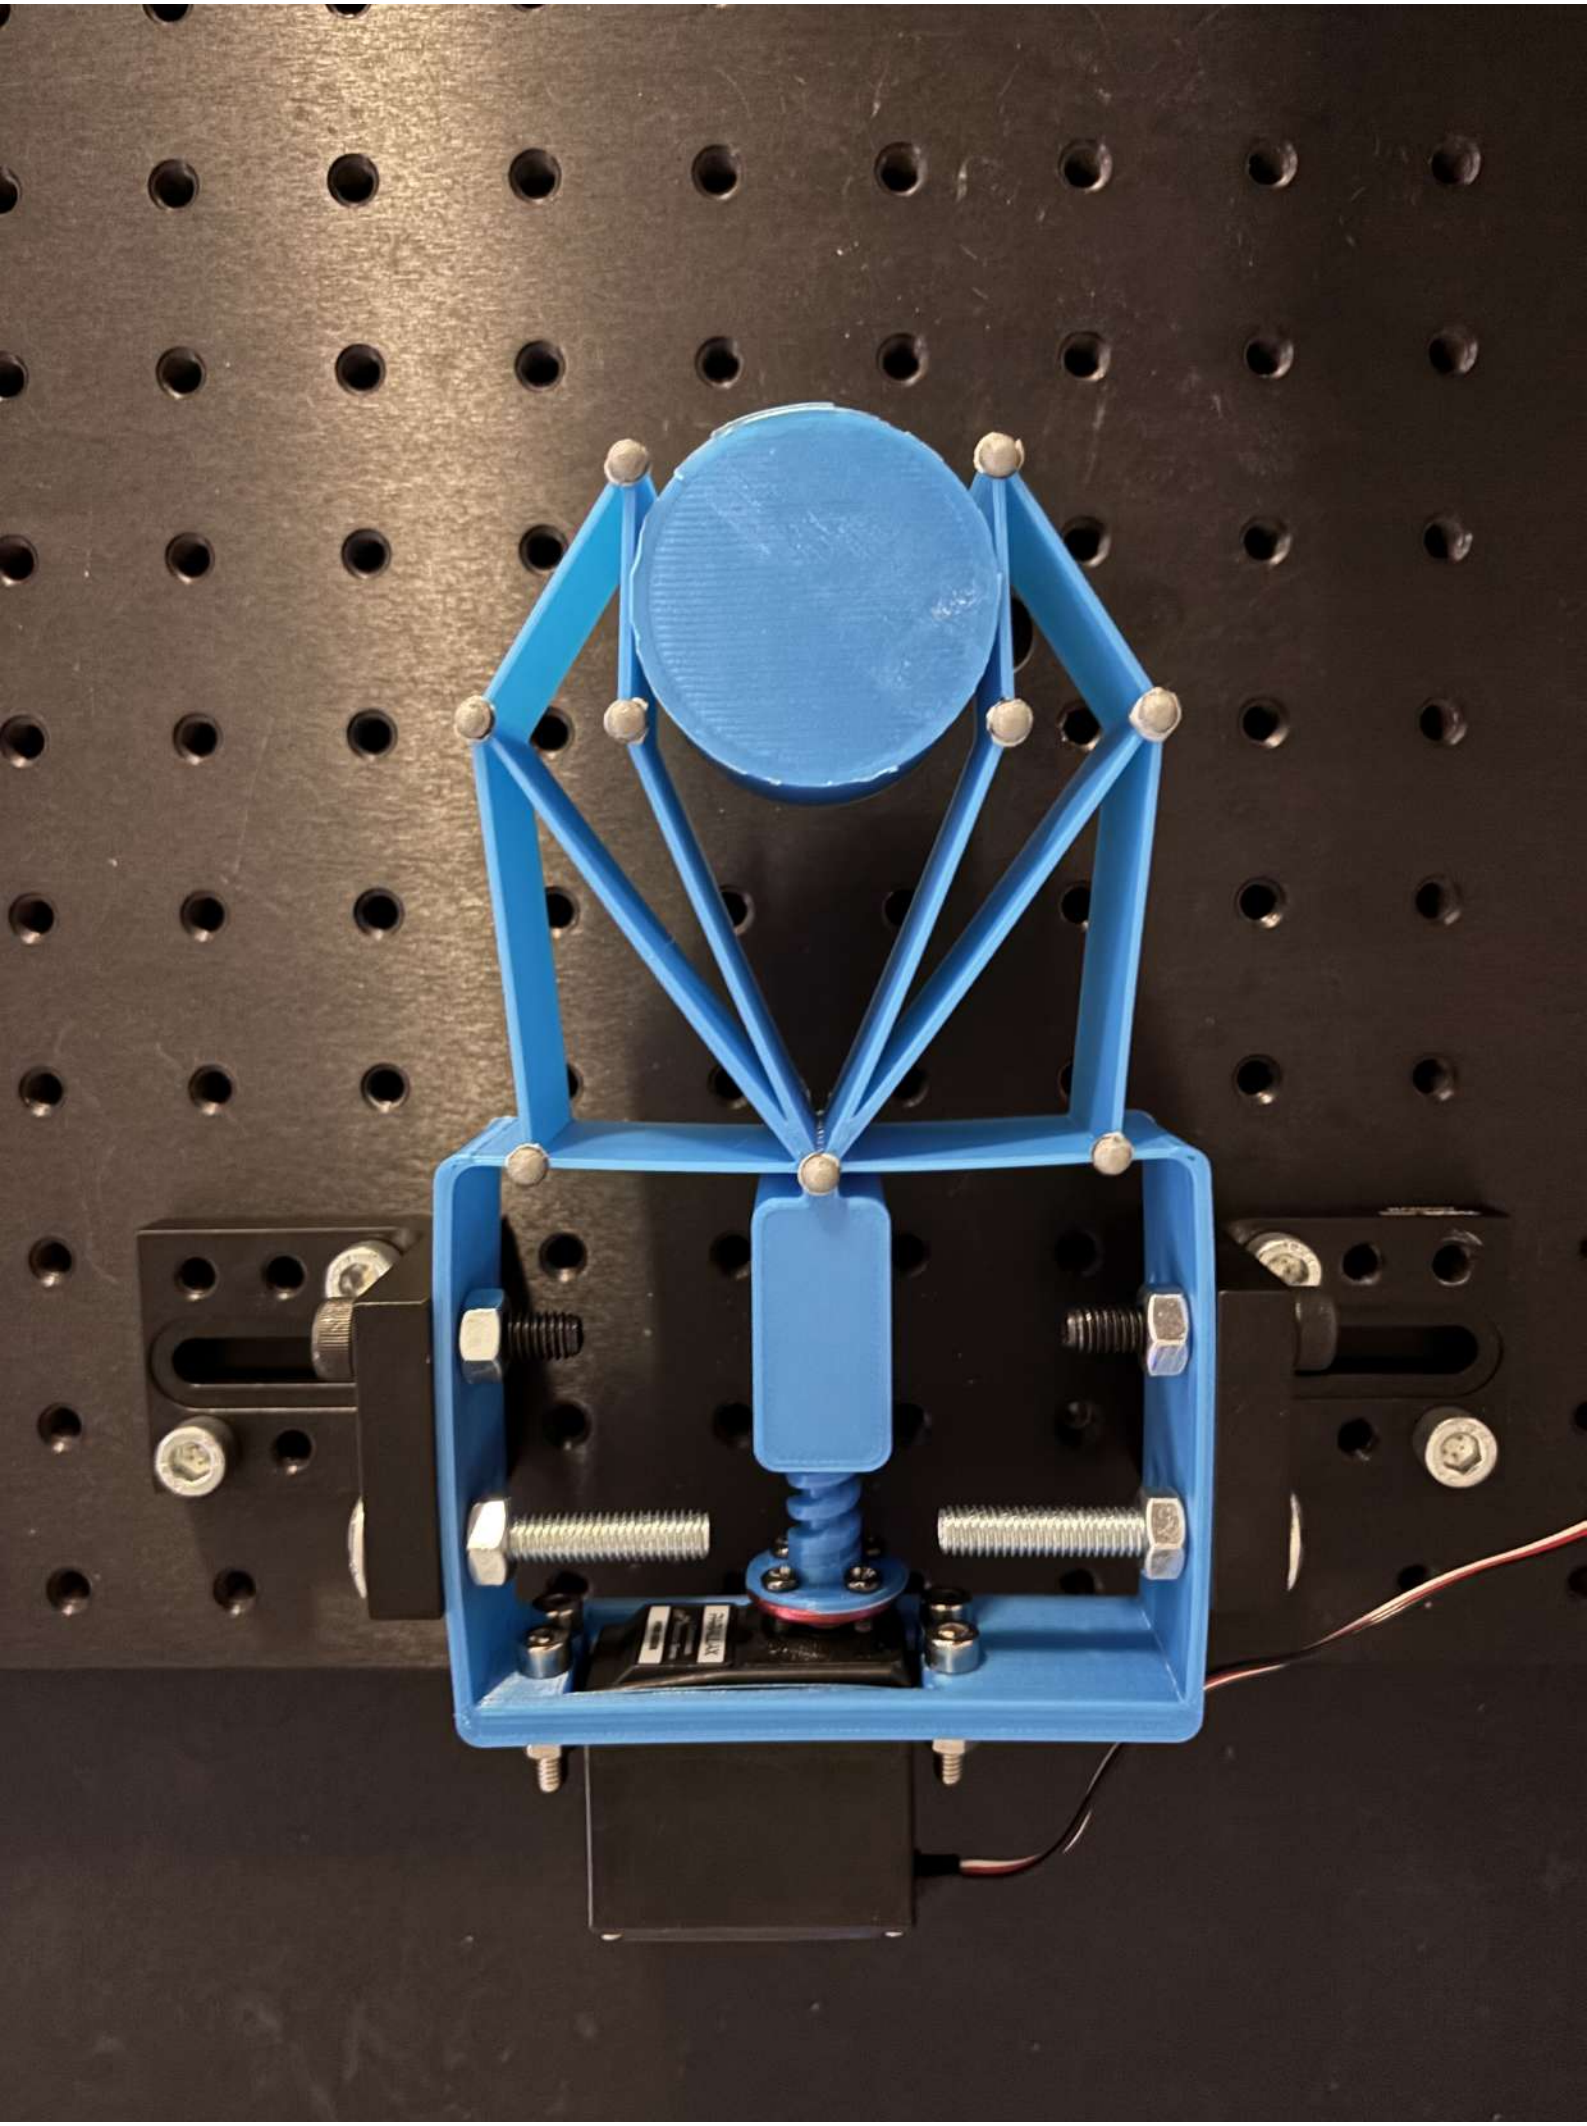


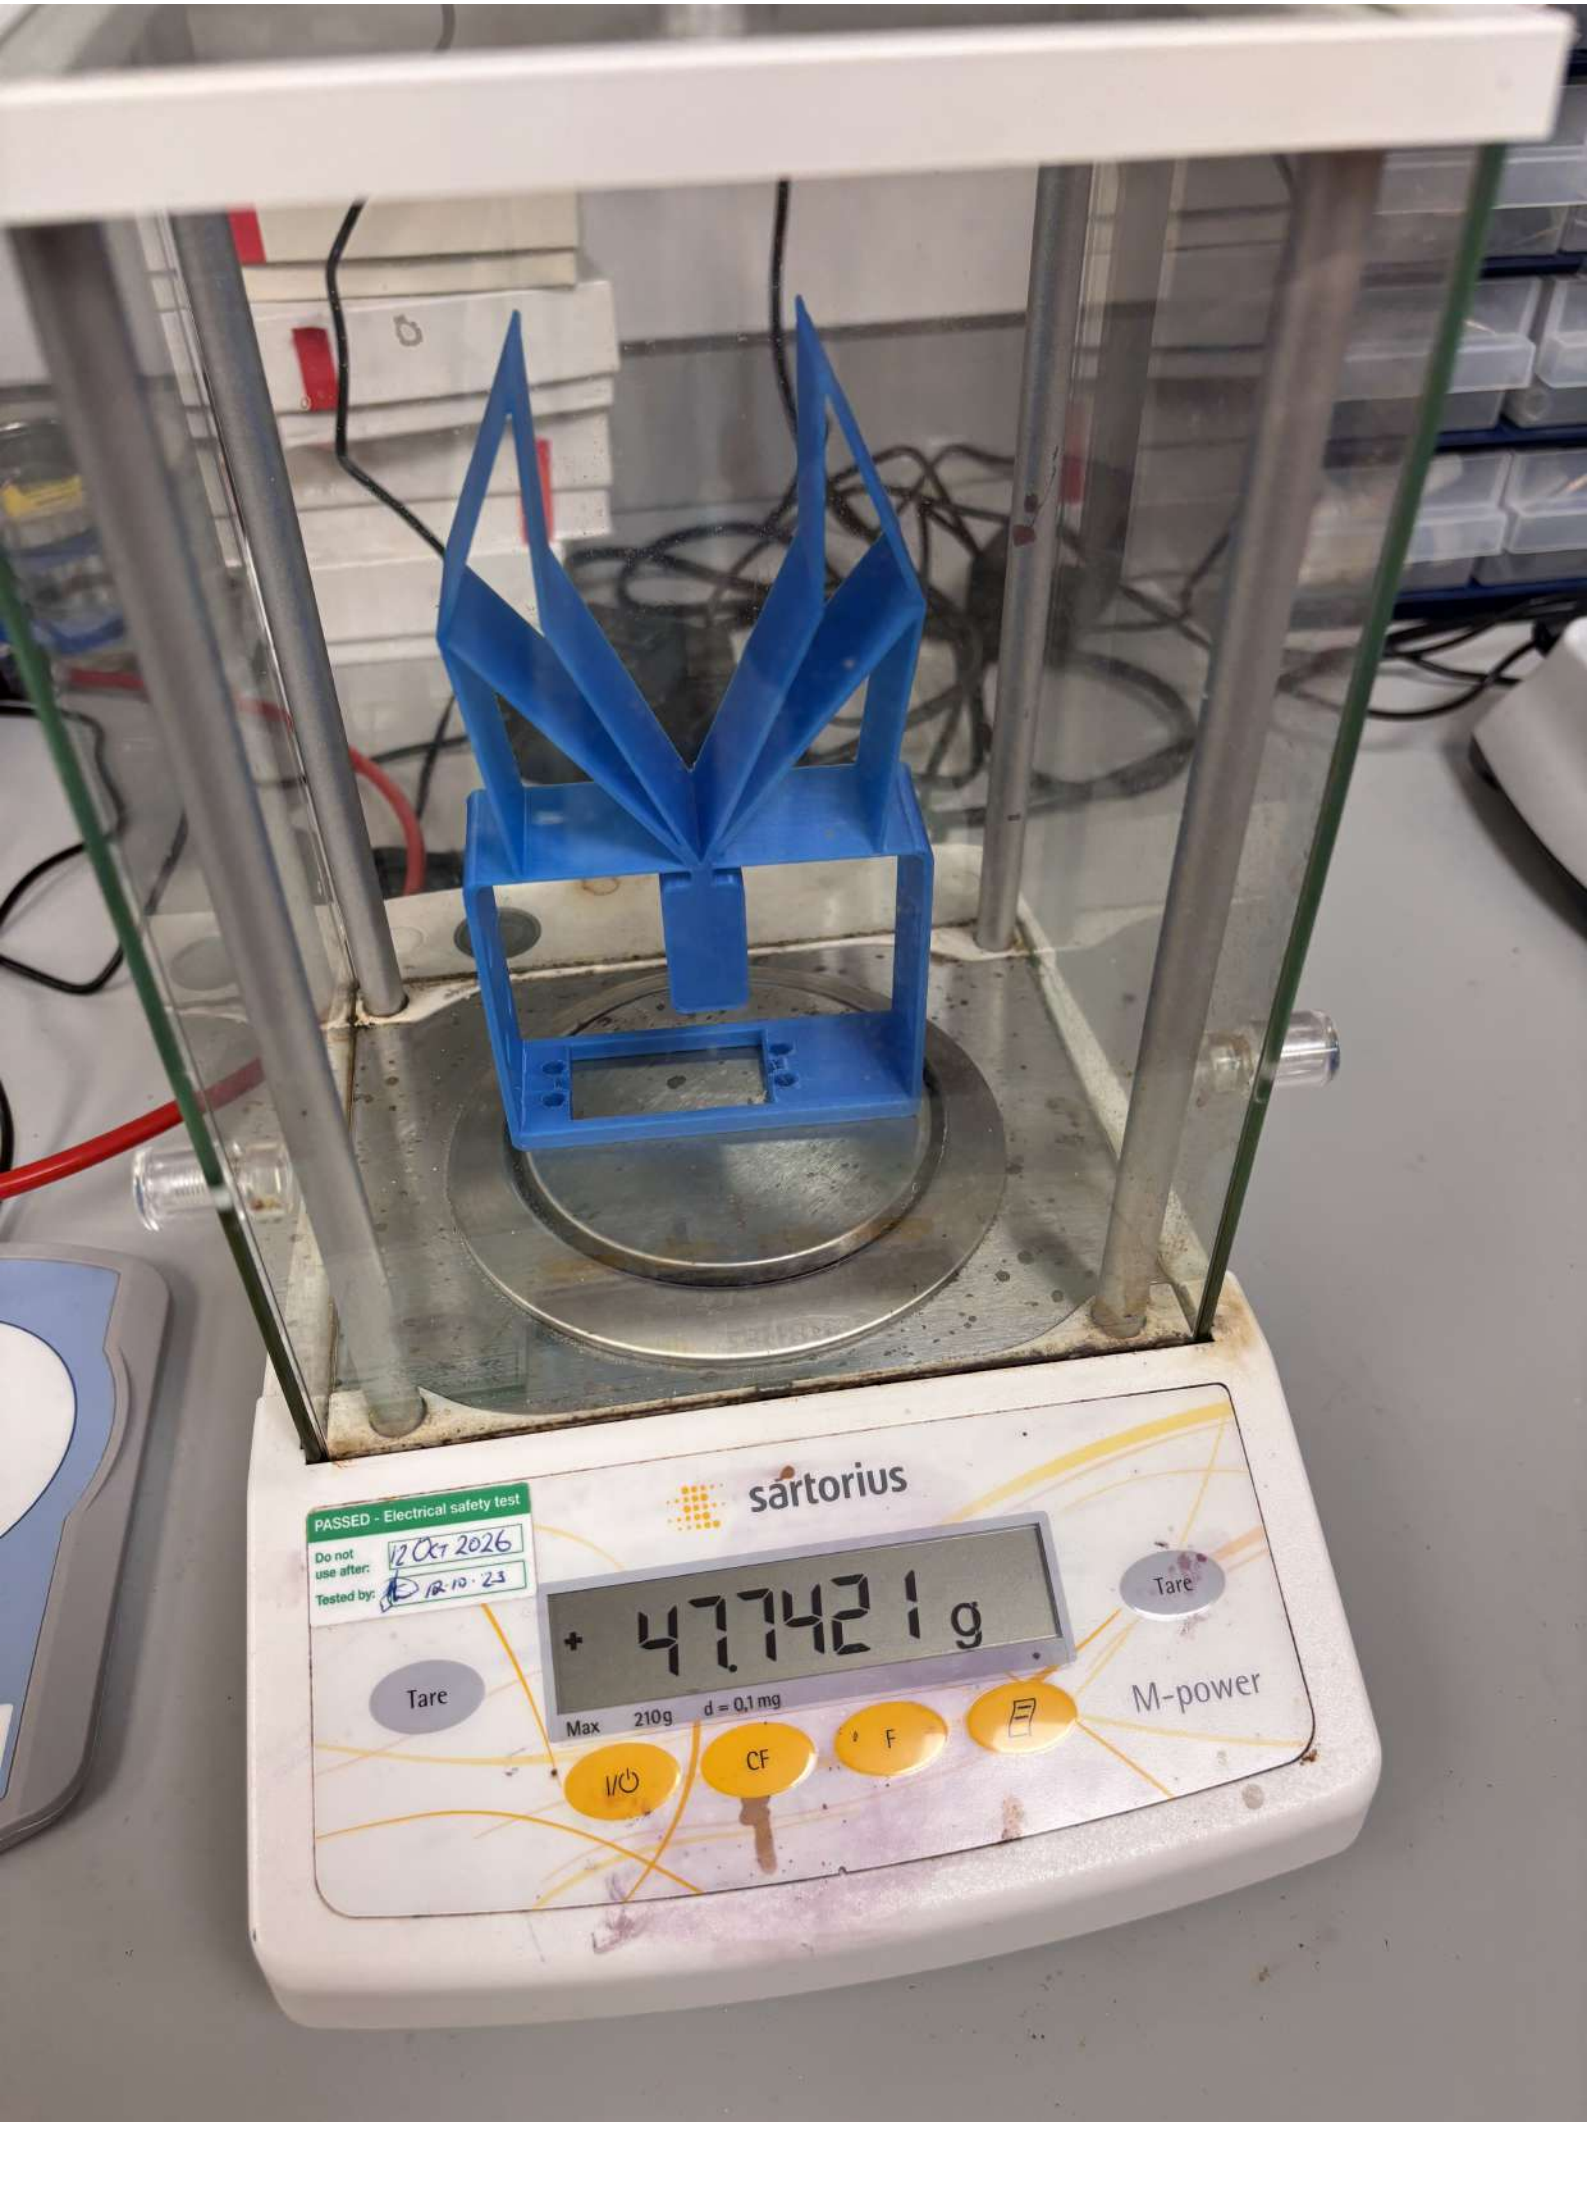

PASSED - Electrical safety test
Do not use after: 12 Oct 2026
Tested by: IR 10 23
sartorius
+ 47.7421 g
Max 210g d = 0,1 mg
Tare
Tare
M-power
I/⏻
CF
F

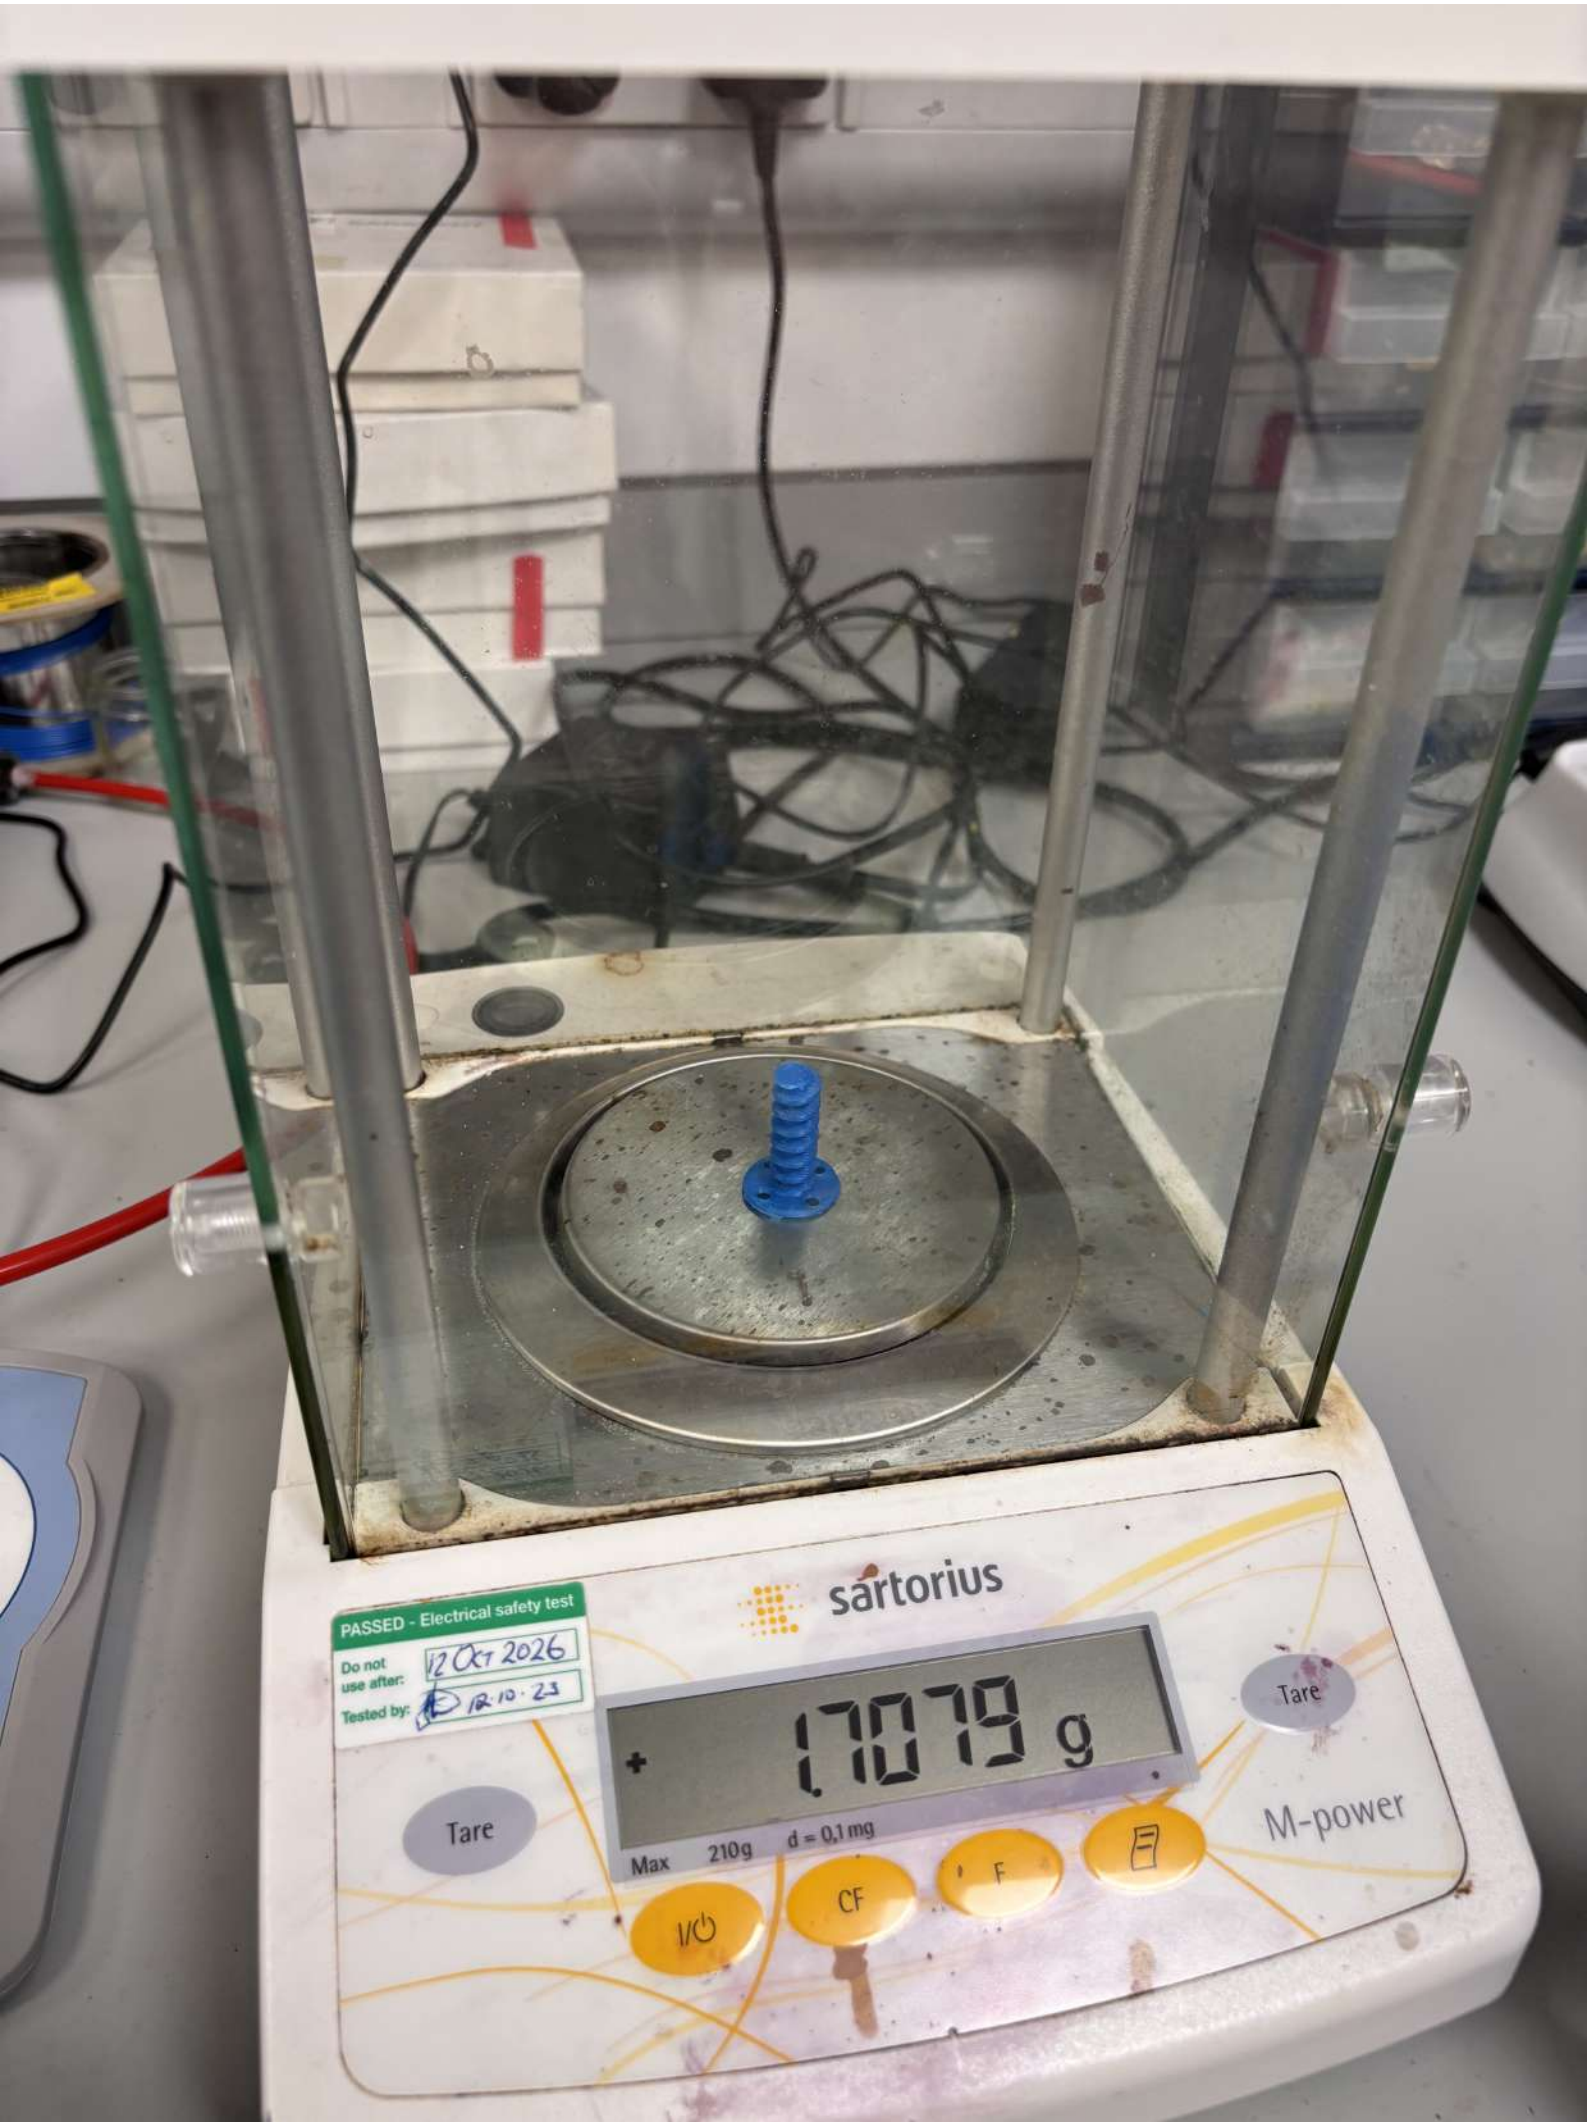

PASSED - Electrical safety test
Do not use after: 12 Oct 2026
Tested by: 12.10.23
sartorius
+ 17079 g
Max 210g d = 0,1 mg
Tare
Tare
M-power
I/O
CF
F

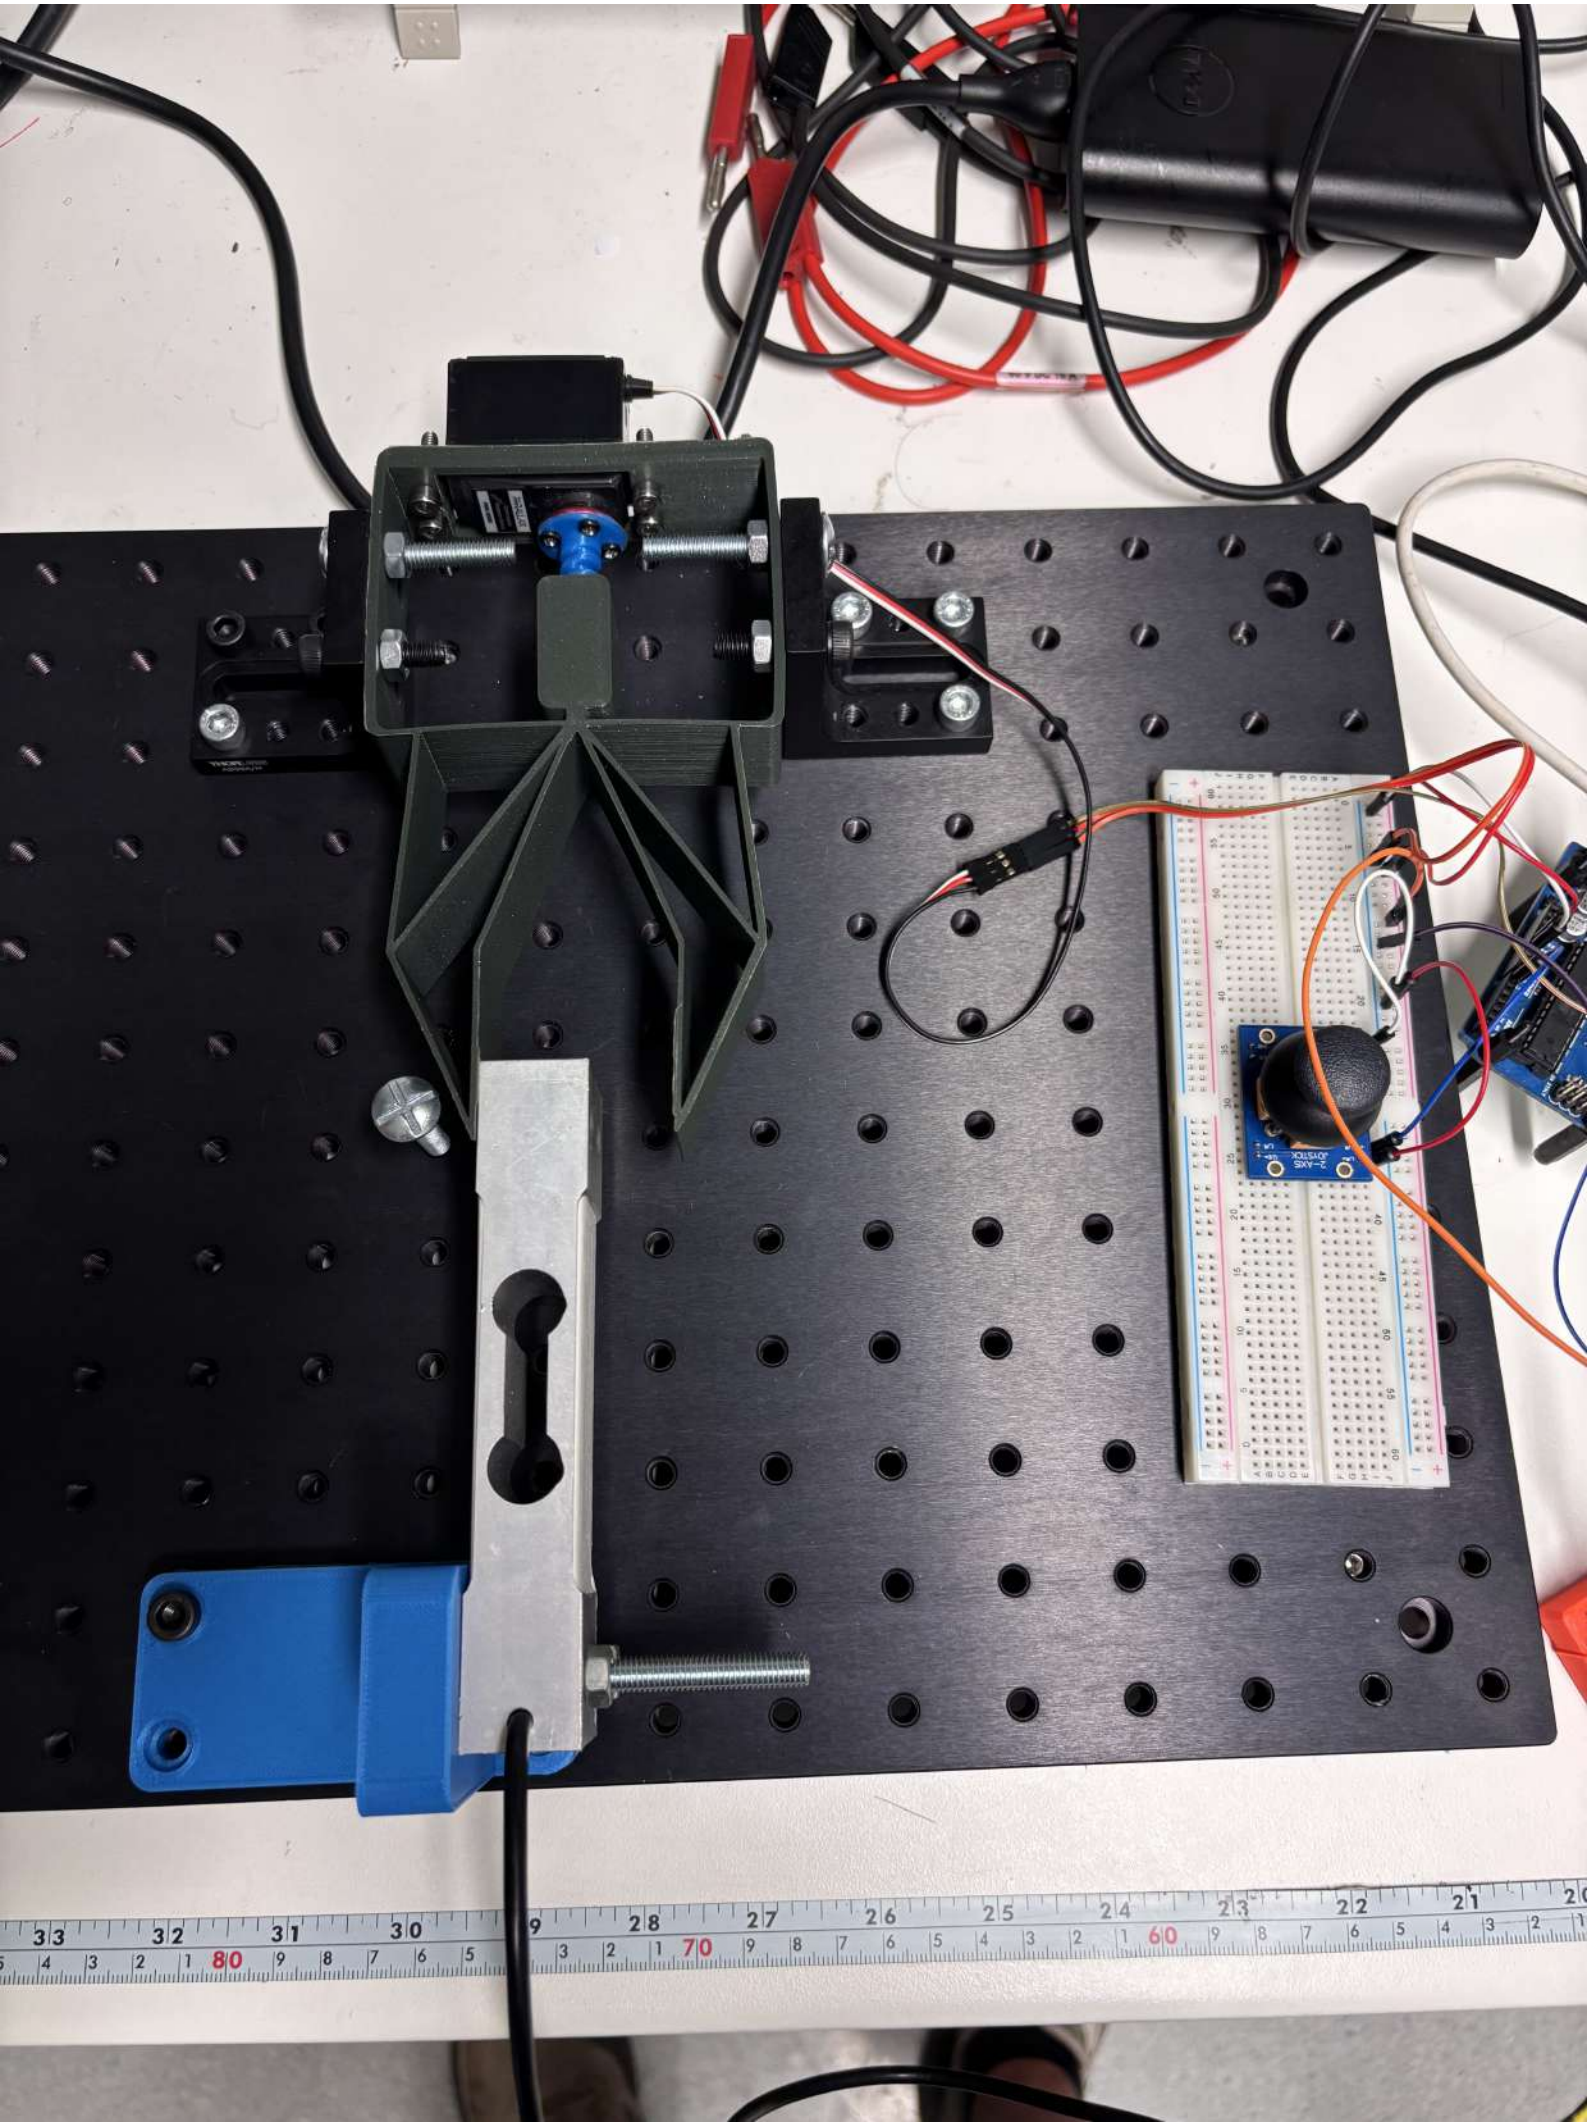

2-AXIS
JOYSTICK

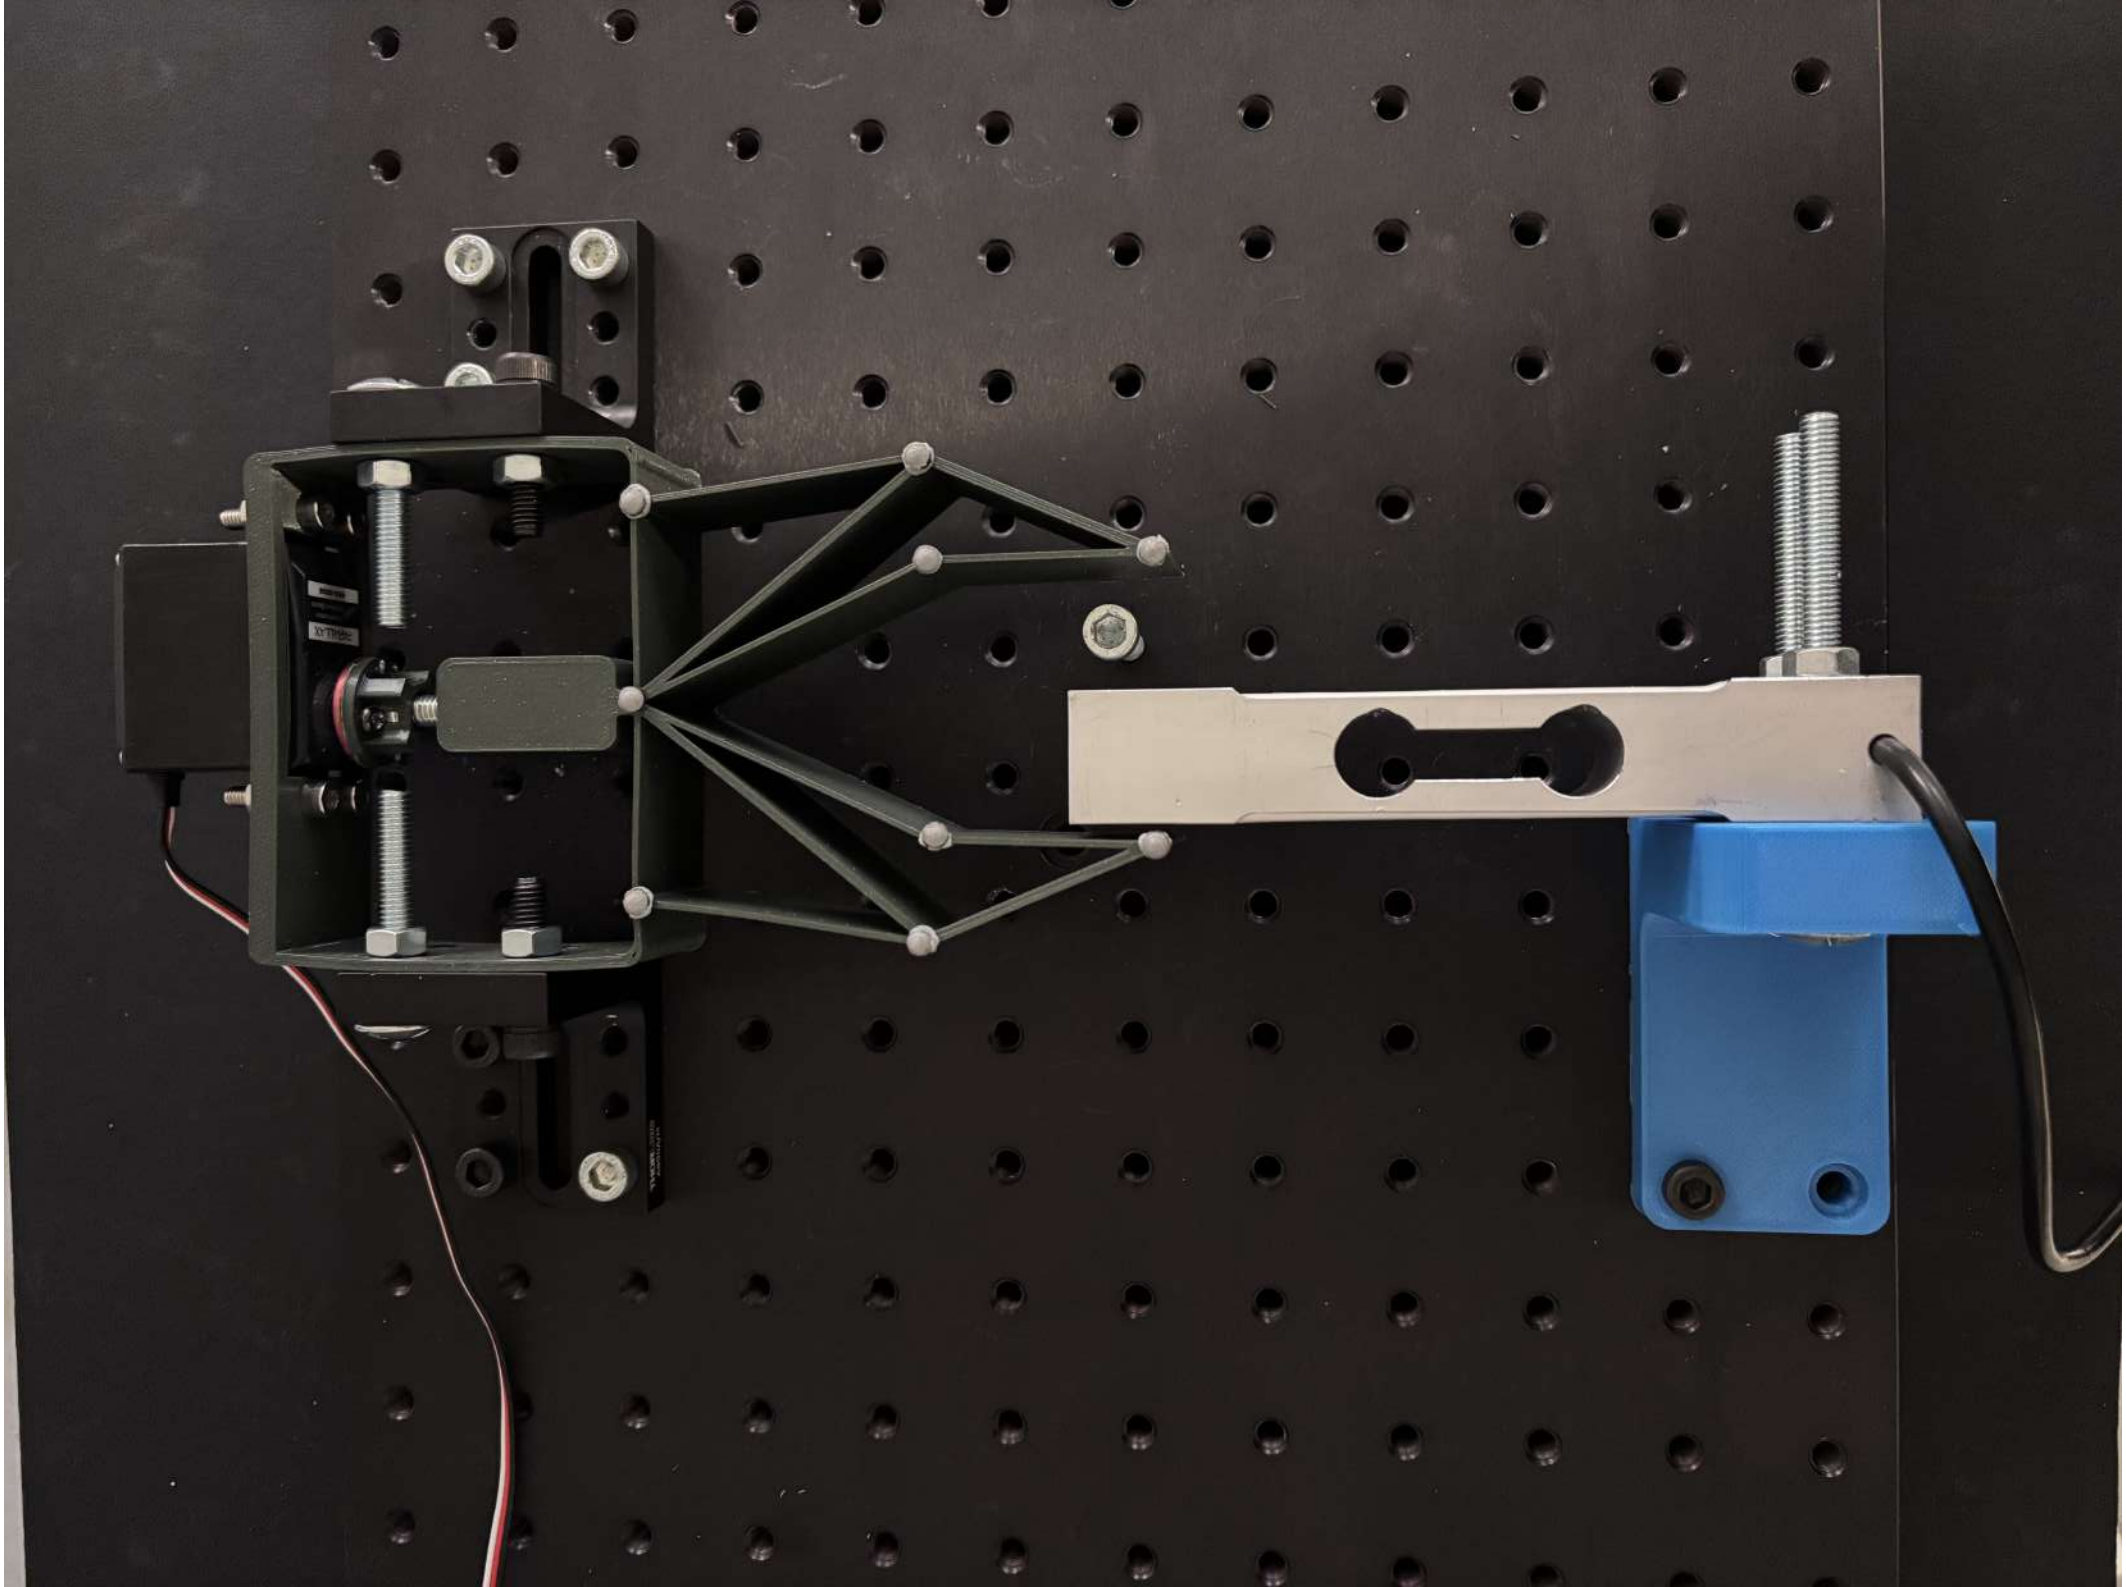

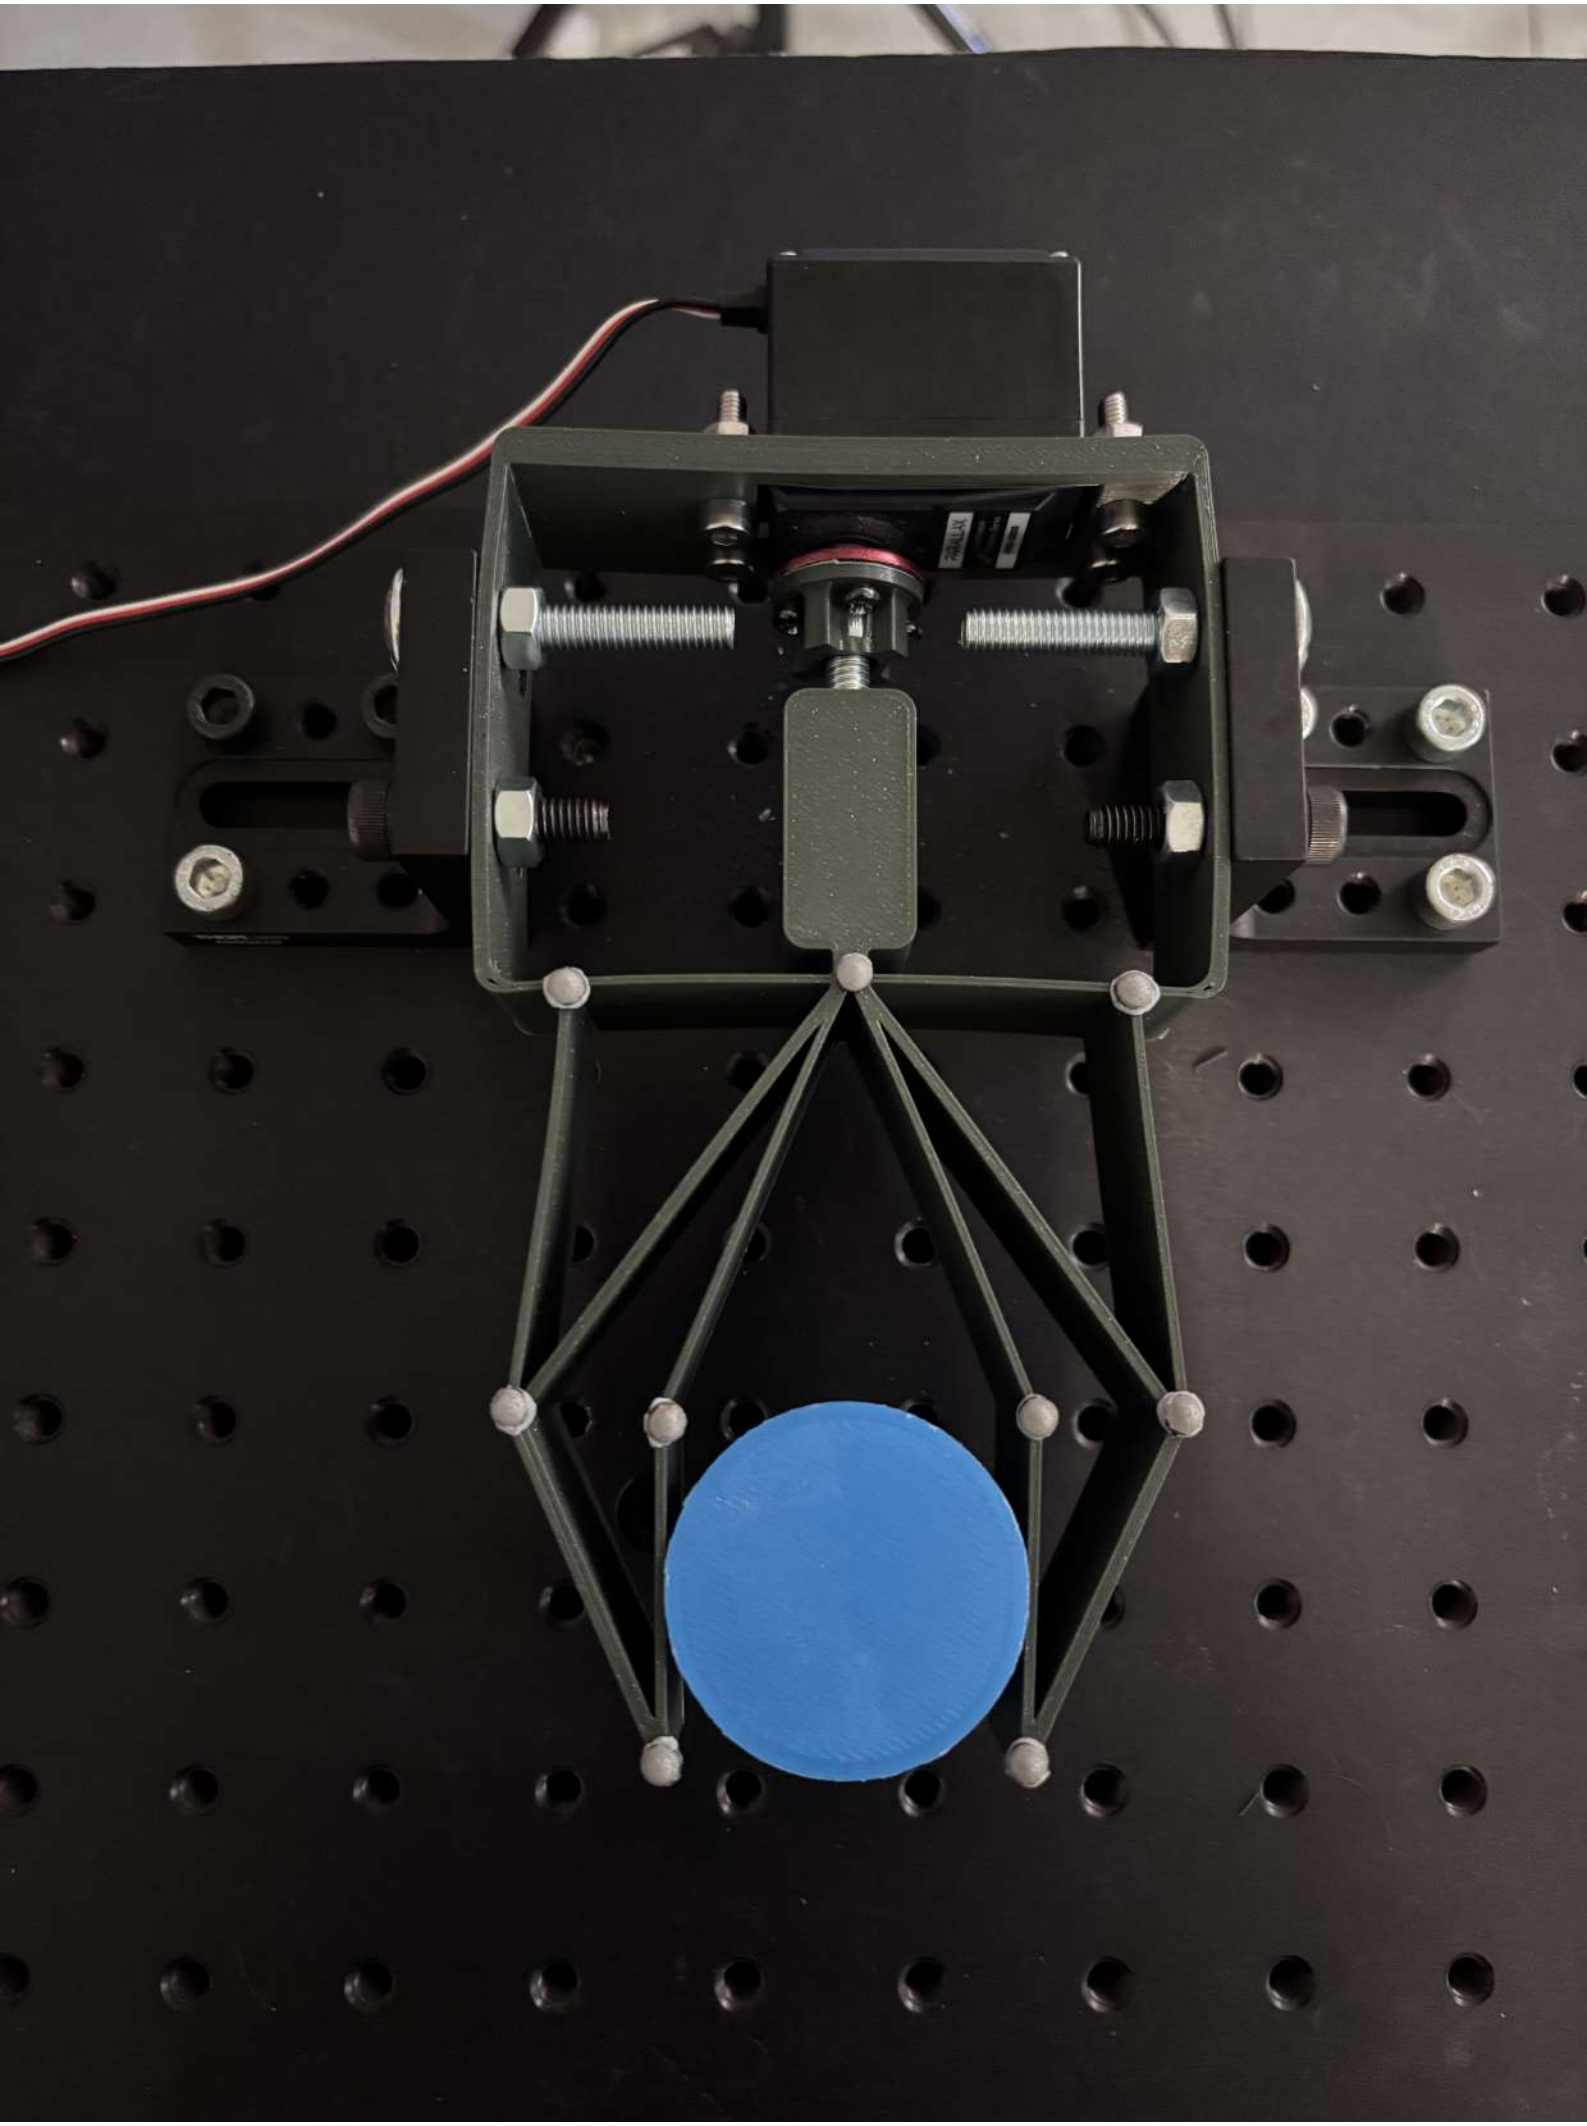

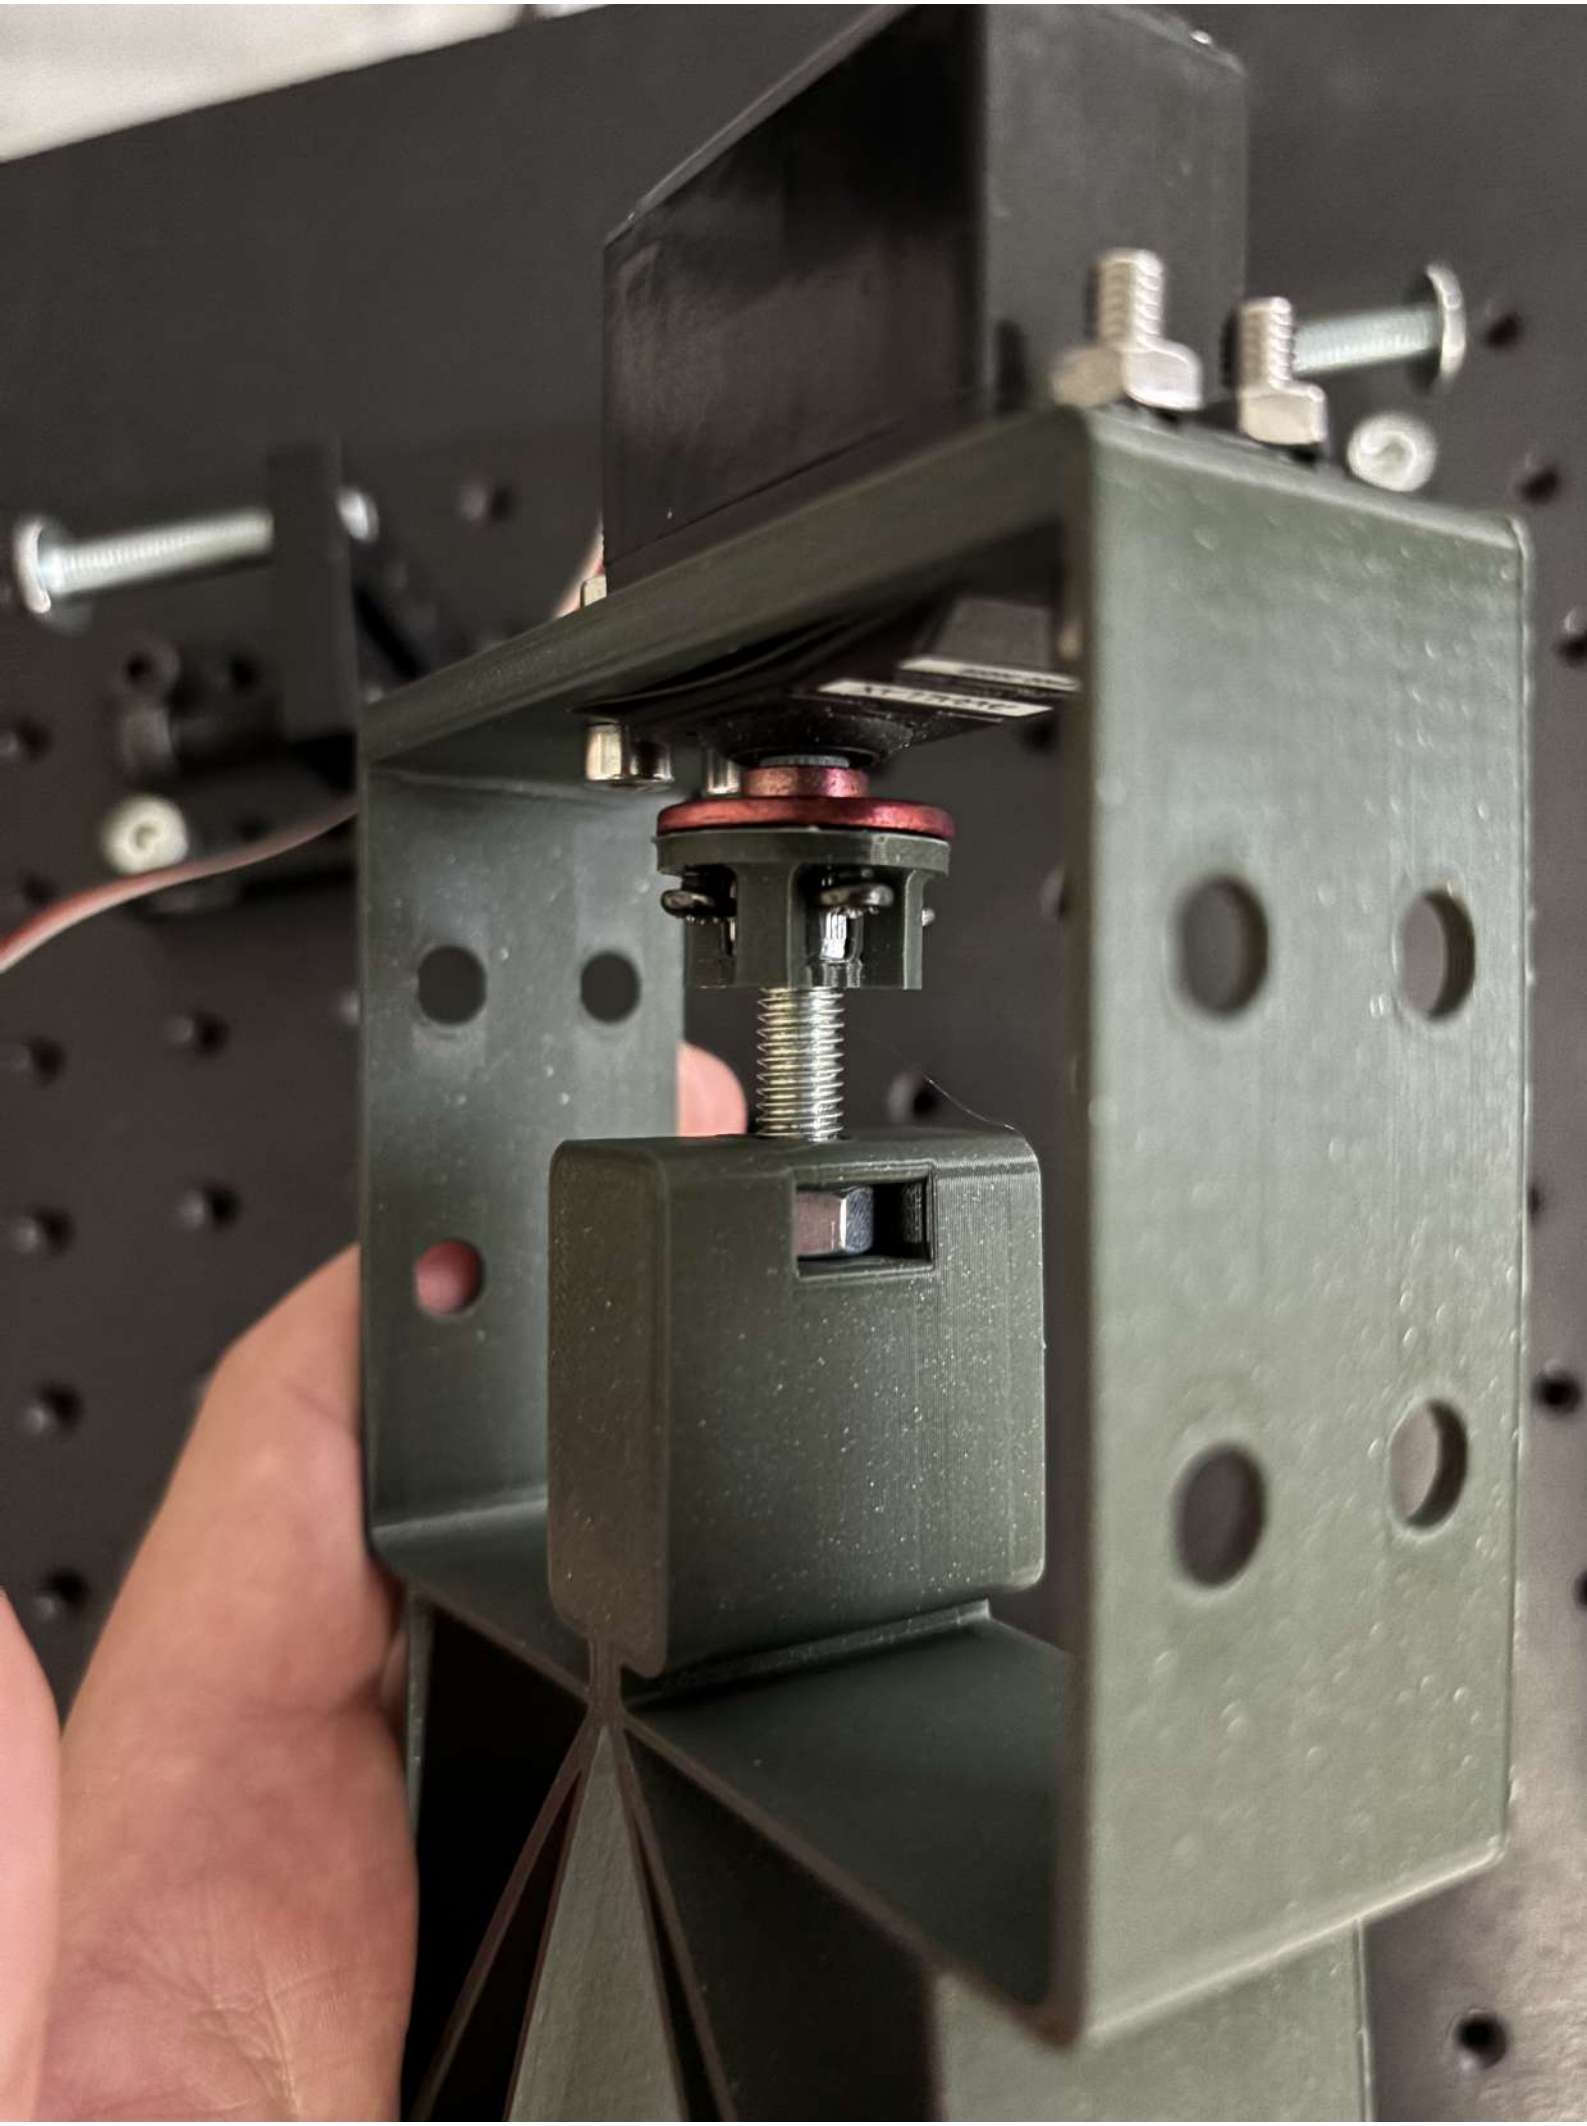


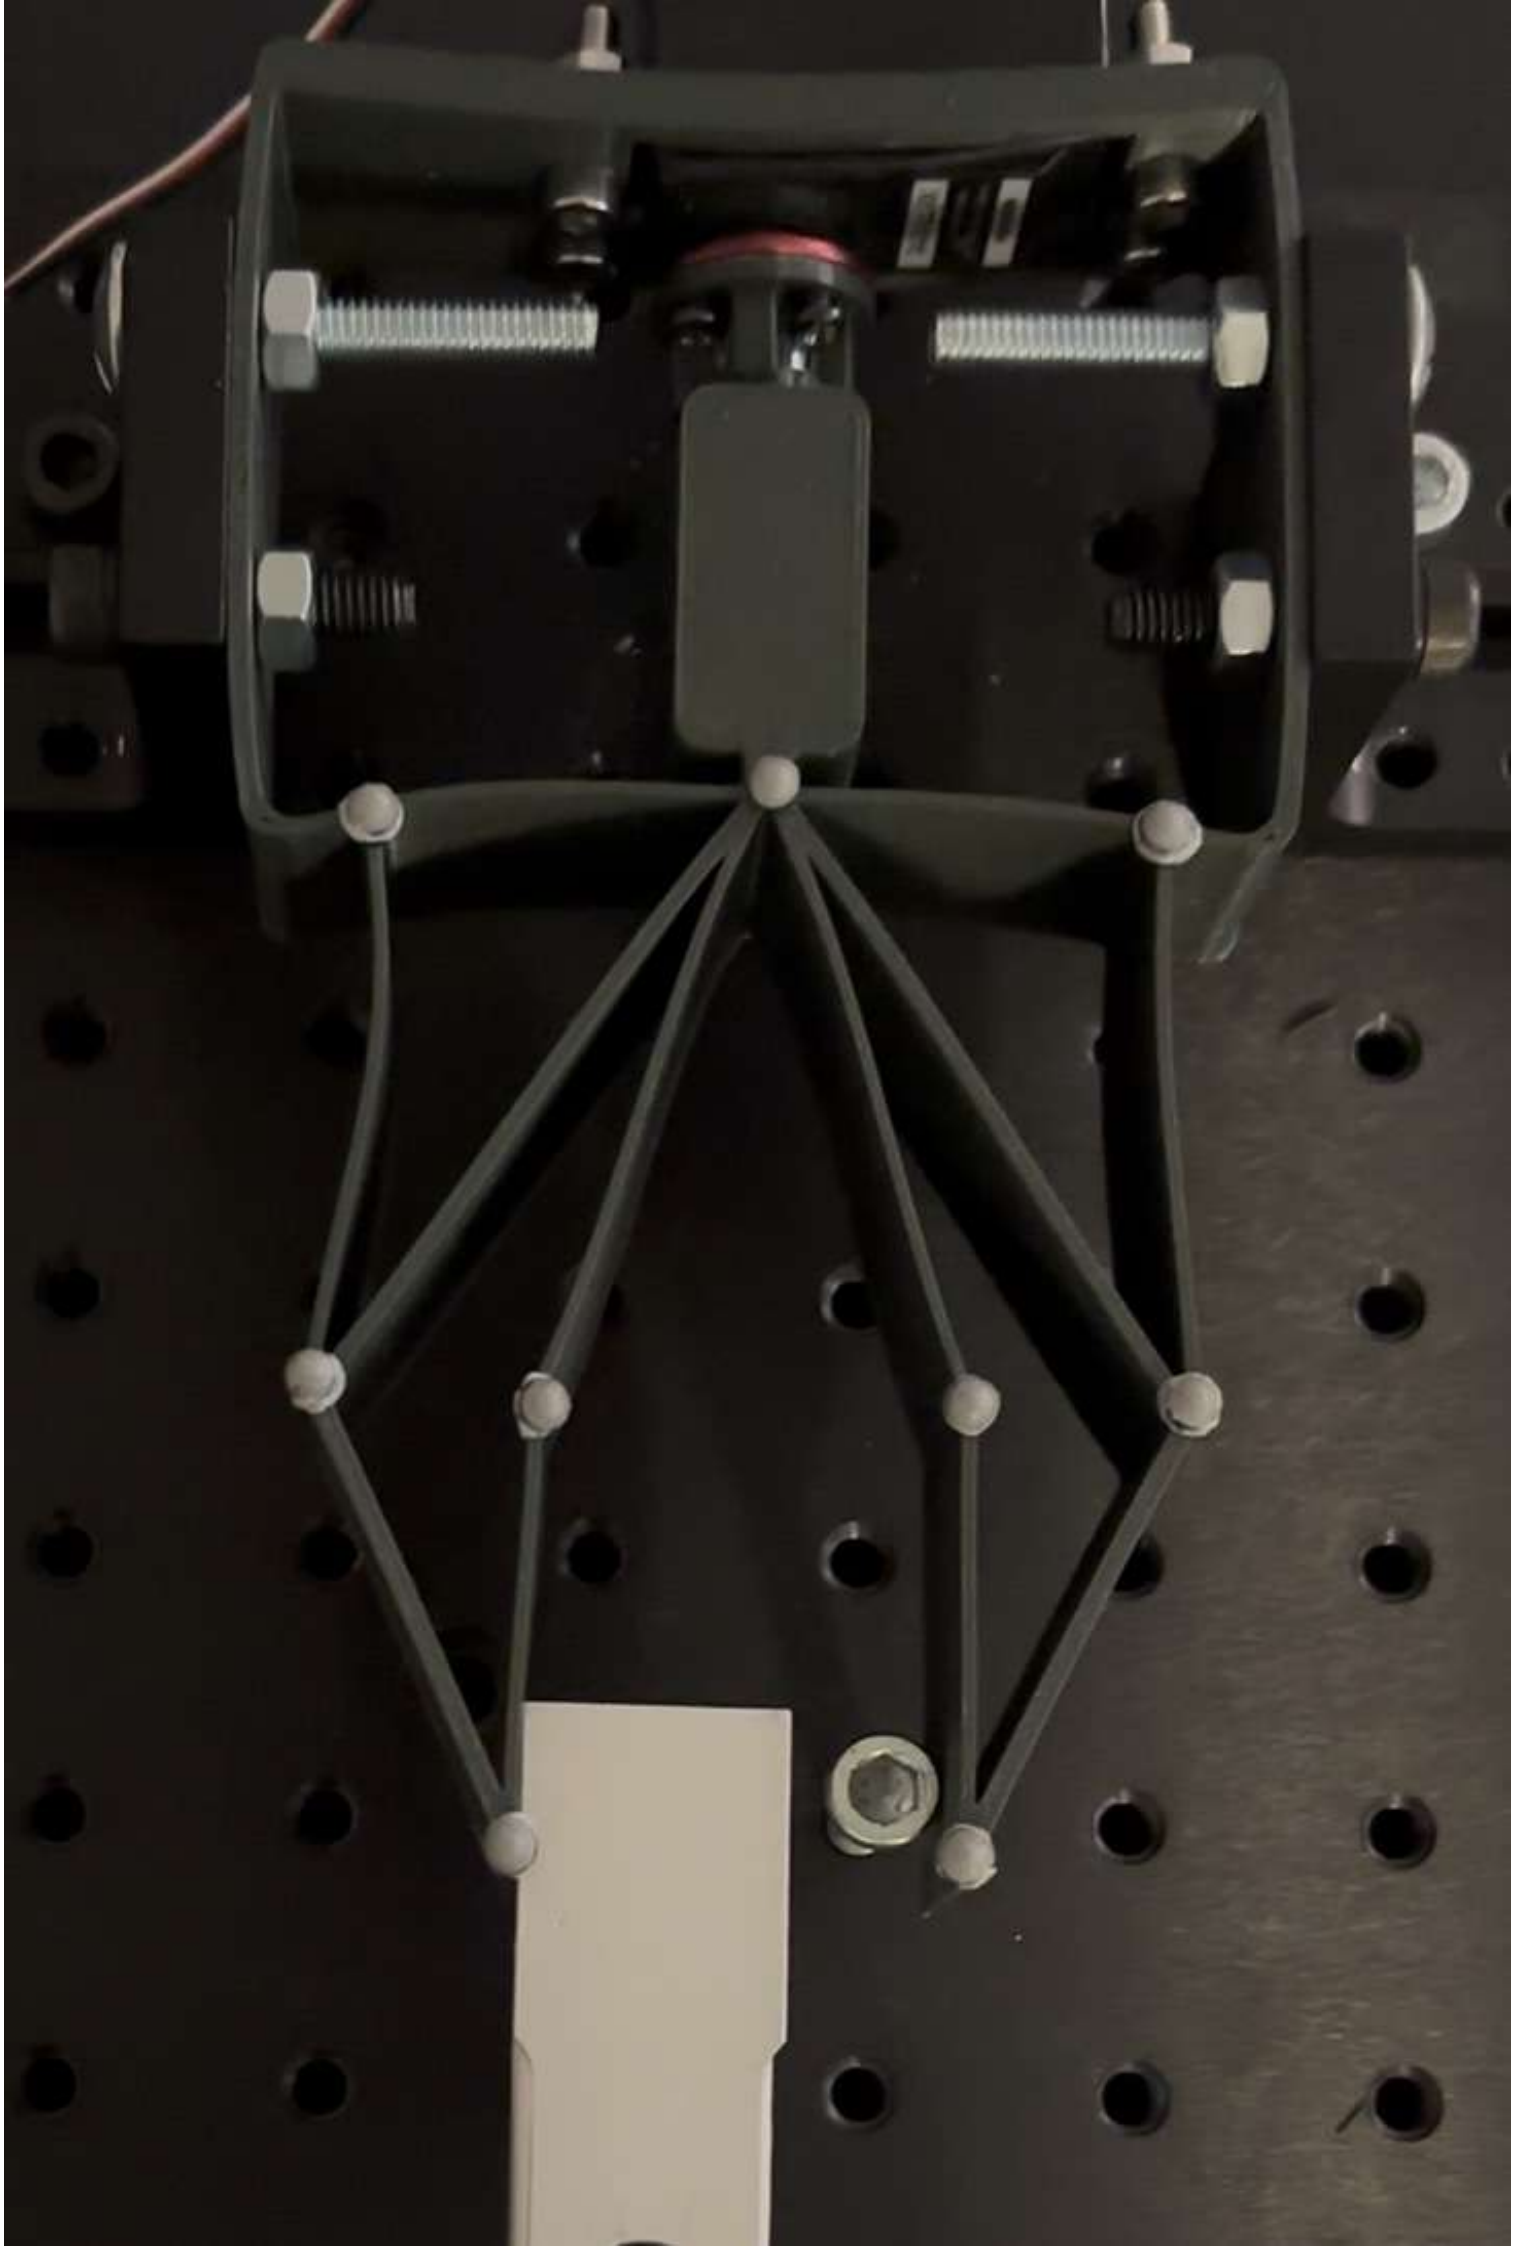


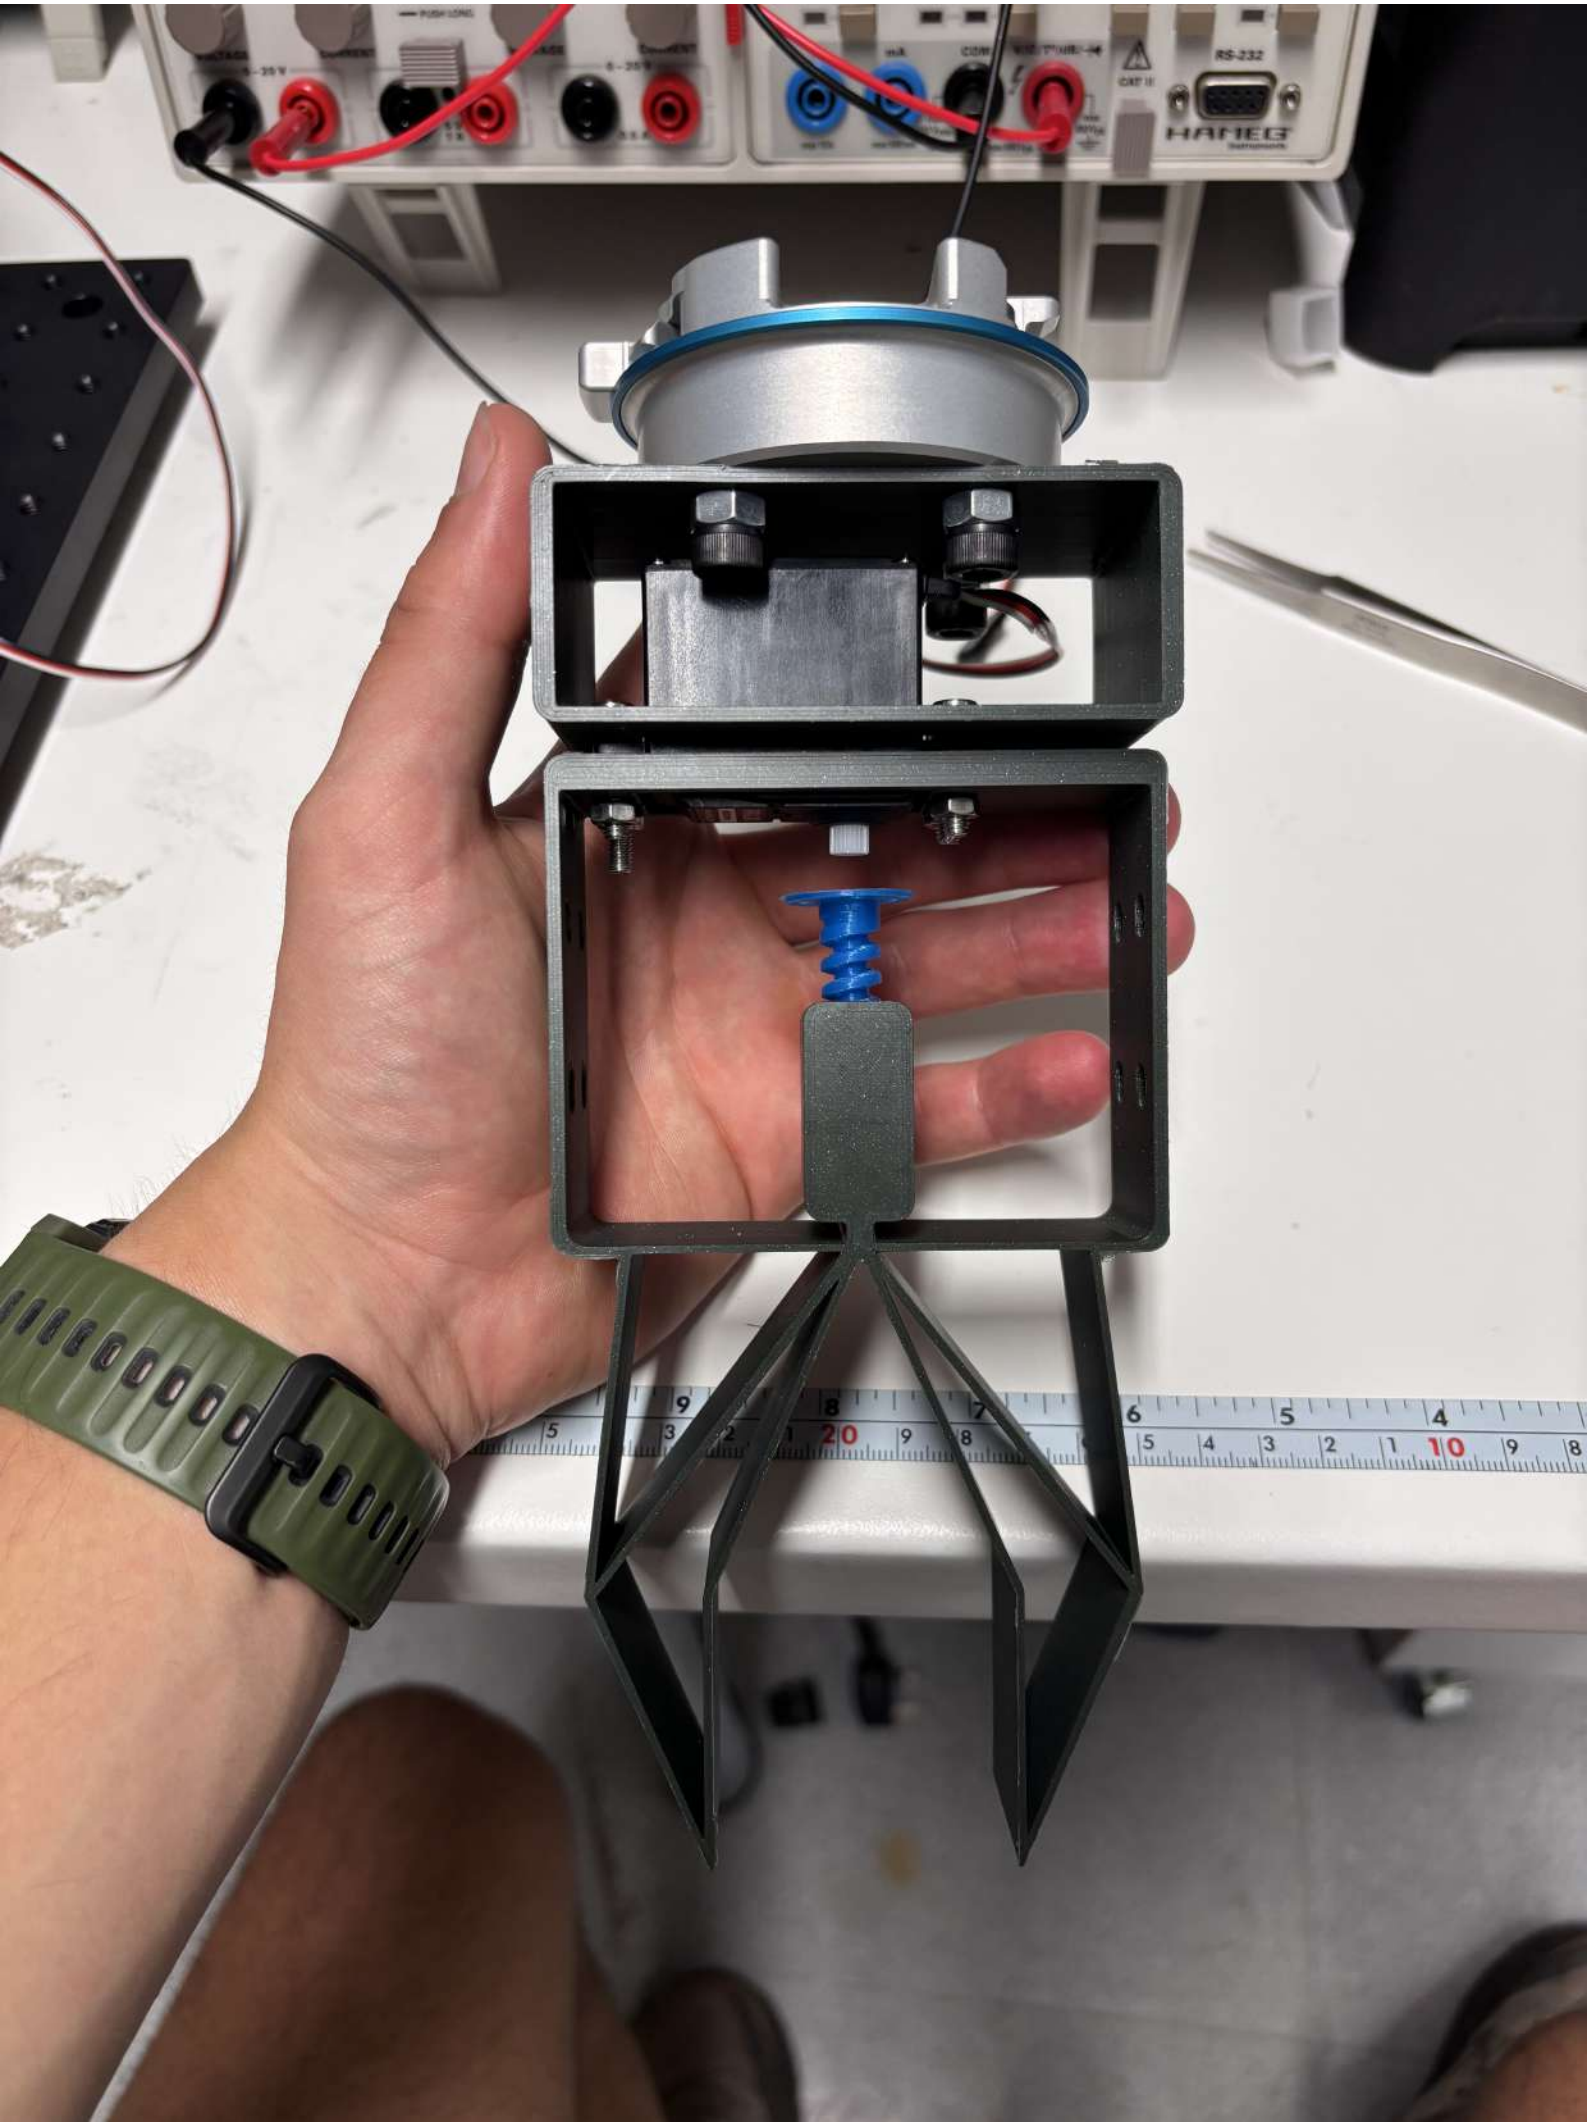

RS-232
HAMEG



ELECTRICAL SAFETY TEST
PASSED
brother
WSN-I478
Innov·is
15.0mm
34.0mm
Rotate
Emb-roidery
NV2700
WSN-I121

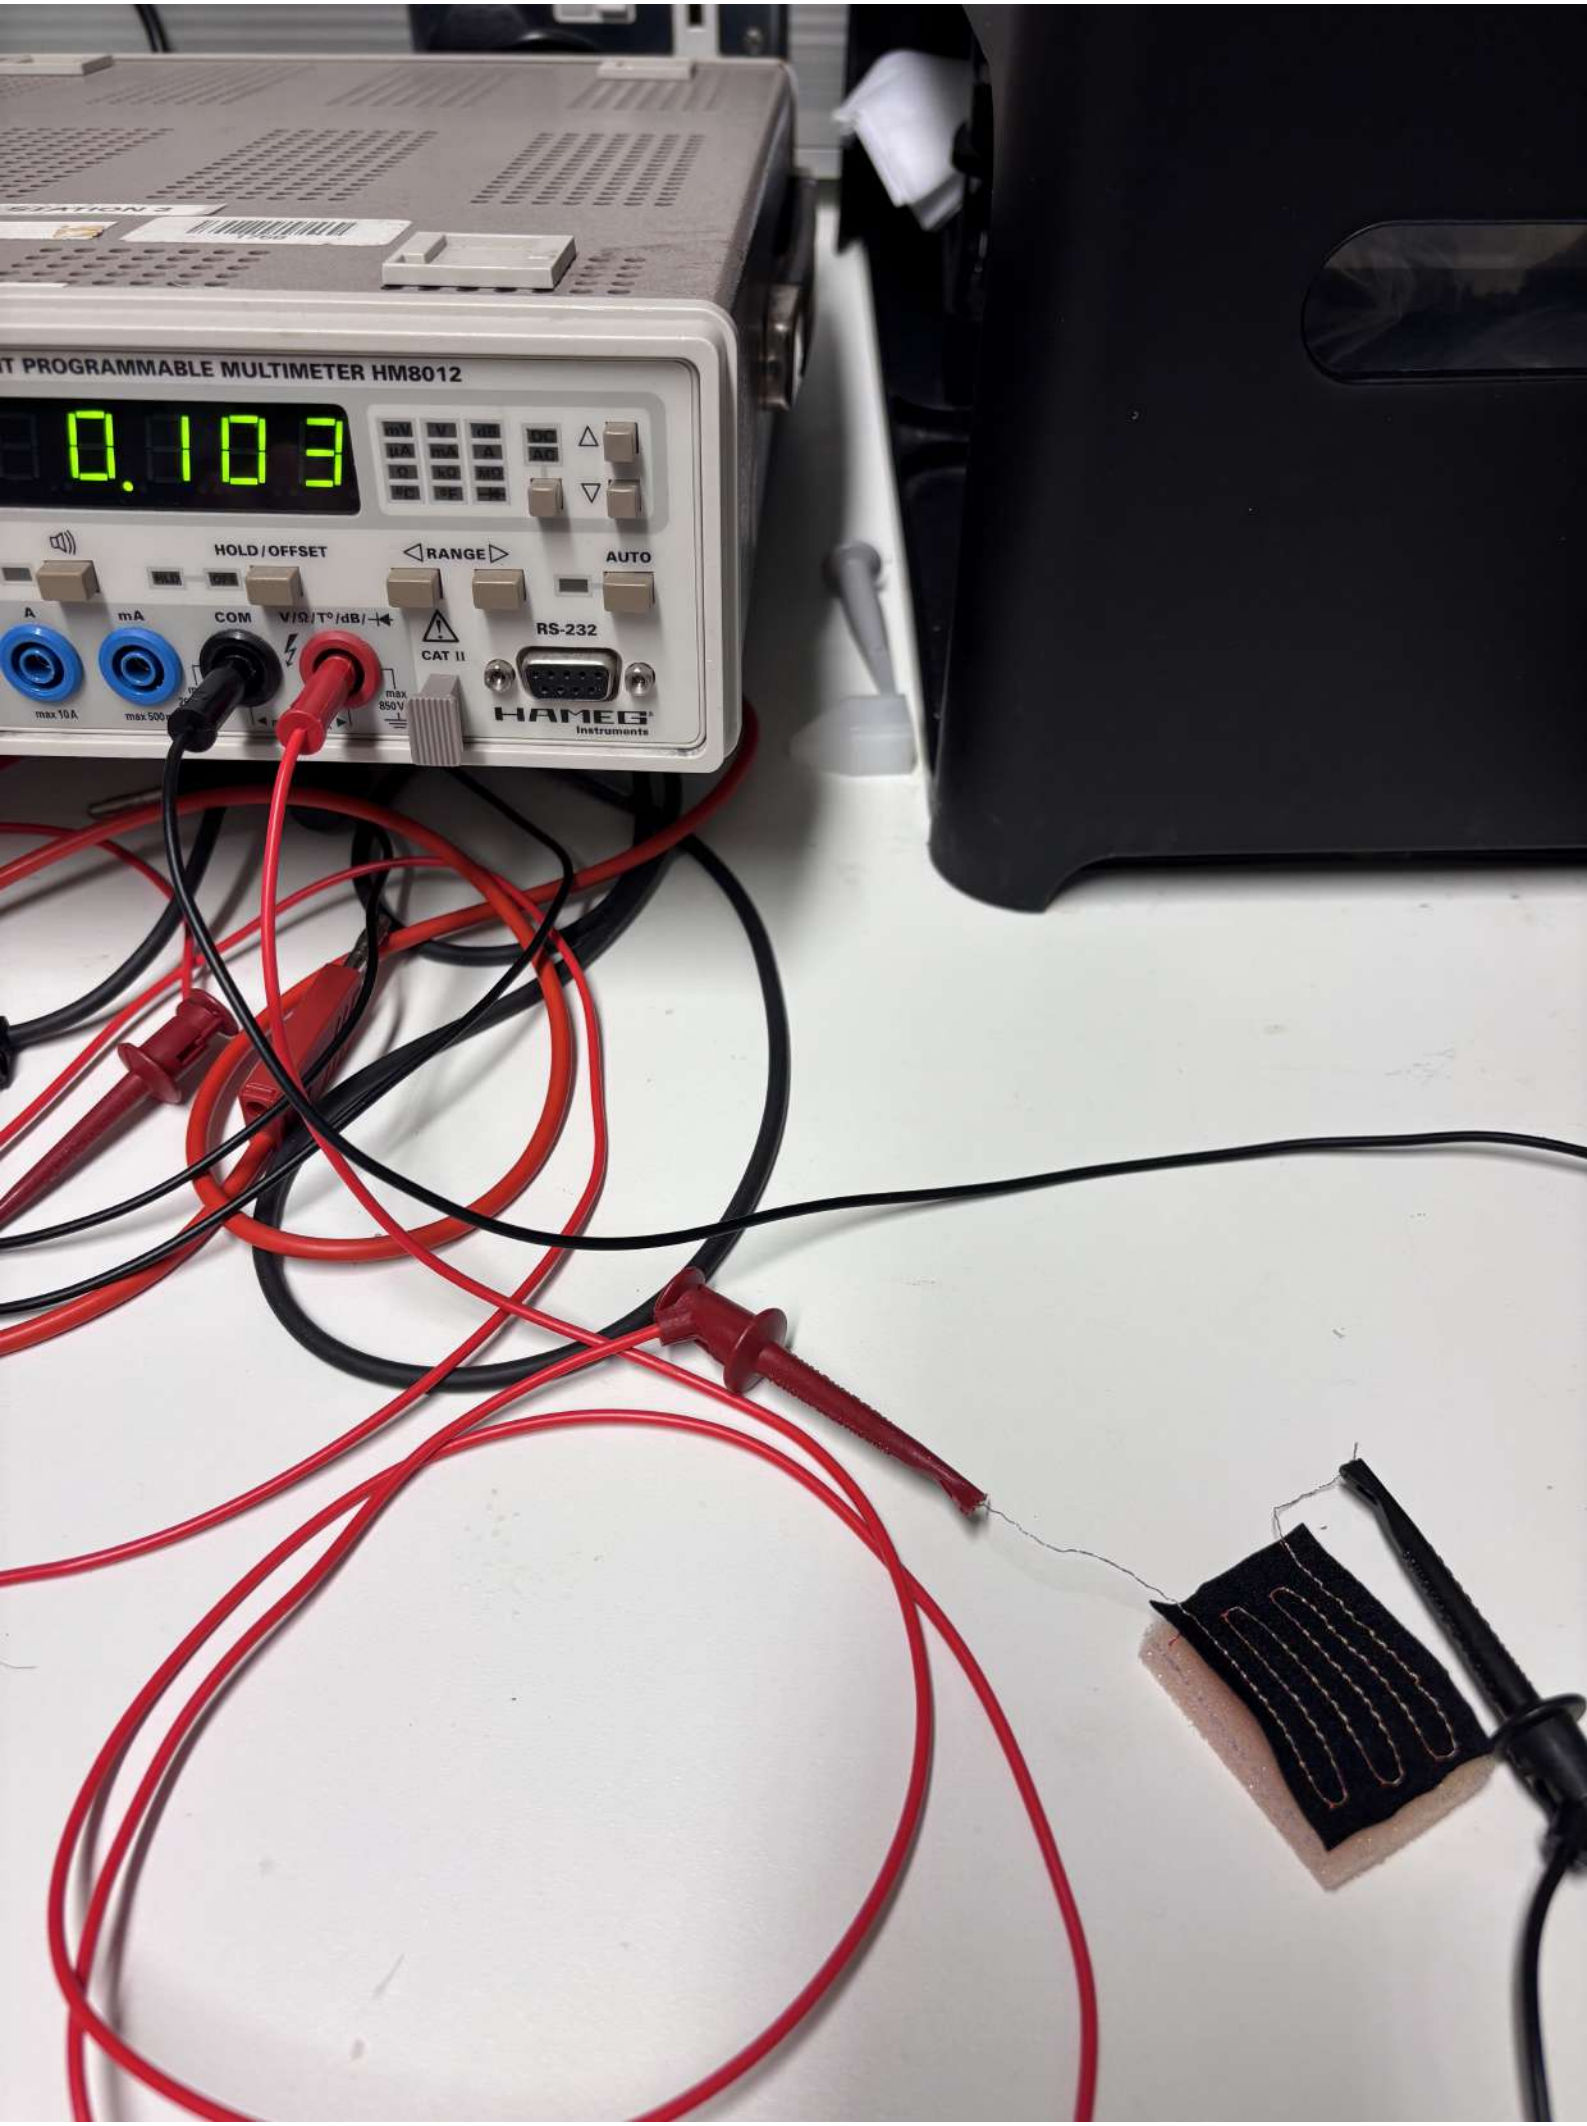


T PROGRAMMABLE MULTIMETER HM8012
0.103
HOLD/OFFSET
RANGE
AUTO
A
mA
COM
V/Ω/T°/dB/
CAT II
RS-232
max 10A
max 850V
HAMEG
Instruments

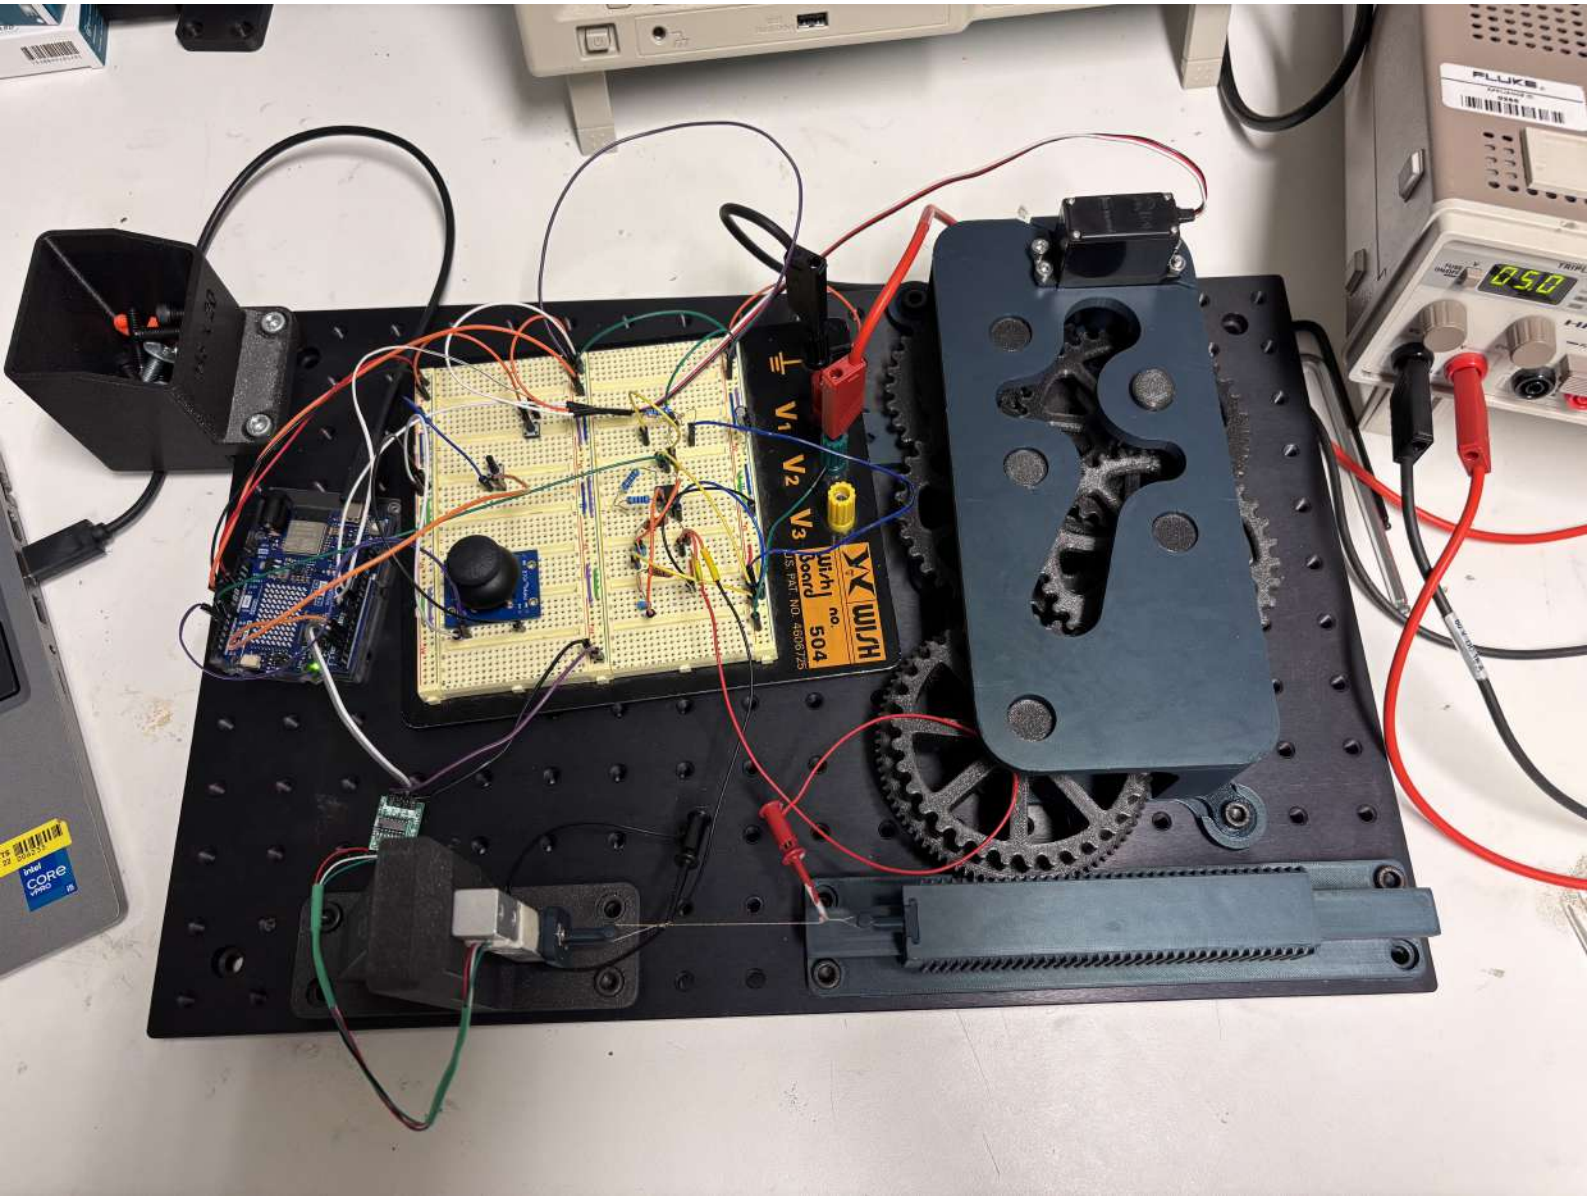

V1
V2
V3
Wish
Board
no.
504
PAT. NO. 4806725
FLUKE
0.50
intel
CORE

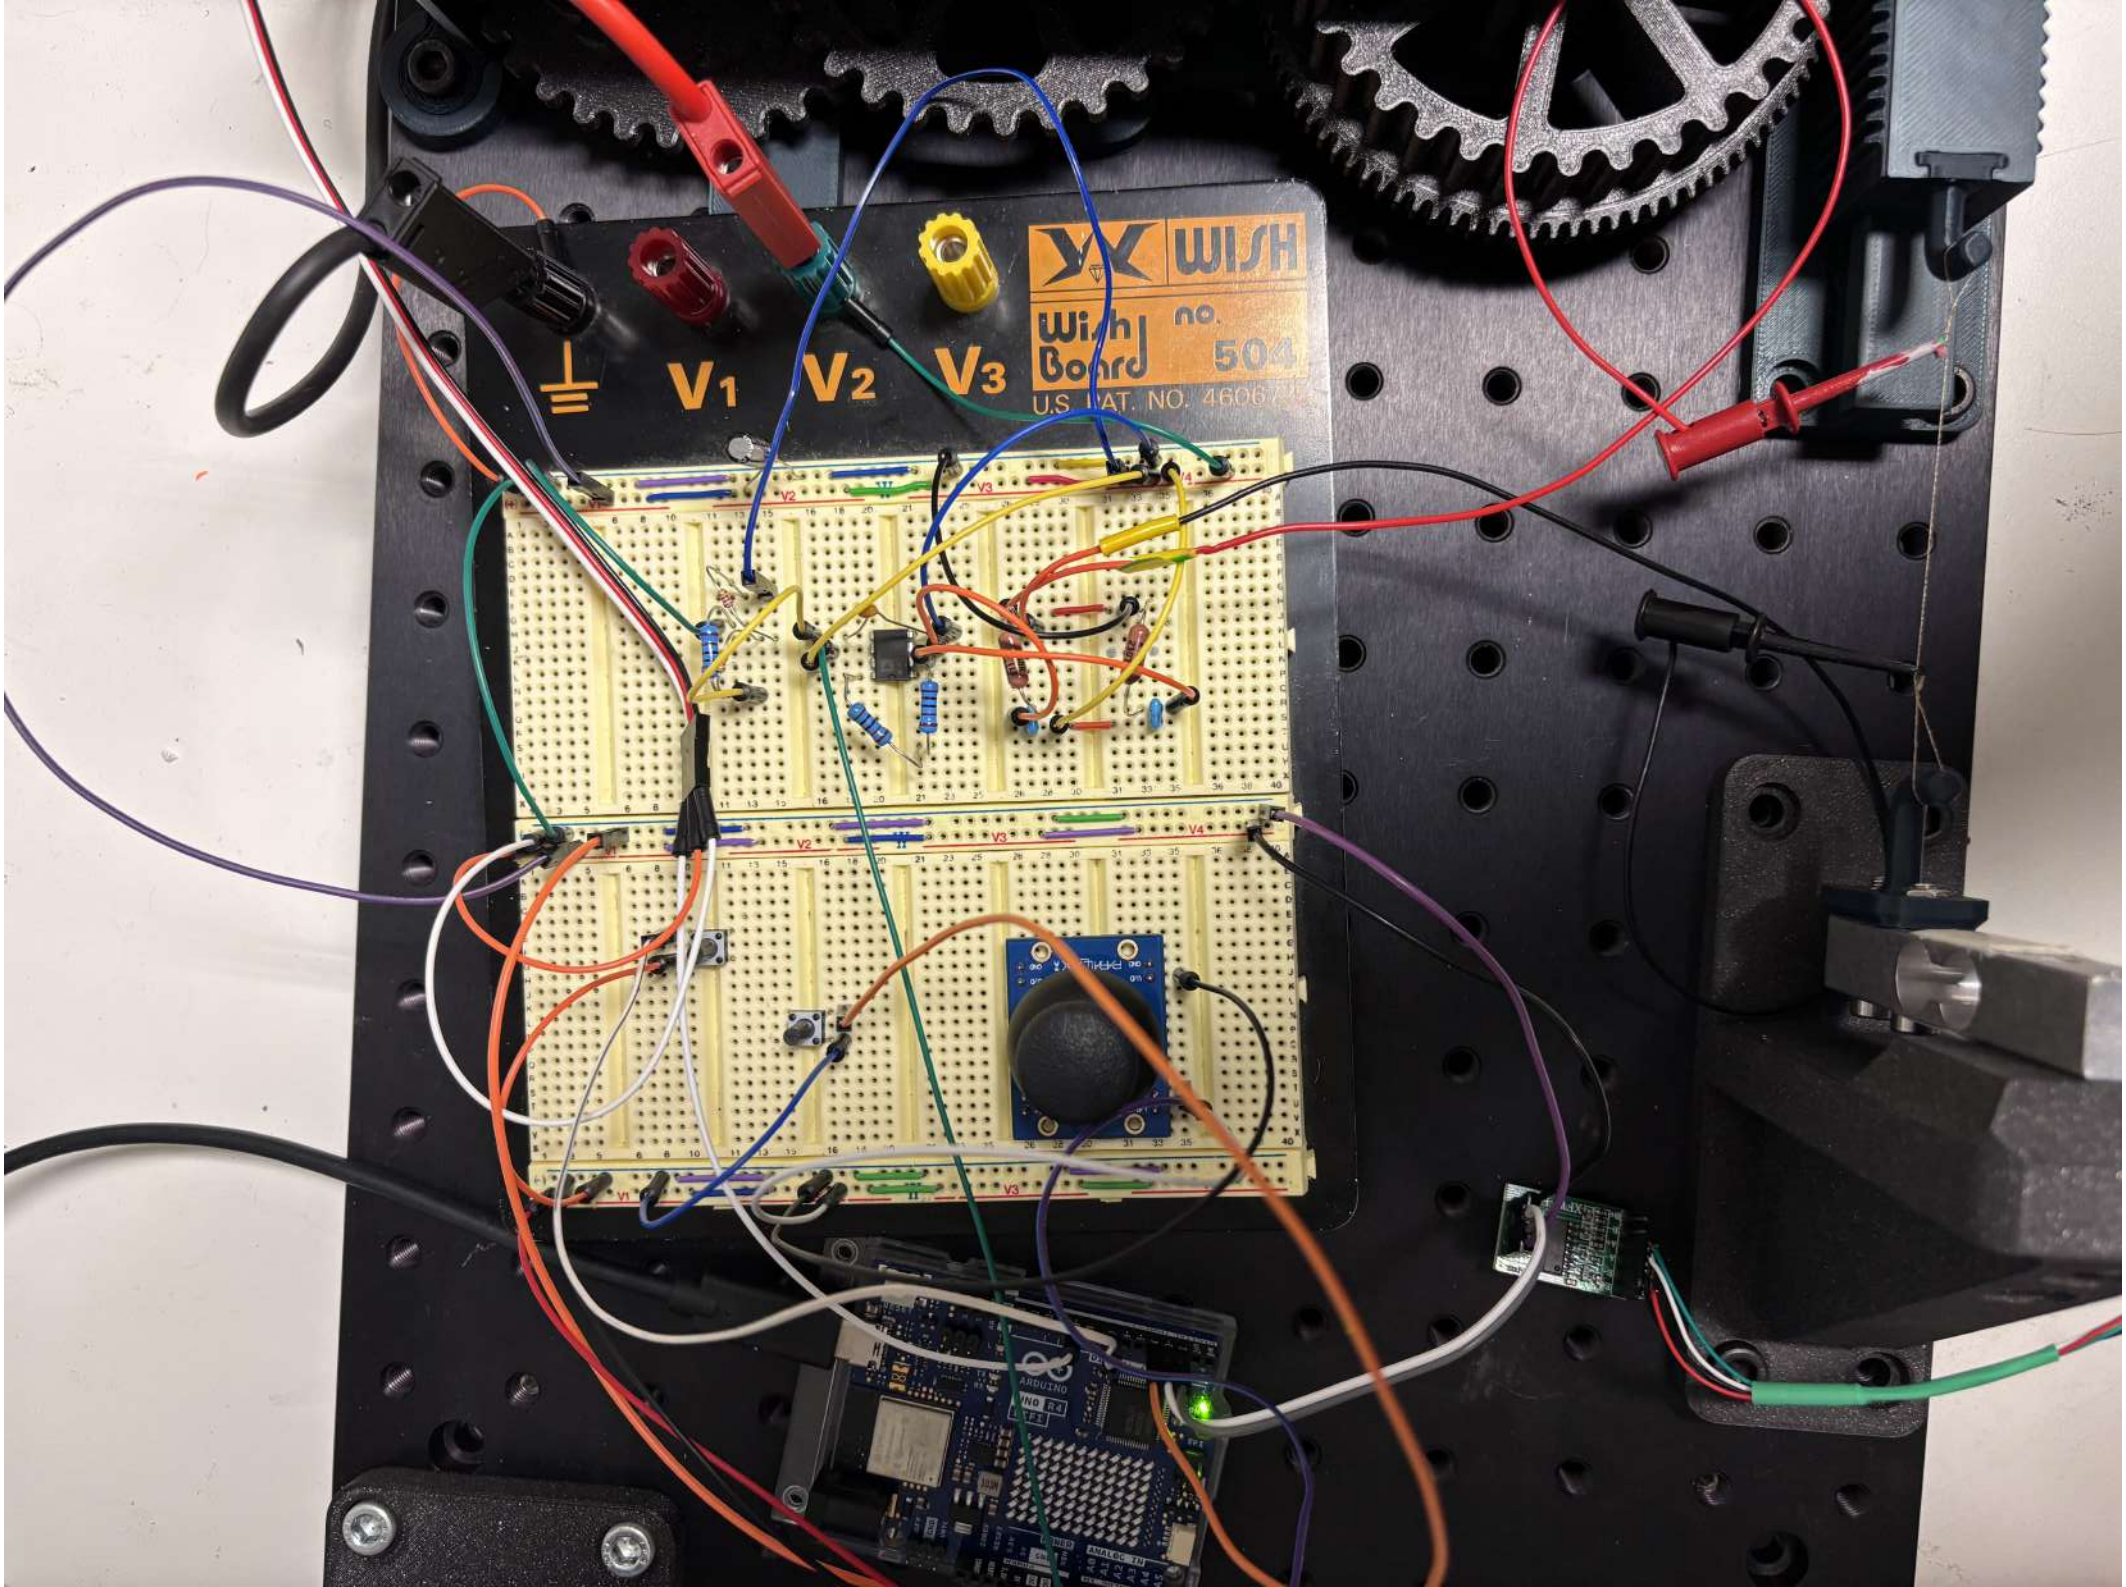
V1
V2
V3
WISH
Wish Board
no. 504
U.S. PAT. NO. 4606

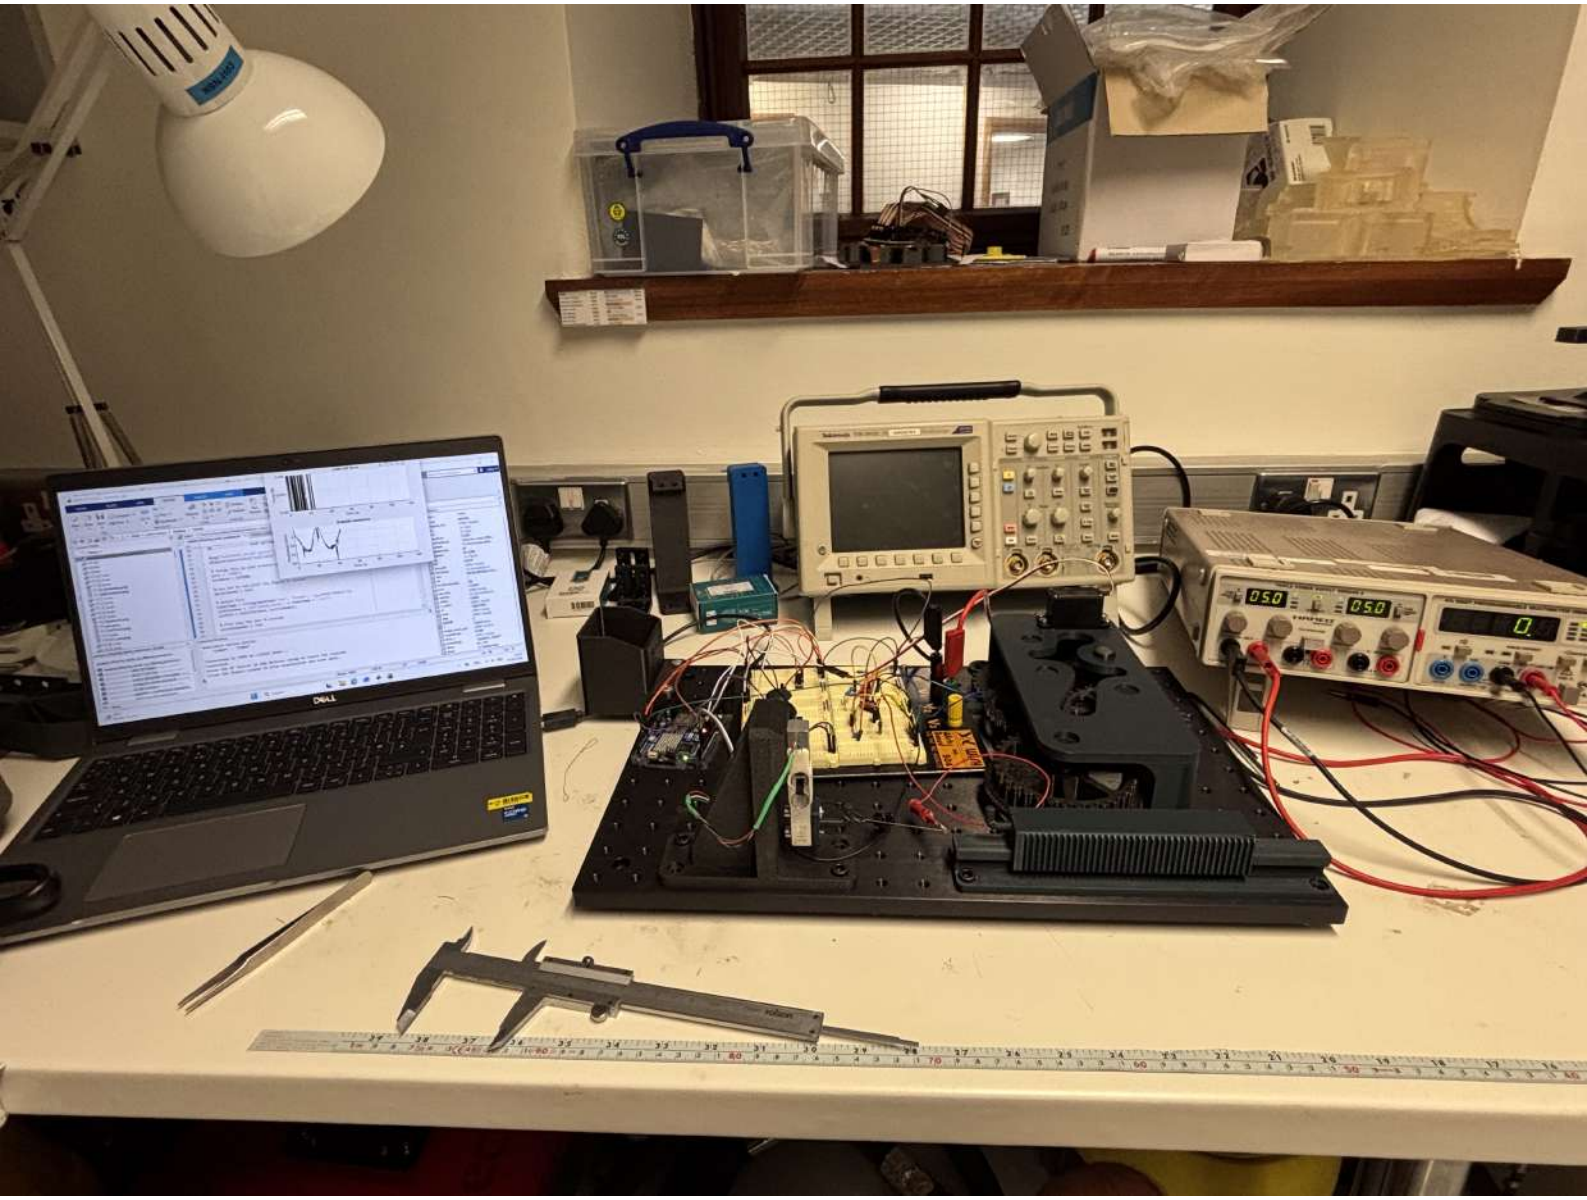

TESTA E-TEXTILES

Distance between probes
Skip 0 - last skip

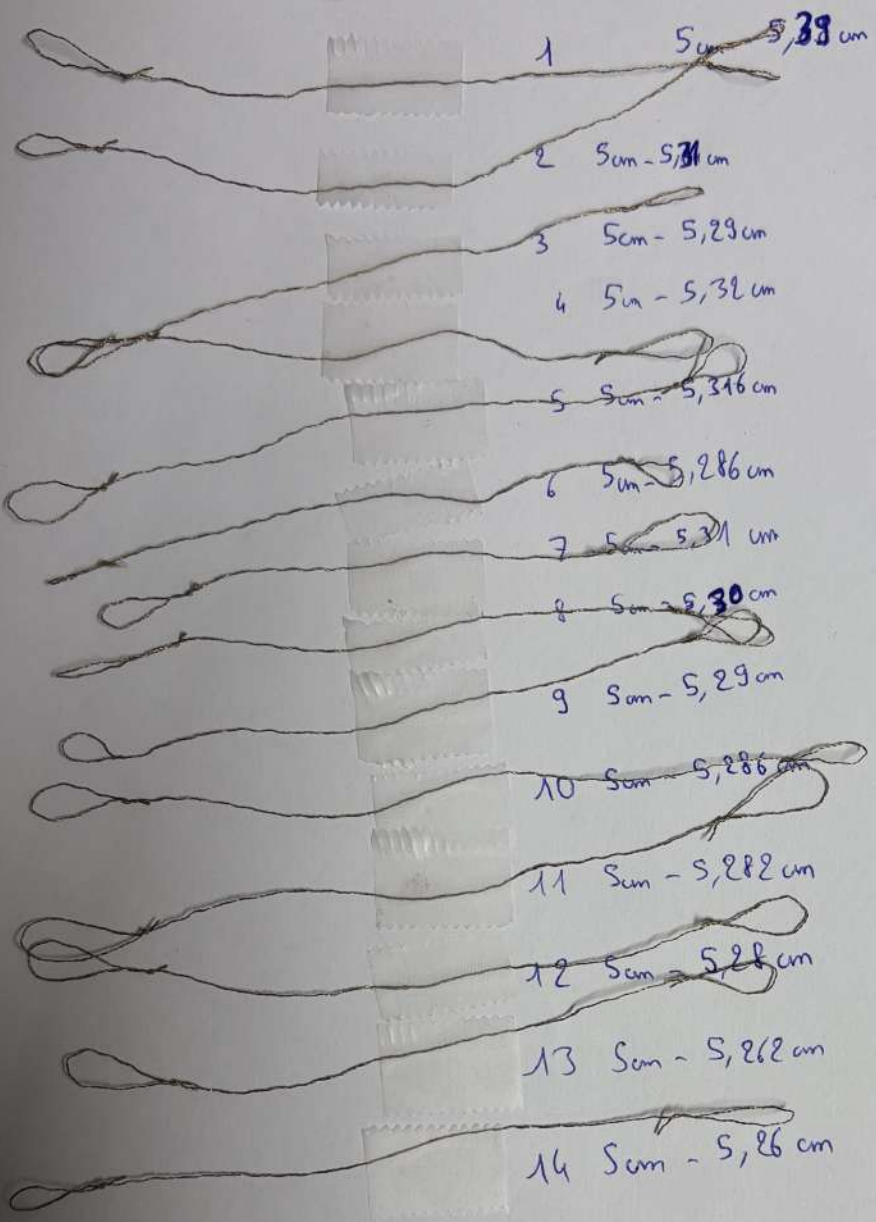

1 5cm - 5,38 cm

2 5cm - 5,31 cm

3 5cm - 5,29 cm

4 5cm - 5,32 cm

5 5cm - 5,316 cm

6 5cm - 5,286 cm

7 5cm - 5,31 cm

8 5cm - 5,30 cm

9 5cm - 5,29 cm


10 5cm - 5,286 cm


11 5cm - 5,282 cm


12 5cm - 5,28 cm

13 5cm - 5,262 cm


14 5cm - 5,26 cm

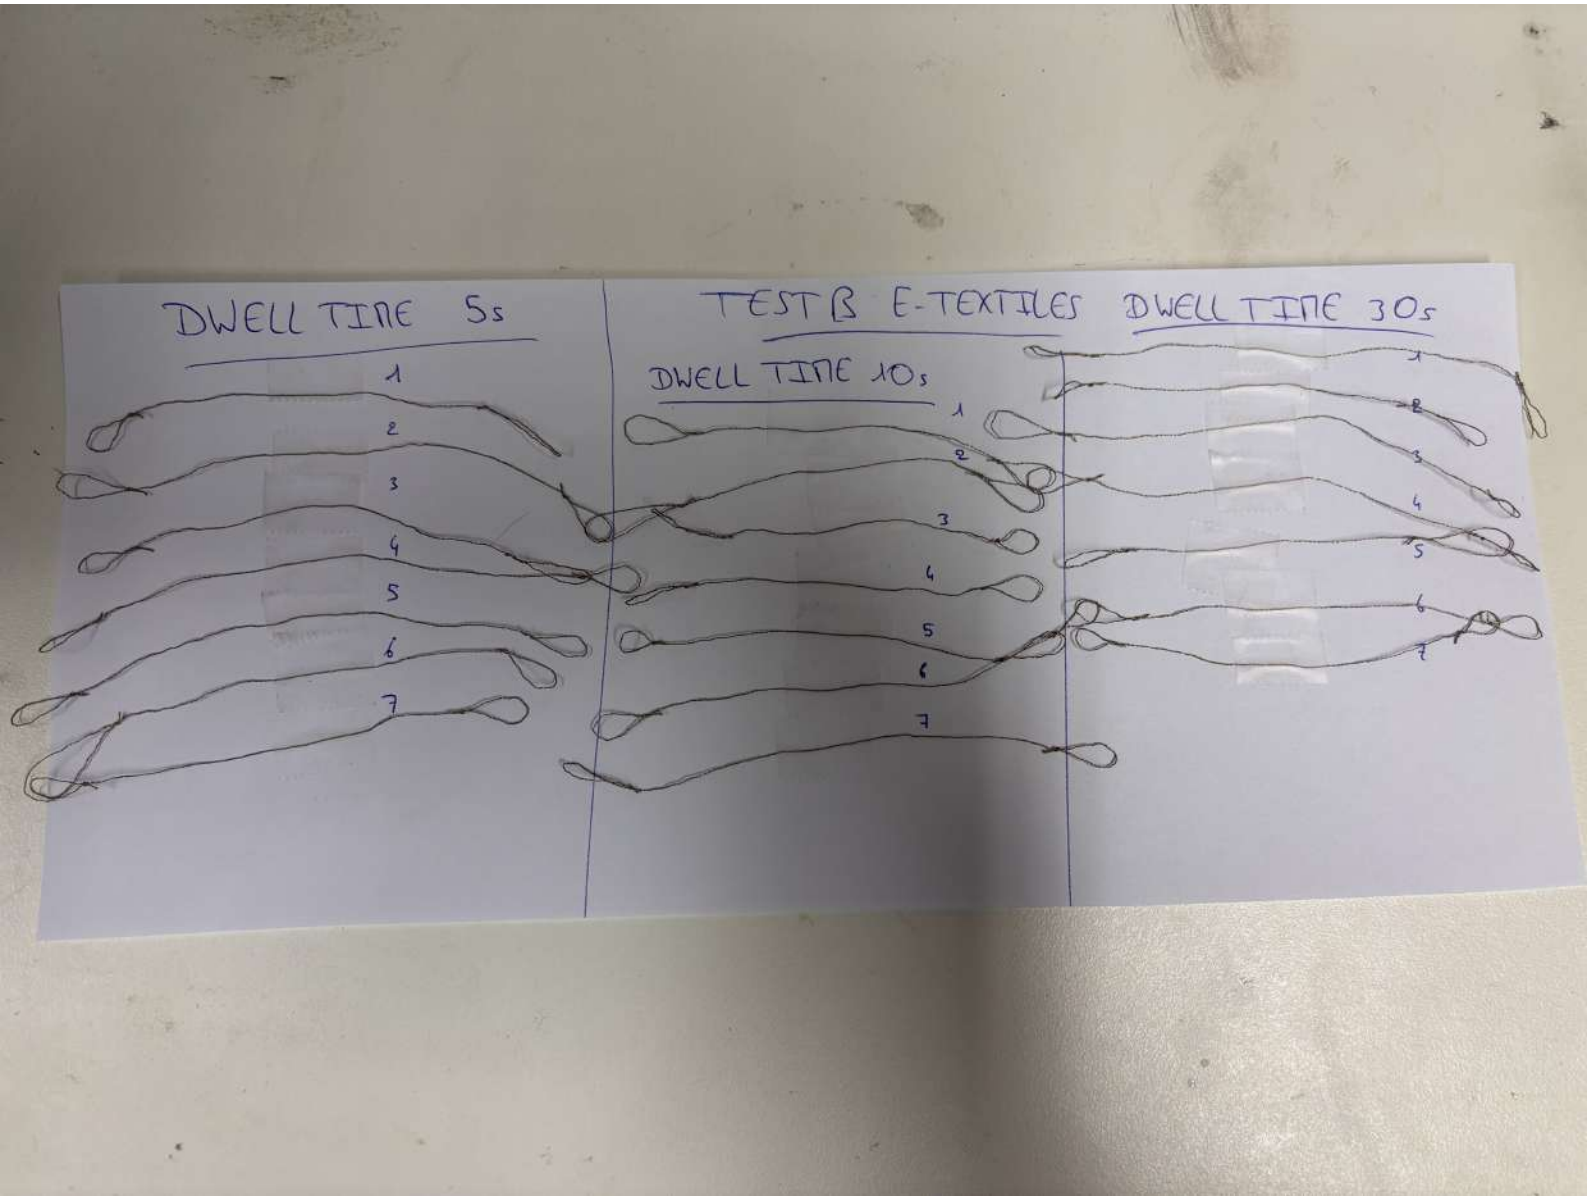
DWELL TIME 5s
1
2
3
4
5
6
7
TEST B E-TEXTILES
DWELL TIME 10s
1
2
3
4
5
6
7
DWELL TIME 30s
1
2
3
4
5
6
7

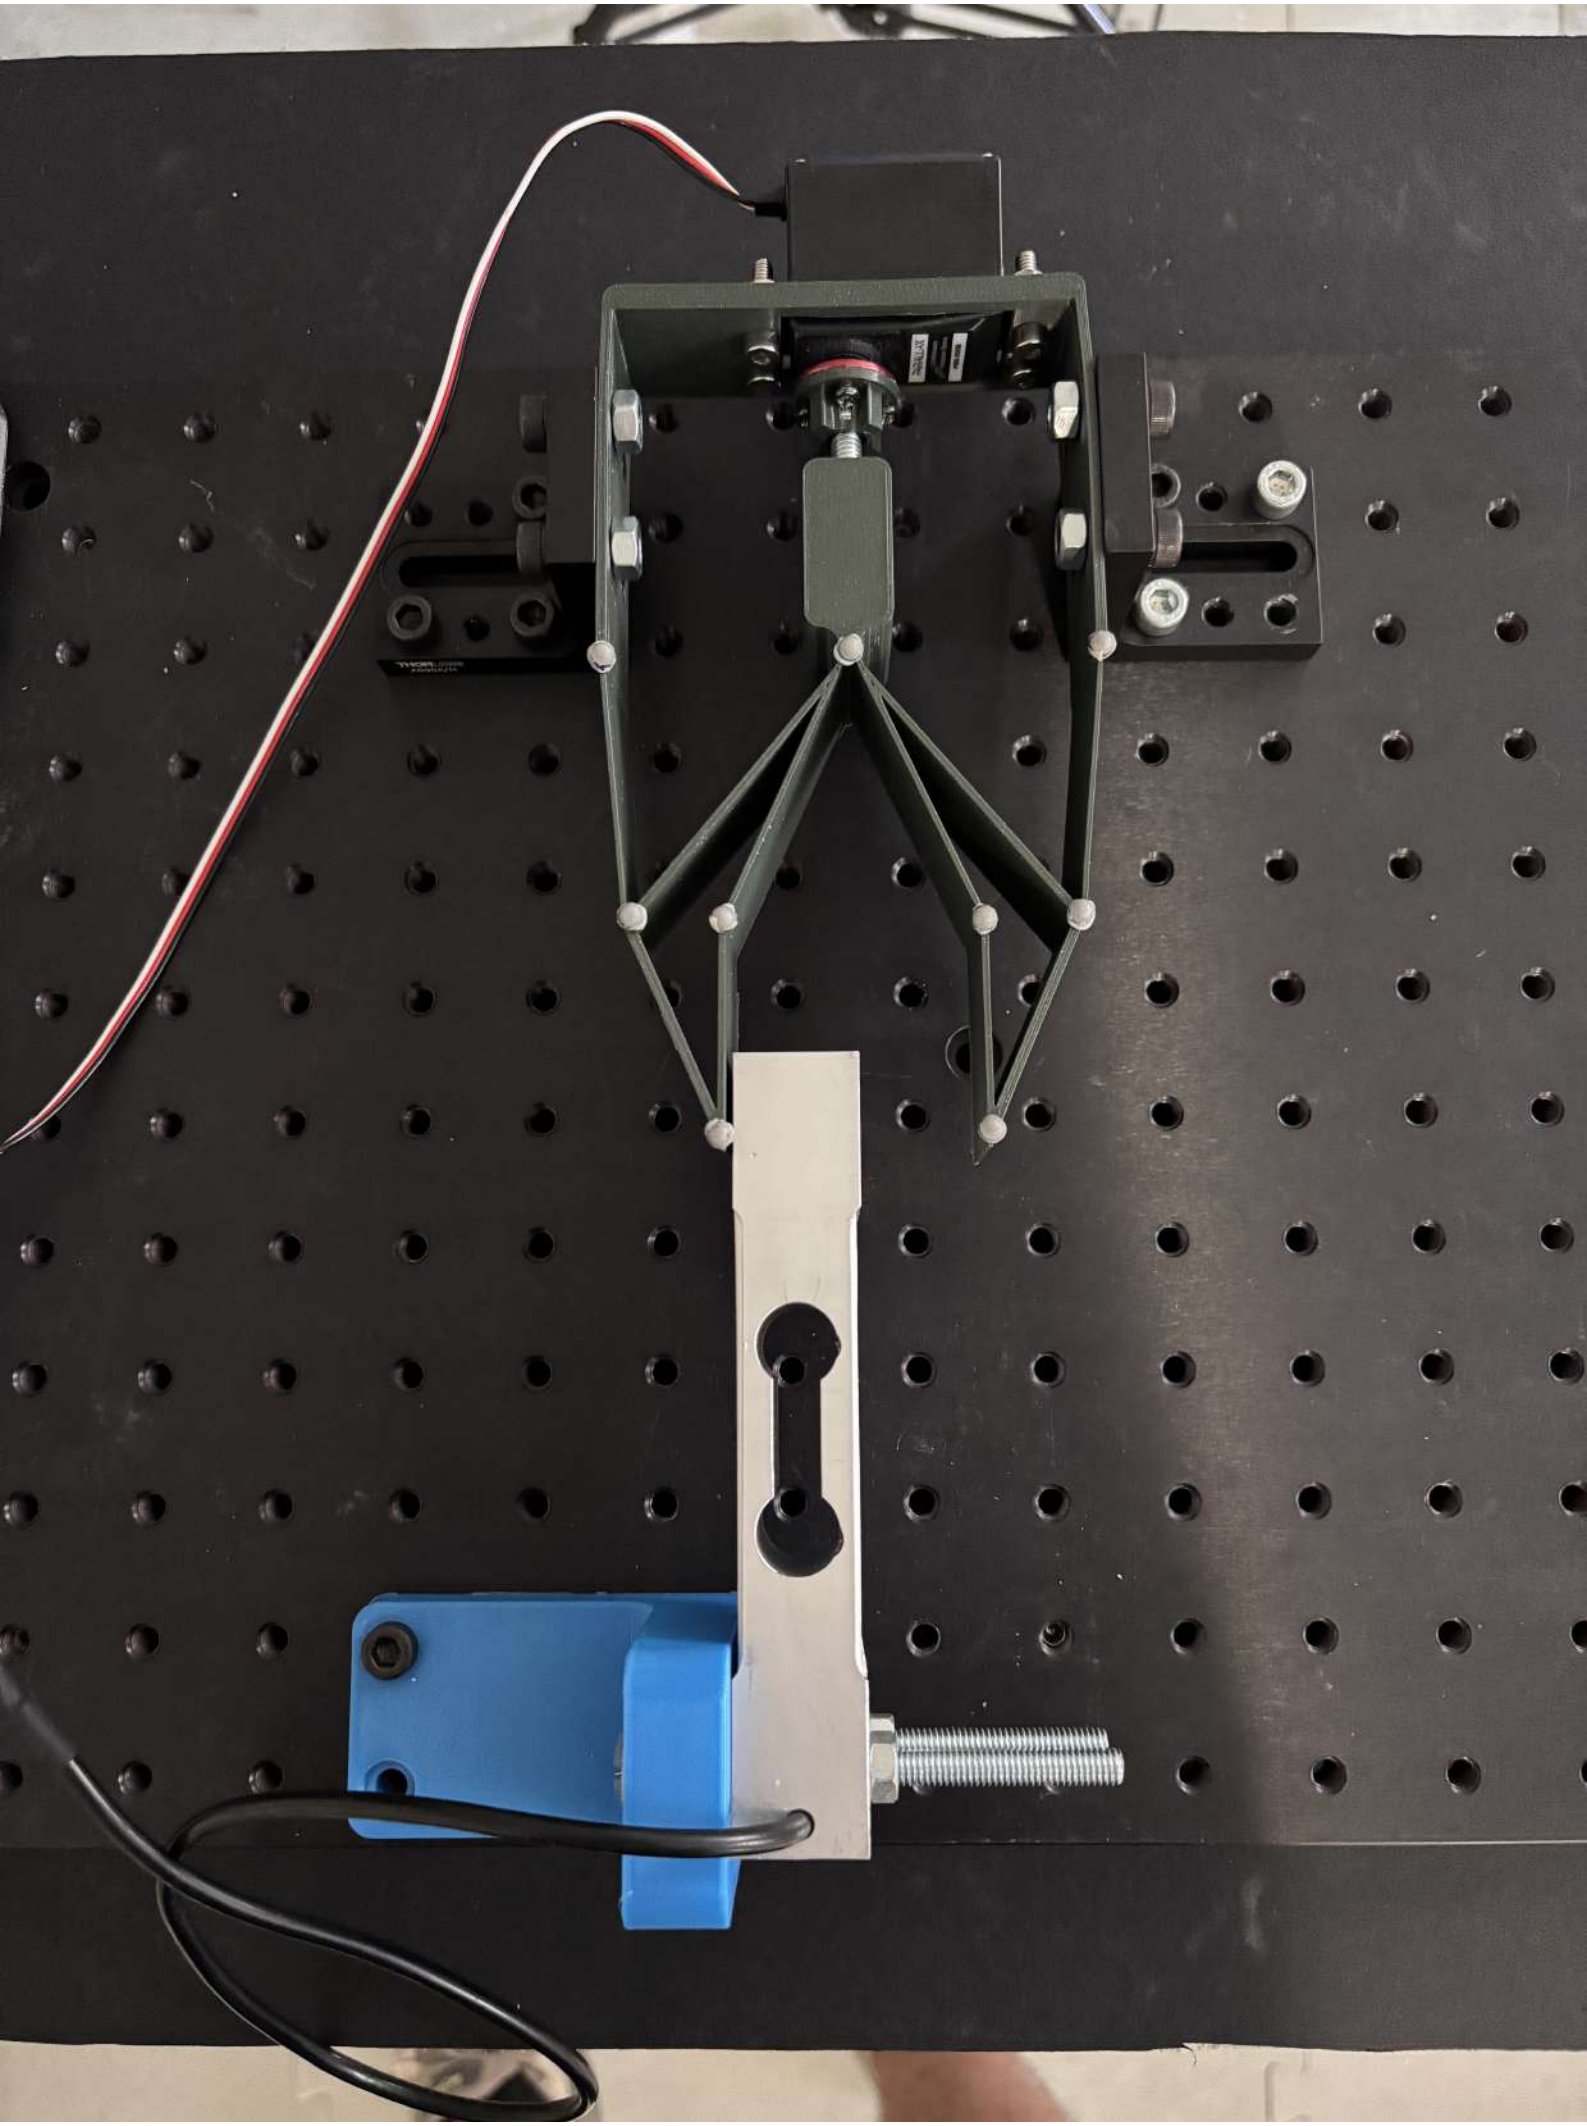


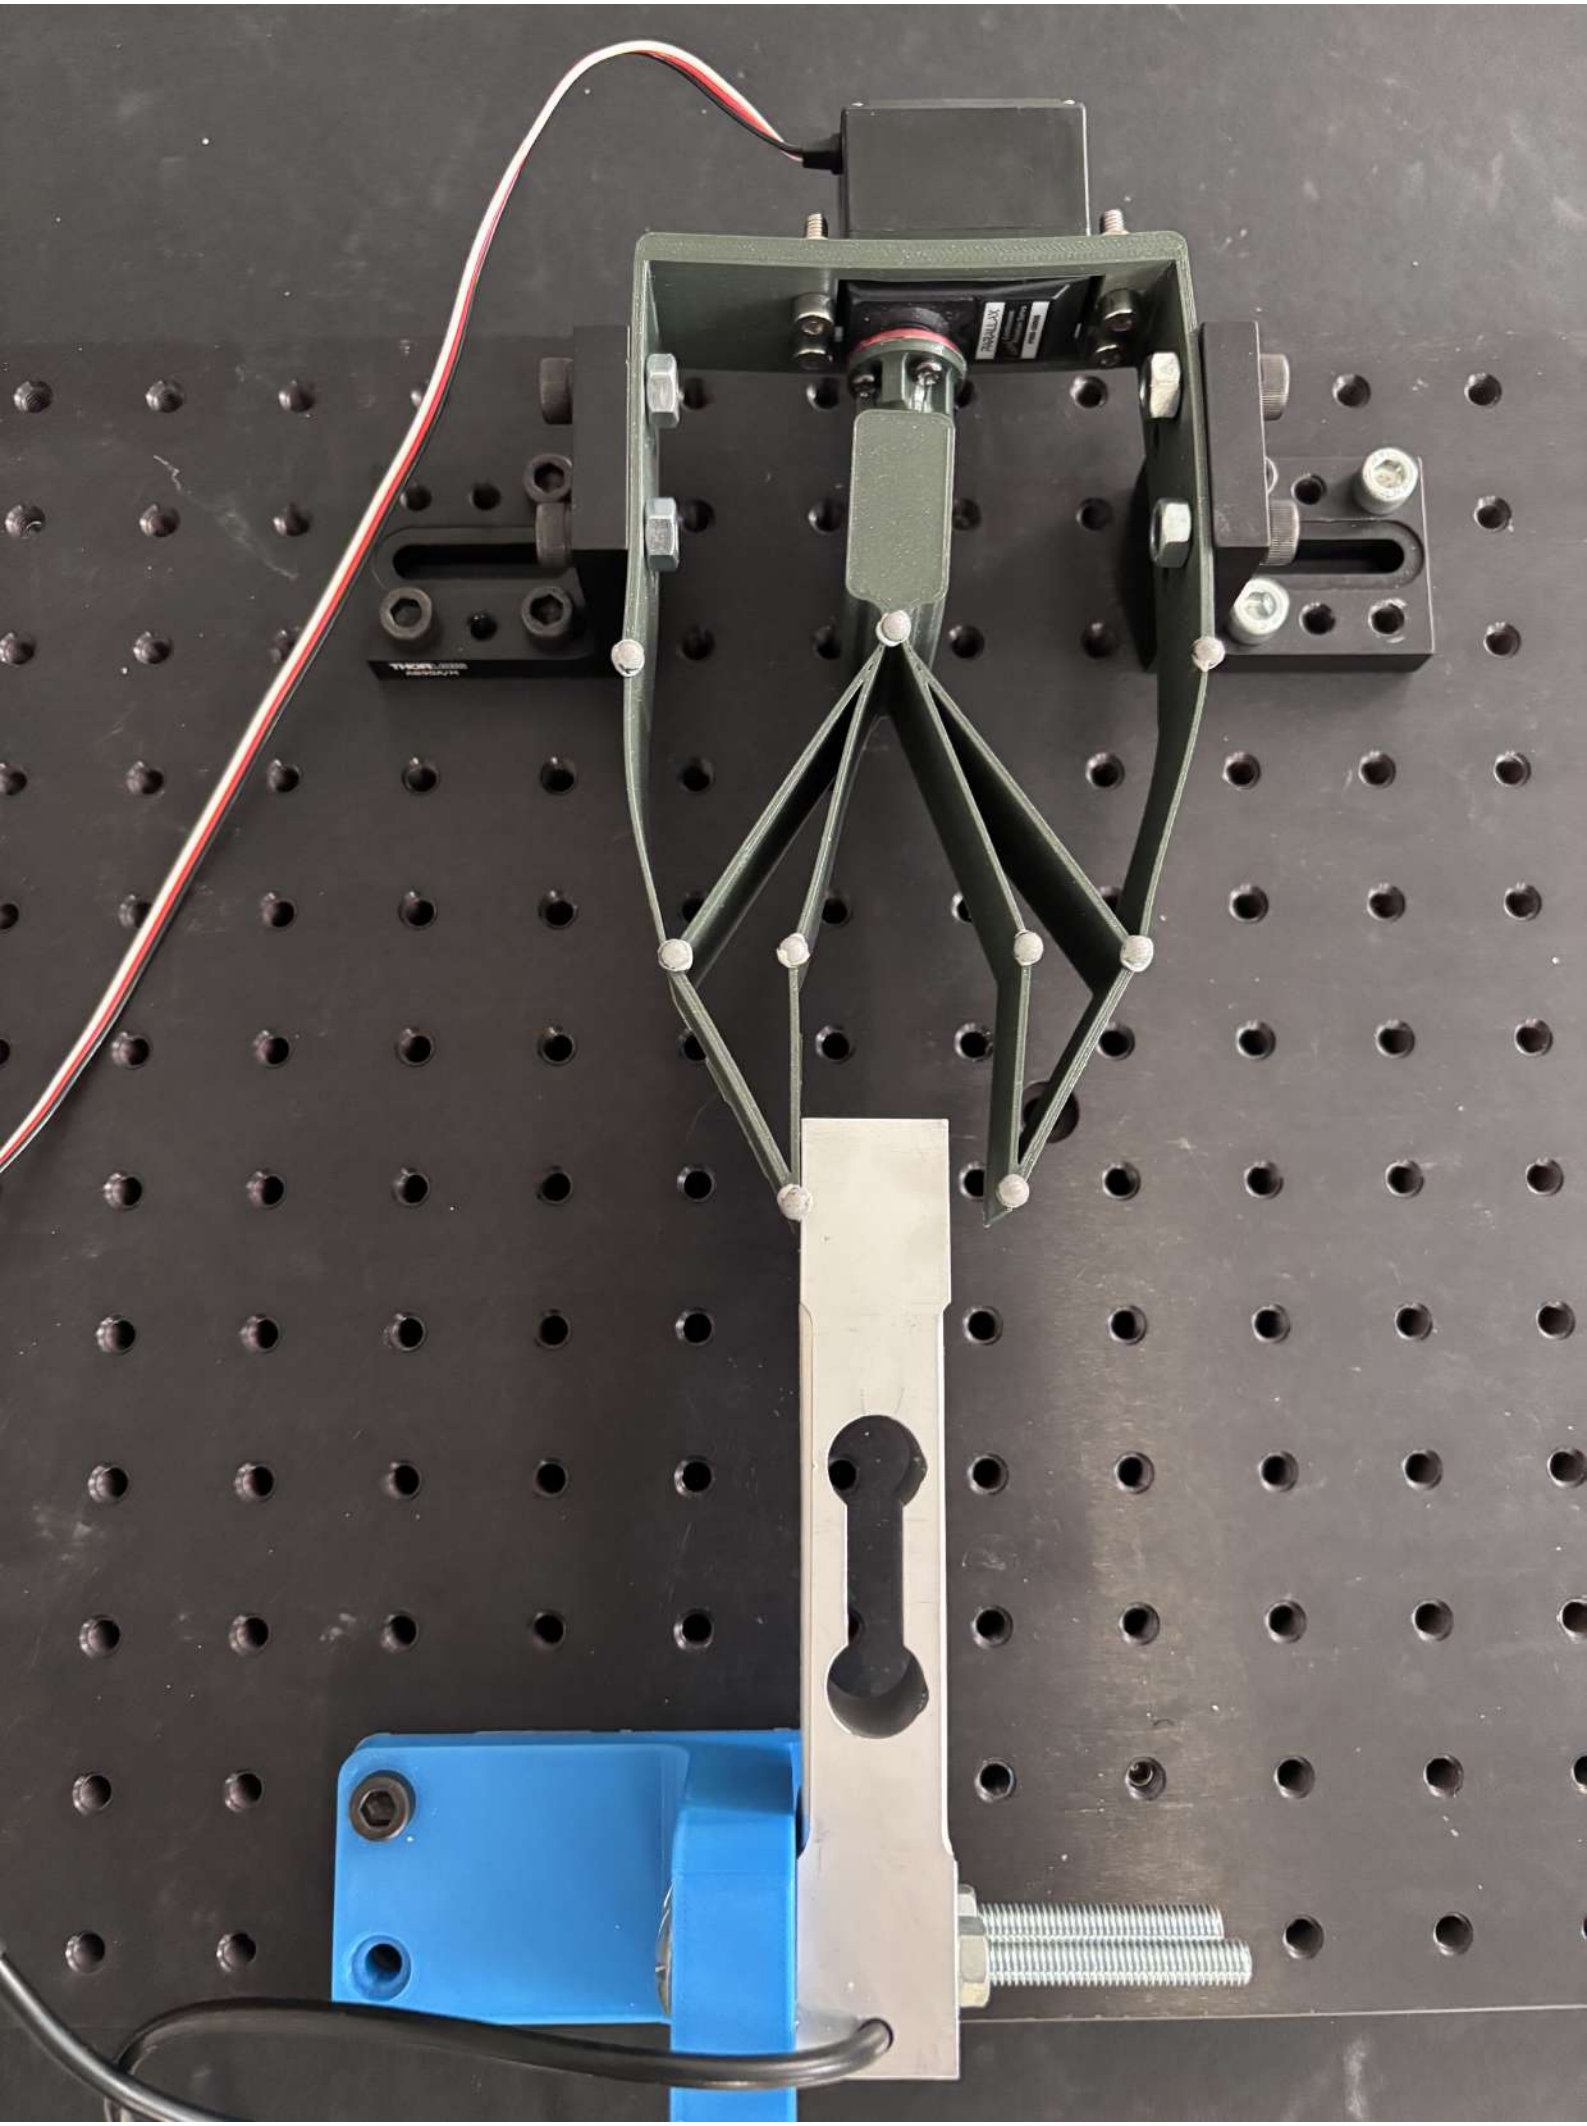


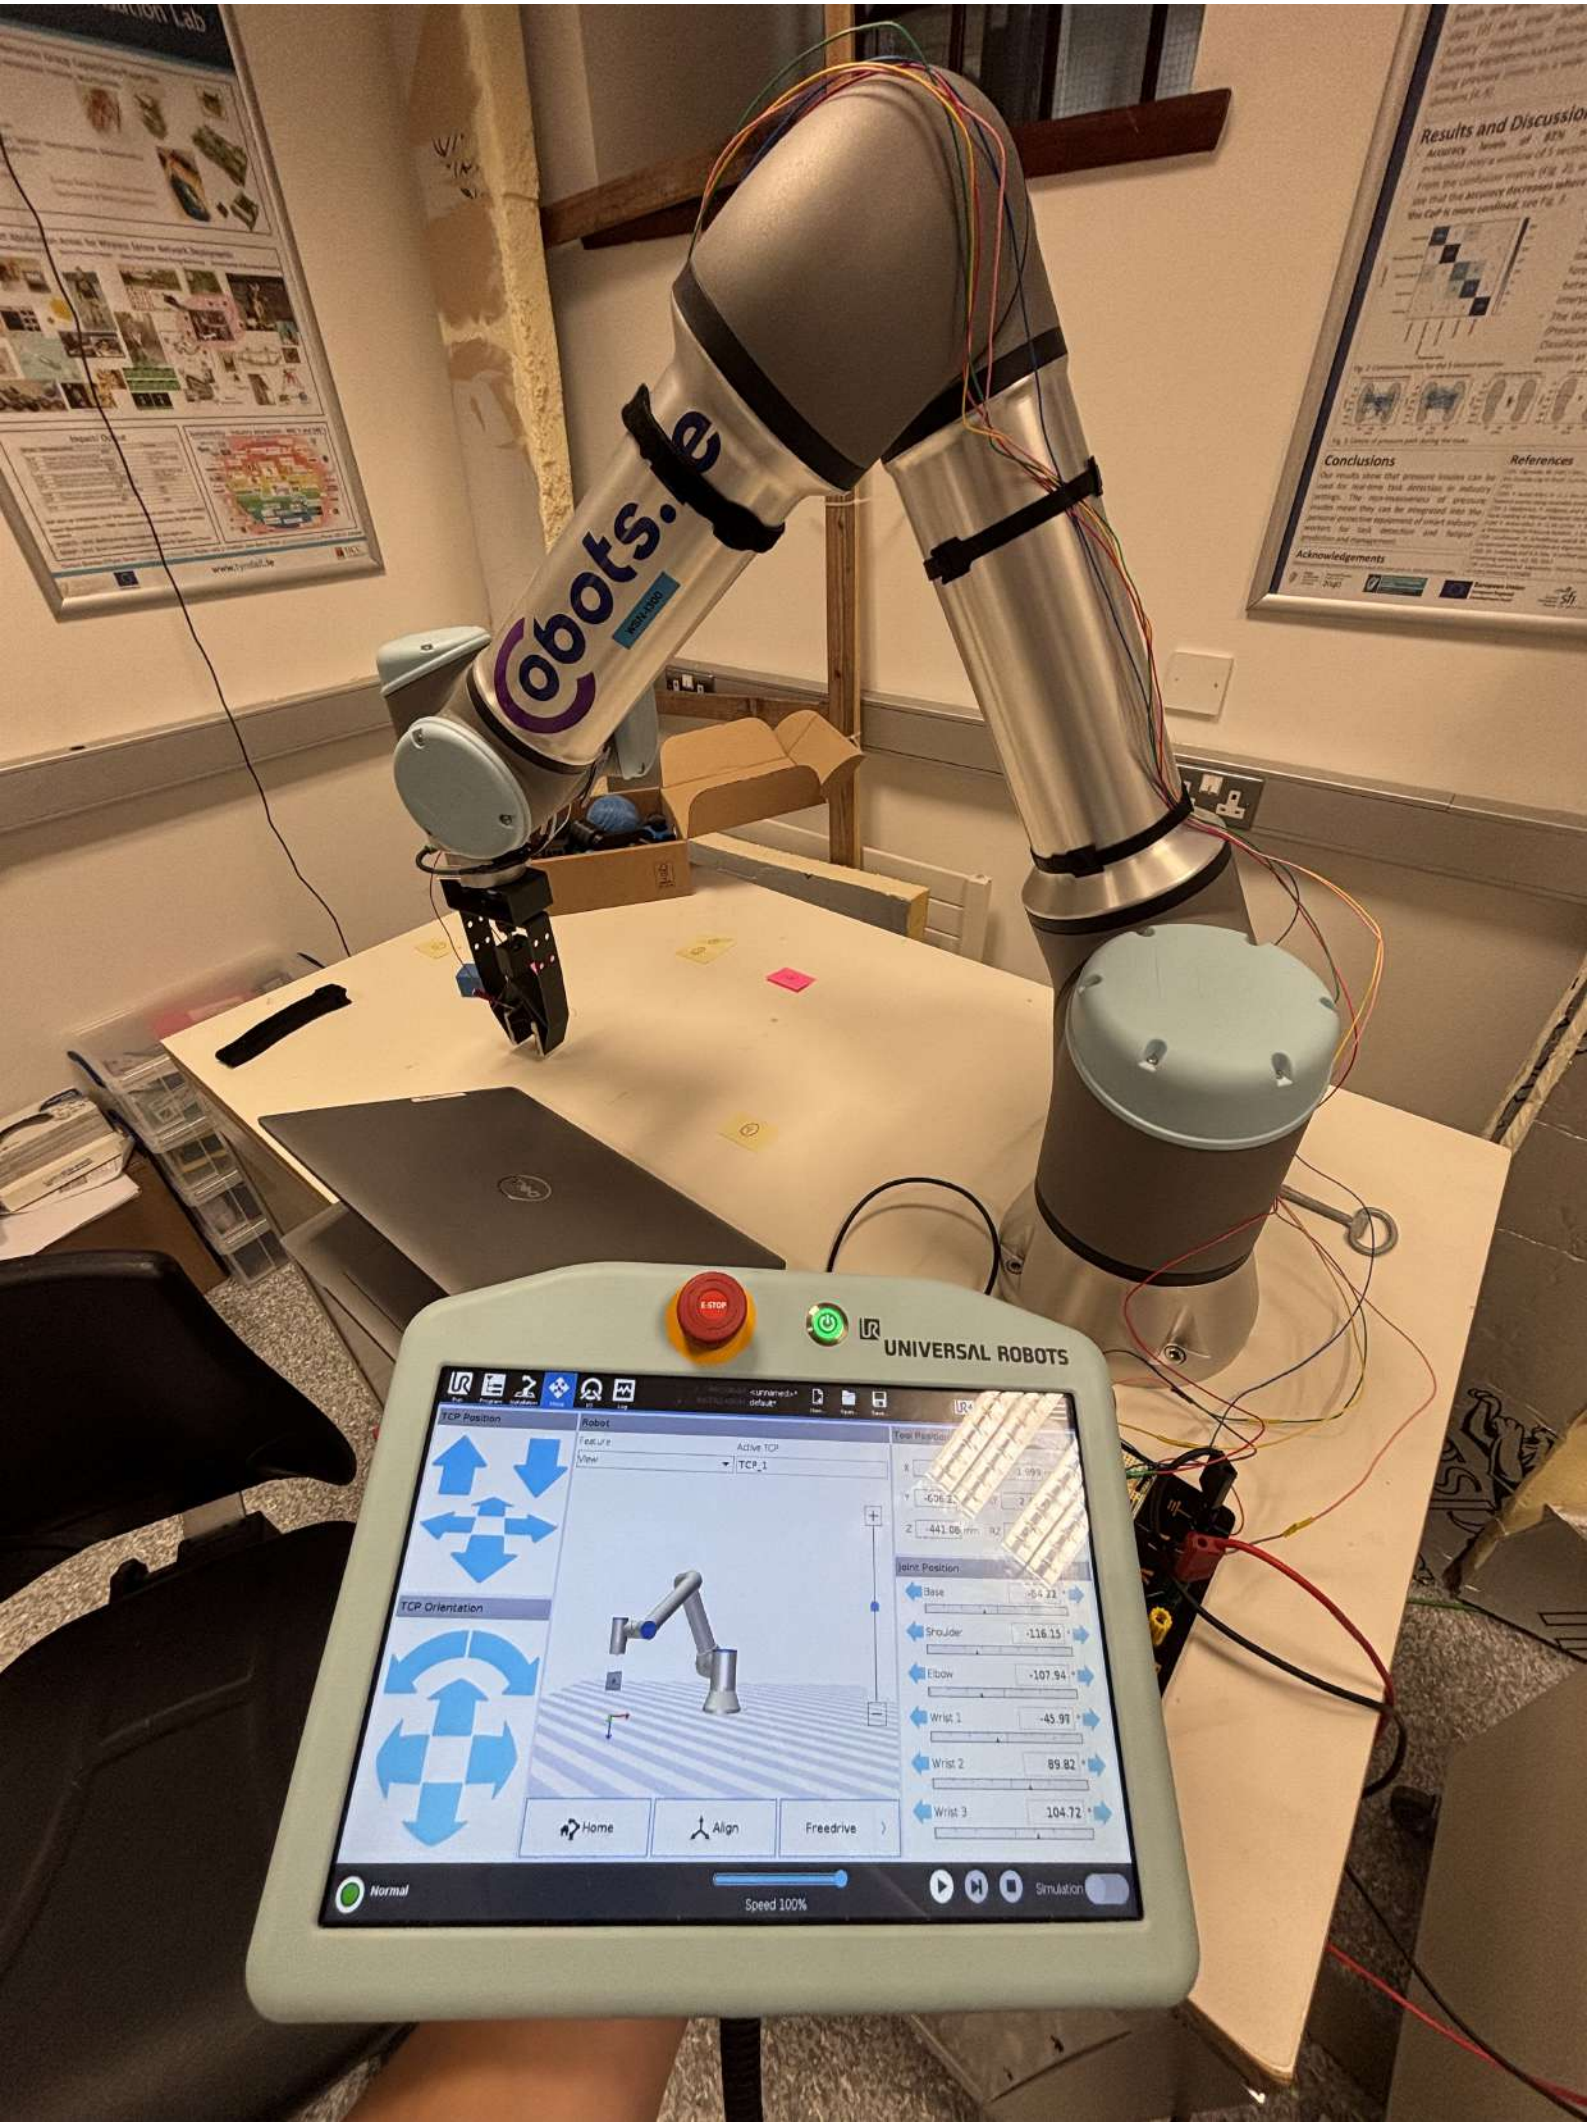




Cobots.ie
E-STOP
UNIVERSAL ROBOTS
TCP Position
TCP Orientation
Robot
Active TCP
TCP_1
Joint Position
Base
Shoulder
Elbow
Wrist 1
Wrist 2
Wrist 3
Home
Align
Freedrive
Normal
Speed 100%
Simulation
Conclusions
References
Acknowledgements



AI-based Task Classification with Pressure Insoles for Occupational Safety in Industry 5.0
Tyndall
Confirm
Introduction
Objective
Methodology
Results and Discussion
Cobots.ie
WSN-1200
1
3
2
4

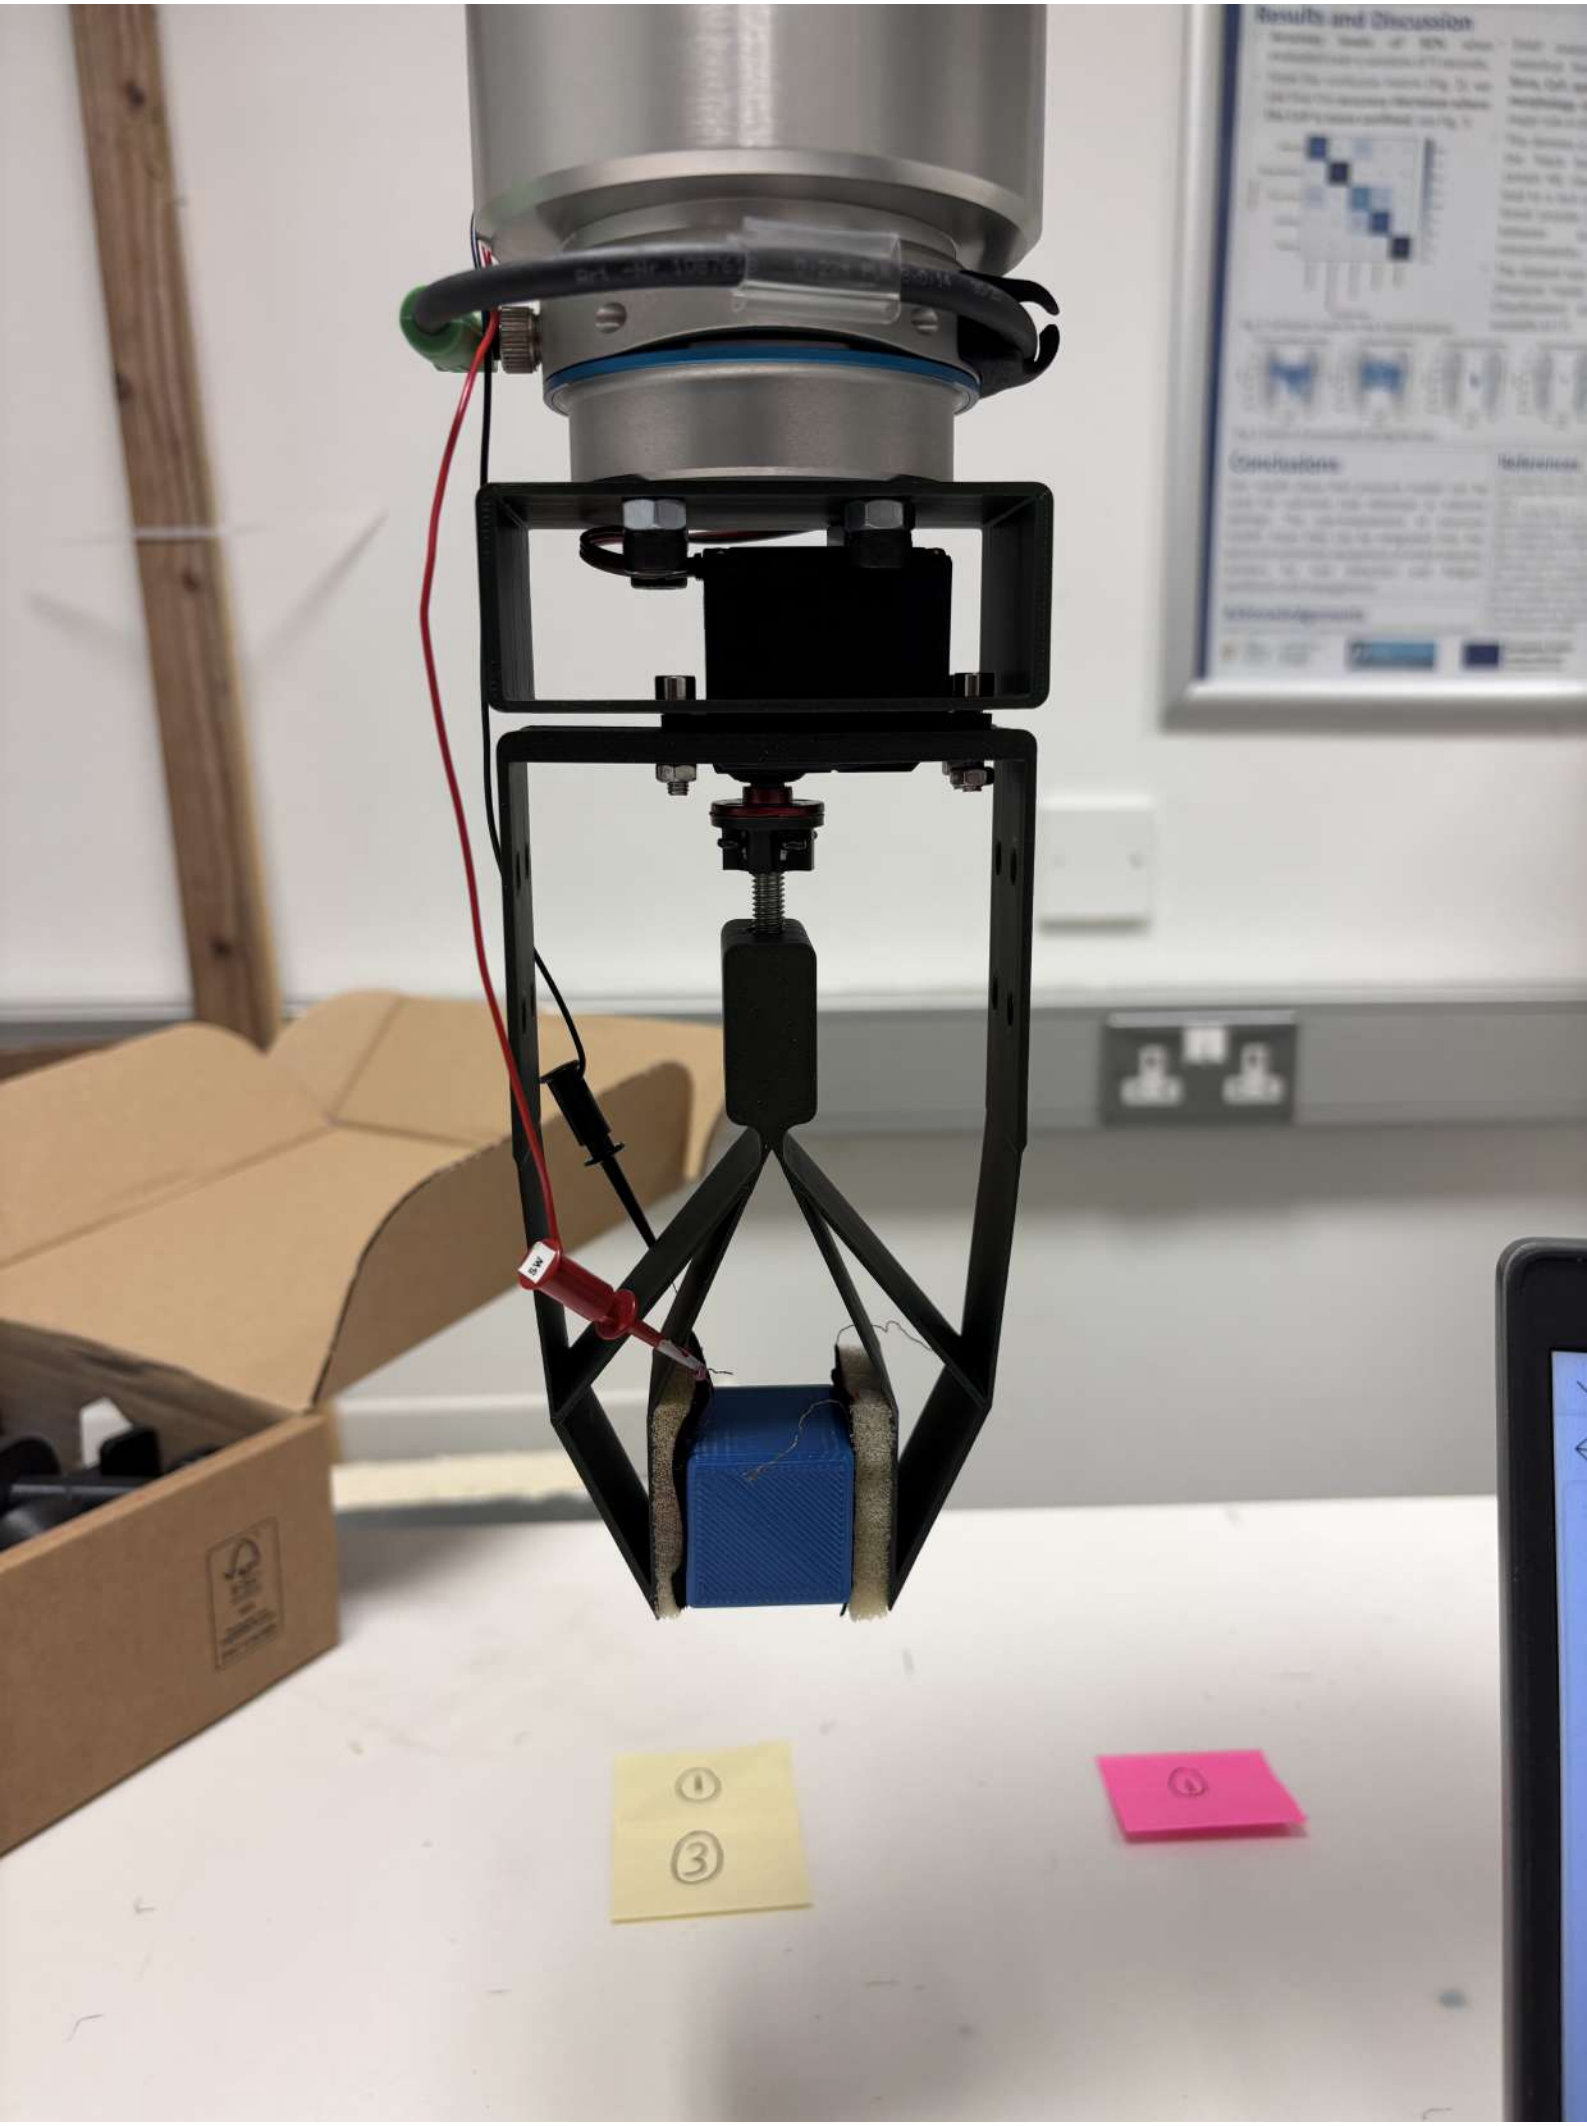
Results and Discussion
Conclusions
References

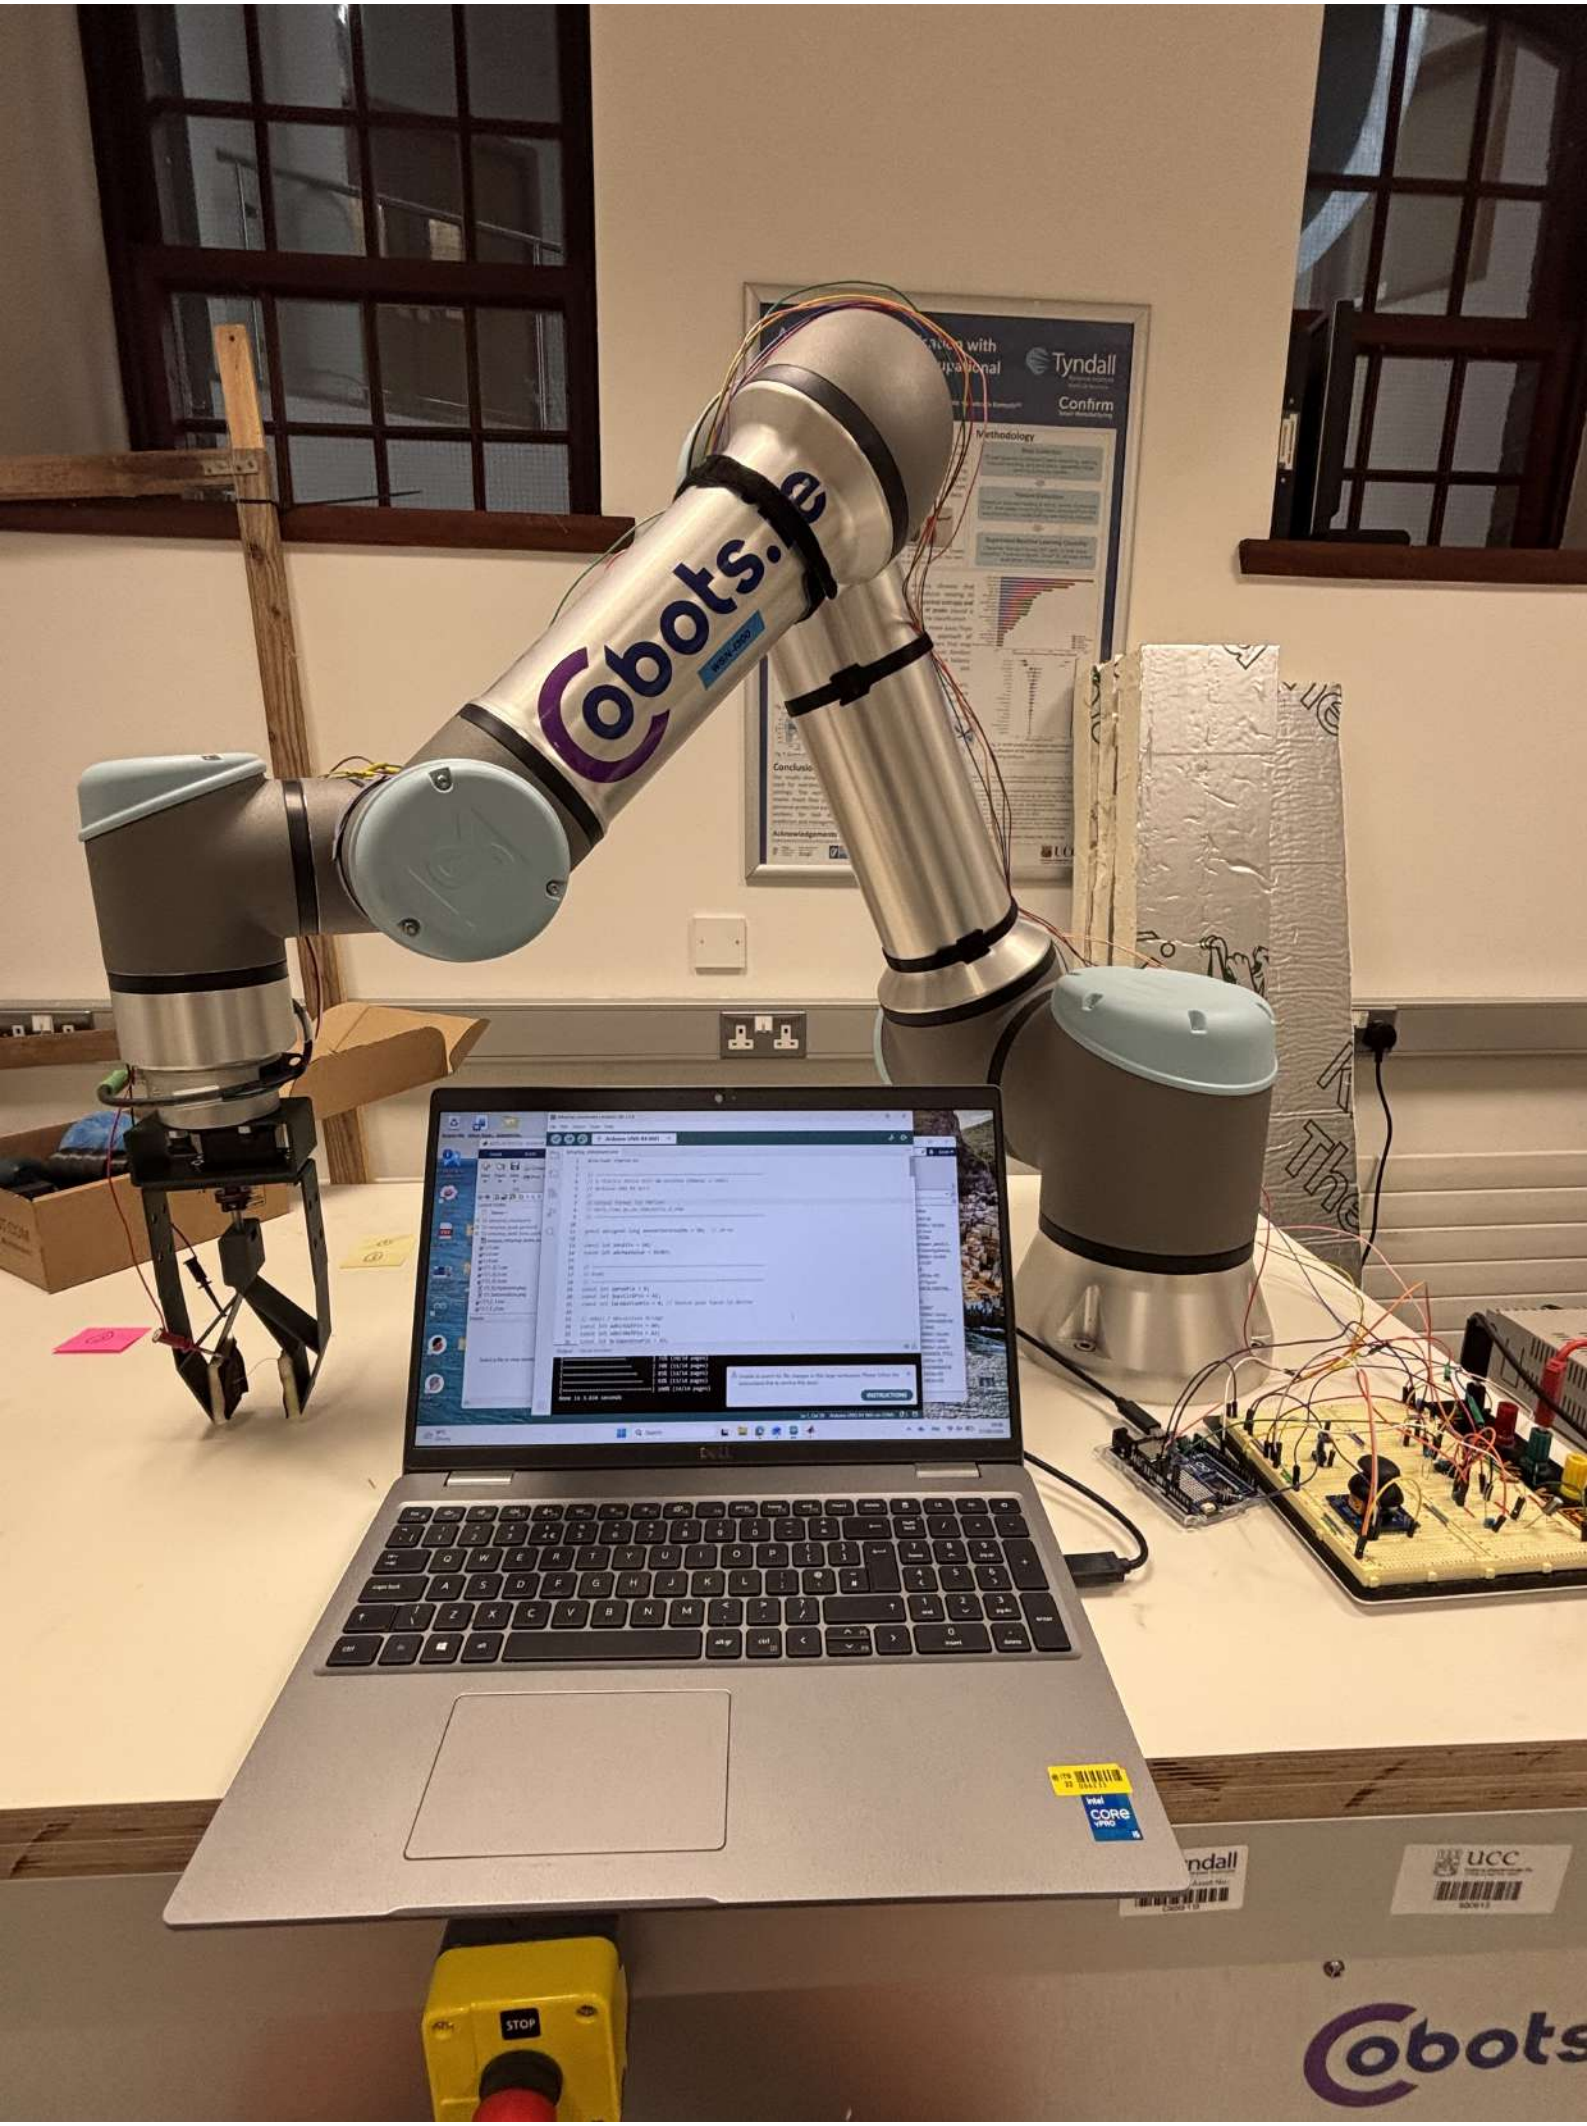

Tyndall
Confirm
Methodology
Cobots.
STOP
UCC
Cobots

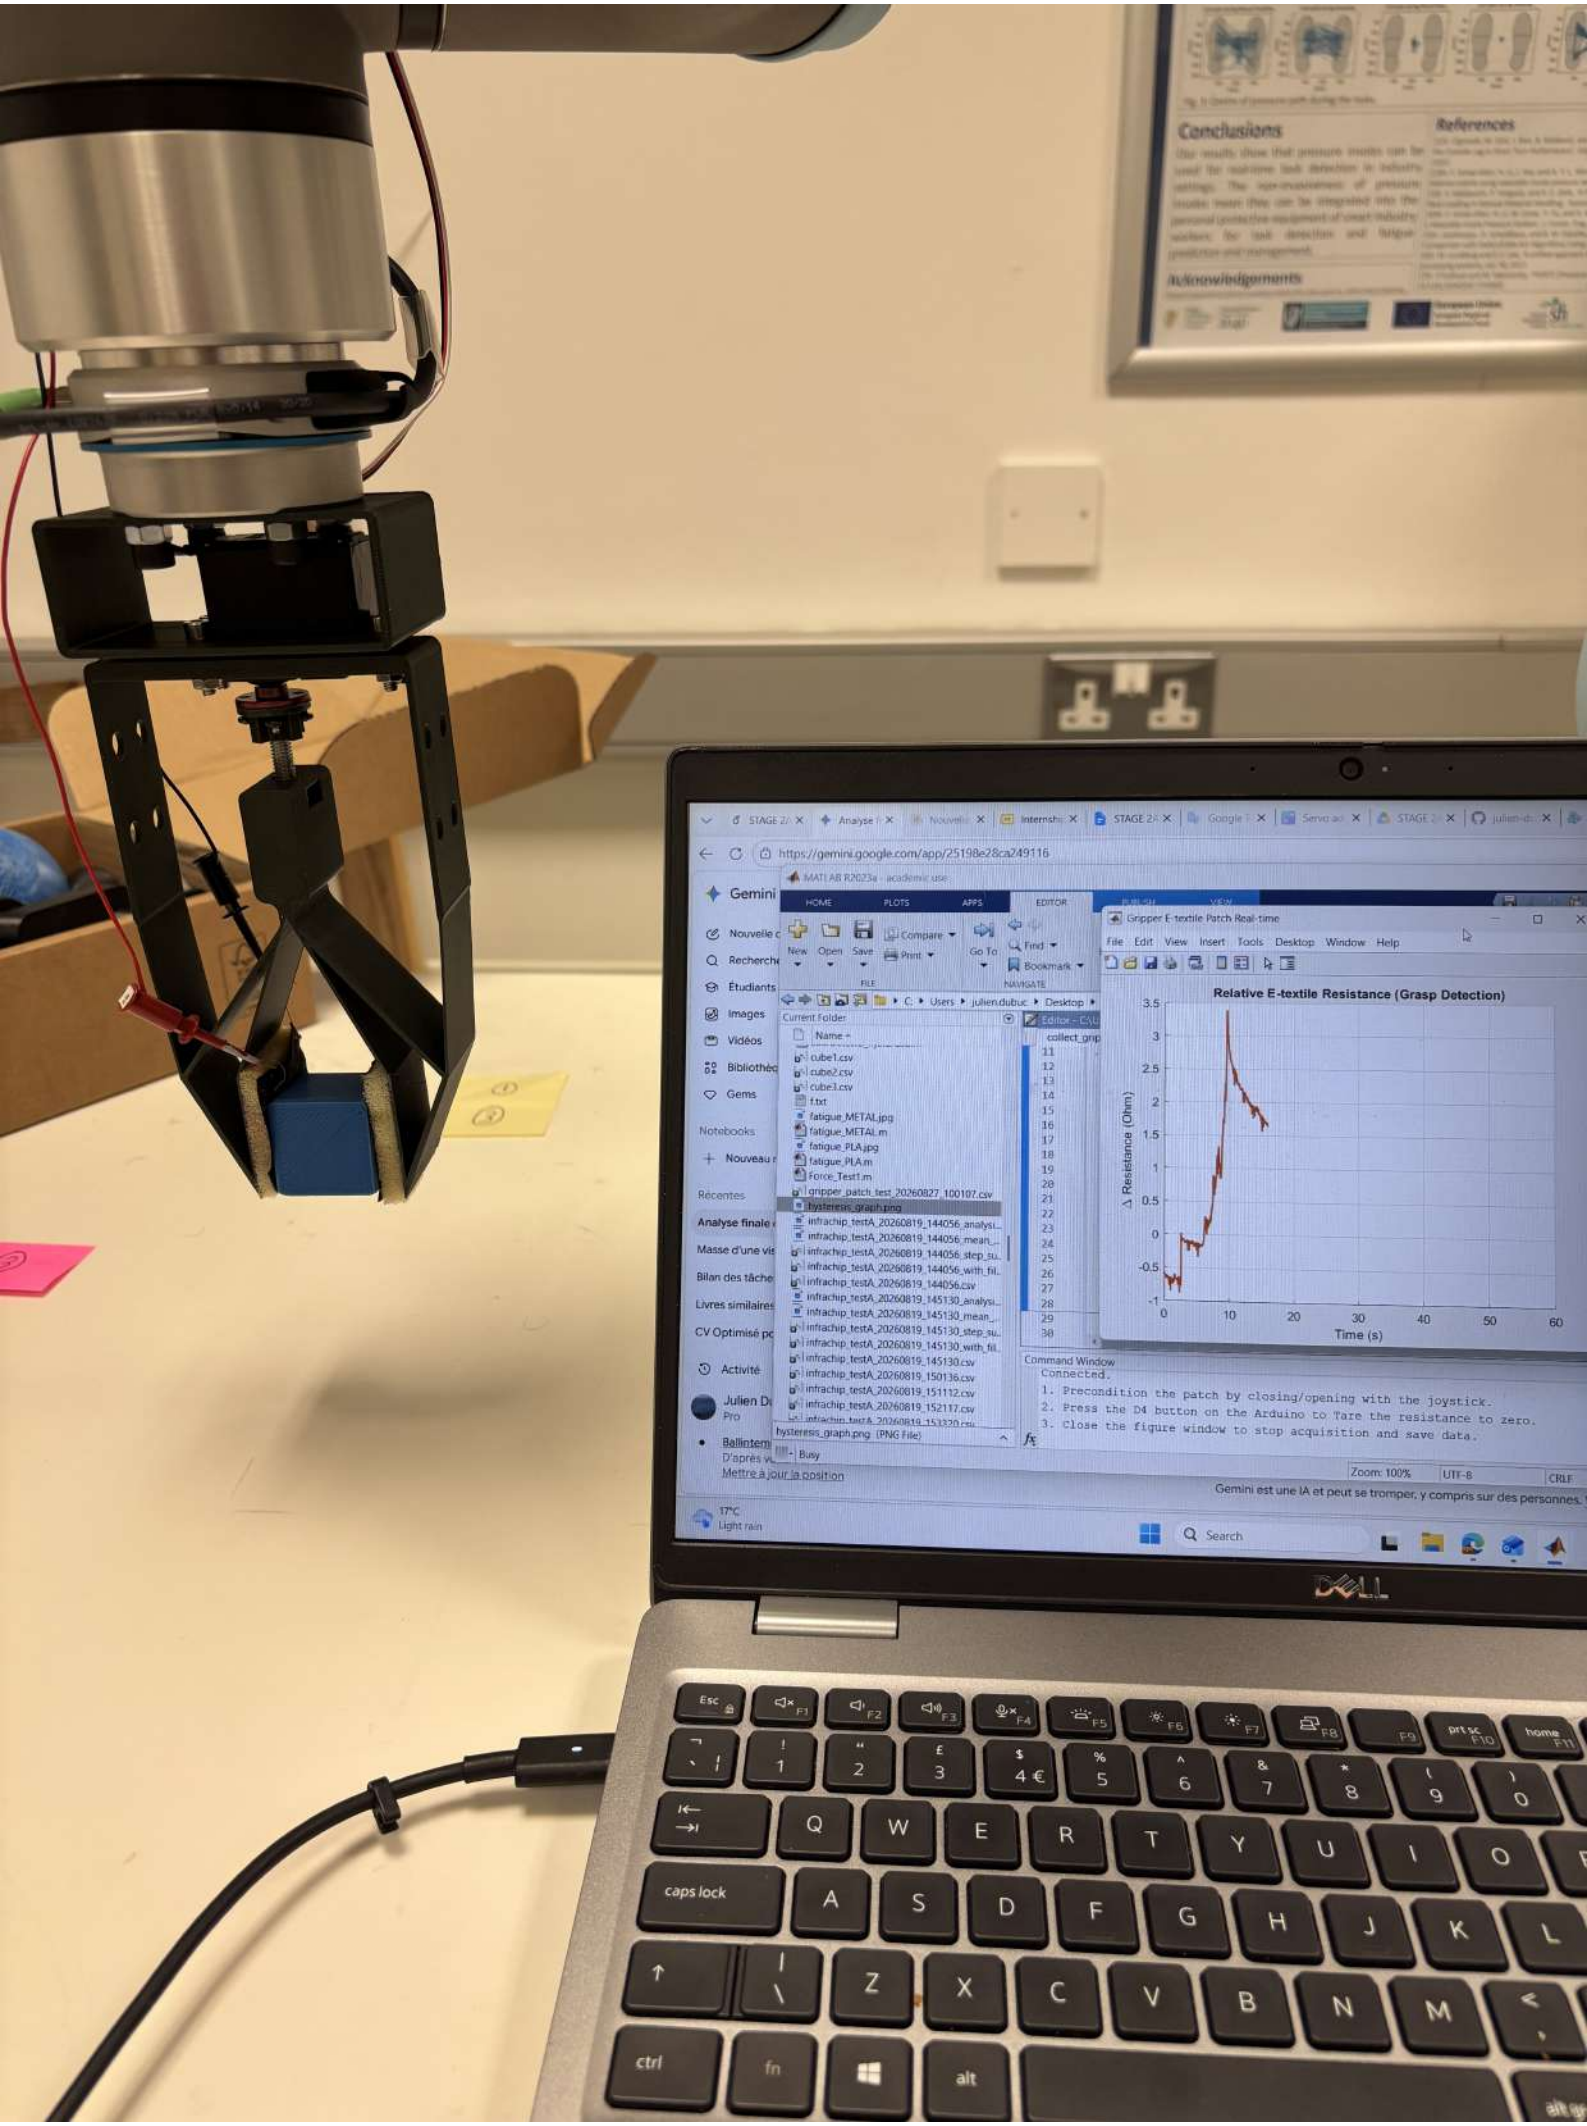
Conclusions
References
Acknowledgements
Relative E-textile Resistance (Grasp Detection)
Δ Resistance (Ohm)
Time (s)
Command Window
Connected.
1. Precondition the patch by closing/opening with the joystick.
2. Press the D4 button on the Arduino to Tare the resistance to zero.
3. Close the figure window to stop acquisition and save data.

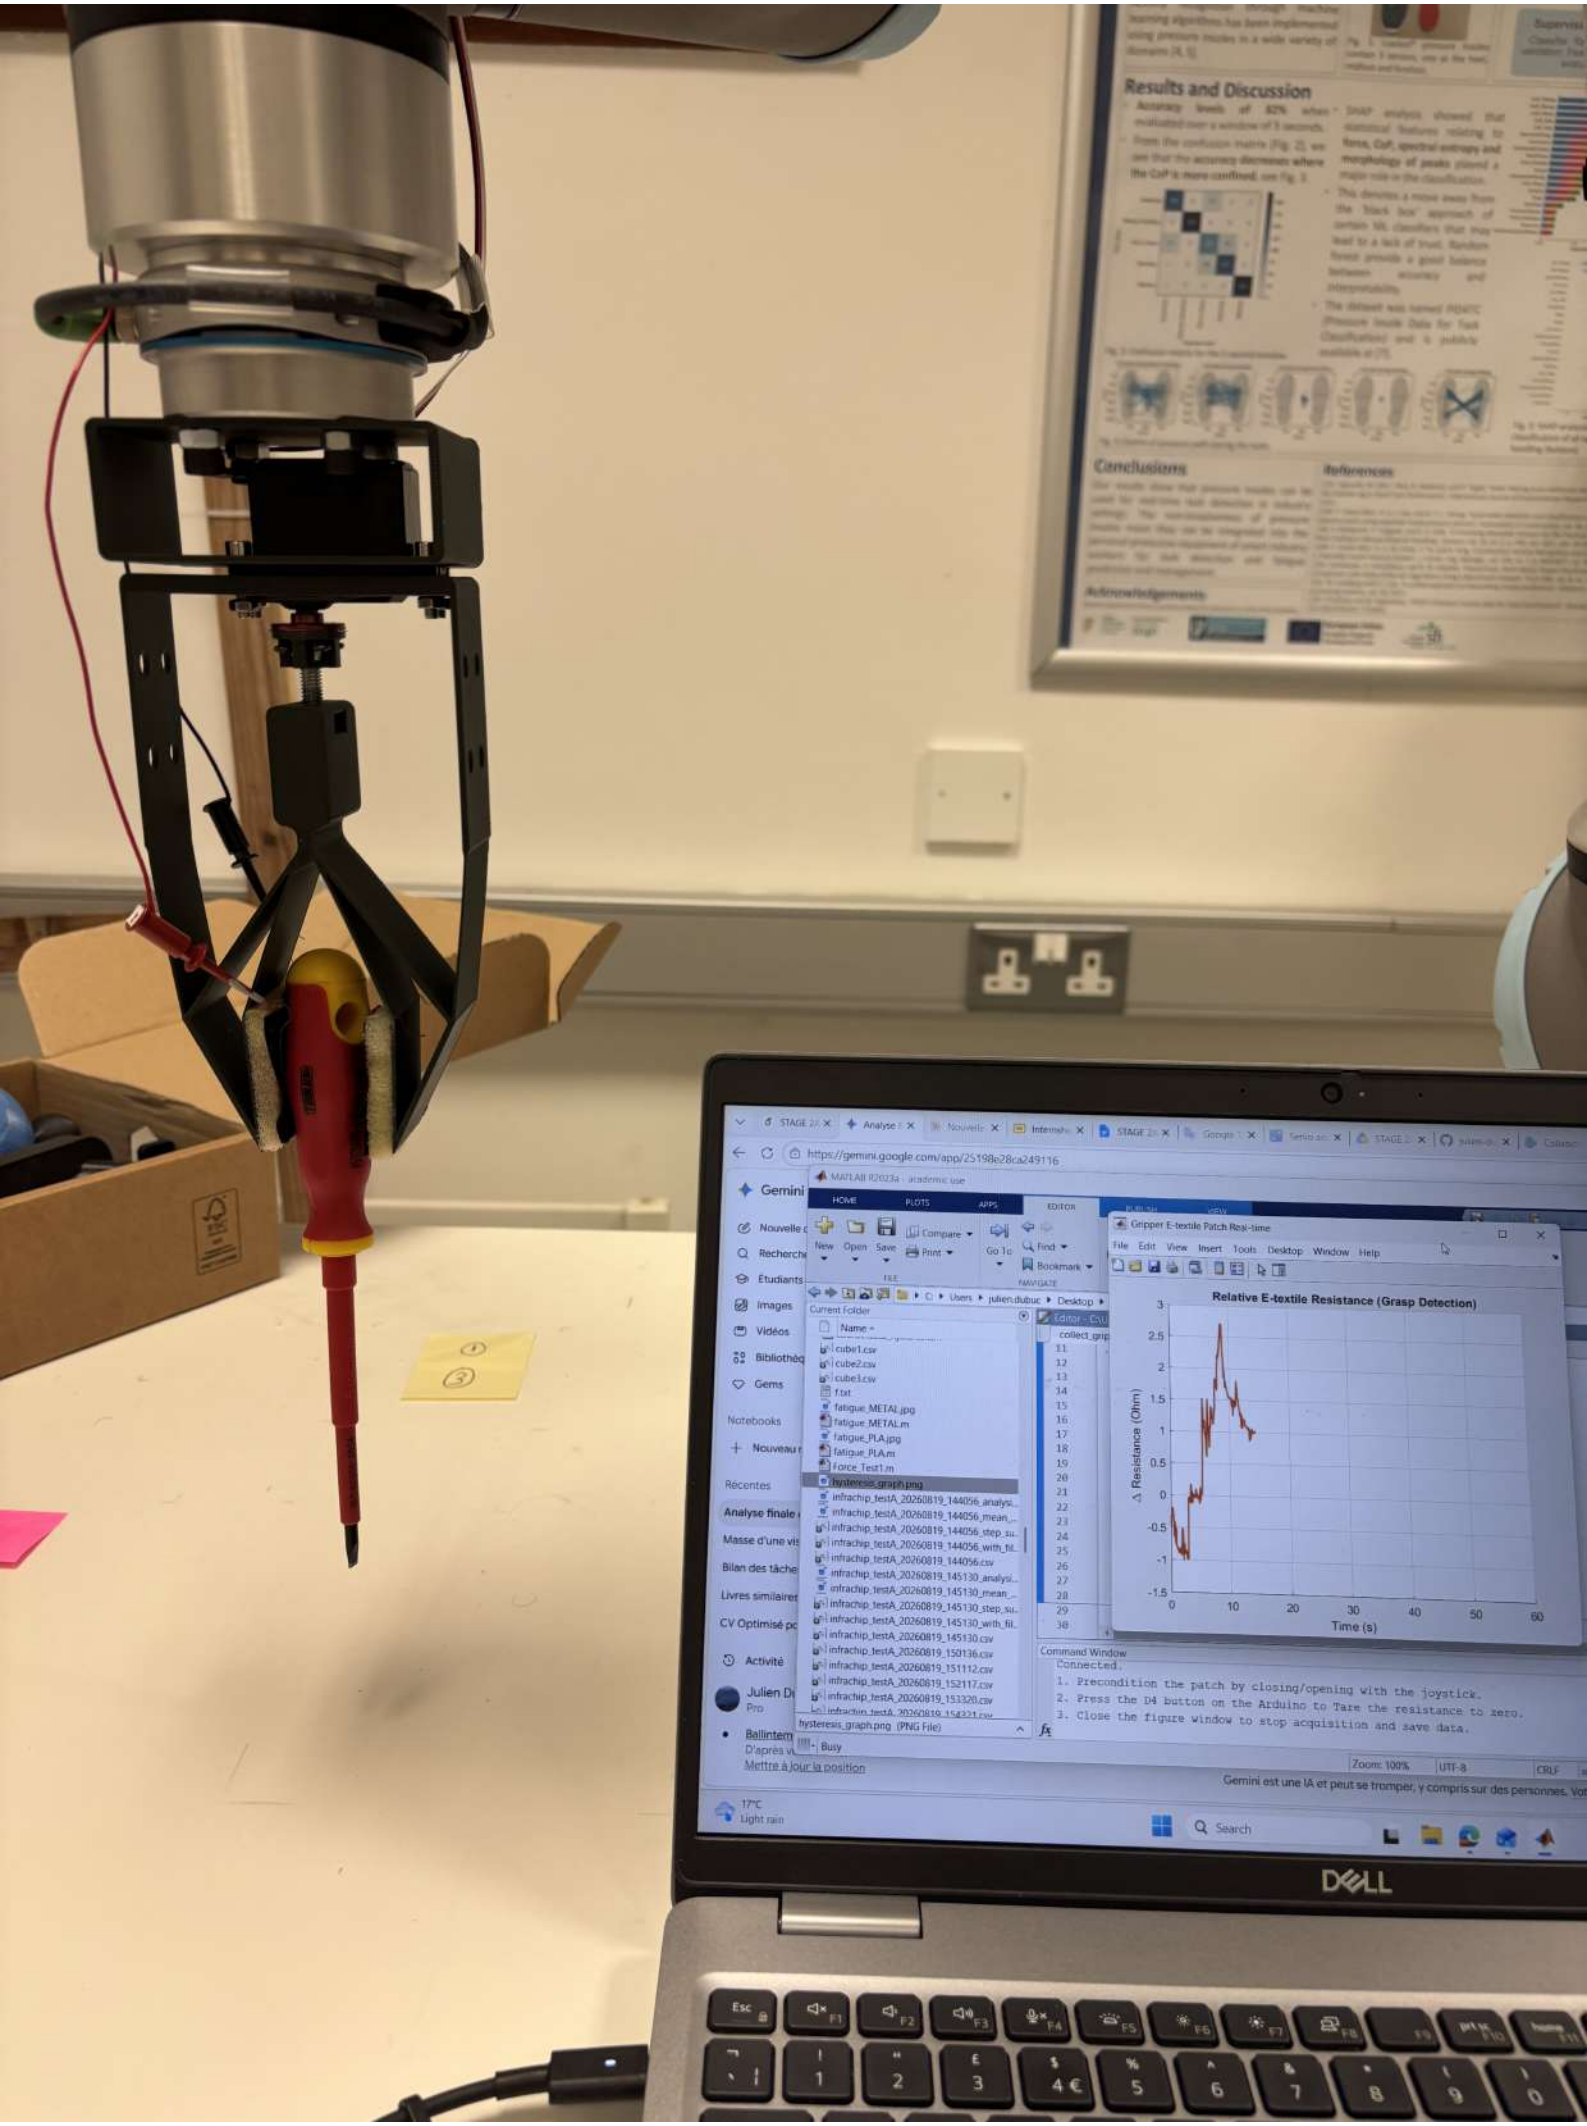

Results and Discussion
Conclusions
References
Gripper E-textile Patch Real-time
Relative E-textile Resistance (Grasp Detection)
Δ Resistance (Ohm)
Time (s)
Command Window
Connected.
1. Precondition the patch by closing/opening with the joystick.
2. Press the D4 button on the Arduino to Tare the resistance to zero.
3. Close the figure window to stop acquisition and save data.
DELL

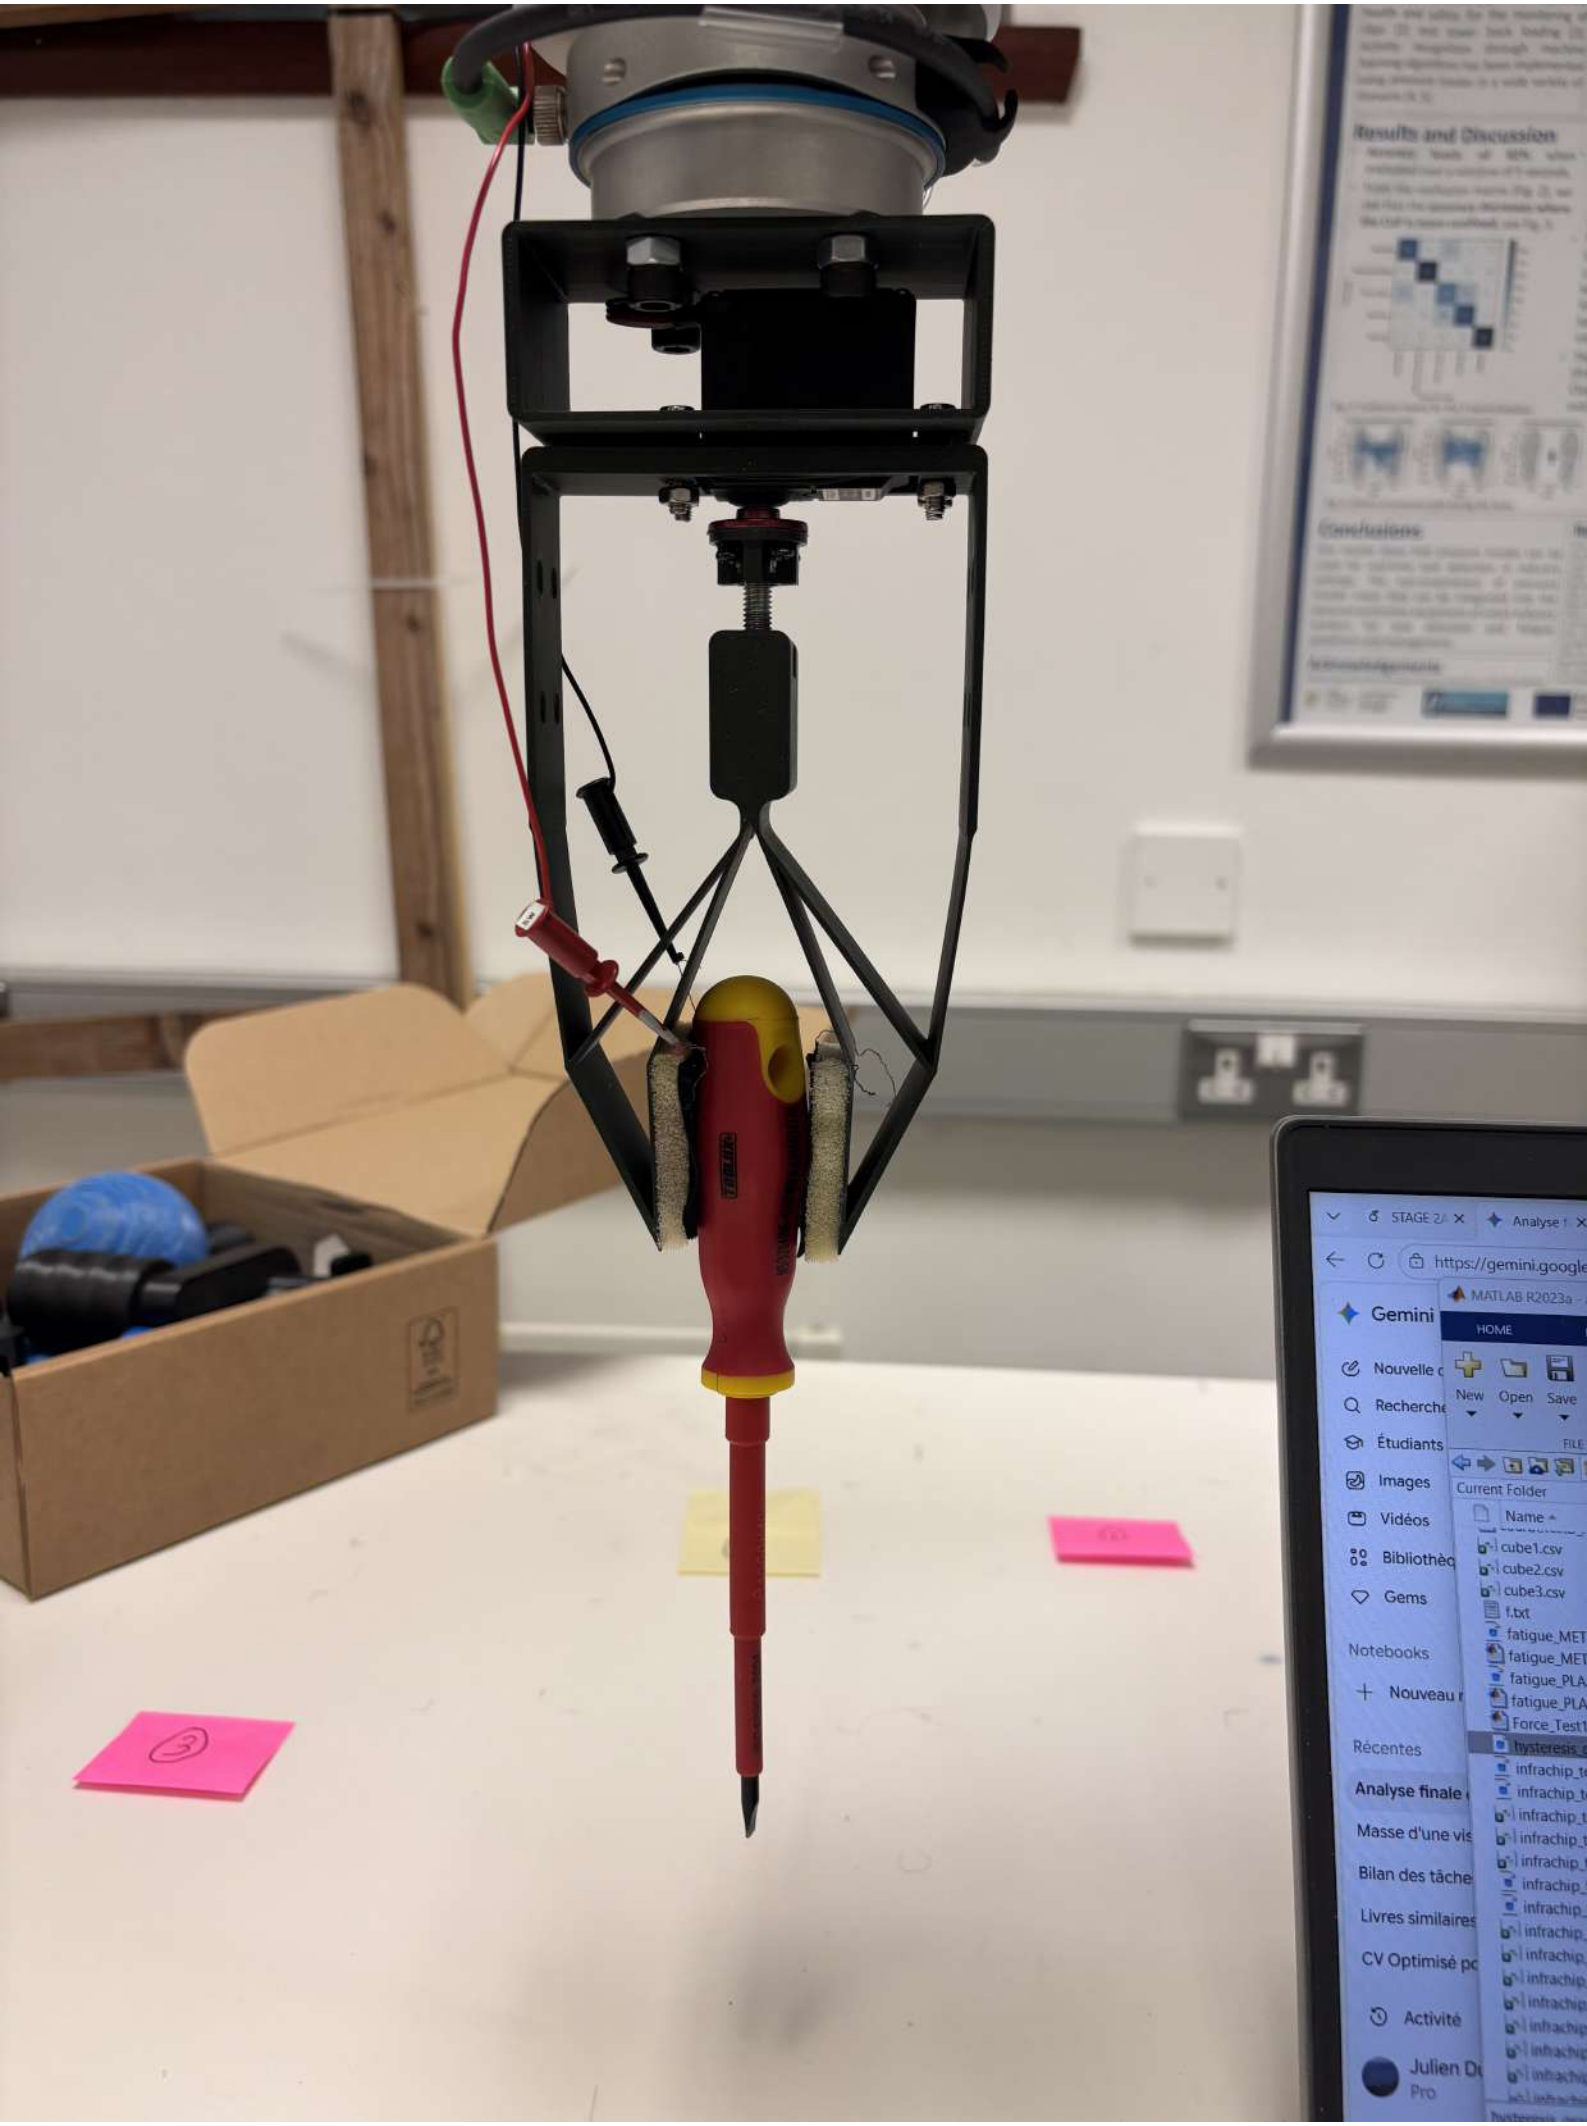

Results and Discussion
Conclusions
MATLAB R2023a
HOME
New
Open
Save
Current Folder
Name
cube1.csv
cube2.csv
cube3.csv
f.txt
Gemini
Nouvelle
Recherche
Étudiants
Images
Vidéos
Bibliothèq
Gems
Notebooks
Nouveau
Récentes
Analyse finale
Masse d'une vis
Bilan des tâche
Livres similaires
CV Optimisé pc
Activité
Julien D
Pro


my
café

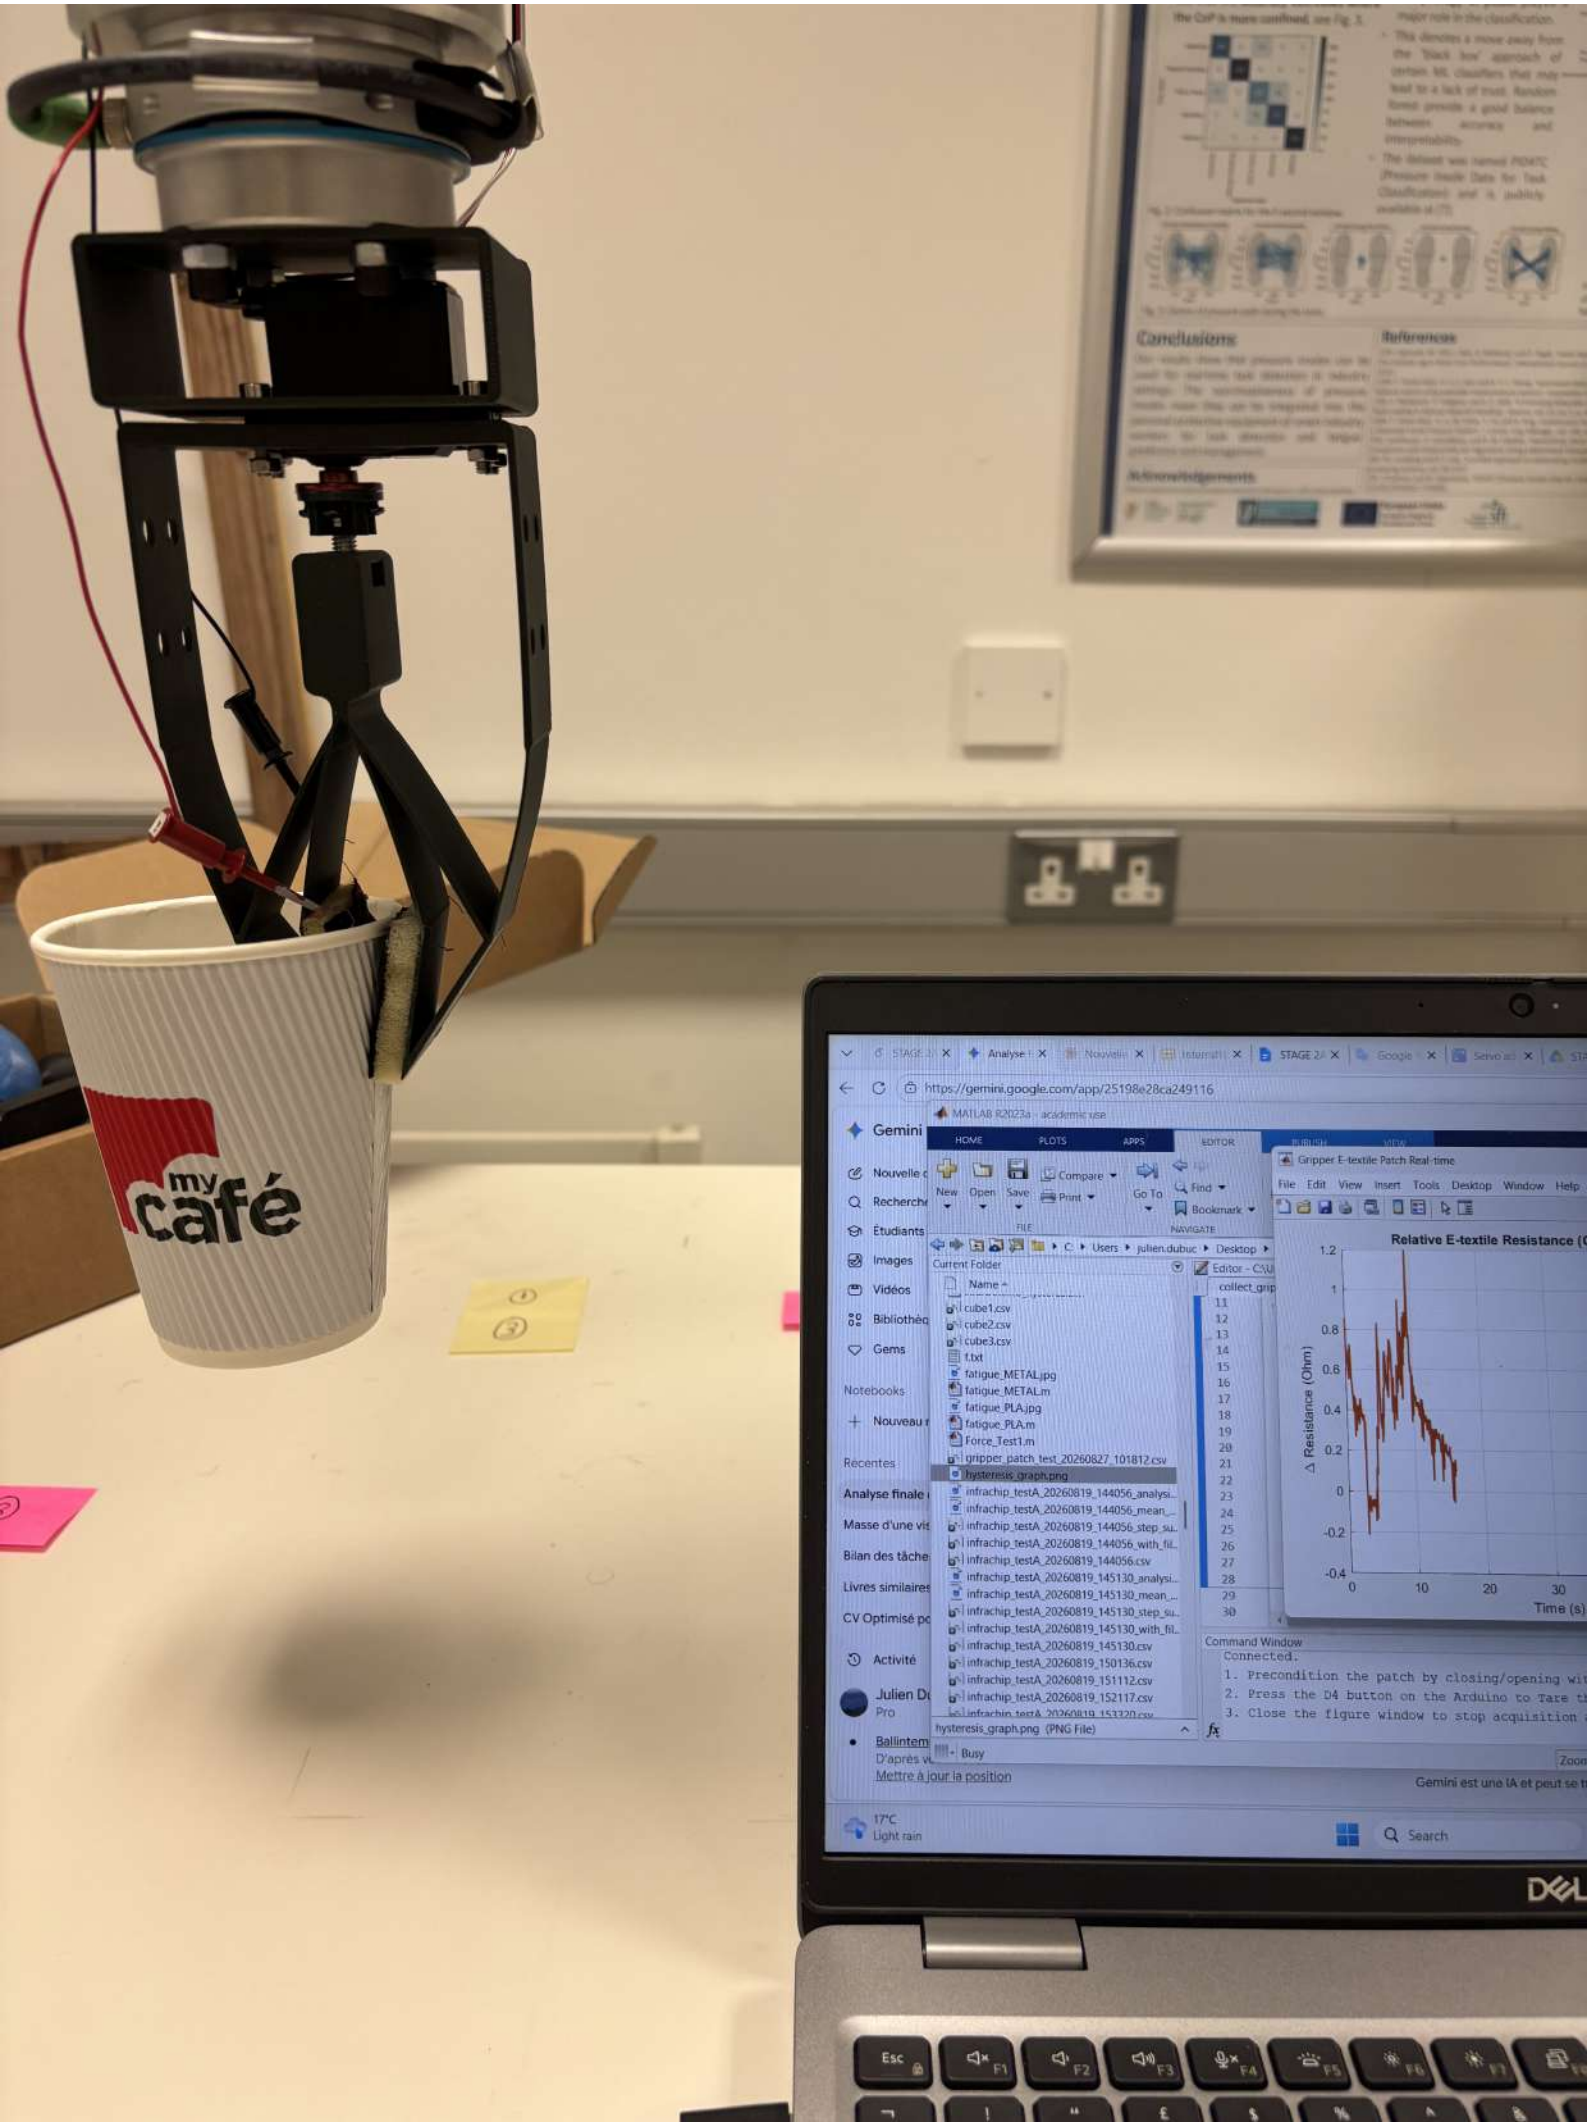

my café
Gripper E-textile Patch Real-time
Relative E-textile Resistance
Δ Resistance (Ohm)
Time (s)
Command Window
Connected.
1. Precondition the patch by closing/opening
2. Press the D4 button on the Arduino to Tare
3. Close the figure window to stop acquisition
hysteresis_graph.png (PNG File)
Busy
Conclusions
References




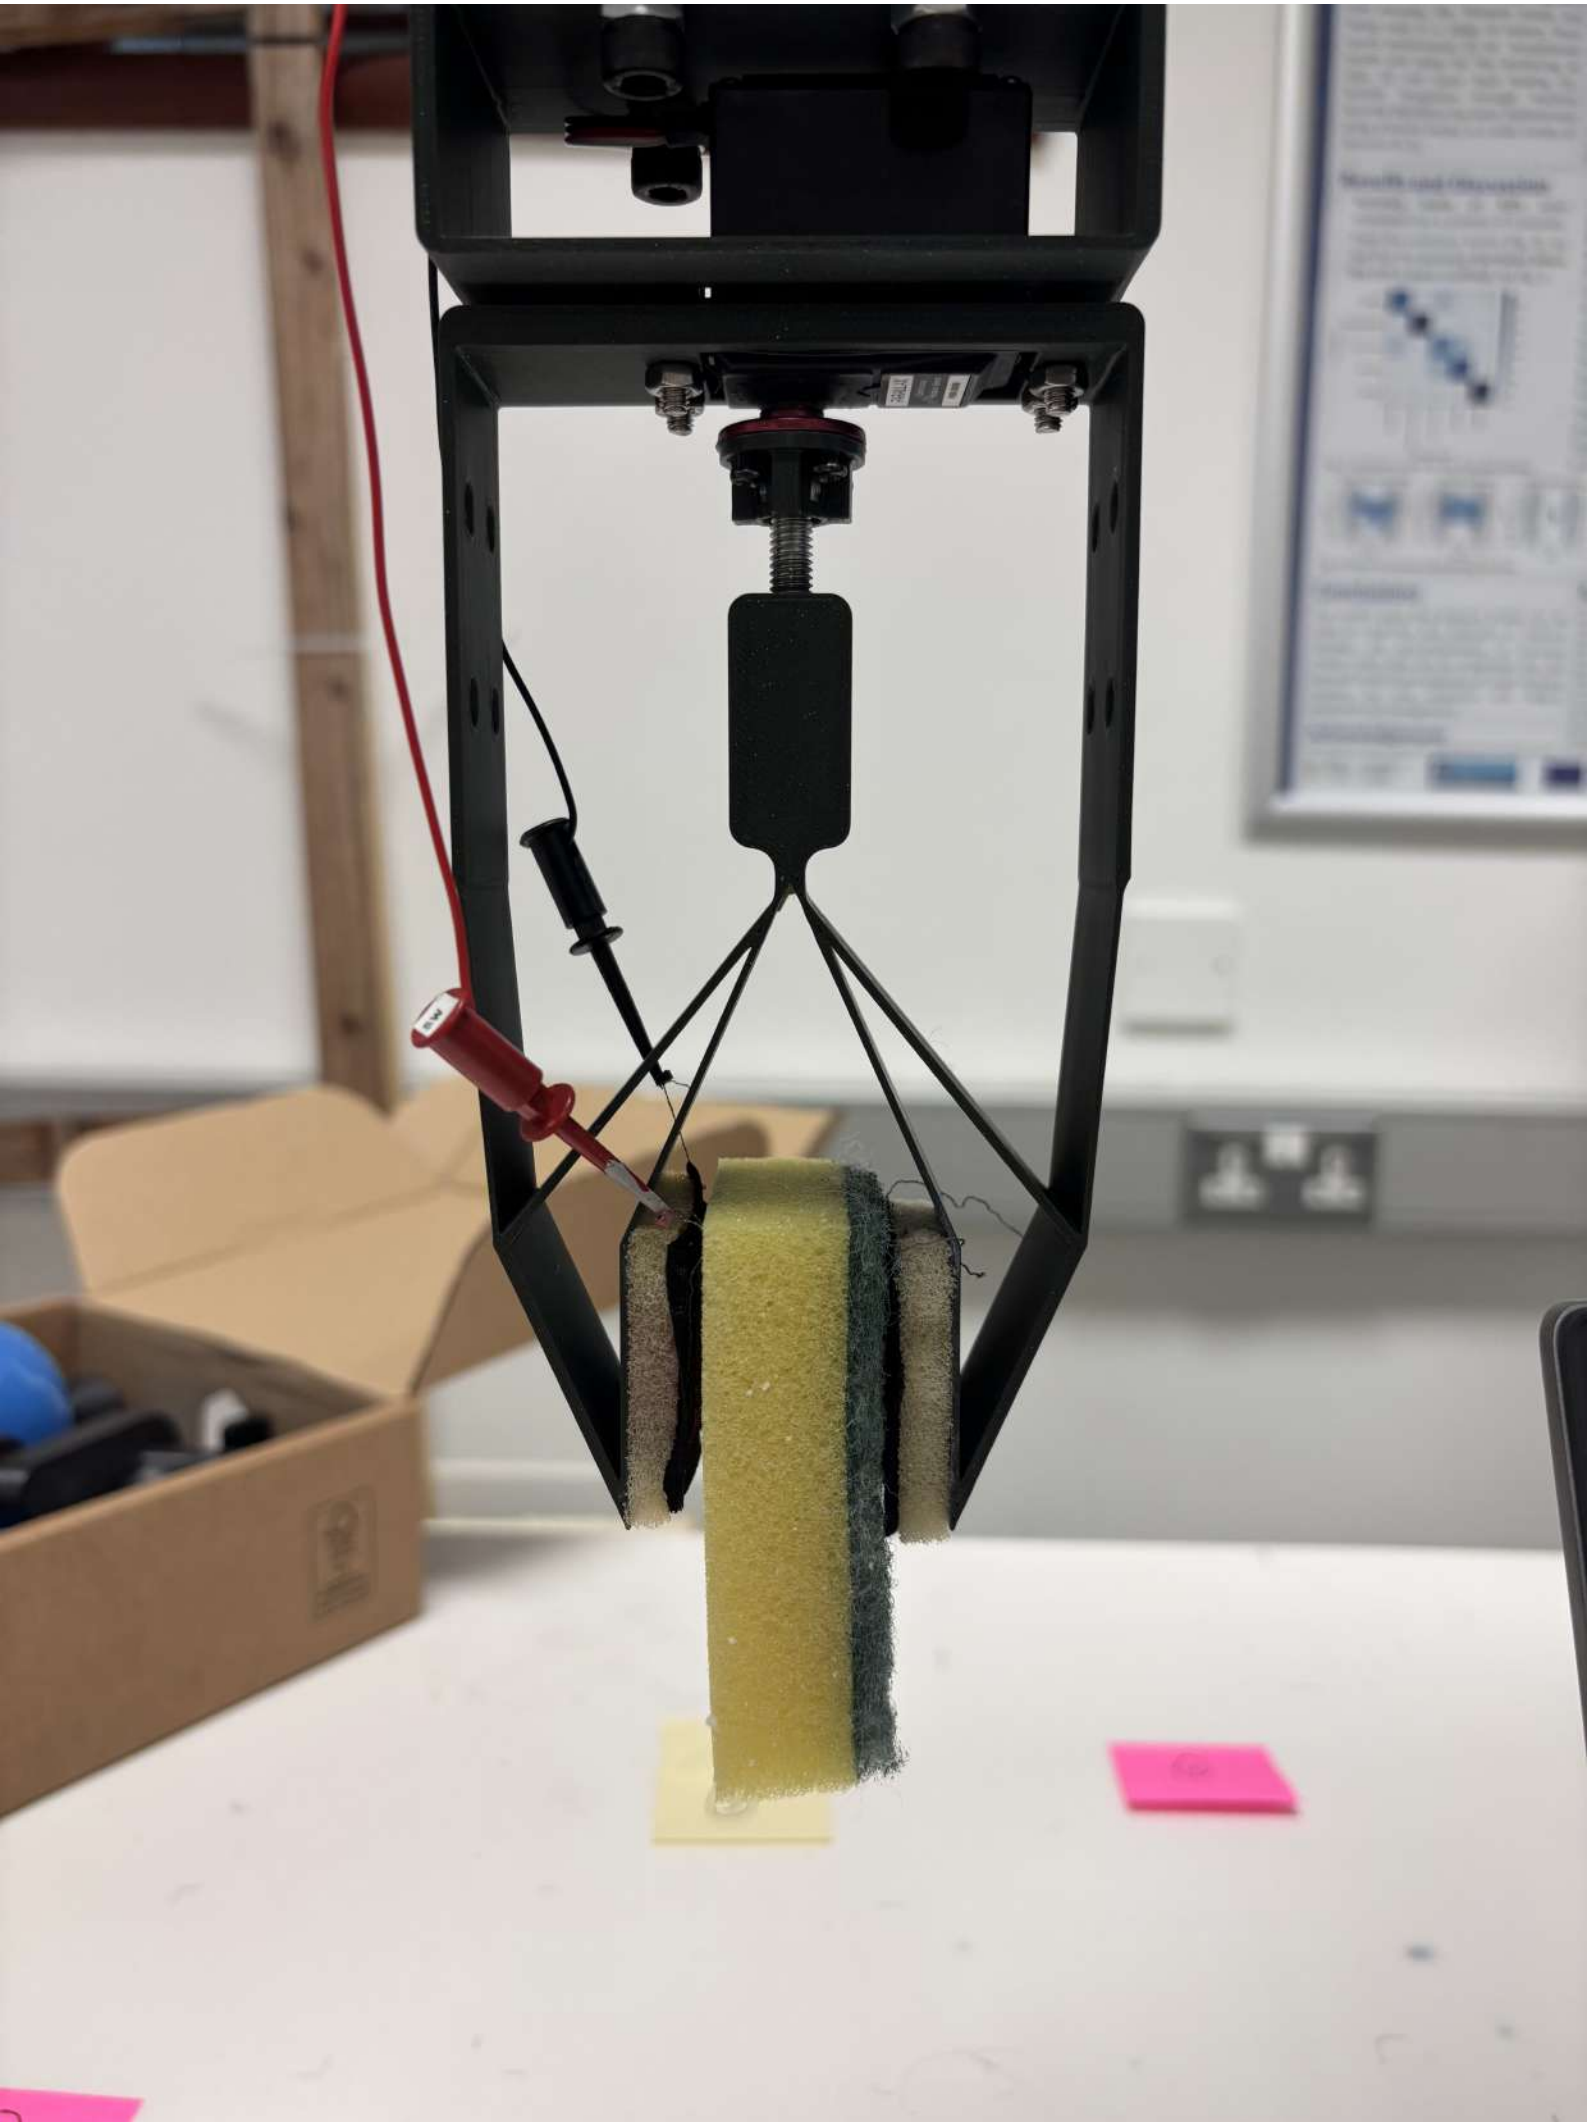


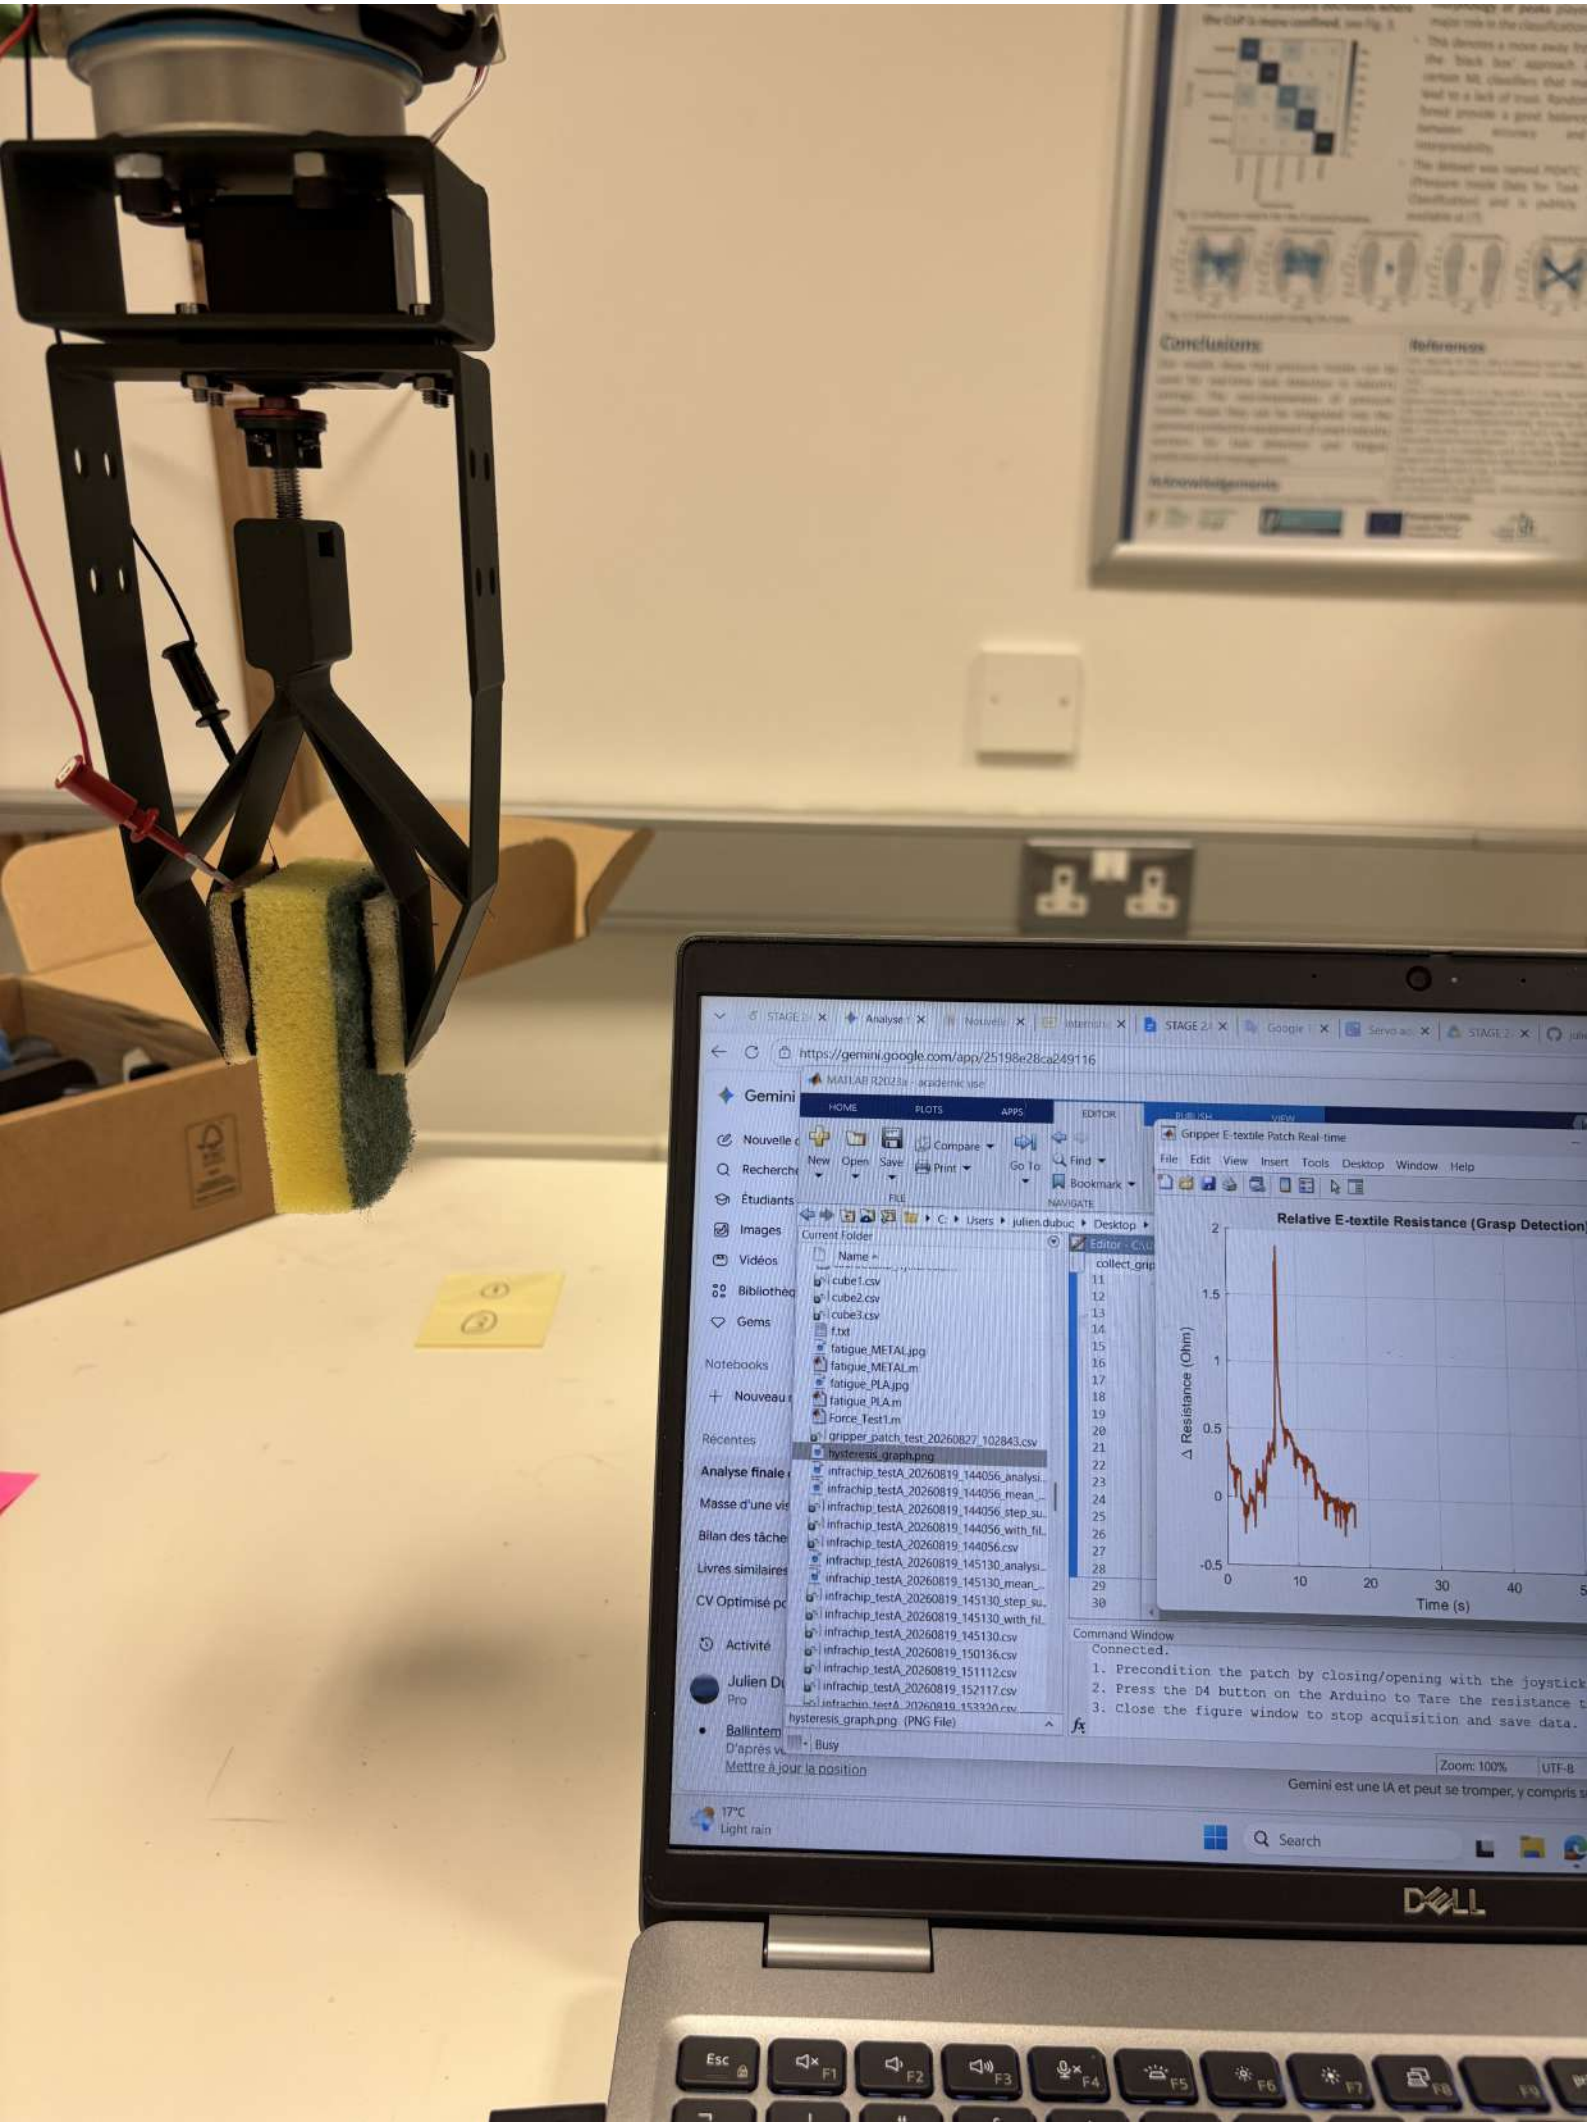
Gripper E-textile Patch Real-time
Relative E-textile Resistance (Grasp Detection)
Δ Resistance (Ohm)
Time (s)
Command Window
Connected.
1. Precondition the patch by closing/opening with the joystick
2. Press the D4 button on the Arduino to Tare the resistance
3. Close the figure window to stop acquisition and save data.
DELL


STAGE 2
Gemini
Nouvelle
Recherche
Étudiants
Images
Vidéos

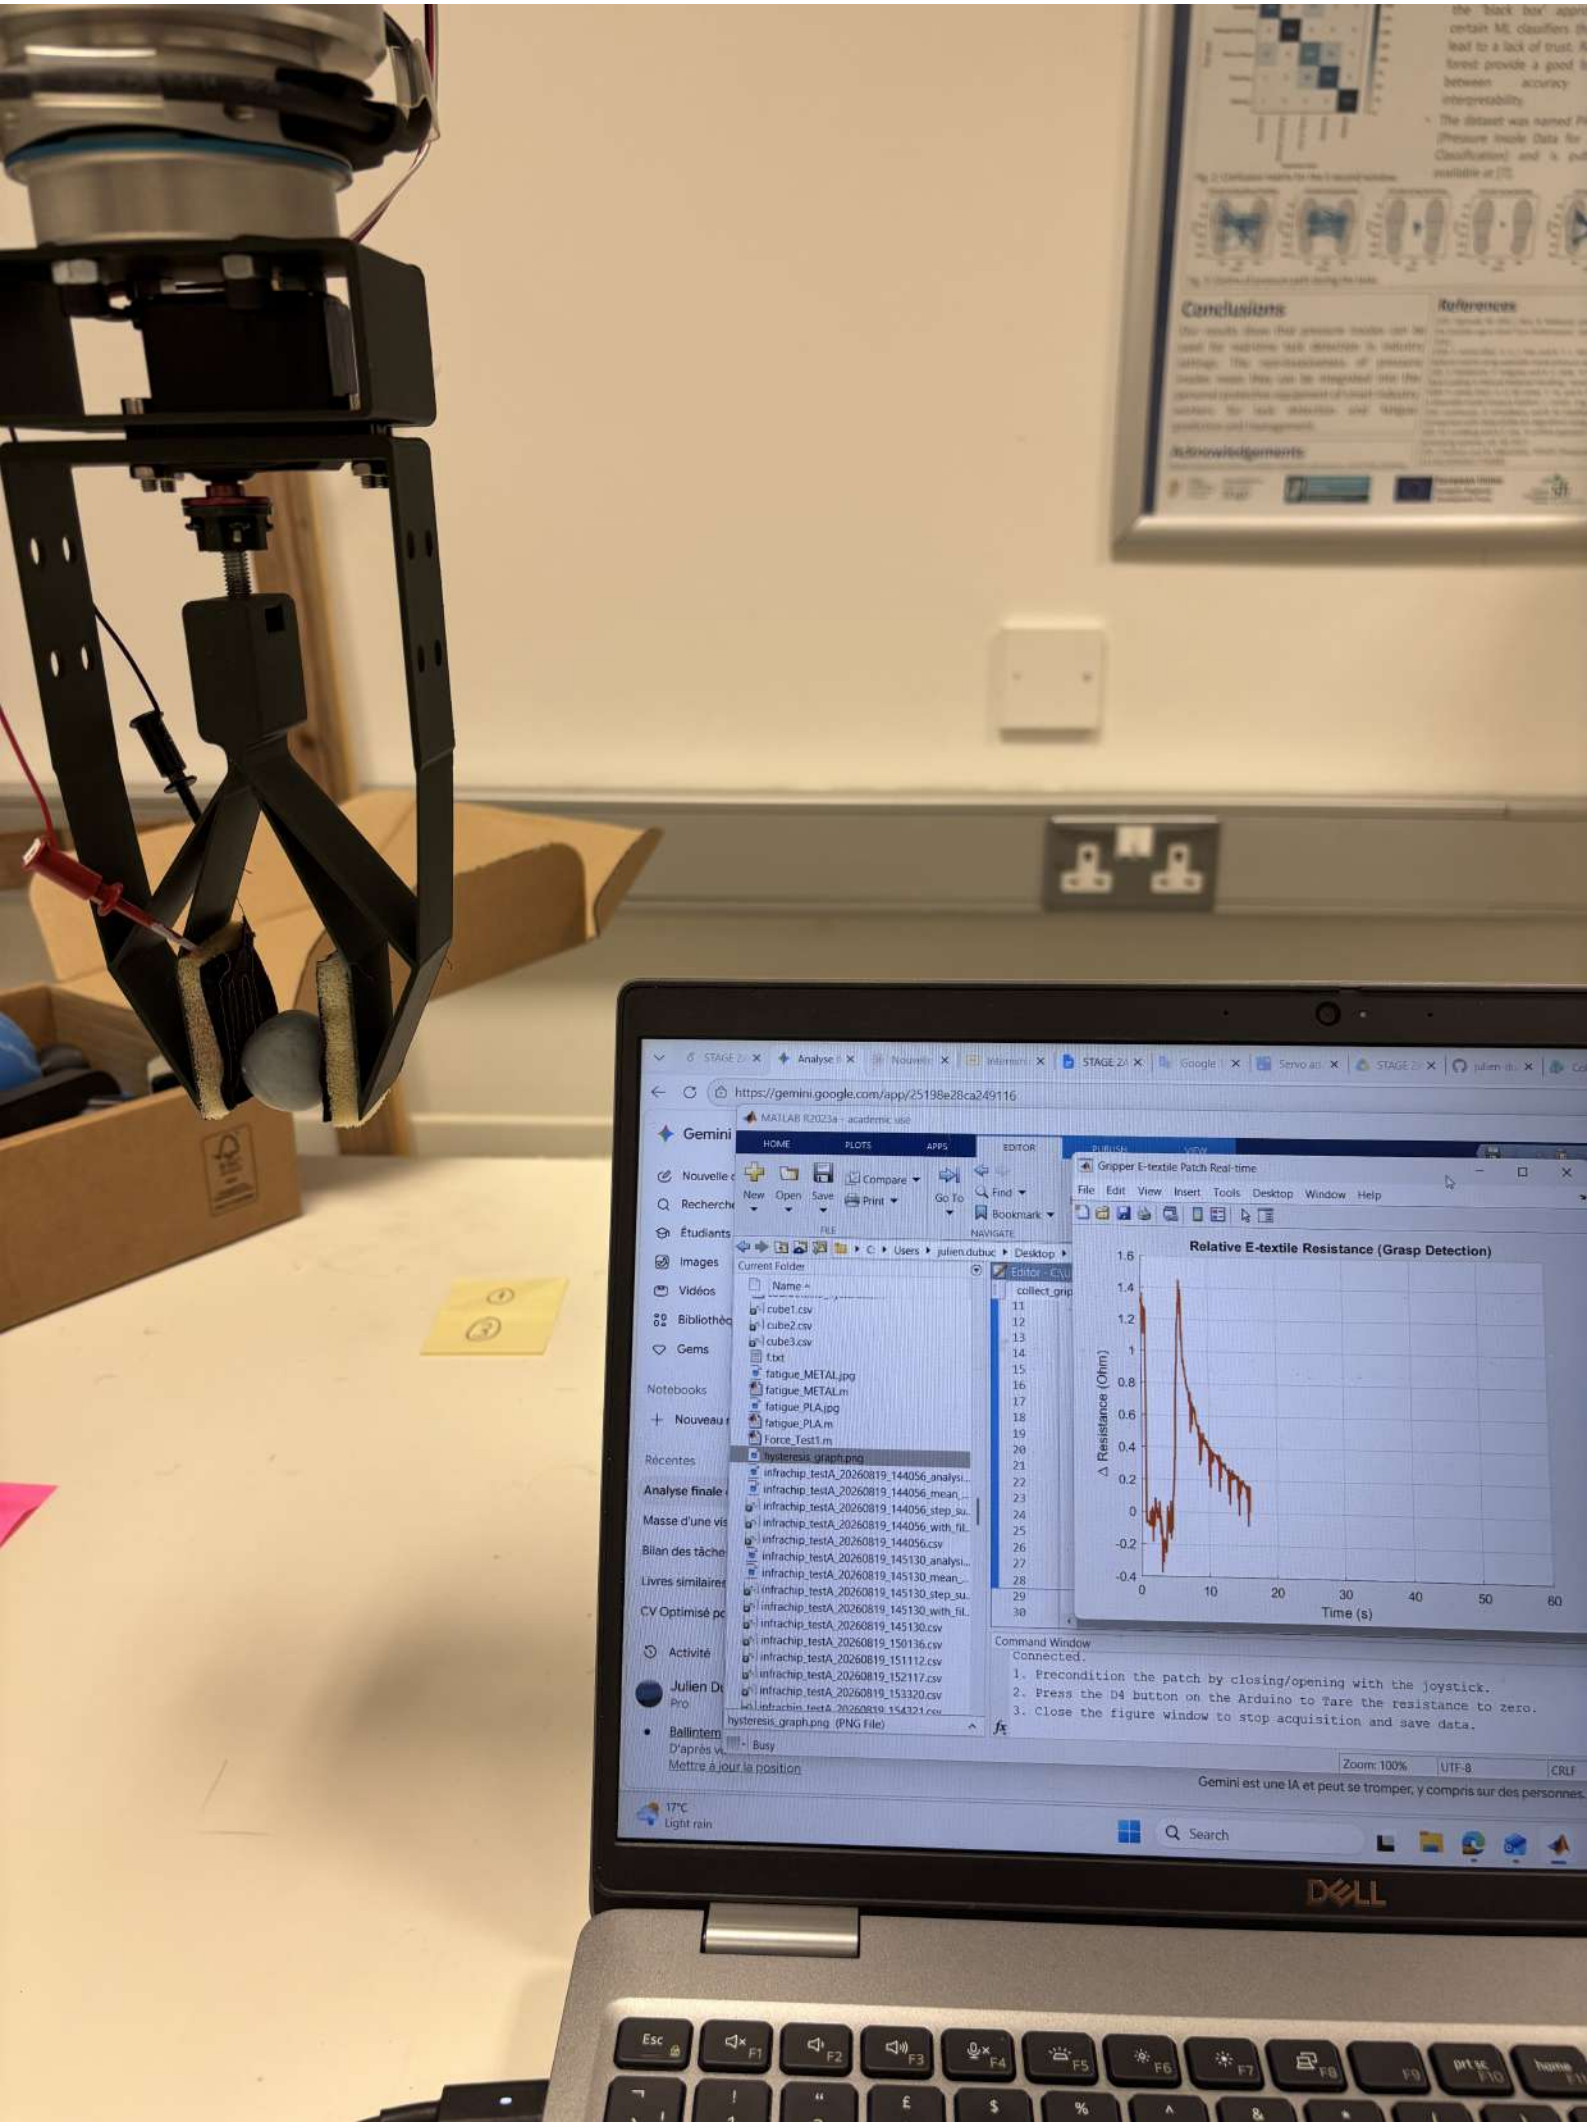
Conclusions
References
Acknowledgements
https://gemini.google.com/app/25198e28ca249116
Gemini
MATLAB R2023a - academic use
Gripper E-textile Patch Real-time
Relative E-textile Resistance (Grasp Detection)
Δ Resistance (Ohm)
Time (s)
Command Window
Connected.
1. Precondition the patch by closing/opening with the joystick.
2. Press the D4 button on the Arduino to Tare the resistance to zero.
3. Close the figure window to stop acquisition and save data.
Gemini est une IA et peut se tromper, y compris sur des personnes
DELL

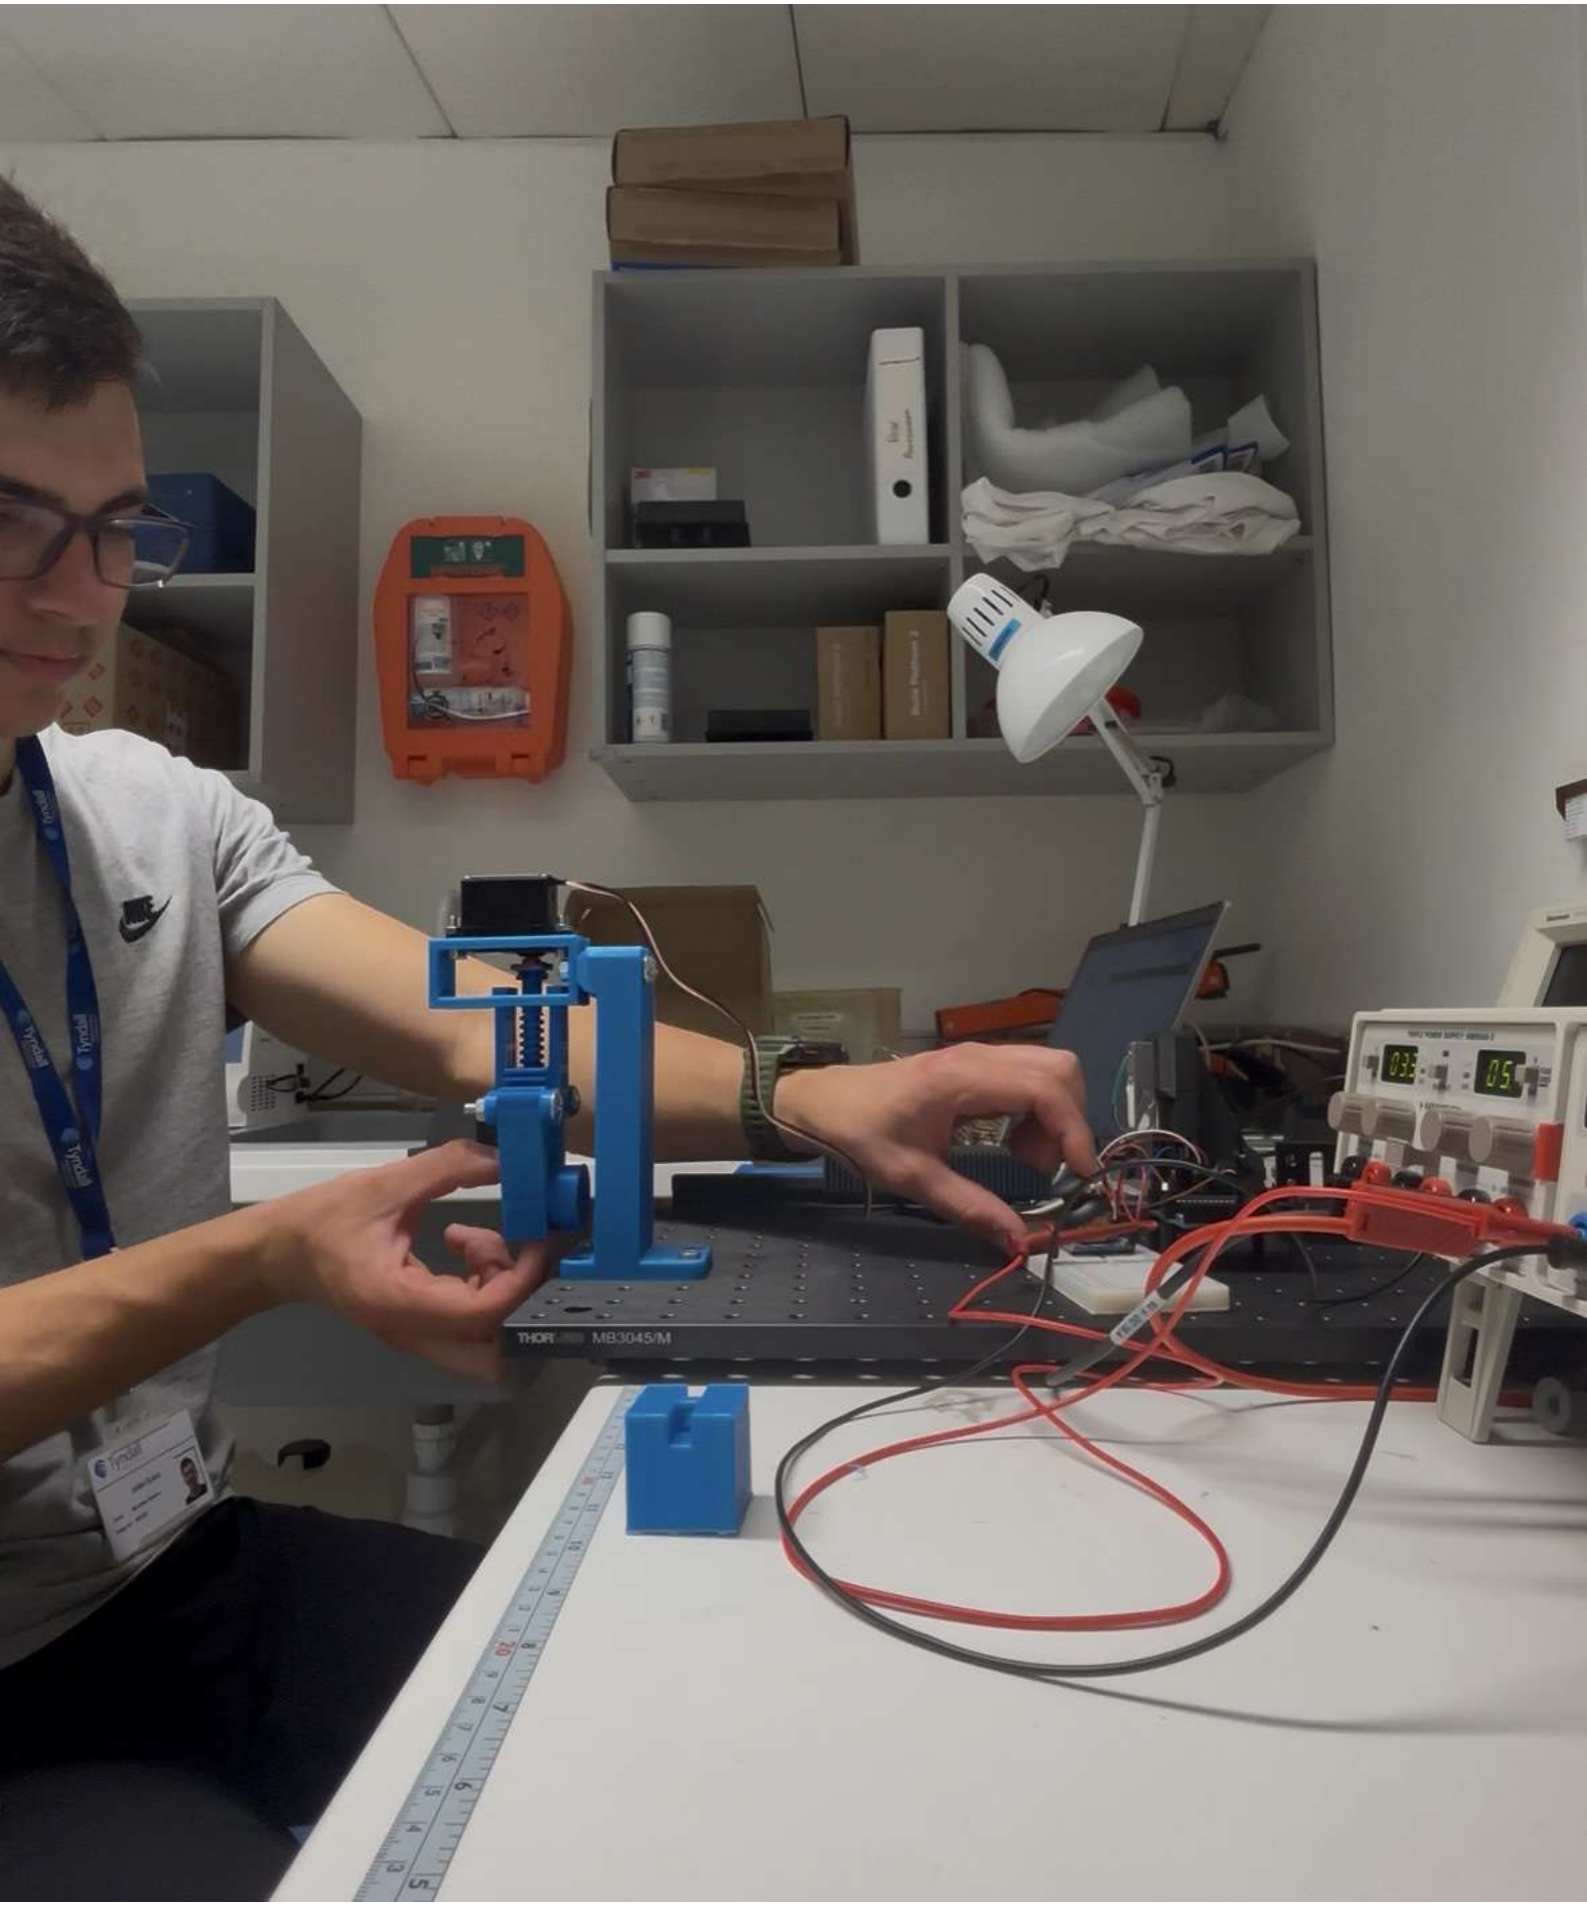
MB3045/M

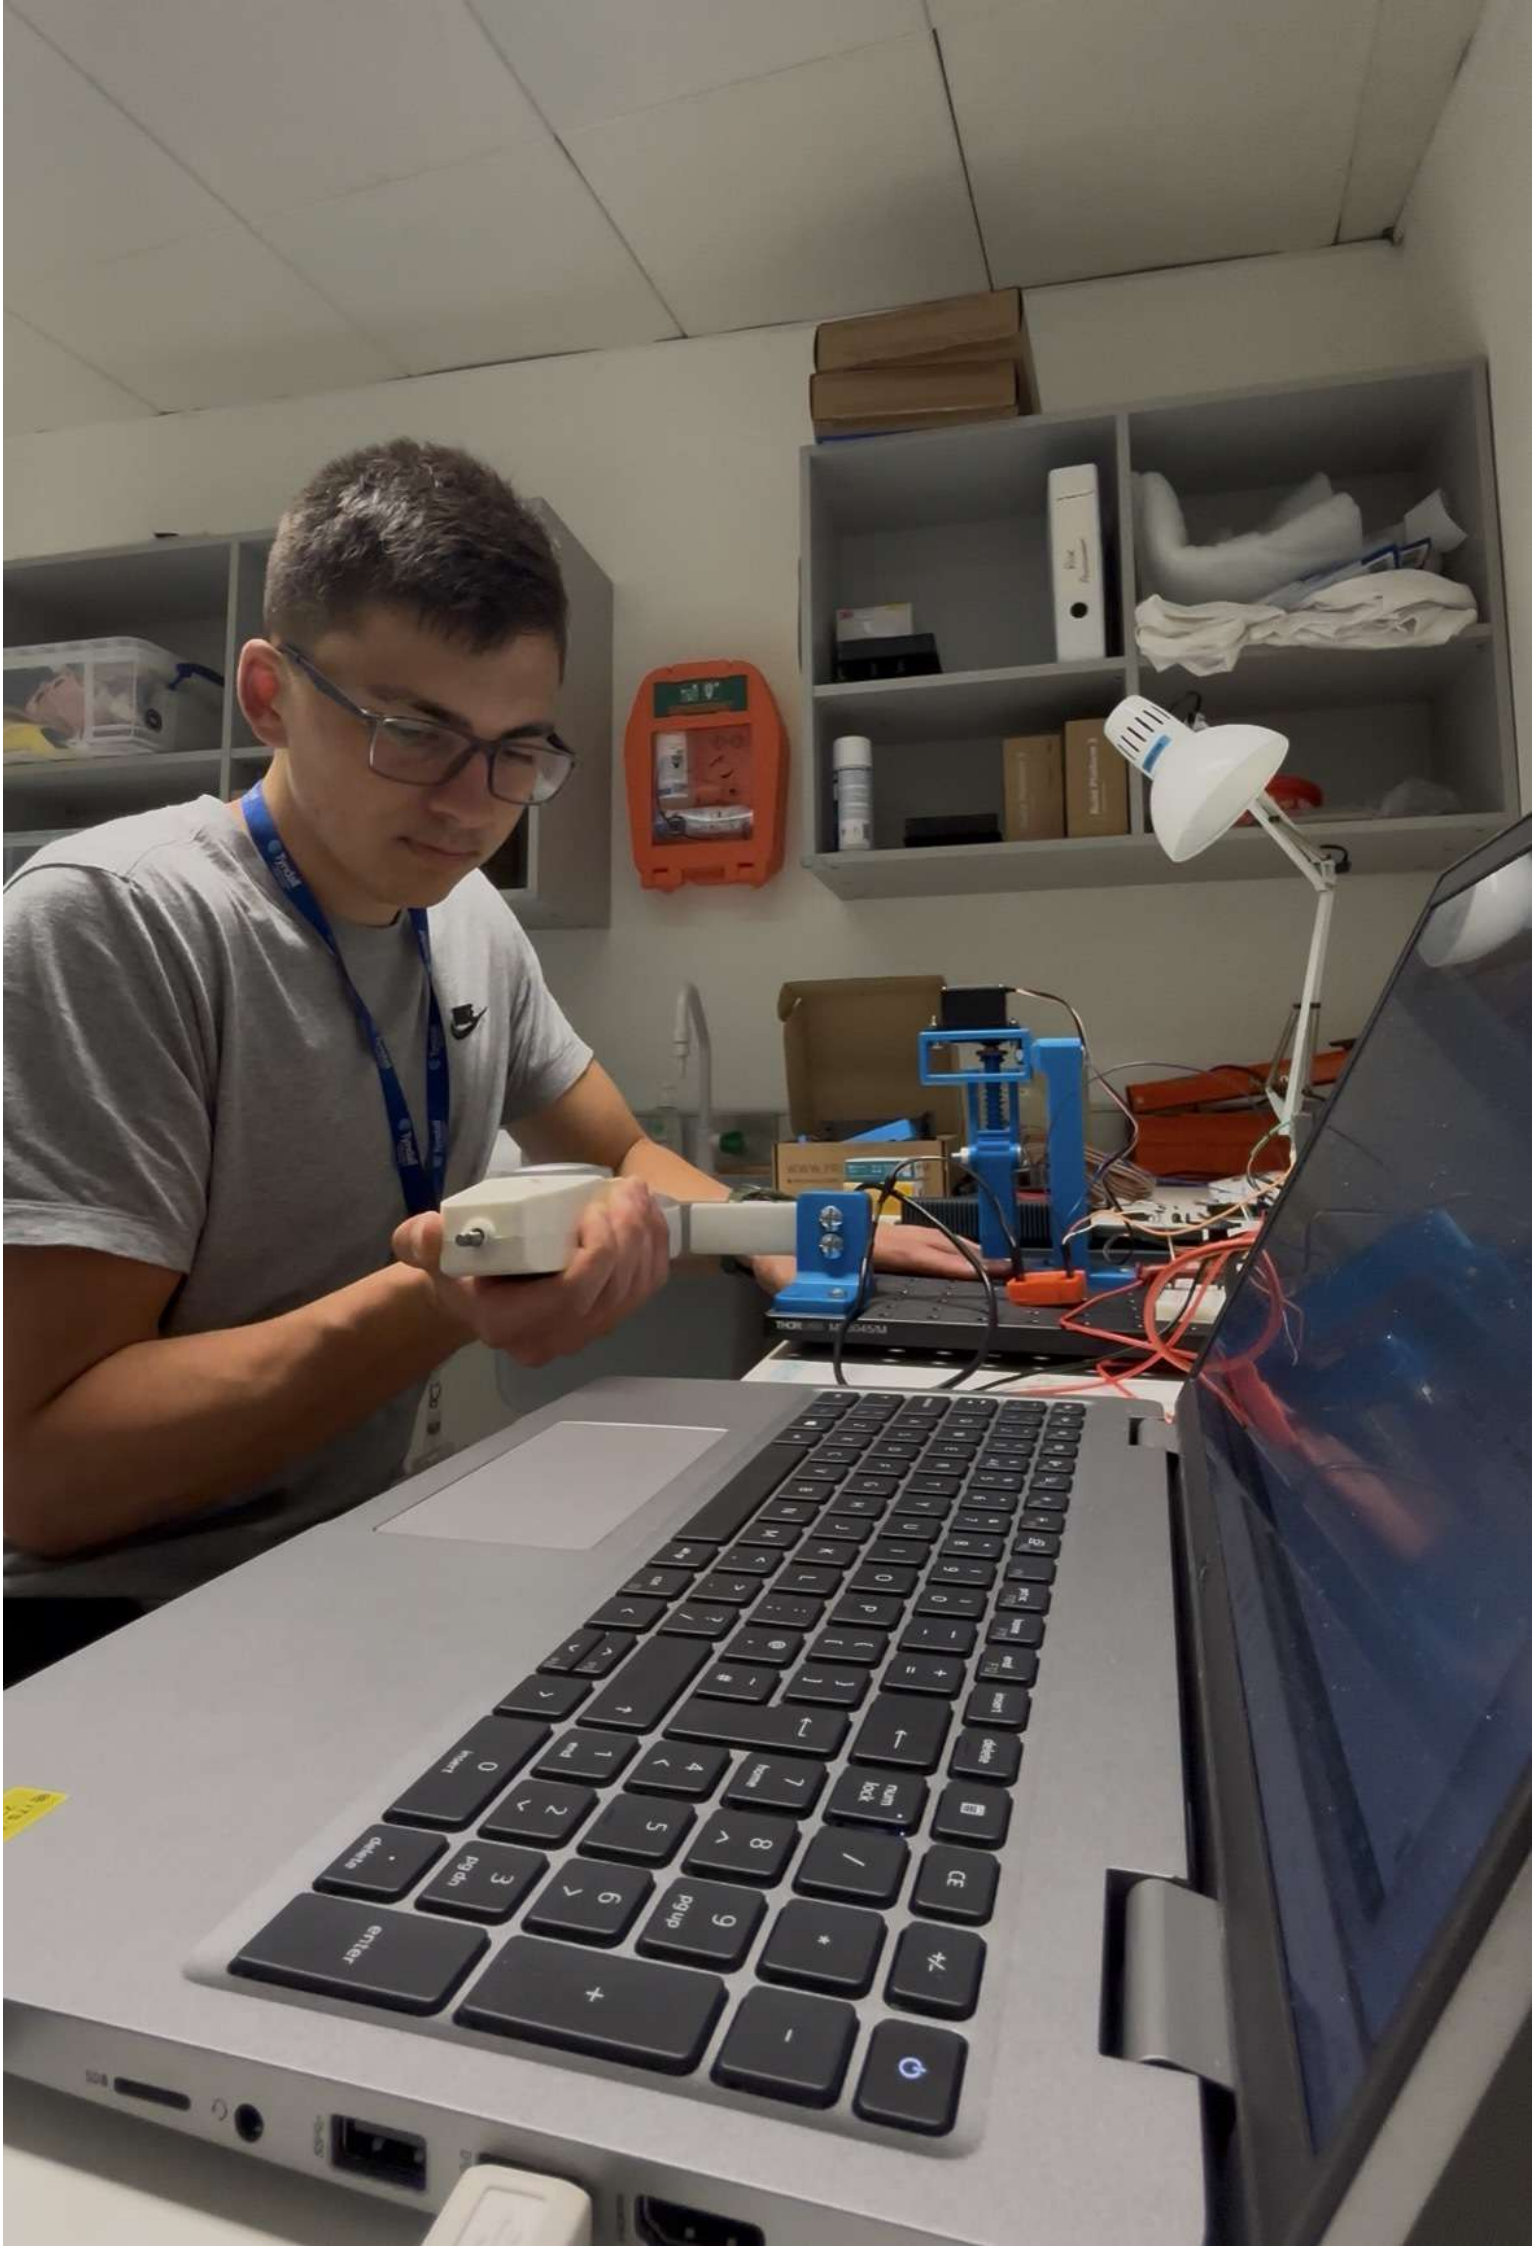


USB
INPUT
Micro USB
INPUT
DISPLAY
RESET
Type-C
OUTPUT
5.228 V
0.059 A
0.309 W
Type-C
INPUT
USB DIGITAL TESTER
YOJOCK
USB
OUTPUT

