

Embedded Processors and DSP Selection Guide 2010



Obtaining Information

How to Obtain Information from Analog Devices

Analog Devices publishes data sheets and a host of other technical literature supporting our products and technologies. Follow the instructions below for worldwide access to this information.

For Data Sheets and Application Notes

United States and Canada

1. Web

a. Our address is www.analog.com. Use the browser of your choice and follow the prompts.

b. We also provide extensive Embedded Processing and DSP literature at www.analog.com/processors.

2. To order the Embedded Processing and DSP Technical Documentation CD [pubcode CD05962-2.5-1/09(D)], contact the Analog Devices Literature Support Center

a. Call 800.262.5643 and select **option 2** from the voice prompts, or

b. Telephone 781.329.4700 for direct access, or

c. Fax your request to Analog Devices at 508.378.8440.

Asia

1. Southeast Asia Literature Support Centre

a. Fax your request to 800.810.0354 (for China only).

b. Fax your request to 65.67469115 (for all other Asian countries).

c. Our email address is asia.support@analog.com.

China

1. Web

Our address is www.analog.com/processors/china. Use the browser of your choice and follow the prompts.

2. Email

Embedded Processing and DSP Support:
processor.china@analog.com

Japan

1. Web

Technical Documentation for Embedded Processors in Japanese can be found at www.analog.com/processors/japan.

2. Telephone

Please check www.analog.com/jp/contact for the respective contact number.

3. Email

Input all inquiries in Japanese to
forms.analog.com/Form_Pages/support/dsp/dspSupport.asp.

Europe and Israel

1. Web

Our address is www.analog.com. Use the browser of your choice and follow the prompts.

2. European Literature Support Centre

a. Email litcentre@btconnect.com.

b. Fax your requests to 32.11.300.635.

India

1. Call 91.80.41194300 or fax 91.80.25216452 and request the data sheet of interest.

Other Locations

1. Web

Our address is www.analog.com. Use the browser of your choice and follow the prompts.

2. Analog Devices Sales Offices

Call your local sales office and request a data sheet.

For Other Technical Publications

An abundant variety of technical publications is available from Analog Devices. To request any of these publications in the United States, follow the instructions above to contact the Analog Devices Literature Support Center. In other locations, contact your local sales office.

Technical Support and Customer Service

In the United States and Canada, please call 800.ANALOGD (262.5643). For price, delivery, and samples, select **option 3**. For literature, select **option 2**.

Visit the EngineerZone technical support forum at EZ.analog.com.

Contact Embedded Processing and DSP Support via email at processor.support@analog.com.

Contact CROSSCORE Development Tools Support via email at processor.tools.support@analog.com.

In China, contact Embedded Processing and DSP Support via email at processor.china@analog.com.

In Japan, visit www.analog.com/jp/contact for the respective contact number or input all inquiries in Japanese to forms.analog.com/Form_Pages/support/dsp/dspSupport.asp.

In Europe and Israel, contact Embedded Processing and DSP Support via email at processor.europe@analog.com, telephone 49.89.76903.333 or fax 49.89.76903.157.

Contents

Introduction to ADI Processors			
ADI Embedded Processors Portfolio	2	SHARC Processor Family	44
Markets and Applications	3	SHARC Processor Family Selection Table	46
Technical Workshops and University Program.....	4	ADSP-21467/ADSP-21469	48
Online Training		ADSP-21371/ADSP-21375	50
Visual Learning and Development	5	ADSP-21367/ADSP-21368/ADSP-21369	51
Development Tools		ADSP-21366	53
CROSSCORE Development Tools.....	7	ADSP-21363/ADSP-21364	54
VisualDSP++ Integrated Development Environment	8	ADSP-21266	55
Extended Development Tools Products	12	ADSP-21262	56
CROSSCORE Development Tools Selection Table	13	ADSP-21261	57
Software Modules for Blackfin and SHARC Processors.....	14	ADSP-21161N	58
Additional Support		ADSP-21160	59
Third Party Developer Program.....	16	ADSP-21065L	60
Platforms and Reference Designs	16	TigerSHARC Processor Family	61
EngineerZone	16	TigerSHARC Processor Family Selection Table	61
Benchmarks.....	17	ADSP-TS203	62
Products and Selection Tables		ADSP-TS202	63
Blackfin Processor Family.....	20	ADSP-TS201	64
Blackfin Processor Family Selection Table	22	ADSP-TS101	65
ADSP-BF504/ADSP-BF504F/ADSP-BF506F	26	ADI Complementary Parts Guides	
ADSP-BF512/ADSP-BF514/ADSP-BF516/ADSP-BF518.....	28	Supervisory Devices and DSP Processors	66
ADSP-BF522/ADSP-BF523/ADSP-BF524/ADSP-BF525/		Power Management and DSP Processors	68
ADSP-BF526/ADSP-BF527	30		
ADSP-BF542/ADSP-BF544/ADSP-BF547/ADSP-BF548/			
ADSP-BF549	32		
ADSP-BF538/ADSP-BF538F.....	34		
ADSP-BF536/ADSP-BF537.....	35		
ADSP-BF534	37		
ADSP-BF561	38		
ADSP-BF531/ADSP-BF532.....	39		
ADSP-BF533	41		
ADSP-BF535	43		

ADI Embedded Processors Portfolio

Analog Devices embedded architectures feature simple yet powerful programming models and are supported by high quality development tools.

Blackfin Processors

High Performance, Low Power Processing

Blackfin® processors embody a new breed of embedded processors designed specifically to meet the computational demands and power constraints of today's embedded audio, video, and communications applications. Blackfin processors deliver breakthrough signal processing performance and power efficiency with a RISC programming model. Blackfin processors present high performance, homogeneous software targets that allow flexible resource allocation between hard real-time DSP tasks and nonreal-time control tasks. System control tasks can often run in the shadow of DSP and video tasks.

Blackfin Processors are Ideal for:

- Portable and networked digital media appliances
- Consumer communications and networks
- Automotive telematics, safety driver assistant, and infotainment
- Industrial instrumentation and medical equipment

SHARC Processors

Leadership in Floating-Point Applications

SHARC® processors offer exceptionally high floating-point DSP performance while integrating application-specific peripherals and interfaces designed to minimize overall system costs. The completely code-compatible family portfolio extends from entry-level products that are priced under \$10 to high-end products providing 450 MHz/2.7 GFLOPS of signal processing performance. The broad range of price and performance points available in the SHARC processor family makes its members particularly well-suited to applications ranging from consumer, automotive, and professional audio to industrial and medical applications.

All SHARC processors are based on a 32-bit Super Harvard Architecture that combines a high performance signal processing core with sophisticated memory and I/O processing subsystems. This balanced architecture enables unparalleled performance while ensuring that sufficient memory and I/O bandwidth are available for the most algorithmically challenging applications. In addition to these hardware-centric efficiencies, all SHARC processors offer a very flexible algorithm development environment by supporting a variety of fixed- and floating-point data types.

The latest members of the SHARC family off load some of the most frequently used and intensive processing into hardware accelerators. An accelerator dedicated for filter processing can reduce the MIPS load on the core, freeing it up for other tasks. The FIR/IIR/FFT accelerator units are capable of performing the filters and FFT without core intervention. This gives software developers enormous freedom to use the core MIPS to implement complex algorithms, effectively adding more MIPS to the processor.

SHARC Processors are Ideal for:

- Home theater audio systems
- Professional audio systems
- Automotive audio systems
- Industrial and instrumentation equipment
- Medical imaging
- Telephony

TigerSHARC Processors

Highest Performance Multiprocessor Systems

The TigerSHARC® processor family offers the industry's highest performance per watt and per square inch of board space for the most demanding signal and image processing applications. Its patented link port technology allows glueless interprocessor communication within arrays of two or more TigerSHARC processors, delivering unbounded performance in terms of MMACS and MFLOPS.

Based on a 128-bit static superscalar architecture, TigerSHARC processors offer native support of fixed- and floating-point data types and a balanced combination of computational performance, I/O bandwidth, and memory integration. Together, this yields sustained DSP system-level performance that is two to four times greater than conventional DSPs or microprocessors with vector processing units.

By providing native support for 1-bit data formats used for chip-rate processing, TigerSHARC processors pioneer a new class of software-defined radios and serve applications that were previously the exclusive domain of expensive ASICs (application-specific integrated circuits) and FPGAs (field-programmable gate arrays). In addition, by moving to a software-centric design model, TigerSHARC processors allow IP reuse, which greatly enhances R&D productivity throughout each successive product generation.

TigerSHARC Processors are Ideal for:

- Wireless infrastructure WiMAX applications such as 802.16 and other advanced standards (e.g., OFDM), base stations, and software-defined radios
- Floating point, performance density related systems in both the single and multiprocessor environments
- Medical imaging equipment (e.g., CAT scan, ultrasound, and MRI)
- Military equipment (e.g., radar/sonar, munitions targeting, and optoelectronics)
- Industrial and instrumentation equipment
- Automated test equipment

Markets and Applications

Market	Applications	Architecture/ Platform
<i>Communications</i>		
Broadband	Broadband over Power Lines	Blackfin
	Digital Media Gateways (VOD)	Blackfin
	Home Networking	Blackfin
	IP PBX	Blackfin
	IP Set-Top Box	Blackfin
	Media Node	Blackfin
	Multimedia over IP	Blackfin
	Video Conferencing/Phone	Blackfin
	Video Surveillance/Security	Blackfin
	Voice over IP	Blackfin
Wireless	Access (Broadband) (i.e., 802.16 ...)	Blackfin, TigerSHARC
	Base Station	TigerSHARC
	Cellular Location	Blackfin
	Satellite Phone	Blackfin
<i>Automotive</i>		
In Cabin	Audio Amplifier	SHARC
	Audio Jukebox	Blackfin
	Digital Radio	Blackfin
	Driver Assistance	Blackfin
	Handsfree	Blackfin
	Head Unit	Blackfin, SHARC
	Multimedia Device Interface	Blackfin
	Navigation	Blackfin
	Occupancy/Classifications	Blackfin
	Premium Audio System	SHARC
Consumer	Rear Seat Audio/Video	Blackfin
	Biometrics	Blackfin, SHARC
	Video Surveillance	Blackfin
	Digital Home Video Appliance	Blackfin
	Digital Network Media Devices	Blackfin
	Digital Radio	Blackfin
	Digital Still Camera	Blackfin
	Digital TV (Audio)	Blackfin, SHARC
	Digital Video Camera	Blackfin
	Digital Video Recorder	Blackfin
Entertainment	DVD/HD DVD/Blu-ray	SHARC
	Home Server	Blackfin, SHARC
	Home Theater A/V Receiver	SHARC
	Wireless Headphones/Headsets	Blackfin
	IP Set-Top Box	Blackfin
	Networked A/V Receiver	Blackfin
	Portable Media Player/ Portable Entertainment Console	Blackfin
	Multimedia Accessories	Blackfin
	Professional Audio/Broadcast	SHARC
	Prosumer Audio	SHARC
Toys	Satellite Radio	Blackfin
	Interactive Toys	Blackfin
	Video Game Console	Blackfin

Market	Applications	Architecture/ Platform
<i>Industrial and Instrumentation</i>		
Medical	CT	Blackfin, SHARC, TigerSHARC
	Diagnostic	Blackfin, SHARC, TigerSHARC
	MRI	SHARC, TigerSHARC
	Patient Monitoring	Blackfin, SHARC, TigerSHARC
	Portable Medical	Blackfin, SHARC
	Ultrasound	Blackfin, SHARC, TigerSHARC
	X-Ray	SHARC, TigerSHARC
Point of Sale	Scanner	Blackfin
	Vending Machine	Blackfin
Test/ Measurement Equipment	ATE	Blackfin, SHARC, TigerSHARC
	Communications	Blackfin, SHARC, TigerSHARC
	Measurement	Blackfin, SHARC, TigerSHARC
	Data Acquisition	Blackfin, SHARC
Industrial	Factory Automation	Blackfin
	Industrial Control	Blackfin, SHARC, TigerSHARC
	Machine Control	Blackfin
	Metering	Blackfin
	Motor Control	Blackfin
	Network Management	Blackfin
	Power Control	Blackfin
	Power Inverters	Blackfin
	Robotics	Blackfin, SHARC, TigerSHARC
	Verification and Biometrics	Blackfin
Military/Aerospace	Video Surveillance Systems	Blackfin
	Vision Systems	Blackfin
	Radar	SHARC, TigerSHARC
	Sonar	SHARC, TigerSHARC
Guidance	Control	Blackfin
	Entertainment	Blackfin
Aerospace	Avionics	Blackfin, SHARC, TigerSHARC
	Communications	Blackfin, TigerSHARC
	Digital Radio	Blackfin, SHARC, TigerSHARC
	Location	Blackfin, TigerSHARC
	Military Imaging	TigerSHARC
	Radar/Sonar	SHARC, TigerSHARC
	Smart Munitions	TigerSHARC
	Target Detection	TigerSHARC
Military		



Technical Workshops and University Program

Technical Workshops

Cut your time to market by getting up to speed fast. The embedded processing and DSP system development and programming workshops provide comprehensive hands-on training on Analog Devices embedded processors and DSPs. The workshops are geared toward people who have a working knowledge of microprocessors and want to learn how to use Analog Devices embedded processors and DSPs. These courses cover the DSP architecture, assembly language syntax, I/O interface, hardware, and software development tools. Throughout the workshop, attendees learn how easy it is to use Analog Devices embedded processors and DSPs from lecture sessions and hands-on exercises.

1-Day Workshops and Seminars

Workshops and seminars for those who want to evaluate the capabilities of ADI high performance embedded processors and development tools. Practical issues and concerns will be addressed in addition to the strengths and power of these devices.

Multiday Workshops

In-depth technical training designed to develop a strong working knowledge of embedded processors and development tools through lecture and hands-on exercises. Workshops are typically 3.5 days and presented by Kaztek Engineering's ADI-trained instructors.

University Workshops

These workshops are presented by ADI's worldwide university network and are taught by local university professors who are supported by Analog Devices embedded processor and DSP application teams.

For more information and schedules, visit
www.analog.com/processors/workshops.

ADI Embedded Processing and DSP University Program

The Analog Devices DSP University Program promotes embedded and digital signal processing education and research at engineering institutions worldwide. It provides the next generation of engineers with embedded processing and DSP knowledge to help them compete in the industry of tomorrow.

Benefits of the ADI DSP University Program

- Lab recommendations
- Complete software and hardware tools to set up an embedded processor or DSP lab
- Discounts on development tools
- Discounts of up to 90% on hardware and software development tools
- Teaching resources
 - Sample lectures and labs
- Discounts on ADI embedded processor and DSP workshops
 - In-depth, hands-on, 3.5-day training sessions

Analog Devices Technologies Are Ideally Suited for Teaching

- Embedded processor and DSP architectures that are the simplest in the industry to program
- Simple instruction sets
- High level of SRAM integration

To learn more about the program and available discounts, visit
www.analog.com/processors/university.

Online Training

Visual Learning and Development

Master the incredible potential of the Blackfin and SHARC processors and build better applications. Discover how without ever leaving your desk by taking one of the new Blackfin or SHARC online training modules.

The modules cover a wide range of topics that address different stages of your development cycle—from the fundamentals of Analog Devices' development tools to tips on how developers can optimize their system performance. These modules are designed to be used independently or in combination, depending on the experience and interest of the viewer.

Video Training Modules:

ADI Solutions for Video Surveillance Equipment

This 50-minute module provides an overview of Analog Devices products and solutions, including the Blackfin processor, for various video surveillance applications in the security market. Signal chain overviews of the broad ADI portfolio, as well as key partners, are included.

Processors in Portable Healthcare

This 15-minute module provides an overview of the evolving trends and requirements within select portable healthcare applications, mainly EKG, ECG, and AEG. It features the Blackfin processor portfolio and highlights the solutions it helps customers achieve when designing solutions for these applications. A key development partner is also featured.

SHARC Processor Overview

This 29-minute module provides an overview of the SHARC processor family. This webcast covers SHARC processors target markets, advantages, hardware overview, IP, DMA, and peripherals, concluding with additional support and resources.

SHARC ADSP-2146x Overview

This 60-minute module provides an overview of the SHARC ADSP-2146x processors, the newest members of the SHARC processor family. It provides an in-depth look at the key features of the ADSP-2146x family such as variable instruction size execution, DDR2 DRAM controller, thermal diode, and media local bus interface. Recommended viewing if this is the user's first look at the SHARC processor family.

Blackfin Core Architecture

This module introduces the Blackfin family, which includes the Blackfin processors, tools, and other development support that is available.

Lockbox Secure Technology on Blackfin Processors

This module focuses on the highlights of Lockbox™ technology on Blackfin processors.

Blackfin Optimizations for Performance and Power Consumption

This module is about optimizing your software design for the Blackfin processor for better performance and lower power consumption.

Introduction to the NI LabVIEW Embedded Module for ADI Blackfin Processors

Through numerous demonstrations, this course provides an introduction to the LabVIEW™ embedded module for the Blackfin development environment. Starting with simple application examples this course covers building, downloading, and running virtual instruments on the Blackfin processor as well as peripheral control, application tuning using background telemetry channels and seamless debugging support through the VisualDSP++® development environment.

Introduction to VisualDSP++ Tools

This module will give the user an overview of the VisualDSP++ Tools. For demonstration purposes, the ADSP-BF537 EZ-KIT Lite will be used as the target. Users will learn some quick tips on how to analyze and fine tune their applications.

Programming and Optimizing C Code on Blackfin Processors

This module introduces concepts, tools, and approaches to optimizing Blackfin C applications. It highlights the problems and opportunities that can lead to potential performance improvements and reviews the available tools/techniques. The module covers a wide range from automatic optimization to detailed rewriting of C expressions.

Blackfin System Services

This module discusses the system services software available for Blackfin processors. It is recommended that users have some understanding of the Blackfin architecture, basic knowledge of software terminology, and experience in embedded systems.

Performance Tuning on the Blackfin Processor

This module discusses the techniques users can use to tune system performance for Blackfin processors. Users should have some understanding of the Blackfin architecture, a basic knowledge of software terminology, and experience in embedded systems.

Basics of Building a Blackfin Application

This module describes the basic software build process of VisualDSP++, specific Blackfin programming “gotchas,” and basic code optimization strategies. Users will see an example demonstrating “zero effort” optimization by using built-in Optimizer and Cache.

Blackfin Device Drivers

This module discusses the device driver model for the Blackfin family of processors. It is recommended that users have an understanding of the Blackfin architecture and are familiar with the Blackfin system services software.



Online Training

Interfacing Blackfin with Audio and Video Peripherals

This module will familiarize the user with the principles behind connecting Blackfin processors to audio and video devices. It is recommended that users have some basic working knowledge of audio and video fundamentals.

Rapid Development of a Blackfin-Based Video Application

This module discusses the rapid development process of a Blackfin video application using readily available and fully supported software and hardware modules. It is recommended that users understand the basic knowledge of software terminology, have experience in embedded systems, and understand Blackfin systems services and device drivers.

Introduction to VDK

This 27-minute module provides an overview of the VisualDSP++ Kernel. A demonstration shows the basics of building and debugging VDK projects. Users should have previous experience with operating systems, as well as a basic knowledge of software terminology.

Multimedia Starter Kit

This 52-minute module introduces the Multimedia Starter Kit. A demonstration covers JPEG and MJPEG. Users should have previous experience with embedded systems, basic knowledge of software terminology, and familiarity with VisualDSP++, Blackfin processors, and ADI evaluation boards.

Using System Services Library and Device Drivers with VisualDSP++ Kernel in Blackfin Applications

This 50-minute module walks through the development of a Blackfin project that uses the System Services Library and Device Drivers (SSL/DD) in conjunction with the VisualDSP++ Kernel (VDK).

New modules are in development. To see the latest modules available or take a training module, visit www.analog.com/VLD.

Development Tools: CROSSCORE

Analog Devices CROSSCORE® development tools are focused on providing easier and more robust methods for engineers to develop and optimize systems by shortening product development cycles to reduce time to market.

- VisualDSP++ development environment
- EZ-KIT Lite® evaluation kits
- EZ-Extender® daughter boards
- Emulators
- EZ-Board™ evaluation board
- Debug agent board

VisualDSP++ Integrated Development Environment

VisualDSP++ is an easy-to-install, easy to use, integrated software development and debugging environment (IDDE). More in-depth information is available on Page 10.

EZ-KIT Lite Evaluation Kit

These systems consist of a standalone evaluation board and an evaluation suite of VisualDSP++ to facilitate architecture evaluations via a PC-hosted tool set. Users can evaluate ADI's processors, learn about digital signal processing applications, as well as simulate, debug, and prototype applications.

EZ-Extender Daughter Boards

EZ-Extender daughter boards give developers access to and the ability to connect to various peripherals from Analog Devices and third parties via the expansion interface of the EZ-KIT Lite evaluation kits.

Emulators

Analog Devices cost-effective and high performance emulators provide an easy, portable, nonintrusive, target-based debugging solution for Analog Devices JTAG processors and DSPs. These powerful emulators perform a wide range of emulation functions, including single-step and full speed execution with predefined breakpoints, and viewing and/or altering of register and memory contents.

See the Development Tools Table on Page 13 for available tools for Blackfin and SHARC processors.

EZ-Board Evaluation Boards

The EZ-Board evaluation board provides developers with a low cost platform for initial evaluation of the processors via an external emulator or µClinux.® The EZ-Board has an expansion interface that allows for modularity with different expansion board types with and without debug agents. The interface also provides a solution to user defined pins reserved for specific processor types and EZ-KIT Lite evaluation kits, multifunction pins, signal terminations, buffering, timing, and interface guidelines.

Debug Agent Board

The standalone debug agent is intended to provide a modular low cost emulation solution for EZ-Board evaluation boards as well as evaluation boards designed by third parties. The standalone debug agent is very similar to the debug agent that is on existing EZ-KIT Lite evaluation kits but has the flexibility to move from one board to another board.



VisualDSP++ Integrated Development Environment

Features

Integrated Development and Debugging Environment

- Supports all Analog Devices processors and DSPs
- Multiple project management
- Profiling and tracing of instruction execution
- Automation API and automation aware scripting engine
- Multiple processor support
- Background telemetry channel (BTC) support with data streaming capability
- Statistical profiling
- Graphical plotting capabilities
- Cache visualization
- Execution pipeline viewer
- Compiled simulation

Efficient Application Code Generation

- Native C/C++ compiler and enhanced assembler
- Profile guided optimization (PGO)
- Expert linker with profiling capability
- Integrated source code control
- TCP/IP and USP support for Blackfin processors
- Processor configuration/start-up code wizard for Blackfin processors
- VisualDSP++ Kernel (VDK) with multiprocessor messaging capability
- System services and device driver support for Blackfin processors
- File system support for Blackfin processors


Platform and Processor Support

VisualDSP++ Release 5.0 supports Analog Devices Blackfin processor, TigerSHARC processor, and SHARC processor families. Windows® XP, Windows 2000, and Windows Vista® hosts are supported.

Description	Part Number
VisualDSP++ Test Drive 90-day free trial	VDSP-BLKFN-PC-TEST
	VDSP-TS-PC-TEST
	VDSP-SHARC-PC-TEST

VisualDSP++ Development and Debugging Environment

VisualDSP++ is a state-of-the-art software development environment targeting the Analog Devices embedded processor portfolio. With the embedded software engineer and signal-processing-intensive applications specifically in mind, VisualDSP++, coupled with Analog Devices in-circuit emulator (ICE) and EZ-KIT Lite evaluation products, provides best-in-class capabilities for developing demanding real-time applications.

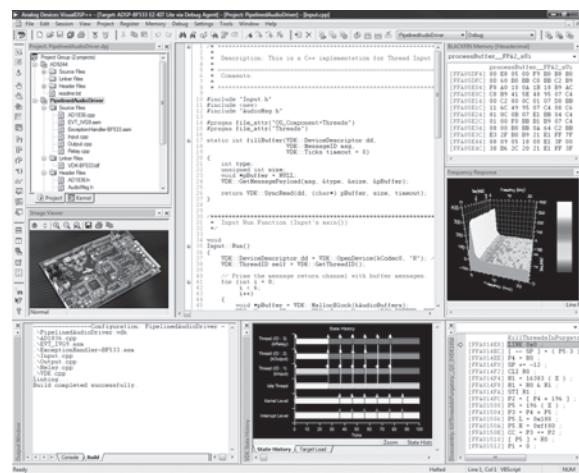

VisualDSP++ interface.

Develop High Performance Applications Quickly

At the heart of VisualDSP++ is a robust and powerful C/C++ compiler. The compiler consistently delivers industry-leading performance on standard benchmarks, ensuring that all but the most performance-demanding applications can be written entirely in the C language, accelerating development time while maintaining a portable code base. The compiler is backed by a rich library of signal-processing routines, allowing easy access to hand-coded, optimized implementations of FFTs, FIRs, etc. The Blackfin and SHARC compilers support MISRA-C:2004 for safety-critical embedded systems (www.misra-c.com).

The ANSI-C compiler is also augmented with popular language extensions and enhancements to make it more amiable to existing code bases. Examples include GNU GCC extensions, ETSI fractional libraries, and multiple heap support.

A compiler's first job is to produce correct code, so there are occasions when the compiler must take a conservative approach to a code sequence when a more aggressive approach should have been taken if certain constraints were guaranteed by the programmer. The VisualDSP++ compiler supports a broad range of pragma that allows the programmer to better exploit the compiler while maintaining C language neutrality. Just as important, the compiler has the ability to feed back advisory information to the programmer, offering further improvements to a code sequence should the programmer be able to make certain guarantees about it. This information is displayed seamlessly in the VisualDSP++ main editor window. This "lifts the veil" off the "black box" that compilers are often, and accurately, accused of being.

VisualDSP++ Integrated Development Environment

```
#include <fract.h>
fract32 sp (fract16* a, fract16* b)
{
    int i;
    fract32 sum = 0;

    #pragma all_aligned
    for ( i = 0; i < 100; ++i )
    {
        sum += a[i] * b[i];
    }

    return sum;
}
```

[Info] This loop executes 2 iterations of the original loop in estimated 1 cycles.
[Info] Loop was vectorized by a factor of 2
[Advice] Consider using pragma extra_loop_loads for this loop.

Backing the compiler is a powerful assembler and linker technology. Analog Devices processors are noted for their intuitive algebraic assembly language syntax, and the VisualDSP++ assembler extends that ease of use with the ability to import C header files, allowing for symbolic references into arbitrarily complex C data structures. Binary data can be “included” directly into assembly source files, creating an easy way to add blocks of static data (such as audio samples and bitmaps) to an application. The VisualDSP++ linker is fully multicore and multiprocessor (MP) aware, allowing for the creation of cross-linked, multi-executable applications in a single pass. Other powerful capabilities of the linker include dead code and data elimination, code and data overlays, section spilling (i.e., automatic overflow from internal to external memory), and automatic short-to-long call expansion.


Leverage Proven Application Infrastructure

VisualDSP++ goes beyond robust code generation tools, providing considerable application infrastructure and “middleware” out-of-the-box to speed application development. The VisualDSP++ Kernel (VDK) is a robust, royalty-free real-time operating system (RTOS) kernel. It provides essential kernel features in a minimal footprint. Features include a fully pre-emptive scheduler (time slicing and cooperative scheduling are also supported), thread creation, semaphores, interrupt management, inter-thread messaging, events, and memory management (memory pools and multiple heaps). In MP environments, MP messaging is also provided. Configuration of these elements is done graphically, with code wizards to speed the creation of new threads and interrupt handlers. VDK has been available for multiple releases of VisualDSP++ and is now a key component of products shipping from a number of high volume vendors. Several commercial RTOSs are also available from select Analog Devices third parties.

Blackfin processors can take advantage of the system service library (SSL), which provides consistent, easy C language access to Blackfin features such as the interrupt manager, direct memory access (DMA), and power management units. Clock frequency and voltage can be changed easily at run time through a set of simple APIs. Interrupt handling can be “live,” fired at the time of the event, or “deferred” to a later time of the application’s choosing. A device manager integrates device drivers for on- and off-chip peripherals. VisualDSP++ includes ever expanding device driver support for all on-chip peripherals and off-chip devices found on Analog Devices EZ-KIT Lite and EZ-Extender® products. The SSL is OS-neutral and can be run as a standalone or in conjunction with an RTOS.

Built upon the system service library, the file system service (FSS) provides a portable and extensible means of accessing mass storage media from the Blackfin processor. Support for the ADSP-BF548 EZ-KIT Lite development board is provided with VisualDSP++ 5.0 for FAT file systems on the attached hard disk drive, supplied SD card, and USB flash.

As embedded applications become increasingly part of the “connected world,” the ability to rapidly add reliable Ethernet or USB connectivity to an application can often make or break a development schedule. For Blackfin processors, VisualDSP++ includes a tuned port of the open-source LwIP TCP/IP stack. An example application showcasing an embedded Web server is among the highlights of this support. For Blackfin processors and SHARC processors, USB 2.0 device connectivity is provided. Bulk and asynchronous transfer modes are supported out of the box, with USB-IF logo certified embedded and host applications provided with full source code.

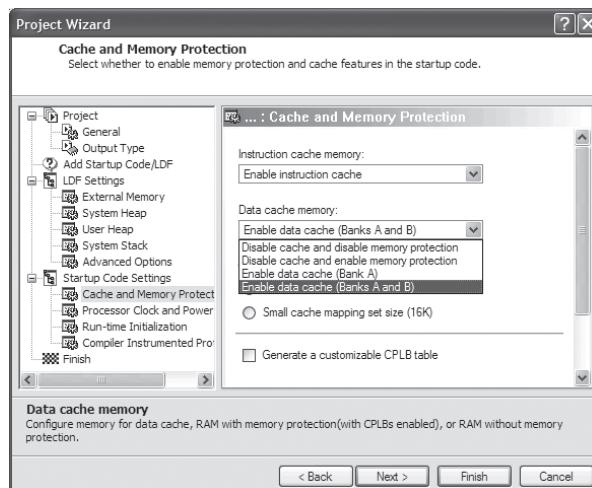

Source code generation.

Wrapping all of these powerful tools and libraries is the VisualDSP++ state-of-the-art integrated development and debugging environment (IDDE). The IDDE includes full-featured editing and project management tools, with incremental builds, multiple build configurations (“debug” and “release,” for example), syntax-coloring editor, and many other code editing features. Makefiles can be imported and exported freely. For Blackfin processors, many application attributes can be configured graphically, enabling point-and-click access to SDRAM setup, stack and heap placement, power management, clock speed, cache setup, and more.

Debug and Tune Your Application with Ease


The ability to develop a high performance application is often gated by the visibility into the running system that your debugger provides. VisualDSP++ excels in this regard, with best-in-class debugging and inspection support. Robust fundamental C language source debugging (source level stepping and breakpoints, stack unwinds, local variable and C expression support, memory and register windows) serves as a foundation upon which multiple innovative and unique tools rest.



VisualDSP++ Integrated Development Environment


VisualDSP++ supports a variety of debugging “targets.” Most common is a JTAG connection to an EZ-KIT Lite board or to a custom target board by means of Analog Devices emulator products. However, there will be occasions where closer inspection in a simulated environment may be required. VisualDSP++ provides core cycle-accurate simulators, allowing inspection of every nuance of activity within the processor, including visualization of the processor’s pipeline and cache. These simulators are robust and highly accurate, so much so that they are used by Analog Devices’ own silicon designers for validation. A second simulator is available to Blackfin processor users—a high speed functional simulator. Using proprietary just-in-time (JIT) technology, the simulators have the ability to simulate millions of cycles per second on the most modest of host PCs. Effectively, this means that what used to be an overnight run is now a 10-minute coffee break, and what was once a coffee break is now a near instantaneous simulation.

As many of the most performance-demanding applications process a signal of some sort, comprehensive memory plotting is a cornerstone of VisualDSP++ debugger support. VisualDSP++ provides multiple views, from basic (line plots) to sophisticated (eye diagrams and waterfalls), to pinpoint anomalous data sequences in your application. Image viewing in a number of data formats is also available.

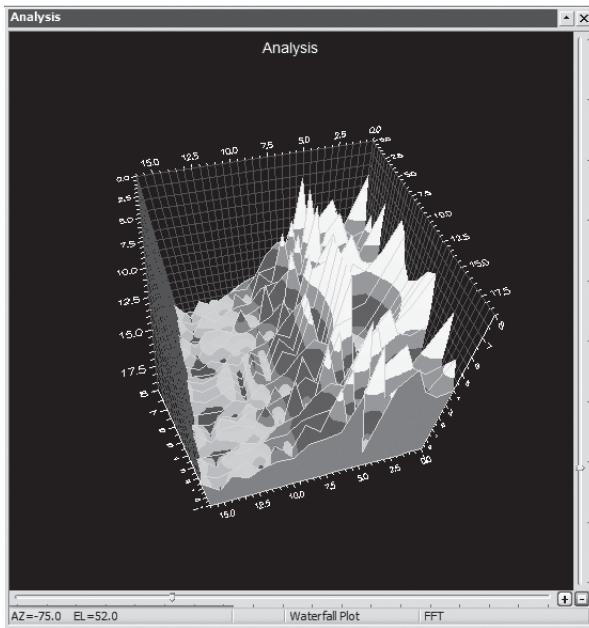

Comprehensive memory plotting.

Users of the VDK get unparalleled visibility into the internals of the kernel. Status on a per-thread basis is available, as is a comprehensive pictorial history of kernel events and CPU loading. Thread changes, posted and pending semaphores, and other kernel events are captured in this display.

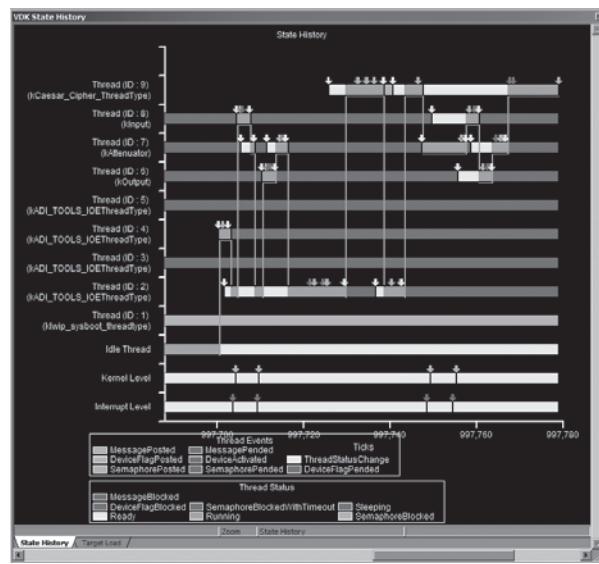

Kernel event history.

For Blackfin processors and SHARC processors, inspection, or even application stimulation, from the debugger at run time is possible through the use of the processor’s background telemetry channel (BTC). BTC allows for an arbitrary number of communication channels to be established between the host debugger and application. Channels may go in either direction, so BTC can be used to read and write data as the processor runs. Scalar values or entire arrays may be serviced by a channel. Arrays read from the target can even be plotted in real time.

MP users get the same compelling set of debugging features across all processors, unified into a single debugging interface. Individual windows can be made to “float” their focus to whichever processor currently is the debugger’s focus, or they can be “pinned” to a specific processor so their contents do not follow the debugger’s focus. To further aid MP debug, synchronous run, step, halt, and reset are also provided.

The Analog Devices patented statistical profiler offers unprecedented and unique visibility into a running application. Operating completely nonintrusively to the application, the application is polled thousands of times per second, and a statistical view of where an application is spending the majority of its time is quickly assembled. This tool can be used to easily inspect an application for unexpected hotspots (suggesting the need to move a key routine from external to internal memory, for example). Simulator targets provide a completely linear profiling view. For Blackfin processors, traditional instrumented profiling is also available.

Going even further, the VisualDSP++ compiler is able to act upon profiling information. Profile-guided optimization (PGO) is a technique that allows the compiler to instrument an application, run the application, and then make a second-pass compilation, exploiting the information that was gathered during the run of the application. This gives the compiler unique insight on a block-by-block basis, allowing it to optimize with a level of granularity that is not possible with a tool that operates only a file-by-file basis.

VisualDSP++ *Integrated Development Environment*

Integrate into Your Existing Environment

A development tool suite is always a part of an organization's larger software engineering environment. VisualDSP++ has been designed to operate in a larger environment.

Since an embedded engineer is often developing on a new platform while maintaining existing products that were likely developed with an earlier version of the tools, VisualDSP++ can be installed discretely an arbitrary number of times at a variety of release levels, allowing engineering to easily switch between current and legacy versions of VisualDSP++.

To better integrate to source code control (SCC) systems, VisualDSP++ is able to connect to any SCC provider that supports the Microsoft Common Source Code Control (MCSCC) interface. This interface is supported by all leading SCC vendors. VisualDSP++ goes one step further by supporting the control of VisualDSP++ itself within a source code control system.

The ability to robustly test an embedded application is enabled through a comprehensive automation application programmers interface (API). Using Microsoft's language-neutral automation technology, nearly every feature of the graphical environment is available to script authors.

Applications can be rebuilt, downloaded, and run from a simple script executed from the command-line or from within a custom test harness framework. The automation API is supported by C++ and VBScript examples for all API calls, though any automation-aware language can be used.

For prototype runs and/or small volume deployment, an Analog Devices emulator can be used to flash a program onto your custom system. Accessible through the automation API, the flash programmer can be scripted, making it possible to develop a turnkey user interface for use by a production floor technician or other individual not familiar with VisualDSP++. Device drivers are provided for all flash devices found on EZ-KIT Lite products, and these drivers are easily adjusted to support an arbitrary flash device.

The standalone flash programmer enables the development engineer to script or automate this process with a license-free tool, allowing the manufacturing technician to repeatedly program any number of boards prior to major production.

To download a test drive, visit www.analog.com/testdrive.



Development Tools: Extended Development Tools Products

In addition to CROSSCORE development tools, there are a variety of starter kits, hardware, and software available.

Starter Kit—provides everything needed to get started on an application. Starter kits contain a Blackfin EZ-KIT Lite, EZ-Extender daughter board(s), and the Software Development Kit (SDK), which contains sample code, “how to” documents, and various encoders/decoders that make getting started on an application easy and shortens the learning curve.

Software Development Kits (SDK)—contains example software, source code, device drivers, algorithms, utilities information, and application notes that allow you to develop processor applications. The software can be used as a framework, or as examples of how to use certain aspects and peripherals, in conjunction with an ADI processor. The SDK is included in the starter kits and is also available for free download, provided you have the required hardware, at www.analog.com/SDK/downloads.

Multimedia Starter Kit—provides everything you need to get started on a multimedia application. Using a Blackfin EZ-KIT Lite and EZ-Extenders daughter board(s) to perform multimedia related tasks, learn how to render/capture video and audio streams using various off the shelf multimedia devices. As well, the SDK contains source code, “how to” documents, and various encoders/decoders that make getting started easy and shorten the learning curve.

Audio Starter Kit—provides everything you need to get started on an audio application. Using an ADSP-BF537 Blackfin EZ-KIT Lite and EZ-Extenders daughter board(s) to perform audio related tasks, learn how to render audio streams using various off the shelf audio devices and from files available on PCs. As well, the SDK contains source code, “how to” documents, and various encoders/decoders that make getting started easy and shorten the learning curve.

Media Player Starter Kit—provides everything you need to get started on a media player application using a Blackfin EZ-KIT Lite and included software to perform audio and graphic related tasks. Learn how to render audio contents and images to the on-board peripherals from the on-board storage devices such as the hard drive and memory sticks. The SDK contains source code, “how to” documents, and various decoders that make getting started easy and shorten the learning curve.

µClinux—is an open-source OS that has gained significant attention and popularity over the past few years. There are several advantages to having open-source tools available for the Blackfin processor: source code availability, royalty-free licenses, reliability, community support, tools availability, networking support, portability, and an extensive application base. Developers have the opportunity to develop even the most demanding feature-rich applications in a very short time frame and can leverage the work of others in the community. The µClinux kernel and GNU toolchain have been ported to the Blackfin processor and are both available for download from the µClinux website. This website (www.blackfin.uclinix.org) is the central repository for all open-source Blackfin projects. Examples of current Blackfin projects are: GNU Toolchain for Blackfin (gcc 3.x), Uboot for the Blackfin Processor, CoLinux Port of Blackfin Tools, µClinux for Blackfin Documentation, JTAG Tools for Blackfin, Networked Audio Media Node, and Networked Oscilloscope.

One of the board support packages is the ADSP-BF537 STAMP µClinux Kernel board support package (BSP). The STAMP board has been specifically designed to support the development and porting of open-source µClinux applications and includes the full complement of memory along with serial and network interfaces. A variety of daughter cards that plug into this board are also available. Go to www.blackfin.uclinix.org for the most current open-source hardware and software information for the Blackfin processor.

NI LabVIEW Embedded Module for ADI Blackfin Processors—is a comprehensive graphical development environment for embedded design. This module builds on NI LabVIEW embedded technology, which facilitates dataflow graphical programming for embedded systems and includes hundreds of analysis and signal-processing functions, integrated I/O, and an interactive debugging interface. With the NI LabVIEW Embedded Module for ADI Blackfin Processors, users can easily access essential VisualDSP++ specific compiler options through LabVIEW such as the ability to enable cache, optimize linking, and view live front-panel updates via JTAG. To help debug those challenging designs, users can connect the host development PC to evaluation hardware or end product using an Analog Devices JTAG emulator. LabVIEW includes a wide array of built-in visualization features including tools for charting and graphing real-time data and reconfiguring attributes of data presentation, such as colors, font size, and graph types. Furthermore, users can dynamically tune applications at run time through live front-panel controls.

CROSSCORE Development Tools Selection Table

Processor	Hardware	Emulator	VisualDSP++ Development Software	Additional Software Available
Blackfin Processors				
ADSP-BF504	ADZS-BF506F-EZLITE	ADZS-ICE-100B ADZS-USB-ICE ADZS-HPUSB-ICE	VDSP-BLKFN-PC-TEST VDSP-BLKFN-PC-FULL VDSP-BLKFN-PCFLOAT VDSP-BLKFN-PCFLT-5	
ADSP-BF504F				
ADSP-BF506F				
ADSP-BF512/ADSP-BF512F	ADZS-BF518F-EZLITE			
ADSP-BF514/ADSP-BF514F	ADZS-BF518F-EZBRD			
ADSP-BF516/ADSP-BF516F	ADZS-DBGAGENT-BRD			
ADSP-BF518/ADSP-BF518F	ADZS-BFLLCD-EZEXT ADZS-BLUET-EZEXT ADZS-BFSHUSB-EZEXT			
ADSP-BF522/ADSP-BF522C	ADZS-BF526-EZLITE			
ADSP-BF524/ADSP-BF524C	ADZS-BF526-EZBRD			
ADSP-BF526/ADSP-BF526C	ADZS-BFLLCD-EZEXT ADZS-DBGAGENT-BRD			
ADSP-BF523/ADSP-BF523C	ADZS-BF527-EZLITE			
ADSP-BF525/ADSP-BF525C	ADZS-BF527-MPSKIT			
ADSP-BF527/ADSP-BF527C	ADZS-BFAV-EZEXT ADZS-BFFPGA-EZEXT			
ADSP-BF531	ADZS-BF533-EZLITE			
ADSP-BF532	ADZS-BLUET-EZEXT			
ADSP-BF533	ADZS-BF-EZEXT-1 ADZS-BFAV-EZEXT			
	ADZS-USBLAN-EZEXT			
	ADZS-BFAUDIO-EZEXT			
	ADZS-BFFPGA-EZEXT			
	ADZS-BF533-MMSKIT			
ADSP-BF535	—			
ADSP-BF534	ADZS-BF537-EZLITE			
ADSP-BF536	ADZS-BFAV-EZEXT			
ADSP-BF537	ADZS-USBLAN-EZEXT			
	ADZS-BFAUDIO-EZEXT			
	ADZS-BFFPGA-EZEXT			
	ADZS-BF537-STAMP			
	ADZS-BF537-ASKIT			
	ADZS-BFLLCD-EZEXT			
ADSP-BF538/ADSP-BF538F	ADZS-BF538F-EZLITE ADZS-BFLLCD-EZEXT			
ADSP-BF542	ADZS-BF548-EZLITE			
ADSP-BF544	ADZS-BF548-MPSKIT			
ADSP-BF547	ADZS-BLUET-EZEXT			
ADSP-BF548	ADZS-BFAV-EZEXT			
ADSP-BF549	ADZS-BFFPGA-EZEXT			
ADSP-BF561	ADZS-BF561-EZLITE ADZS-BF561-MMSKIT			
TigerSHARC Processors				
ADSP-TS101	ADZS-TS201S-EZLITE	ADZS-USB-ICE ADZS-HPUSB-ICE	VDSP-TS-PC-TEST VDSP-TS-PC-FULL VDSP-TS-PCFLOAT VDSP-TS-PCFLT-5	Mathworks (Not available on the ADSP-TS101)
ADSP-TS201				
ADSP-TS202				
ADSP-TS203				
SHARC Processors				
ADSP-21160M	ADZS-21160-EZLITE	ADZS-USB-ICE ADZS-HPUSB-ICE	VDSP-SHARC-PC-TEST VDSP-SHARC-PC-FULL VDSP-SHARC-PCFLOAT VDSP-SHARC-PCFLT-5	Mathworks (ADSP-21363, ADSP-21364, ADSP-21366, ADSP-21367, ADSP-21368, and ADSP-21369 only)
ADSP-21160N				
ADSP-21161N	ADZS-21161N-EZLITE			
ADSP-21261	ADZS-21262-EZLITE			
ADSP-21262	ADZS-21262-1-EZEXT			
ADSP-21266	ADZS-SHRCUSB-EZEXT			
ADSP-21363	ADZS-21364-EZLITE			
ADSP-21364	ADZS-SHRCUSB-EZEXT			
ADSP-21366				
ADSP-21367	ADZS-21369-EZLITE			
ADSP-21368	ADZS-SHRCUSB-EZEXT			
ADSP-21369				
ADSP-21371	ADZS-21375-EZLITE			
ADSP-21375				
ADSP-21467	ADZS-21469-EZLITE			
ADSP-21469	ADZS-21469-EZBRD ADZS-DBGAGENT-BRD ADZS-SHAUDIO-EZEXT ADZS-BFSHUSB-EZEXT			



Software Modules for Blackfin and SHARC Processors

Overview

Analog Devices (ADI) software modules are a series of popular audio and video algorithms for Blackfin processor-based designs and a series of SHARC processors. The highly optimized software modules allow you to quickly and easily incorporate these multimedia functions, providing a fast development path to the end product. The software modules feature a consistent API to ensure rapid integration of multiple software algorithms.

Developed internally by ADI, these software module implementations are provided free to Blackfin and SHARC processor software programmers. New and revised modules and their supported processors are added frequently. For the latest information on software modules go to www.analog.com/software.

Hardware Requirements

The software modules run on ADI EZ-KIT Lite evaluation boards and EZ-Extender daughter boards or on custom boards with supported processors.

Availability and Licensing

Each module supports ADI Blackfin and SHARC processors and is a licensed product that is available in object code format.

Licensing restrictions for Dolby, DTS, and Microsoft

The customer must be a licensee for Dolby®, DTS®, or Microsoft® before production code can be shipped for that particular algorithm. Dolby, DTS, and Microsoft modules have been certified on specific processors.

Worldwide Support

Each software module includes a detailed product reference guide and demonstration code to get you started. Online information for each module is available on ADI's website, www.analog.com/software. Additional support for designers and programmers is available by emailing software.module.support@analog.com. Support for system integration is available through ADI third parties.

Features

- Free implementation of multimedia VoIP and other popular algorithms
- Most available as production downloadable code from the Web
- Modules developed directly by Analog Devices
- Highly optimized—coded by ADI processor experts
- Consistent API (application programming interface) and framework across all modules
- Demonstration applications provided
- Uses ADI development tools
- Runs on the latest revision of VisualDSP++
- Support for Blackfin and SHARC processors

Each Software Module Includes

- Library module with a standard C-callable API consistent with other code modules
- Reference C source code interface routine that calls the code as a single library module
- Demonstration software for execution on ADI evaluation boards
- Documentation, including application notes and detailed developers guides

Software Modules for Blackfin and SHARC Processors

Blackfin Processor Software Modules

Software	Type
Adaptive Jitter Buffer	Telephony/VoIP
Asynchronous Sample Rate Converter (ASRC)	Audio Postdecoder
Audio Mixer	Telephony/VoIP
Bit Stream Detector (for S/PDIF)	Audio Preprocessor
Blackfin Image Processing Toolbox	Image/Video Processing Primitives
Blackfin 2D Graphics Library (BF2DGL)	Graphics Engine
Dolby Digital (AC-3) 5.1 Decoder	Audio Decoders and Postdecoders
Dolby Digital (AC-3) Consumer Encoder	Audio Encoders
Dolby Digital EX Decoder	Audio Decoder
Dolby Headphone v2	Audio Decoders and Postdecoders
Dolby Pro Logic IIx	Audio Decoders and Postdecoders
Dolby Virtual Speaker (DVS)	Audio Decoders and Postdecoders
DTS 5.1 Decoder	Audio Decoders and Postdecoders
DTS Neo:6	Audio Decoders and Postdecoders
Dual Tone Multifrequency (DTMF) Decoder	Telephony/VoIP
Dual Tone Multifrequency (DTMF) Generator	Telephony/VoIP
Enhanced Video Post Processing (eVPP)	Video Postprocessor
G.711 Appendix I Voice Codec with PLC	Voice Codec
G.723.1A Voice Codec	Voice Codec
G.729AB Voice Codec	Voice Codec
H.264 BP Decoder	Video/Imaging Decoder
H.264 BP Encoder	Video Encoder
H.264 BP/MP Encoder	Video Encoder
JPEG Decoder	Imaging Decoder
JPEG Encoder	Imaging Encoder
MP3 Decoder (with Layer 1 and 2 support)	Audio Decoders and Postdecoders
MP3 Encoder	Audio Encoder
MPEG-2 Video Decoder	Video/Imaging Decoder
MPEG-4 AAC-BSAC Decoder	Audio Decoders and Postdecoders
MPEG-4 AAC-LC Decoder	Audio Decoder
MPEG-4 HE-AAC v2 Decoder (with DAB+ and DRM support)	Audio Decoders and Postdecoders
MPEG-4 HE-AAC v2 Encoder	Audio Encoders
MPEG-4 SP/ASP Decoder Library	Audio Decoders and Postdecoders
MPEG-4 Simple Profile and Advanced Simple Profile Video Encoder	Video Encoder
Multiband Graphic Equalizer	Audio Postdecoder
Ogg Vorbis Decoder	Audio Decoder
RTP/RTCP	Telephony/VoIP
Signal Tone Detector with Modem/Fax Passthrough	Telephony/VoIP
Signal Tone Generator	Telephony/VoIP
Video Analytics Toolbox	Video/Imaging Postprocessors
Windows Media Audio (WMA9) Standard Decoder	Audio Decoders and Postdecoders
Windows Media Audio (WMA9) Standard Encoder	Audio Encoders
Windows Media Video (WMV9) Standard Decoder	Video/Imaging Decoder

SHARC Processor Software Modules

Software	Type
Asynchronous Sample Rate Converter (ASRC)	Audio Postdecoders
Dolby Advanced Fader	Audio Decoders and Postdecoders
Dolby Intelligent Mixer (eMix)	Audio Decoders and Postdecoders
Dolby Digital (AC-3) 5.1 Decoder	Audio Decoders and Postdecoders
Dolby Digital EX Decoder	Audio Decoder
Dolby Headphone (DH) Post Processing	Audio Decoders and Postdecoders
Dolby Pro Logic IIx	Audio Decoders and Postdecoders
Dolby Virtual Speaker	Audio Decoders and Postdecoders
DTS 5.1 Decoder	Audio Decoders and Postdecoders
DTS Neo:6 Matrix Decoder	Audio Decoders and Postdecoders

New modules are frequently being added.

Visit www.analog.com/software for the latest listing.



Additional Support

Third-Party Developers Program for Embedded Processor and DSP Applications

Find a Third Party to Help You Get Your Design to Market Faster

Analog Devices Third Party Developers network consists of companies all over the world that provide hardware products, software products, algorithms, and design services for a wide variety of applications and markets.

The third party search on our website allows you to quickly find the third parties that offer services for our Embedded Processors and DSPs. The interface allows you to easily filter our third party network by ADI processor(s) supported, offerings, regions supported, and markets and applications supported. You can also perform a keyword search of all the third party listings.

Visit the new Embedded Processing and DSP Third Party Search at www.analog.com/3rdparty.

Become an Analog Devices Third Party Developer at www.analog.com/join-thirdpartynetwork.

Platforms and Reference Designs

Platforms and reference designs help jump-start your design. They include comprehensive software suites with documented APIs running on application-specific evaluation boards. The easy to use APIs enable customization and control of core system functions, letting you focus on adding value through product differentiation. For more information on Analog Devices platforms, reference designs, and third-party reference designs, visit www.analog.com/software.

EngineerZone—A Technical Support Forum from Analog Devices


Where DSP Engineers Go for the Right Answers

EngineerZone is a new online technical support forum that provides direct access to DSP technical support engineers.

Features

- Search FAQs and technical information to get quick answers to your embedded processing and DSP design questions
- Connect with other DSP developers who face similar design challenges
- Share knowledge and collaborate with the ADI support team and your peers in this open forum

Join the forum at EZ.analog.com.

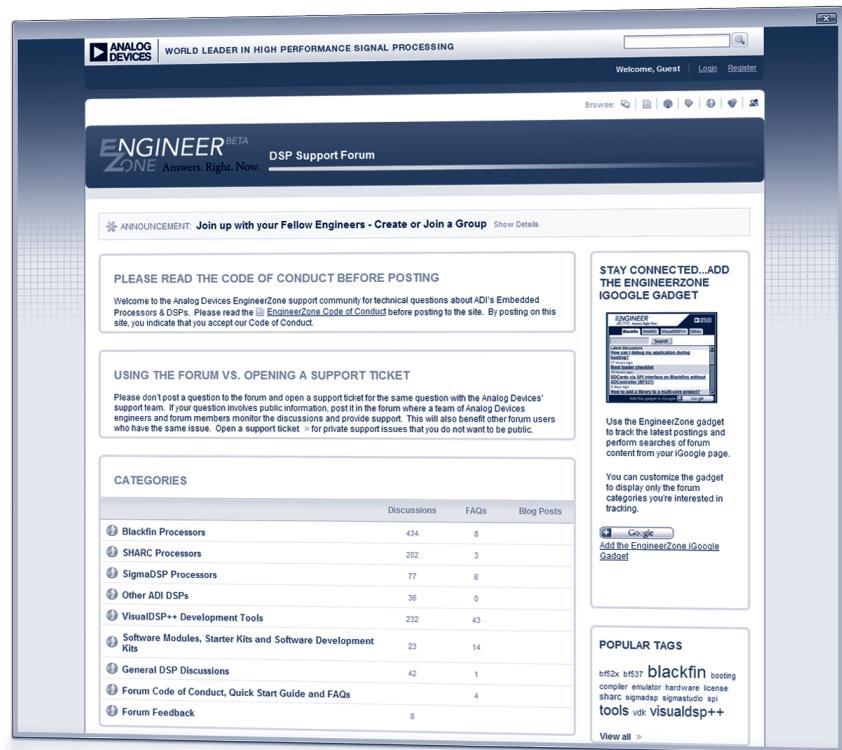

Benchmarks

Comparing Processors

To truly assess a processor's performance, you have to look beyond MHz, MIPS, or MFLOPS. There are many attributes that may be more accurate predictors of real-time signal processing performance.

Circular Buffers

Circular buffers allow a region of memory to be continually accessed without explicit program interaction. The buffer uses a pointer that automatically resets to the beginning of the buffer (wraparound) if the pointer is advanced beyond the last location in the buffer. Circular buffers are a key feature of DSP routines. Multiple buffers are used in the same routine to store filter coefficients and implement a delay line of input samples. Performance suffers if the DSP core has to perform pointer calculations along with the calculations for the routine. Performance also suffers if the DSP core only supports one circular buffer and must save and restore address registers to implement multiple buffers.

Analog Devices processors have hardware support for multiple circular buffers, eliminating processor overhead for address calculations.

DMA Channels/Nonintrusive DMA

The DMA (direct memory access) channels transfer data between an external source and the processors' on-chip memory. With DMA channels, data transfers occur without the core processor having to execute data movement instructions. For example, the overhead clock cycles used to move data for an FFT can add a significant amount of time to overall algorithm execution. With multiple DMA channels available, all data transfers happen without core involvement, eliminating any overhead clock cycles.

One of the strengths of Analog Devices processor architecture is that these DMAs do not interfere with the core operation. This capability is referred to as nonintrusive or zero-overhead DMA.

Interrupt Latency

Interrupt latency is a measure of how quickly a processor responds to an interrupt. Quick response is important, especially in real-time processing. For example, an interrupt that might indicate the availability of data is only available for a finite amount of time; therefore, fast response is critical, or the data will be lost.

Analog Devices products feature fast interrupt response time for quick execution of interrupt service routines.

Multiprocessing Support

Even with the powerful DSPs available today, there are times when the DSP task for a given system does not fit into a single processor. Examples of such applications include sonar, radar, medical imaging, audio mixers, etc. In these cases, the ability to connect multiple processors in a system without any glue logic greatly simplifies the implementation.

Analog Devices offers SHARC and TigerSHARC processors with specialized hardware for glueless multiprocessing.

On-Chip Memory/On-Chip SRAM Size

The amount of on-chip memory available can greatly impact system performance, cost, size, power consumption, and complexity. Any time the DSP core accesses external memory, performance can suffer. Off-chip memory often requires the core to wait additional cycles. In contrast, the DSP core can access on-chip memory at the same rate as its instruction rate. Supplemental memory adds extra components to the system, which increases cost, power consumption, and complexity.

ADI processors have on-chip memories that often eliminate the need for external memory in a system. Furthermore, the memory is configurable for data-word size, code word size, and storage size. This allows designers to tailor the memory to meet the algorithm requirements.

TDM Mode

TDM (time division multiplexed) mode refers to time division multiplexing, which is a common mode for transferring serial data. In telecommunications applications, T1 and E1 lines use TDM. TDM allows multiple serial devices to send and receive information using the same physical connection. TDM also allows communication between multiple processors.

All ADI products support TDM mode in the serial ports.

Zero-Overhead Looping

The code for most DSP routines falls naturally into a set of nested loops. Without the support for zero-overhead looping, the DSP core must spend cycles calculating the loop termination values, in addition to the cycles used to process the algorithm's computations. Without zero-overhead looping, performance degrades.

Analog Devices offers 16-bit fixed-point and 32-bit fixed- and floating-point processors with zero-overhead, nestable looping to save instruction cycles.



ADI Processor Benchmarks¹

	Cycle Count	Execution Time @ 600 MHz
Blackfin Processor		
Block FIR Filter	$(x/2)(2 + h)$	
Biquad IIR Filter (4 Coeff)	$2.5bq + 3.5$	
Complex FIR Filter	$2h + 2$	
Delayed LMS Filter	$1.5h + 4.5$	
1024-Point Complex FFT (Prescaled)	11,559	19.3 μ s
256-Point Complex FFT (Out of Place)	2324	3.87 μ s
Max Search	0.5N	
Max Index Search	0.5N	

	ADSP-21160N ADSP-21161N	ADSP-2126x	ADSP-2136x	ADSP-21371 ADSP-21375	ADSP-2146x
SHARC Processor (SIMD)					
Clock Speed	100 MHz	200 MHz	400 MHz	266 MHz	450 MHz
Instruction Cycle Time	10 ns	5 ns	2.5 ns	3.75 ns	2.22 ns
MFLOPS					
Sustained	400 MFLOPS	800 MFLOPS	1600 MFLOPS	1064 MFLOPS	1800 MFLOPS
Peak	600 MFLOPS	1200 MFLOPS	2400 MFLOPS	1596 MFLOPS	2700 MFLOPS
MOPS (32-Bit, Fixed-Point)					
Sustained	400 MFLOPS	800 MFLOPS	1600 MFLOPS	1064 MFLOPS	1800 MFLOPS
Peak	600 MFLOPS	1200 MFLOPS	2400 MFLOPS	1596 MFLOPS	2700 MFLOPS
1024-Point Complex FFT (Radix 4, with Digit Reverse)	92 μ s	46 μ s	23 μ s	34.5 μ s	20.44 μ s
FIR Filter (per Tap)	5 ns	2.5 ns	1.25 ns	1.88 ns	1.11 ns
IIR Filter (per Biquad)	20 ns	10 ns	5.0 ns	7.5 ns	4.43 ns
Matrix Multiply					
$(3 \times 3) \times (3 \times 1)$	45 ns	22.5 ns	11.25 ns	16.91 ns	10.00 ns
$(4 \times 4) \times (4 \times 1)$	80 ns	40 ns	20.0 ns	30.07 ns	17.78 ns
Divide (y/x)	30 ns	15 ns	7.5 ns	11.27 ns	6.67 ns
Inverse Square Root	45 ns	22.5 ns	11.25 ns	16.91 ns	10.00 ns

	Cycle Count	Execution Time @ 600 MHz
TigerSHARC Processor		
256-Point Radix 2 Complex FFT (16-Bit)	525	0.875 μ s
1k Point Complex FFT ² (Radix 2) (32-Bit)	9384	15.64 μ s
64k Point Complex FFT ² (Radix 2) (32-Bit)	1,397,544	2.33 ms
FIR Filter (per Real Tap) (32-Bit)	0.5	0.83 ns
[8 × 8][8 × 8] Matrix Multiply (Complex, Floating-Point)	1399	2.3 μ s

NOTES

¹Benchmarks are for best data conditions.²Cache preloaded.

h = number of taps.

bq = number of biquads.

x = number of samples.

ADI Processor Benchmarks

EEMBC Blackfin Comparison

EEMBC® benchmarks represent out-of-the-box performance for a typical suite of consumer applications. For more information, see www.eembc.com.

Blackfin Controller Performance

Processor	Blackfin	ARM1136JF-S	ARM926EJ-S
<i>Product</i>	<i>ADSP-BF533</i>	<i>i.MX31</i>	<i>i.MX21</i>
Clock Frequency (MHz)	594	532	266
<i>Certified on Hardware?</i>	<i>yes</i>	<i>yes</i>	<i>yes</i>
EEMBC Networking 2.0¹			
IPmark ²	45	50.4	24.4
TCPmark ²	117	68.5	29.2 ³
EEMBC Autobench 1.1¹			
Automark ²	183.1	126.6	29.6
EEMBC ConsumerBench1.1¹			
Consumermark ²	54.9	26.6	13.7
EEMBC AOBench1.1¹			
A0mark ²	352	341	152
EEMBC TeleBench1.1¹			
Telemark ²	11.7	6.1	2.5
EEMBC DENBench1.0¹			
MPEG Decodemark ²	337	231	112
MPEG Encodemark ²	392	243	100
Cryptomark ²	257	219	104
Imagemark ²	352	315	154
DENmark ²	57.5	45.5	21.6
EEMBC Geometric Mean	138.7	99.3	42.6

NOTES

¹Out-of-the-box category.

²Iterations per second (bigger is better).

³i.MX21 TCPmark contains an estimate for one subtest whose result is filed n/a at EEMBC. (Estimate is $\frac{1}{2}$ i.MX31 performance.)

EEMBC is a registered trademark of the Embedded Microprocessor Benchmark Consortium.

For more information and scores, go to www.eembc.org.



<http://www.ebenchmarks.com>



Blackfin Processor Family

High Performance, Low Power Processing Leadership

Blackfin processors are a new breed of embedded media processors, designed specifically to meet the computational demands and power constraints of today's embedded audio, video, and communications applications. Blackfin processors combine a 32-bit RISC-like instruction set and dual 16-bit multiply accumulate (MAC) signal processing functionality with the ease-of-use attributes found in general-purpose microcontrollers. Blackfin processors perform equally well in both signal processing and control processing applications, in many cases deleting the requirement for separate heterogeneous processors. This capability greatly simplifies both the hardware and software design implementation tasks.


Blackfin processors offer performance up to 600 MHz/1200 MMACS in single-core products. New symmetric, multiprocessor members of the Blackfin family extend this to over 3000 MMACS. The family offers the lowest power consumption—as low as 0.15 mW/MMAC at 0.8 V. The combination of high performance and low power is essential in meeting the needs of today and future signal processing applications, including broadband wireless, audio-/video-capable Internet appliances, and mobile communications.

All Blackfin processors offer fundamental benefits to the system designer, including:

- High performance signal processing and efficient control processing capability
- Dynamic power management (DPM), enabling the system designer to tailor device power consumption to the end-system requirements
- Easy to use instruction set architecture and development tools suite that saves development time


High Performance Signal Processing

The Blackfin processor architecture employs numerous techniques to ensure that signal processing performance is maximized. These include a fully interlocked instruction pipeline, multiple parallel computational blocks, efficient DMA capability, and instruction set enhancements designed to accelerate video processing.

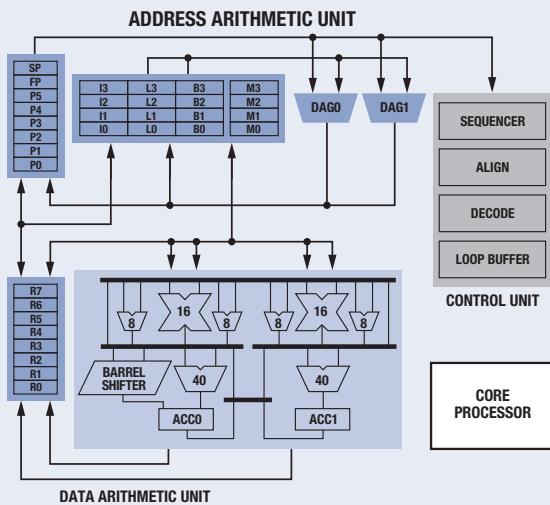

Efficient Control Processing

The Blackfin processor architecture also offers a variety of benefits most often seen in RISC control processors. These features include a hierarchical memory architecture, superior code density, and a variety of microcontroller-style peripherals, including a watchdog timer, a real-time clock, and an integrated SDRAM controller. All of these features provide the system designer with a great deal of design flexibility while minimizing end system costs.

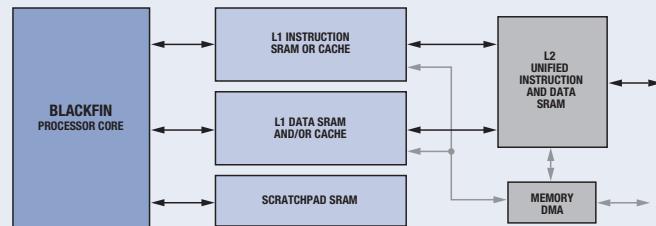

Dynamic Power Management

All Blackfin processors employ multiple power-saving techniques. Blackfin processors are based on a gated clock core design that selectively powers down functional units on an instruction-by-instruction basis. Blackfin processors also support multiple power-down modes for periods when little or no CPU activity is required. Last, and probably most importantly, Blackfin processors support a dynamic power management scheme whereby the operating frequency and voltage can be tailored to meet the performance requirements of the algorithm currently being executed. These transitions may occur continually under the control of an RTOS or user firmware. Currently available products also offer on-chip core voltage regulation circuitry as well as operation to as low as 0.8 V and are particularly well-suited for portable applications requiring extended battery life.

Easy to Use

A single Blackfin processor can be utilized in many applications previously requiring both a high performance signal processor and a separate efficient control processor. This benefit greatly reduces development time and costs, ultimately enabling end products to get to market sooner. Additionally, a single set of development tools can be used, which decreases the system designer's initial expenses and learning curve.

Blackfin Processor Family

Analog Devices' long-term commitment to the Blackfin processor means each subsequent generation of Blackfin-based designs will benefit from increases in speed, power efficiency, and cost reductions across a broad range for single and dual core processors.

The Blackfin processor family includes devices that target a wide range of applications in the consumer, automotive, industrial, instrumentation, and communications markets. To address these markets, the Blackfin processor

family offers scalable performance from the 200 MHz ADSP-BF535 to the dual core 600 MHz ADSP-BF561 to the ADSP-BF52x with advanced peripherals to the low power ADSP-BF51x family with real-time Ethernet capabilities and the ADSP-BF50x with integrated flash and analog-to-digital converter. Future devices will further extend ADI's leadership in performance and power efficiency while maintaining code compatibility and providing the widest array of processor options for the most demanding convergent processing challenges.

Blackfin Processor Product Portfolio

	Value → Highest Performance →													
	Future	ADSP-BF504 ADSP-BF504F ADSP-BF506F	ADSP-BF512	ADSP-BF514 ADSP-BF516 ADSP-BF518	ADSP-BF522 ADSP-BF524 ADSP-BF526	ADSP-BF523 ADSP-BF525 ADSP-BF527	ADSP-BF531 ADSP-BF532	ADSP-BF533	ADSP-BF534 ADSP-BF535 ADSP-BF536	ADSP-BF537	ADSP-BF538 ADSP-BF539	ADSP-BF542 ADSP-BF544 ADSP-BF547 ADSP-BF548	ADSP-BF561 ADSP-BF549	Future
Low BOM Cost	•	•	•			•		•						
Baseline Connectivity	•	•	•			•	•	•	•				•	
System-Level Connectivity				•	•	•				•	•	•	•	•
Low Standby	•	•	•	•	•	•								•
Lockbox™ Security				•	•	•						•		•
System Integration (Flash, Mixed-Signal)		•	•	•	•	•	•				•			
600 MHz or Greater							•		•		•	•	•	•
Multicore												•	•	

Blue product number indicates automotive grade is available.



Blackfin Processor Family Selection Table

Part Number	Performance			Memory			Peripheral options ¹			Packaging and Operating Temperature Range Options ^{4,5}							
	Clock Speeds (MHz)	16-Bit Fixed-Point MIMACs	On-Chip L1 Program Data (Bytes)	On-Chip L1 Other Internal Memory (Bytes)	External Memory Type Supported	DMA (Channels)	Serial Ports	Other Ports/Features	Number of GPIOs	Voltage (V) Nominal ⁶	Core V _{HIGH} (Max Speed)	Total Core Power ³ (mW Typ)	Packaging ⁵	Temperature Range (NonAutomotive Grade)	Temperature Range Automotive Grade (W) ⁷	Price @ 1k (US\$) ⁸	Availability
Single Core																	
ADSP-BF504	400	800	—	16K SRAM/cache + 16K SRAM (+ 4k scratchpad)	16K SRAM/cache + 16K SRAM (+ 4k scratchpad)	—	2 UARTs, 2 SPIs, TWI CAN	PPILCD, RS/SDIO, 2 PWMs, 2 rotary encoders, ACM	Up to 35	8 GP, WD	1.4 ⁷ , 3.3	<139 ⁷	12 mm × 12 mm, 0.5 mm, 88-ball CSP_EFB	-40°C to +85°C, 0°C to +70°C	-40°C to +105°C, -40°C to +85°C	5.18 ⁸	
ADSP-BF504F	300	600	—	16K SRAM/cache + 16K SRAM (+ 4k scratchpad)	16K SRAM/cache + 16K SRAM (+ 4k scratchpad)	—	14	2 SPORTS, 2 SPIs, TWI CAN	PPILCD, RS/SDIO, 2 PWMs, 2 rotary encoders, ACM, 12-bit dual SARADC (12-channel)	Up to 35	1.4 ⁷ , 3.3	<139 ⁷	14 mm × 14 mm, 0.4 mm, 120-ball LQFP_EP	-40°C to +85°C, 0°C to +70°C	-40°C to +105°C, -40°C to +85°C	7.48 ⁸	Sampling
ADSP-BF506F	400	800	—	—	—	—	—	PPILCD, PWMM, rotary encoder, Lockbox	—	—	1.4 ⁷ , 3.3	<139 ⁷	12 mm × 12 mm, 0.8 mm, 168-ball CSP_BGA; 24 mm × 24 mm, 0.5 mm, 176-ball LQFP_EP	-40°C to +85°C, 0°C to +70°C	-40°C to +105°C, -40°C to +85°C	12.21 ⁸	
ADSP-BF512	300	600	—	—	—	—	—	PPILCD, PWMM, rotary encoder, Lockbox	—	—	1.4 ⁷ , 3.3	<139 ⁷	12 mm × 12 mm, 0.8 mm, 168-ball CSP_BGA; 24 mm × 24 mm, 0.5 mm, 176-ball LQFP_EP	-40°C to +85°C, 0°C to +70°C	-40°C to +105°C, -40°C to +85°C	12.78 ⁸	
ADSP-BF512F	400	800	—	—	—	—	—	PPILCD, Lockbox, ATAPI, RS/SDIO, rotary encoder, PWM	—	—	1.4 ⁷ , 3.3	<139 ⁷	12 mm × 12 mm, 0.8 mm, 168-ball CSP_BGA; 24 mm × 24 mm, 0.5 mm, 176-ball LQFP_EP	-40°C to +85°C, 0°C to +70°C	-40°C to +105°C, -40°C to +85°C	9.35 ⁸	
ADSP-BF514	300	600	—	—	—	—	—	PPILCD, Lockbox, ATAPI, RS/SDIO, rotary encoder, PWM	Up to 40	8 GP, WD, RTC	1.4 ⁷ , 3.3	<139 ⁷	12 mm × 12 mm, 0.8 mm, 168-ball CSP_BGA; 24 mm × 24 mm, 0.5 mm, 176-ball LQFP_EP	-40°C to +85°C, 0°C to +70°C	-40°C to +105°C, -40°C to +85°C	7.78 ⁸	
ADSP-BF514F	400	800	—	16K SRAM/cache + 32K SRAM (+ 4k scratchpad)	32K SRAM/cache + 32K SRAM (+ 4k scratchpad)	—	2 UARTs, 2 SPIs, TWI	Ethernet MAC, PP/LCD, Lockbox, ATAPI, RS/SDIO, rotary encoder, PWM	Up to 40	8 GP, WD, RTC	1.4 ⁷ , 3.3	<139 ⁷	12 mm × 12 mm, 0.8 mm, 168-ball CSP_BGA; 24 mm × 24 mm, 0.5 mm, 176-ball LQFP_EP	-40°C to +85°C, 0°C to +70°C	-40°C to +105°C, -40°C to +85°C	8.92 ⁸	Production
ADSP-BF516	300	600	—	—	—	—	—	Ethernet MAC, IEEE1588, PP/LCD, Lockbox, ATAPI, RS/SDIO, rotary encoder, PWM	Up to 40	8 GP, WD, RTC	1.4 ⁷ , 3.3	<139 ⁷	12 mm × 12 mm, 0.8 mm, 168-ball CSP_BGA; 24 mm × 24 mm, 0.5 mm, 176-ball LQFP_EP	-40°C to +85°C, 0°C to +70°C	-40°C to +105°C, -40°C to +85°C	8.93 ⁸	
ADSP-BF516F	400	800	—	—	—	—	—	Ethernet MAC, IEEE1588, PP/LCD, Lockbox, ATAPI, RS/SDIO, rotary encoder, PWM	Up to 40	8 GP, WD, RTC	1.4 ⁷ , 3.3	<139 ⁷	12 mm × 12 mm, 0.8 mm, 168-ball CSP_BGA; 24 mm × 24 mm, 0.5 mm, 176-ball LQFP_EP	-40°C to +85°C, 0°C to +70°C	-40°C to +105°C, -40°C to +85°C	11.08 ⁸	
ADSP-BF518	400	800	—	—	—	—	—	Ethernet MAC, IEEE1588, PP/LCD, Lockbox, ATAPI, RS/SDIO, rotary encoder, PWM	Up to 40	8 GP, WD, RTC	1.4 ⁷ , 3.3	<139 ⁷	12 mm × 12 mm, 0.8 mm, 168-ball CSP_BGA; 24 mm × 24 mm, 0.5 mm, 176-ball LQFP_EP	-40°C to +85°C, 0°C to +70°C	-40°C to +105°C, -40°C to +85°C	13.08 ⁸	
ADSP-BF518F	400	800	—	—	—	—	—	Ethernet MAC, IEEE1588, PP/LCD, Lockbox, ATAPI, RS/SDIO, rotary encoder, PWM	Up to 40	8 GP, WD, RTC	1.4 ⁷ , 3.3	<139 ⁷	12 mm × 12 mm, 0.8 mm, 168-ball CSP_BGA; 24 mm × 24 mm, 0.5 mm, 176-ball LQFP_EP	-40°C to +85°C, 0°C to +70°C	-40°C to +105°C, -40°C to +85°C	14.08 ⁸	
ADSP-BF522	300	600	—	—	—	—	—	—	—	—	1.4 ⁷ , 3.3	<139 ⁷	17 mm × 17 mm, 0.8 mm, 208-ball CSP_BGA	-40°C to +85°C	-40°C to +105°C, -40°C to +85°C	8.18 ⁸	
ADSP-BF523	400	800	—	—	—	—	—	—	—	—	1.4 ⁷ , 3.3	<139 ⁷	12 mm × 12 mm, 0.5 mm, 208-ball CSP_BGA	0°C to +70°C	-40°C to +105°C, -40°C to +85°C	10.33 ⁸	
ADSP-BF523	533	1066	—	16K SRAM/cache + 48K SRAM (+ 4k scratchpad)	32K SRAM/cache + 32K SRAM (+ 4k scratchpad)	—	2 UARTs, 2 SPIs, TWI	PPILCD, Lockbox, host DMA, rotary encoder	Up to 48	8 GP, WD, RTC	1.4 ⁷ , 3.3	<139 ⁷	17 mm × 17 mm, 0.8 mm, 208-ball CSP_BGA	-40°C to +85°C	-40°C to +105°C, -40°C to +85°C	13.46 ⁸	
ADSP-BF524	600	1200	—	—	—	—	—	Sync. SDRAM, mobile SDRAM, NAND flash	Up to 48	8 GP, WD, RTC	1.4 ⁷ , 3.3	<139 ⁷	12 mm × 12 mm, 0.5 mm, 208-ball CSP_BGA	0°C to +70°C	-40°C to +105°C, -40°C to +85°C	16.99 ⁸	
ADSP-BF524	300	600	—	—	—	—	—	USB 2.0 HS OTG, 2 UARTs, 2 SPORTs, SPI, TWI	Up to 48	8 GP, WD, RTC	1.4 ⁷ , 3.3	<139 ⁷	12 mm × 12 mm, 0.5 mm, 208-ball CSP_BGA	0°C to +70°C	-40°C to +105°C, -40°C to +85°C	9.58 ⁸	Pre-production
ADSP-BF524	400	800	—	—	—	—	—	—	—	—	1.4 ⁷ , 3.3	<139 ⁷	12 mm × 12 mm, 0.5 mm, 208-ball CSP_BGA	0°C to +70°C	-40°C to +105°C, -40°C to +85°C	12.03 ⁸	Pre-production

Part Number	Performance		Memory			Peripheral options ^a			Packaging and Operating Temperature Range Options ^{a,b}						
	Clock Speeds (MHz)	16-Bit Fixed-Point MMACs	On-Chip L1 Program Data (Bytes)	On-Chip L1 Other Internal Memory (Bytes)	External Memory Type Supported	DMA (Channels)	Serial Ports	Other Ports/Features	Number of GPIOs	Voltage (V) Nominal ^c	Total Core Power ^d (mW Typ)	Temperature Range (NonAutomotive Grade)	Temperature Range Automotive Grade (W)	Price @1k (\$U.S.) ^e	Availability
Single Core															
ADSP-BF525	533	1066								1.15	166	12 mm × 12 mm, 0.5 mm, 288-ball CSP_BGA	-40°C to +85°C	15.17	Production
ADSP-BF526	600	1200								1.20	205	12 mm × 12 mm, 0.5 mm, 288-ball CSP_BGA; 17 mm × 17 mm, 0.8 mm, 208-ball CSP_BGA	0°C to +70°C	—	18.71
ADSP-BF527	300	600	16k SRAM/ cache + 48k SRAM (+ 4k scratchpad)		Async, SDRAM, mobile SDRAM, NAND Flash	14	USB 2.0 HS OTG, 2 USARTs, SPI, TWI	Ethernet MAC, PPI/ LCD, Lockbox, host DMA, rotary encoder	Up to 48	1.225	93	17 mm × 17 mm, 0.8 mm, 208-ball CSP_BGA	-40°C to +85°C	10.76	Pre- production
ADSP-BF522C	400	800								1.40	158	12 mm × 12 mm, 0.5 mm, 288-ball CSP_BGA	0°C to +70°C	—	13.82
ADSP-BF523C	533	1066								1.15	166	17 mm × 17 mm, 0.8 mm, 208-ball CSP_BGA	-40°C to +85°C	16.99	Production
ADSP-BF524C	300	600	16k SRAM/ cache + 48k SRAM (+ 4k scratchpad)		Async, SDRAM, mobile SDRAM, NAND flash	14	USB 2.0 HS OTG, 2 USARTs, SPI, TWI	Ethernet MAC, PPI/ LCD, Lockbox, host DMA, rotary encoder, stereo audio codec	Up to 48	1.225	12 mm × 12 mm, 0.5 mm, 288-ball CSP_BGA	0°C to +70°C	—	20.56	
ADSP-BF525C	533	1066	16k SRAM/ cache + 48k SRAM (+ 4k scratchpad)							1.40	158	12 mm × 12 mm, 0.5 mm, 288-ball CSP_BGA	0°C to +70°C	9.89	Pre- Production
ADSP-BF526C	300	600								1.15	166	12 mm × 12 mm, 0.5 mm, 288-ball CSP_BGA	0°C to +70°C	15.63	Production
ADSP-BF527C	533	1066								1.20	205	12 mm × 12 mm, 0.5 mm, 288-ball CSP_BGA	0°C to +70°C	19.24	Production
ADSP-BF531	400	800	16k SRAM/ cache + 16k SRAM (+ 4k scratchpad)		Async, SDRAM, mobile SDRAM	12	UART, 2 SPORTS, SPI	PPI/LCD	3 GP WD RTC	1.20	150	12 mm × 12 mm, 0.8 mm, 160 CSP_BGA	-40°C to +105°C -40°C to +85°C	5.70	Production
ADSP-BF532	400	800	16k SRAM/ cache + 32k SRAM (+ 4k scratchpad)							1.20	150	19 mm × 19 mm, 1.0 mm, 169-ball PbGA	-40°C to +85°C -40°C to +85°C	9.33	Production

Part Number	Performance		Memory		Peripheral options ¹		Packaging and Operating Temperature Range Options ^{2,3}		Total Core Power ³ (mW Typ)	Temperature Range (Automotive Grade) Temperature Range (Industrial Grade) Temperature Range (Commercial Grade)	Price @ 1k (\$U.S.) ⁶	Availability
	Clock Speeds (MHz)	16-Bit Fixed-Point MMACS	On-Chip L1 Program (Bytes)	On-Chip L1 Data (Bytes)	Other Internal Memory (Bytes)	External Memory Type Supported	DMA (Channels)	Serial Ports	Other Ports/Features	Number of GPUs	Core V _{HIGH} (Max Spread) (V)	External I/O (I/O)
Single Core												
ADSP-BF533	400	800	16K SRAM/ cache + 32K SRAM (+ 4K scratchpad)	—	Async, SDRAM, mobile SDRAM	12	UART, 2 SPORTS, SPI	PPI/LCD	3 GP, WD RTC	1.20	1.20	24 mm × 24 mm, 0.5 mm, 176-ball QFP
ADSP-BF534	500	1000	32K SRAM/cache + 32K SRAM (+ 4K scratchpad)	—	Async, SDRAM	16	UART, 2 SPORTS, SPI	PPI/LCD	3 GP, WD RTC	1.20	1.20	19 mm × 19 mm, 1.0 mm, 169-ball PGAs; 160-ball CSP_BGA
ADSP-BF536	500	1000	16K SRAM/ cache + 48K SRAM (+ 4K scratchpad)	—	Async, SDRAM	14	2 UARTs, 2 SPIs, TWI, CAN	PPI/LCD	Up to 48 WD RTC	1.20	1.20	12 mm × 12 mm, 0.8 mm, 162-ball CSP_BGA;
ADSP-BF537	500	1000	32K SRAM/cache + 32K SRAM (+ 4K scratchpad)	—	Async, SDRAM	14	2 SPIs, TWI, CAN	Ethernet MAC, PPI/LCD	Up to 48 WD RTC	1.20	1.20	12 mm × 12 mm, 0.8 mm, 162-ball CSP_BGA;
ADSP-BF538	400	800	32K SRAM/cache + 32K SRAM (+ 4K scratchpad)	—	Async, SDRAM	28	3 UARTs, 4 SPORTS, 3 SPIs, 2 TWI, CAN	PPI/LCD	3 GP, WD RTC	1.20	1.20	12 mm × 12 mm, 0.8 mm, 162-ball CSP_BGA;
ADSP-BF538F	400	800	16K SRAM/ cache + 64K SRAM	—	512K/1M parallel flash	34	3 UARTs, 4 SPORTS, 3 SPIs, 2 TWI, CAN	PPI/LCD, MXVR	Up to 54 WD RTC	1.25	1.25	12 mm × 17 mm, 0.8 mm, 316-ball CSP_BGA
ADSP-BF539	533	1066	32K SRAM/cache + 32K SRAM (+ 4K scratchpad)	—	512K/1M parallel flash	34	3 UARTs, 4 SPORTS, 3 SPIs, 2 TWI, CAN	PPI/LCD, MXVR	3 GP, WD RTC	1.25	1.25	12 mm × 17 mm, 0.8 mm, 316-ball CSP_BGA
ADSP-BF539F	533	1066	16K SRAM/ cache + 48K SRAM (+ 4K scratchpad)	—	512K/1M parallel flash	34	3 UARTs, 4 SPORTS, 3 SPIs, 2 TWI, CAN	ePPI/LCD, ATAP, SDIO, keypad, rotary pixel compositor, Lockbox	8 GP, WD RTC	1.20	1.20	17 mm × 17 mm, 0.8 mm, 400-ball CSP_BGA
ADSP-BF542	533	1066	16K SRAM/ cache + 48K SRAM (+ 4K scratchpad)	—	—	34	3 UARTs, 3 SPORTS, 2 SPIs, 2 TWI, CAN	ePPI/LCD, host dma keypad, rotary pixel compositor, Lockbox	8 GP, WD RTC	1.25	1.25	17 mm × 17 mm, 0.8 mm, 400-ball CSP_BGA
ADSP-BF544	400	800	64K L2 SRAM	—	Async, DDR1, NAND flash (mDDR option for 533 MHz grade only)	28	USB 2.0 HS OTG, 3 UARTs, 3 SPORTS, 2 SPIs, 2 TWI	11 GP, WD RTC	1.25	1.25	17 mm × 17 mm, 0.8 mm, 400-ball CSP_BGA	
ADSP-BF547	533	1066	128K L2 SRAM	—	—	28	USB 2.0 HS OTG, 4 UARTS, 4 SPORTS, 4 SPIs, 2 TWI	11 GP, WD RTC	1.25	1.25	17 mm × 17 mm, 0.8 mm, 400-ball CSP_BGA	
ADSP-BF548	533	1066	128K L2 SRAM	—	—	28	USB 2.0 HS OTG, 4 UARTS, 4 SPORTS, 3 SPIs, 2 TWI, 2 CANs	11 GP, WD RTC	1.25	1.25	17 mm × 17 mm, 0.8 mm, 400-ball CSP_BGA	

Due to our vendor options, not all neighborhood combinations may be available simultaneously. Please refer to data sheet and vendor website for full information.

Automotive grade products may require different voltage conditions. Please refer to data sheet for full information.

A/DSP-BF51X, and A/DSP-BF50x products offer lowest sleep power and less power variation over temperature.

All DSC products available in RoHS compliant options. Please refer to data sheet for complete information.

All packaging, operating temperature, and grade combinations may not be available. Please refer to data sheet for full information and contact ADI for options outside those listed.

Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate the lowest priced version of that particular speed device and

will vary depending on package type and/or temperature range and grade.

Preliminary product information: pricing, power and core voltage are subject to change. Please contact ADI for further information and release schedule.



ADSP-BF504/ADSP-BF504F/ADSP-BF506F Blackfin Processors

Low Power and Cost Optimized with Optional Integrated Executable Flash and 12-Bit ADC

The ADSP-BF50x family of processors brings a new level of system integration to the Blackfin portfolio by combining a high performance Blackfin processor with a 4 MB executable flash memory and a 12-bit, dual SAR ADC. Additionally, with a peripheral set including multiple serial interfaces, a parallel port interface, a CAN controller, two UARTs, eight general-purpose timers, and two 3-phase PWM interfaces, the ADSP-BF50x family is well suited for a variety of industrial and instrumentation applications. The 12-bit, dual SAR ADC is a hallmark feature of the ADSP-BF506F. This integrated signal conversion capability based on Analog Devices legendary analog signal processing technology meets the demanding requirements of a multitude of advanced power electronics applications, including motor control, universal power supply, and alternative energy inverters, as well as many other signal processing applications. An integrated ADC control module peripheral on the ADSP-BF50x family enables highly synchronized and precise control of the ADC's input sampling, eliminating the need for less precise software-based control or more expensive external logic-based control.

The ADSP-BF50x family of processors offers a highly optimized memory architecture that combines 68 kB of core L1 memory with 4 MB of synchronous burst flash memory that can be used for program execution, as well as data and boot code storage. This ample memory storage allows system designers to eliminate costly and power hungry external SDRAM chips and also serves to reduce the pin count, package size, and cost of the ADSP-BF50x processors vs. processors that provide external memory interfaces.

For low cost, low power, small memory footprint applications, the ADSP-BF50x family of processors offers best-in-class processor performance in its price range enabling advanced signal processing capabilities that previously weren't possible due to price constraints of competitive processors on the market. Addressing the need for integration of external mass storage devices, the removable storage interface of the ADSP-BF50x family of processors supports popular removable storage options such as MMC and SD, as well as providing an interface to wireless interfaces such as Bluetooth.


Features

- Blackfin processor core with up to 400 MHz (800 MMACS) performance
- 68 kB L1 SRAM and optional 4 MB synchronous, parallel burst flash memory
- Optional 12-bit, dual SAR ADC
- ADC control module for precise ADC sampling of inputs
- Two 3-phase PWM units
- Connectivity: SDIO, CE-ATA, eMMC, UARTs, SPORTs, SPI, PPI, CAN and TWI
- 8 general-purpose counters
- 12 peripheral DMA channels supporting one- and two-dimensional data transfers
- Multiple low power modes, including external voltage regulator interface with multiple GPIO wakeup.
- 120-lead, 0.4 mm pitch, 14 mm × 14 mm LQFP (ADSP-BF506F)
- 88-lead, 0.5 mm pitch, 12 mm × 12 mm LFCSP (ADSP-BF504 and ADSP-BF504F)
- Commercial and industrial temperature range

Applications

- Motor control
- Uninterruptible power supplies
- Programmable logic controllers
- Alternative energy inverters
- Biometric systems
- Medical devices
- Consumer audio
- Automotive
- Games/learning aids
- Industrial and instrumentation
- Portable test equipment
- PMPs
- Cameras
- Image scanners

ADSP-BF50x Block Diagram

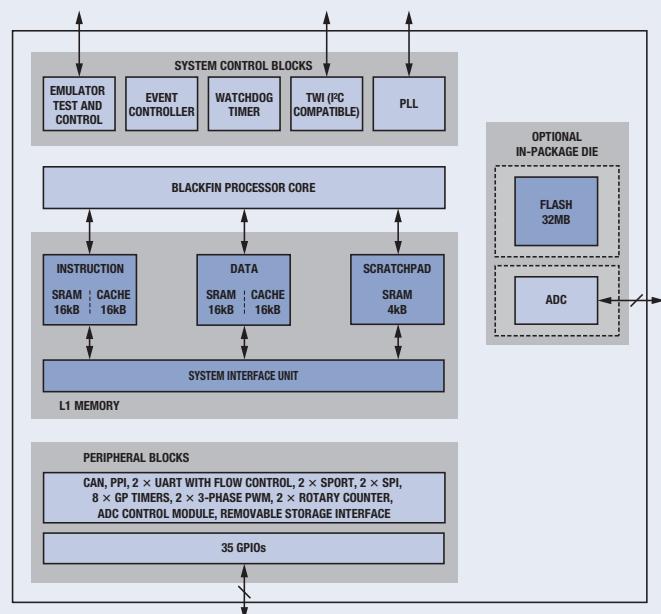

ADSP-BF504/ADSP-BF504F/ADSP-BF506F Blackfin Processors

Low Power and Cost Optimized with Optional Integrated Executable Flash and 12-Bit ADC

Part Number	Max (MHz)	Max (MMACs)	L1 Memory (kB)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @1k (\$U.S.) ¹
ADSP-BF504BCPZ-4	400	800	68	-40 to +85	2 SPIs, PPI, 2 SPORTs, 2 UARTs, 2 PWMs, ADC control module	88-lead LFCSP	
ADSP-BF504KCPZ-4	400	800	68	0 to 70		88-lead LFCSP	
ADSP-BF504BCPZ-3F	300	600	68	-40 to +85		88-lead LFCSP	
ADSP-BF504KCPZ-3F	300	600	68	0 to 70		88-lead LFCSP	
ADSP-BF504BCPZ-4F	400	800	68	-40 to +85	2 SPIs, PPI, 2 SPORTs, 2 UARTs, 2 PWMs, ADC control module, 4 MB parallel flash	88-lead LFCSP	
ADSP-BF504KCPZ-4F	400	800	68	0 to 70		88-lead LFCSP	5.18 to 12.78 ²
ADSP-BF506BSWZ-3F	300	600	68	-40 to +85	2 SPIs, PPI, 2 SPORTs, 2 UARTs, 2 PWMs, ADC control module	120-lead LQFP E_Pad	
ADSP-BF506KSWZ-3F	300	600	68	0 to 70		120-lead LQFP E_Pad	
ADSP-BF506BSWZ-4F	400	800	68	-40 to +85	4 MB parallel flash, 12-bit ADC	120-lead LQFP E_Pad	
ADSP-BF506KSWZ-4F	400	800	68	0 to 70		120-lead LQFP E_Pad	

NOTES

¹Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

²Preliminary product information. Pricing is subject to change. Please contact ADI for further information and release schedule.

Z = RoHS compliant part.

ADSP-BF512/ADSP-BF514/ADSP-BF516/ADSP-BF518 Blackfin Processors

Low Power with Advanced Embedded Connectivity

The Blackfin processor family is extended further into the industrial and instrumentation market by the introduction of the ADSP-BF51x family, which offers the availability of an on-chip eMAC that supports IEEE 1588 (version 2), a 3-phase PWM generation unit, and a quadrature encoder.

The high performance 16-/32-bit Blackfin embedded processor core, the flexible cache architecture, the enhanced DMA subsystem, and the dynamic power management (DPM) functionality allow system designers a flexible platform to address a wide range of connected applications, including motor control, power line monitoring, biometrics, pro-audio, and femtocells.

The embedded eMAC of the ADSP-BF518F is fully compliant with the IEEE 1588 standard, version 2. With the time stamping mechanism being on the processor, users are free to chose any PHY they want to implement a 1588-based system. This, coupled with a 400 MHz CPU and a plethora of other peripherals, makes the ADSP-BF51x the most attractive choice for demanding network connected systems.

The VoIP challenge to the embedded system designer is to choose a processing solution that is cost-effective, easy to deploy, and scalable in performance across market spaces. A “sweet spot” embedded solution approach is to design with a platform that can implement a low channel count basic VoIP solution yet retain sufficient capacity for value added capabilities and services—such as video, music, imaging, and system control. Unlike traditional VoIP embedded solutions that utilize two processor cores to provide VoIP functionality, the ADSP-BF516 and ADSP-BF518 provide a convergent solution in a unified core architecture that allows voice and video signal processing concurrent with RISC MCU processing to handle network and user-interface demands. This unique ability to offer full VoIP functionality on a single convergent processor provides for a unified software development environment, faster system debugging and deployment, and lower overall system cost.

IP protection has become a necessary part of today’s embedded computing applications. The ADSP-BF51x products provide a security scheme that balances flexibility and upgradeability with performance through the inclusion of a firmware-based solution including OTP (one-time programmable) memory to enable users to implement private keys for secure access to program code.


Features

- Blackfin processor core with up to 400 MHz (800 MMACS) performance
- 2 dual-channel, full-duplex synchronous serial ports supporting 8 stereo I^SS channels
- 12 peripheral DMA channels supporting one- and two-dimensional data transfers
- Ethernet 10/100 MII interface with IEEE 1588 v2 support
- Connectivity: SDIO, CE-ATA, eMMC, UARTs, SPORTs, SPI and TWI
- Lockbox Secure Technology: hardware-enabled security for code and content protection
- Memory controller providing glueless connection to multiple banks of external SDRAM, SRAM, flash, or ROM
- 176-lead, 0.5 mm pitch, 24 mm × 24 mm LQFP
- 168-ball, 0.8 mm pitch, 12 mm × 12 mm CSP_BGA

Applications

- Biometric systems
- Consumer audio
- Games/learning aids
- Industrial and instrumentation
- Portable test equipment
- PMPs
- Wi-Fi devices
- Cameras
- Medical devices
- VoIP
- Industrial control
- Motor control
- Networked audio
- Femtocells

ADSP-BF51x Block Diagram

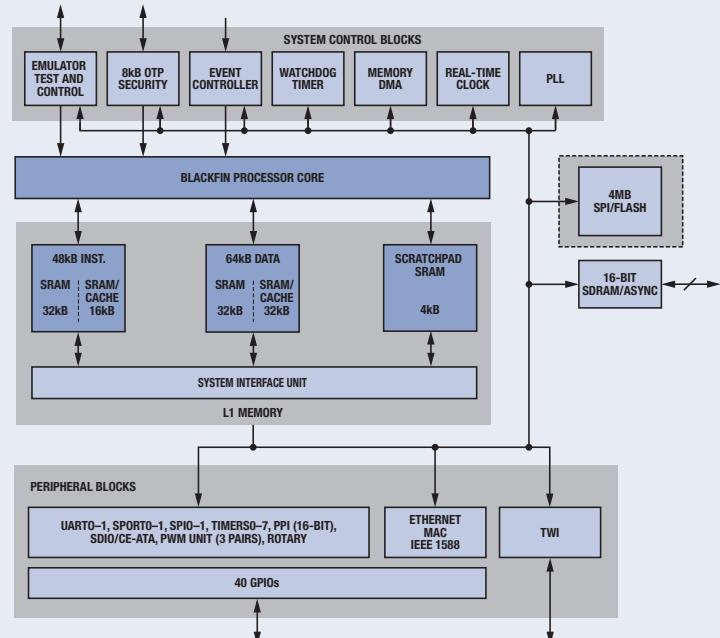

ADSP-BF512/ADSP-BF514/ADSP-BF516/ADSP-BF518 Blackfin Processors

Low Power with Advanced Embedded Connectivity

Part Number	Max (MHz)	Max (MMACS)	L1 Memory (kB)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ¹
ADSP-BF512BBCZ-3	300	600	116	-40 to +85		168-ball CSP_BGA	
ADSP-BF512BBCZ-4	400	800	116	-40 to +85		168-ball CSP_BGA	
ADSP-BF512BSWZ-3	300	600	116	-40 to +85		176-lead LQFP	
ADSP-BF512BSWZ-4	400	800	116	-40 to +85	PPI, 2 SPIs, 2 SPORTs, TWI, 2 UARTs	176-lead LQFP	
ADSP-BF512KBCZ-3	300	600	116	0 to 70		168-ball CSP_BGA	
ADSP-BF512KBCZ-4	400	800	116	0 to 70		168-ball CSP_BGA	
ADSP-BF512KSWZ-3	300	600	116	0 to 70		176-lead LQFP	
ADSP-BF512KSWZ-4	400	800	116	0 to 70		176-lead LQFP	6.27 to 9.93
ADSP-BF512BBCZ-4F4	400	800	116	-40 to +85		168-ball CSP_BGA	
ADSP-BF512BSWZ-4F4	400	800	116	-40 to +85	PPI, 2 SPIs, 2 SPORTs, TWI, 2 UARTs, SPI flash	176-lead LQFP	
ADSP-BF512KBCZ-4F4	400	800	116	0 to 70		168-ball CSP_BGA	
ADSP-BF512KSWZ-4F4	400	800	116	0 to 70		176-lead LQFP	
ADSP-BF514BBCZ-3	300	600	116	-40 to +85		168-ball CSP_BGA	
ADSP-BF514BBCZ-4	400	800	116	-40 to +85		168-ball CSP_BGA	
ADSP-BF514BSWZ-3	300	600	116	-40 to +85		176-lead LQFP	
ADSP-BF514BSWZ-4	400	800	116	-40 to +85	PPI, 2 SPIs, 2 SPORTs, TWI, 2 UARTs, SDIO, CE-ATA, eMMC	176-lead LQFP	
ADSP-BF514KBCZ-3	300	600	116	0 to 70		168-ball CSP_BGA	
ADSP-BF514KBCZ-4	400	800	116	0 to 70		168-ball CSP_BGA	
ADSP-BF514KSWZ-3	300	600	116	0 to 70		176-lead LQFP	7.78 to 10.50
ADSP-BF514KSWZ-4	400	800	116	0 to 70		176-lead LQFP	
ADSP-BF514BBCZ-4F4	400	800	116	-40 to +85		168-ball CSP_BGA	
ADSP-BF514BSWZ-4F4	400	800	116	-40 to +85	PPI, 2 SPIs, 2 SPORTs, TWI, 2 UARTs, SDIO	176-lead LQFP	
ADSP-BF514KBCZ-4F4	400	800	116	0 to 70	CE-ATA, eMMC, SPI flash	168-ball CSP_BGA	
ADSP-BF514KSWZ-4F4	400	800	116	0 to 70		176-lead LQFP	
ADSP-BF516BBCZ-3	300	600	116	-40 to +85		168-ball CSP_BGA	
ADSP-BF516BBCZ-4	400	800	116	-40 to +85		168-ball CSP_BGA	
ADSP-BF516BSWZ-3	300	600	116	-40 to +85		176-lead LQFP	
ADSP-BF516BSWZ-4	400	800	116	-40 to +85	PPI, 2 SPIs, 2 SPORTs, TWI, 2 UARTs, SDIO, CE-ATA, eMMC	176-lead LQFP	
ADSP-BF516KBCZ-3	300	600	116	0 to 70	10/100 Ethernet, SDIO, CE-ATA, eMMC	168-ball CSP_BGA	
ADSP-BF516KBCZ-4	400	800	116	0 to 70		168-ball CSP_BGA	
ADSP-BF516KSWZ-3	300	600	116	0 to 70		176-lead LQFP	8.93 to 11.66
ADSP-BF516KSWZ-4	400	800	116	0 to 70		176-lead LQFP	
ADSP-BF516BBCZ-4F4	400	800	116	-40 to +85		168-ball CSP_BGA	
ADSP-BF516BSWZ-4F4	400	800	116	-40 to +85	PPI, 2 SPIs, 2 SPORTs, TWI, 2 UARTs, SDIO, CE-ATA, eMMC	176-lead LQFP	
ADSP-BF516KBCZ-4F4	400	800	116	0 to 70	10/100 Ethernet, SDIO, CE-ATA, eMMC, SPI flash	168-ball CSP_BGA	
ADSP-BF516KSWZ-4F4	400	800	116	0 to 70		176-lead LQFP	
ADSP-BF518BBCZ-4	400	800	116	-40 to +85	PPI, 2 SPIs, 2 SPORTs, TWI, 2 UARTs, 10/100 Ethernet with 1588, SDIO, CE-ATA, eMMC, SPI flash	168-ball CSP_BGA	
ADSP-BF518BSWZ-4	400	800	116	-40 to +85		176-lead LQFP	13.08 to 14.07
ADSP-BF518BBCZ-4F4	400	800	116	-40 to +85	PPI, 2 SPIs, 2 SPORTs, TWI, 2 UARTs, 10/100 Ethernet with 1588, SDIO, CE-ATA, eMMC	168-ball CSP_BGA	
ADSP-BF518BSWZ-4F4	400	800	116	-40 to +85		176-lead LQFP	

NOTES

¹Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.



ADSP-BF522/ADSP-BF523/ADSP-BF524/ADSP-BF525/ADSP-BF526/ADSP-BF527

Blackfin Processors

Low Power with Advanced Peripherals

The ADSP-BF52x Blackfin processor family combines high performance, power efficiency, and system integration to enable highly optimized designs without compromises. With built-in peripheral selectivity, the ADSP-BF52x family provides the greatest flexibility for today's most demanding convergent signal processing applications. With power consumption as low as 0.16 mW/MHz¹ and performance up to 600 MHz, applications can now add greater signal processing performance without sacrificing battery life. The ADSP-BF52x family supports peripheral flexibility and system scalability to enable developers to create products that fit their target needs.

The high performance 16-bit Blackfin embedded processor core, the flexible cache architecture, the enhanced DMA subsystem, and the dynamic power management (DPM) functionality allow system designers a flexible platform to address a wide range of portable applications, including consumer, communications, and industrial/instrumentation.

IP protection has become a necessary part of today's embedded computing applications. The ADSP-BF52x family provides a security scheme that balances flexibility and upgradeability with performance through the inclusion of a firmware-based solution including OTP (one-time programmable) memory to enable users to implement private keys for secure access to program code.

¹Referenced at 250 MHz operating speed for 300 MHz and 400 MHz ADSP-BF52x parts only.


Features

- Lockbox technology: hardware-enabled security for code and content
- Blackfin processor core with up to 600 MHz (1200 MMACs) performance
- 2 dual-channel, full-duplex synchronous serial ports supporting 8 stereo I^S channels
- 12 peripheral DMA channels supporting one- and two-dimensional data transfers
- NAND flash controller with 8-/16-bit interface for commands, addresses, and data
- Connectivity: HS USB OTG, host DMA port, UARTs, SPORTs, SPI, and TWI
- Ethernet 10/100 MII/RMII interface
- Memory controller providing glueless connection to multiple banks of external SDRAM, SRAM, flash, or ROM
- Wide range of operating voltages
- 289-ball, 12 mm × 12 mm, 0.5 mm pitch CSP_BGA (commercial temperature range 0°C to 70°C)
- 208-ball, 17 mm × 17 mm, 0.8 mm pitch CSP_BGA (industrial temperature range -45°C to +85°C)
- For space-constrained audio applications, the ADSP-BF52xC supports an embedded low power stereo codec

Applications

- VoIP
- Multimedia
- Multimedia accessories
- Home audio/video
- Instrumentation
- Imaging
- Industrial control
- PMP
- Mobile TV
- Coprocessor applications
- Networked audio
- Biometric systems
- Consumer audio
- Handheld and portable devices

ADSP-BF527 Block Diagram

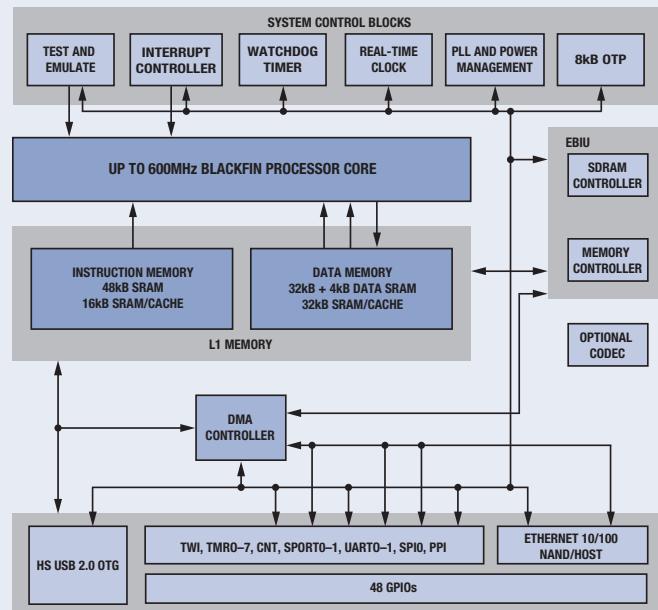

ADSP-BF522/ADSP-BF523/ADSP-BF524/ADSP-BF525/ADSP-BF526/ADSP-BF527

Blackfin Processors

Low Power with Advanced Peripherals

Part Number ¹	Max (MHz)	Max (MMACS)	L1 Memory (kB)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ²
ADSP-BF522BBCZ-3A	300	600	132	-40 to +85		208-ball CSP_BGA	
ADSP-BF522BBCZ-4A	400	800	132	-40 to +85		208-ball CSP_BGA	
ADSP-BF522KBCZ-3	300	600	132	0 to 70		289-ball CSP_BGA	
ADSP-BF522KBCZ-3C ³	300	600	132	0 to 70		289-ball CSP_BGA	8.18 to 12.04 ⁴
ADSP-BF522KBCZ-4	400	800	132	0 to 70	PPI, SPI, 2 SPORTs, NAND interface, TWI, host DMA, 2 UARTs, Lockbox	289-ball CSP_BGA	
ADSP-BF522KBCZ-4C ³	400	800	132	0 to 70		289-ball CSP_BGA	
ADSP-BF523BBCZ-5A	533	1066	132	-40 to +85		208-ball CSP_BGA	
ADSP-BF523KBCZ-5	533	1066	132	0 to 70		289-ball CSP_BGA	
ADSP-BF523KBCZ-5C ² ³	533	1066	132	0 to 70		289-ball CSP_BGA	
ADSP-BF523KBCZ-6	600	1200	132	0 to 70		289-ball CSP_BGA	13.46 to 19.24
ADSP-BF523KBCZ-6A	600	1200	132	0 to 70		208-ball CSP_BGA	
ADSP-BF523KBCZ-6C ³	600	1200	132	0 to 70		289-ball CSP_BGA	
ADSP-BF524BBCZ-3A	300	600	132	-40 to +85		208-ball CSP_BGA	
ADSP-BF524BBCZ-4A	400	800	132	-40 to +85		208-ball CSP_BGA	
ADSP-BF524KBCZ-3	300	600	132	0 to 70		289-ball CSP_BGA	
ADSP-BF524KBCZ-3C ³	300	600	132	0 to 70		289-ball CSP_BGA	9.58 to 13.74 ⁴
ADSP-BF524KBCZ-4	400	800	132	0 to 70	PPI, SPI, 2 SPORTs, NAND interface, TWI, host DMA, 2 UARTs, Lockbox,	289-ball CSP_BGA	
ADSP-BF524KBCZ-4C ³	400	800	132	0 to 70	HS USB OTG	289-ball CSP_BGA	
ADSP-BF525BBCZ-5A	533	1066	132	-40 to +85		208-ball CSP_BGA	
ADSP-BF525KBCZ-5	533	1066	132	0 to 70		289-ball CSP_BGA	
ADSP-BF525KBCZ-5C ² ³	533	1066	132	0 to 70		289-ball CSP_BGA	
ADSP-BF525KBCZ-6	600	1200	132	0 to 70		289-ball CSP_BGA	15.17 to 21.00
ADSP-BF525KBCZ-6A	600	1200	132	0 to 70		208-ball CSP_BGA	
ADSP-BF525KBCZ-6C ³	600	1200	132	0 to 70		289-ball CSP_BGA	
ADSP-BF526BBCZ-3A	300	600	132	-40 to +85		208-ball CSP_BGA	
ADSP-BF526BBCZ-4A	400	800	132	-40 to +85		208-ball CSP_BGA	
ADSP-BF526KBCZ-3	300	600	132	0 to 70		289-ball CSP_BGA	
ADSP-BF526KBCZ-3C ³	300	600	132	0 to 70		289-ball CSP_BGA	10.76 to 15.53 ⁴
ADSP-BF526KBCZ-4	400	800	132	0 to 70	PPI, SPI, 2 SPORTs, 10/100 Ethernet, TWI, host DMA,	289-ball CSP_BGA	
ADSP-BF526KBCZ-4C ³	400	800	132	0 to 70	NAND interface, 2 UARTs, Lockbox,	289-ball CSP_BGA	
ADSP-BF527BBCZ-5A	533	1066	132	-40 to +85	HS USB OTG	208-ball CSP_BGA	
ADSP-BF527KBCZ-5	533	1066	132	0 to 70		289-ball CSP_BGA	
ADSP-BF527KBCZ-5C ² ³	533	1066	132	0 to 70		289-ball CSP_BGA	
ADSP-BF527KBCZ-6	600	1200	132	0 to 70		289-ball CSP_BGA	16.99 to 22.89
ADSP-BF527KBCZ-6A	600	1200	132	0 to 70		208-ball CSP_BGA	
ADSP-BF527KBCZ-6C ³	600	1200	132	0 to 70		289-ball CSP_BGA	

NOTES

¹Certain models available in automotive grade.

²Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

³Stereo audio codec available.

⁴Preliminary product information; pricing is subject to change. Please contact ADI for further information and release schedule.

Z = RoHS compliant part.



ADSP-BF542/ADSP-BF544/ADSP-BF547/ADSP-BF548/ADSP-BF549

Blackfin Processors

High Performance Convergent Multimedia Processors

The ADSP-BF54x family was specifically designed to meet the needs of convergent multimedia applications where system performance and cost are essential ingredients. The integration of multimedia, human interface, and connectivity peripherals combined with increased system bandwidth and on-chip memory provides customers a platform to design the most demanding applications.

IP protection has become a necessary part of today's embedded applications. The ADSP-BF54x provides a security scheme that balances flexibility and upgradeability with performance through the inclusion of a firmware-based solution including OTP memory to enable users to implement private keys for secure access to program code.

The ADSP-BF54x provides peripheral flexibility to complement its high performance processing. These rich system-level peripherals are well-suited for industrial multimedia and automotive infotainment applications where multiple standards are prevalent and system performance is required.


Features

- Powerful and flexible cache architecture suitable for soft real-time control tasks and industry-standard operating systems, plus hard real-time signal processing tasks
- Blackfin processor core with up to 600 MHz (1200 MMACS) performance
- Lockbox Secure Technology
- Two independent DMA controllers
- Human interface: 18-/24-bit LCD controller, 32-bit up/down counter/thumbwheel interface, 8 × 8 keypad interface
- Connectivity: high speed USB on-the-go (OTG) controller, host DMA, UARTs, SPORTs, SPI, TWI, and CAN (not available on ADSP-BF547)
- Expansion: SD/SDIO and ATAPI controllers
- Multimedia: 18-/24-bit LCD controller, multiple enhanced parallel peripheral interfaces (EPPI), pixel compositor hardware accelerator, and media transceiver (MXVR [ADSP-BF549 only]) for connection to a MOST® Network
- Asynchronous memory interface for SRAM, EEPROM, NAND/NOR flash connectivity
- Synchronous memory interface for DDR or Mobile DDR connectivity
- Core voltage: 0.9 V to 1.43 V

Applications

- Digital radio
- Audio jukebox
- Navigation
- Driver assistance
- Rear seat audio and video
- Advanced vehicle infotainment
- Mobile communications
- Security and access control systems
- Industrial control and factory automation
- Automotive driver assistance/safety
- Telecommunications radio and switches
- Security and access control systems
- Factory/building automation
- Automotive multimedia device interconnect
- PC peripherals
- POS barcode scanners

ADSP-BF54x Block Diagram

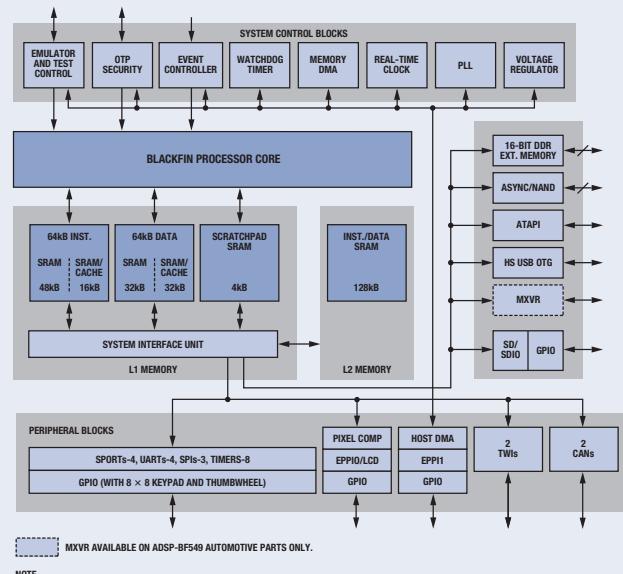

ADSP-BF542/ADSP-BF544/ADSP-BF547/ADSP-BF548/ADSP-BF549

Blackfin Processors

High Performance Convergent Multimedia Processors

Part Number ^{1,2}	Max (MHz)	Max (MMACS)	L1/L2 Memory (kB)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ³
ADSP-BF542BBCZ-4A	400	800	132/—	−40 to +85		400-ball CSP_BGA	
ADSP-BF542BBCZ-5A	533	1066	132/—	−40 to +85	CAN, HS USB OTG, 3 EPPIs, pixel comp,	400-ball CSP_BGA	
ADSP-BF542MBBCZ-5M	533	1066	132/—	−40 to +85	ATAPI-6, Lockbox	400-ball CSP_BGA	15.66 to 19.14
ADSP-BF542KBCZ-6A	600	1200	132/—	0 to 70		400-ball CSP_BGA	
ADSP-BF544BBCZ-4A	400	800	132/64	−40 to +85	CAN, Host DMA, 3 EPPIs, pixel comp,	400-ball CSP_BGA	
ADSP-BF544BBCZ-5A	533	1066	132/64	−40 to +85	Lockbox	400-ball CSP_BGA	16.56 to 18.40
ADSP-BF544MBBCZ-5M	533	1066	132/64	−40 to +85		400-ball CSP_BGA	
ADSP-BF547BBCZ-5A	533	1066	132/128	−40 to +85	HS USB OTC, 3 EPPIs, pixel comp,	400-ball CSP_BGA	
ADSP-BF547MBBCZ-5M	533	1066	132/128	−40 to +85	ATAPI-6, Lockbox	400-ball CSP_BGA	20.11 to 22.12
ADSP-BF547KBCZ-6A	600	1200	132/128	0 to 70		400-ball CSP_BGA	
ADSP-BF548BBCZ-5A	533	1066	132/128	−40 to +85	HS USB OTG, 3 EPPIs, pixel comp,	400-ball CSP_BGA	
ADSP-BF548MBBCZ-5M	533	1066	132/128	−40 to +85	ATAPI-6, Lockbox, CAN	400-ball CSP_BGA	20.71
ADSP-BF549WBBCZ5A	533	1066	132/128	−40 to +85	MXVR, CAN, HS USB OTG, ATAPI-6,	400-ball CSP_BGA	
ADSP-BF549MWBBCZ-5M	533	1066	132/128	−40 to +85	3 EPPIs, pixel comp, Lockbox	400-ball CSP_BGA	Contact ADI

NOTES

¹Certain models available in automotive grade.

²Products without an M support standard DDR memory only.

³Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

M = support for 1.8 V mobile DDR memory.

Z = RoHS compliant part.




ADSP-BF538/ADSP-BF538F Blackfin Processors

Embedded and Integrated Development

The Blackfin processor family has been expanded to address the ever increasing need for more connection possibilities with two new family members. This connectivity is coupled with the high performance 16-/32-bit Blackfin embedded processor core, the flexible cache architecture, the enhanced DMA subsystem, and the dynamic power management (DPM) functionality. System designers can take advantage of the combined control and signal processing capabilities of the processor core across a wide range of end applications through code compatibility of these new family members with existing Blackfin offerings.

The ADSP-BF538 and ADSP-BF538F are functional extensions of the popular ADSP-BF533 processor (found on Page 41), and they are ideally suited for applications with multiple device connections. The ADSP-BF538 offers equivalent embedded memory and is well-suited for applications such as video security/surveillance and industrial-environment-based distributed control/factory automation applications. The ADSP-BF538F is equivalent in functionality to the ADSP-BF538 processor with the addition of on-board flash memory. Both devices are ideally suited for a broad range of industrial, instrumentation, and medical appliance applications—allowing for broad connection possibilities coupled with a mix of control and signal processing needs based in the end product.

ADSP-BF538/ADSP-BF538F Block Diagram

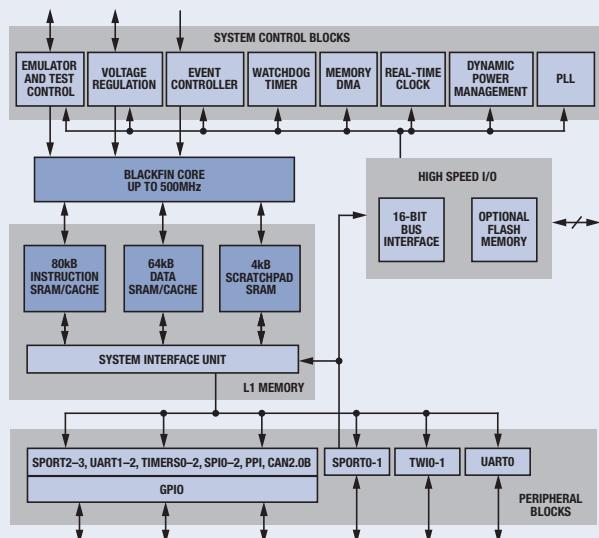

Features

- Powerful and flexible cache architecture suitable for soft real-time control tasks and industry-standard operating systems, plus hard real-time signal processing tasks
- Addition of on-board flash memory for code storage of complex system application that run on a powerful 400 MHz or 533 MHz processor
- Application-tuned peripherals provide glueless connectivity to general-purpose converters in data acquisition applications
- Enhanced dynamic power management with on-chip voltage regulation
- 10-stage RISC MCU/DSP pipeline with mixed 16-/32-bit ISA for optimal code density
- Full SIMD architecture, including instructions for accelerated video and image processing
- Memory management unit (MMU) supporting full memory protection for an isolated and secure environment
- More SPORT, UART, SPI, and TWI peripherals over the popular ADSP-BF533 processor
- Controller area network (CAN) 2.0B interface
- Enhanced DMA controller for high bandwidth throughput accommodating multiple peripherals
- 148 kB on-chip full-speed SRAM
- Glueless SDRAM, SRAM, and flash controllers
- 1 MB of flash memory on ADSP-BF538F devices
- Glueless video capture/display port
- 316-ball, lead-free CSP_BGA package
- Core voltage: 0.8 V to 1.375 V
- Industrial temperature range
- Multiple pin- and code-compatible derivatives

Applications

- Video security/surveillance
- Industrial
- Instrumentation
- Medical appliances

Part Number ¹	Max (MHz)	Max (MMACs)	L1 Memory (kB)	Flash Memory (Bytes)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ²
ADSP-BF538BBCZ-4A	400	800	148	—	-40 to +85		316-ball CSP_BGA	
ADSP-BF538BBCZ-4F8	400	800	148	1M	-40 to +85	CAN 2.0B, 54 GPIOs, 4 SPORTs, 3 UARTs, 3 SPIs, 2 TWIs, PPI, 8 MB flash	316-ball CSP_BGA	16.03 to 20.67
ADSP-BF538BBCZ-5A	533	1066	148	—	-40 to +85		316-ball CSP_BGA	
ADSP-BF538BBCZ-5F8	533	1066	148	1M	-40 to +85		316-ball CSP_BGA	

NOTES

¹Certain models available in automotive grade.

²Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.

ADSP-BF536/ADSP-BF537 Blackfin Processors

Embedded Network Connectivity

The Blackfin processor family addresses the ever increasing need for pervasive embedded network connectivity with the ADSP-BF536/ADSP-BF537. This connectivity is powerful when utilized in conjunction with the high performance 16-/32-bit Blackfin embedded processor core, the flexible cache architecture, the enhanced DMA subsystem, and the dynamic power management (DPM) functionality. System designers can take advantage of the combined control and signal processing capabilities of the processor core across a wide range of end applications through the scalability of the pin and code compatibility of these new family members. The ADSP-BF536 and ADSP-BF537 are a functional extension of the popular ADSP-BF531, ADSP-BF532, and ADSP-BF533 processors (found on Page 39 to Page 42), and they are ideally suited for a variety of networked applications.

Designed for Endpoint Connectivity

The Blackfin processor core is ideally suited for handling both control-oriented networking tasks and user interface mechanisms while also offering full signal processing capabilities for analyzing almost any condition. To complement the performance, the Blackfin processor's memory system offers a powerful and flexible cache architecture that can dynamically balance between the hard real-time tasks desired in SRAM, the soft real-time control tasks, and an operating system (OS) requiring cache functionality. DPM lowers power consumption for extending battery life or for minimizing power dissipation in enclosed applications.

Designed for Bandwidth

The ADSP-BF536/ADSP-BF537 processors integrate a fully compliant IEEE 802.3-2002 standard 10/100 Ethernet MAC that has been enhanced with advanced features to allow for higher network bandwidth capabilities. In addition, the DMA subsystem has been enhanced with greater traffic management abilities to allow for higher data throughput with minimal processor core intervention. The DMA subsystem also includes dual external handshake DMA request lines that, when used in conjunction with the external bus interface unit (EBIU), can be used when a high speed interface is required for external FIFOs and high bandwidth communication peripherals, such as USB 2.0 devices. The ADSP-BF536/ADSP-BF537 processors also embed a controller area network (CAN) module and are capable of data rates of up to 1 Mbps.

Features

- Up to 600 MHz operation
- Embedded IEEE 802.3 2002 compliant 10/100 Ethernet MAC and buffered oscillator output to a separate PHY
- Controller area network (CAN) 2.0B interface
- I²C®-compatible 2-wire interface
- Enhanced DMA controller, including two external handshake DMA request lines
- Up to 132 kB on-chip, full-speed SRAM
- Glueless SDRAM, SRAM, and flash controllers
- Glueless video capture/display port
- 182-ball and 208-ball CSP_BGA packages
- Lead-free and lead-bearing package options
- Industrial temperature ranges
- Core voltage: 0.8 V to 1.4 V

Applications


- Video security
- Video surveillance
- Industrial distributed control
- Industrial factory automation
- Remote monitoring devices
- Point-of-sale terminals
- VoIP
- Biometrics/security
- Instrumentation
- Medical appliances
- Consumer appliances



ADSP-BF536/ADSP-BF537 Blackfin Processors

Embedded Network Connectivity

ADSP-BF536/ADSP-BF537 Block Diagram

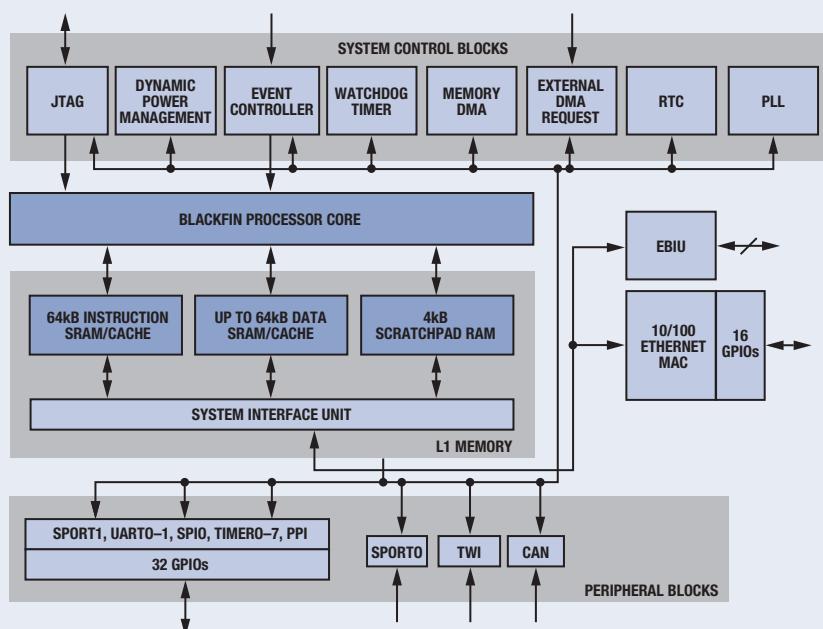

Part Number	Max (MHz)	Max (MMACs)	L1 Memory (kB)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ¹
ADSP-BF536BBC-3A	300	600	100	-40 to +85		182-ball CSP_BGA	
ADSP-BF536BBCZ-3A	300	600	100	-40 to +85		182-ball CSP_BGA	
ADSP-BF536BBCZ-3B	300	600	100	-40 to +85		208-ball CSP_BGA	
ADSP-BF536BBC-4A	400	800	100	-40 to +85		182-ball CSP_BGA	10.07 to 14.42
ADSP-BF536BBCZ-4A	400	800	100	-40 to +85	10/100 Ethernet, CAN, PPI, TWI, 8 timers, 48	182-ball CSP_BGA	
ADSP-BF536BBCZ-4B	400	800	100	-40 to +85		208-ball CSP_BGA	
ADSP-BF537BBC-5A	500	1000	132	-40 to +85	GPIOs, 2 SPORTs/ 2 UARTs, SPI	182-ball CSP_BGA	
ADSP-BF537BBCZ-5A	500	1000	132	-40 to +85		182-ball CSP_BGA	
ADSP-BF537BBCZ-5B	500	1000	132	-40 to +85		208-ball CSP_BGA	
ADSP-BF537BBCZ-5AV	533	1066	132	-40 to +85		182-ball CSP_BGA	17.15 to 21.20
ADSP-BF537BBCZ-5BV	533	1066	132	-40 to +85		208-ball CSP_BGA	
ADSP-BF537KBCZ-6AV	600	1200	132	0 to 70		182-ball CSP_BGA	
ADSP-BF537KBCZ-6BV	600	1200	132	0 to 70		208-ball CSP_BGA	

NOTES

¹Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.

ADSP-BF534 Blackfin Processor

CAN Connectivity for Automotive and Industrial Applications

The ADSP-BF534 is a functional extension of the popular ADSP-BF531, ADSP-BF532, and ADSP-BF533 processors (found on Page 39 to Page 42) and is ideally suited for a variety of CAN networked applications. The ADSP-BF534 offers a high performance series for embedded applications such as automotive safety, automotive body control, automotive driver assistance, automotive entertainment, and industrial factory automation. This processor is ideally suited for a broad range of industrial, instrumentation, medical applications, and fleet monitoring that allows for scalability and CAN network connectivity utilizing a mix of control plus signal processing in the end product.

Designed for Endpoint Connectivity

Embedded CAN networked applications require ever increasing intelligence and analytical capabilities for endpoint decision making. The Blackfin processor core is ideally suited for handling both control-oriented networking tasks and user interface mechanisms while also offering full signal processing capabilities for analyzing almost any condition. To complement the performance, the Blackfin processor's memory system offers a powerful and flexible cache architecture that can dynamically balance the hard real-time tasks desired in SRAM, the soft real-time control tasks, and an operating system (OS) requiring cache functionality. Dynamic power management (DPM) lowers power consumption for extending battery life or for minimizing power dissipation in enclosed applications. DPM allows for independent dynamic scaling of either voltage or frequency in a self-contained system with the integration of both a voltage regulator and PLL that are software programmable.

Designed for Bandwidth

The ADSP-BF534 integrates a fully compliant CAN 2.0B module capable of data rates of up to 1 Mbps. This module supports up to 32 mailboxes with individual acceptance masks and data filtering. In addition, the DMA subsystem has been enhanced with greater traffic management abilities to allow for higher data throughput with minimal processor core intervention. The DMA subsystem also includes dual external handshake DMA request lines that, when used in conjunction with the external bus interface unit (EBIU), can be used when a high speed interface is required for external FIFOs and high bandwidth communication peripherals, such as USB 2.0 devices.


Features

- Up to 500 MHz operation
- Controller area network (CAN) 2.0B interface
- Enhanced DMA controller, including two external handshake DMA request lines
- 132 kB on-chip, full-speed SRAM
- Glueless SDRAM, SRAM, and flash controllers
- Glueless video capture/display port
- 8 timers supporting PWM and pulse width/event count modes
- 48 general-purpose I/Os, 8 with high source/high sink capabilities
- 182-ball and 208-ball sparse CSP_BGA packages
- Lead-free and lead-bearing package options
- Industrial and extended industrial temperature ranges
- Core voltage: 0.8 V to 1.2 V

Applications

- | | |
|--------------------------------|---------------------------------|
| • Automotive safety | • Industrial factory automation |
| • Automotive body control | • Instrumentation |
| • Automotive driver assistance | • Medical appliances |
| • Automotive entertainment | • Consumer appliances |

ADSP-BF534 Block Diagram

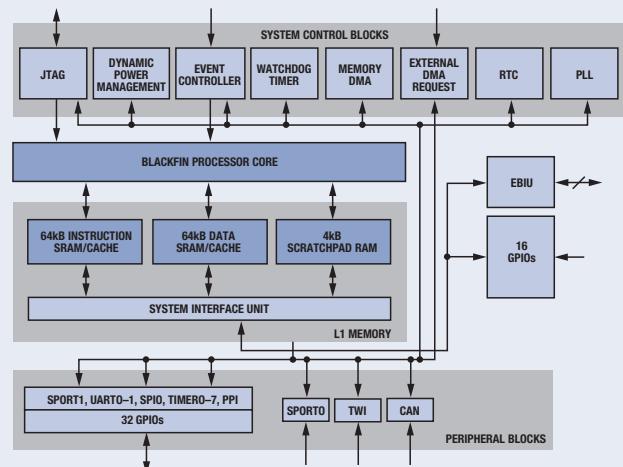

Part Number ¹	Max (MHz)	Max (MMACs)	L1 Memory (kB)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ²
ADSP-BF534BBC-4A	400	800	132	-40 to +85		182-ball CSP_BGA	
ADSP-BF534BBCZ-4A	400	800	132	-40 to +85	CAN, PPI/SPI,	182-ball CSP_BGA	
ADSP-BF534BBCZ-4B	400	800	132	-40 to +85	TWI, 8 timers,	208-ball CSP_BGA	
ADSP-BF534BBC-5A	500	1000	132	-40 to +85	48 GPIOs,	182-ball CSP_BGA	12.40 to
ADSP-BF534BBCZ-5A	500	1000	132	-40 to +85	2 SPORTs/UARTs	182-ball CSP_BGA	18.53
ADSP-BF534BBCZ-5B	500	1000	132	-40 to +85		208-ball CSP_BGA	
ADSP-BF534YBCZ-4B	400	800	132	0 to 70		208-ball CSP_BGA	

NOTES

¹Certain models available in automotive grade.

²Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.



ADSP-BF561 Blackfin Processor

Symmetric Multiprocessing

The Blackfin processor family expands the performance envelope with the introduction of the ADSP-BF561 configured as a symmetric multiprocessing arrangement of two Blackfin processor cores.

The ADSP-BF561 offers twice the signal processing performance of the ADSP-BF533 (found on Page 41), with more than twice the on-chip memory and significantly increased data bandwidth capability.

The ADSP-BF561 retains full code compatibility with the ADSP-BF533 and still maintains very low power consumption by using the dynamic power management capabilities of the Blackfin architecture.

The ADSP-BF561 integrates two Blackfin processor cores, each capable of operating at up to 600 MHz, and 2.6 Mb of on-chip SRAM memory. The on-chip memory is portioned between individual, high speed L1 memory for each core and a large 128 kB bank of shared L2 memory. Extremely high data bandwidth is provided by the 32-bit external port and dual 16-channel DMA controllers.

On-chip peripherals include dual parallel peripheral interfaces (PPIs), each with support for ITU-R 656 video formatting and high speed serial ports supporting I²S formats. The product is optimized for a variety of consumer multimedia and other processing intensive applications.


Features

- Dual Blackfin cores with each core capable of 600 MHz/1200 MMACS (2400 MMACS total)
- Large on-chip memory of 328 kB—arranged as individual L1 memory systems for each core, plus a shared L2 memory space
- High data throughput tailored for the needs of imaging and consumer multimedia applications
- Application-tuned peripherals provide glueless connectivity to a variety of audio/video converters and general-purpose ADCs/DACs
- Core voltage: 0.8 V to 1.4185 V

Applications

- Digital still cameras
- Digital video cameras
- Portable media players
- Digital video recorders
- Set-top boxes
- Consumer multimedia
- Automotive vision systems
- Broadband wireless systems
- Instrumentation
- Security and surveillance

ADSP-BF561 Block Diagram

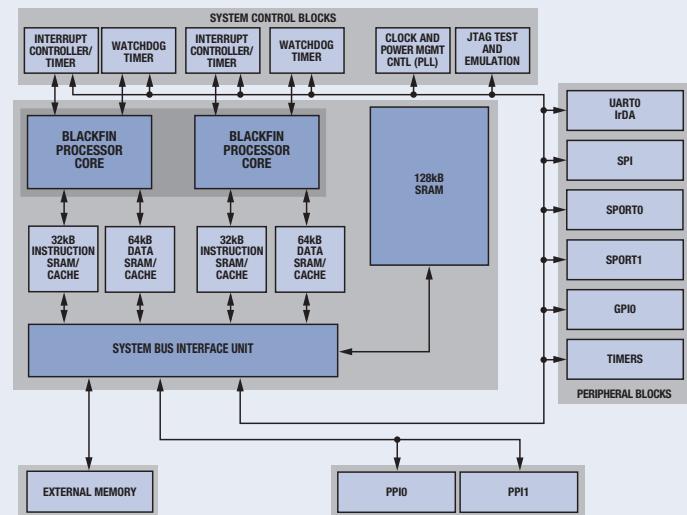

Part Number ¹	Max (MHz)	Max (MMACS)	L1/L2 Memory (kB)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ²
ADSP-BF561SBB500	500	2000	100 ³ /128	-40 to +85		297-ball PBGA	
ADSP-BF561SBBZ500	500	2000	100 ³ /128	-40 to +85		297-ball PBGA	
ADSP-BF561SBBCZ-5A	500	2000	100 ³ /128	-40 to +85		256-ball CSP_BGA	
ADSP-BF561SKB500	500	2000	100 ³ /128	0 to 70		256-ball CSP_BGA	
ADSP-BF561SKBZ500	500	2000	100 ³ /128	0 to 70		256-ball CSP_BGA	
ADSP-BF561SKBCZ500	500	2000	100 ³ /128	0 to 70	2 PPIS, UART,	256-ball CSP_BGA	
ADSP-BF561SKBCZ-5A	500	2000	100 ³ /128	0 to 70	12 timers,	256-ball CSP_BGA	
ADSP-BF561SKBCZ-5V	533	2000	100 ³ /128	0 to 70	2 SPORTs	256-ball CSP_BGA	20.40 to 35.74
ADSP-BF561SBB600	600	2400	100 ³ /128	-40 to +85		297-ball PBGA	
ADSP-BF561SBBZ600	600	2400	100 ³ /128	-40 to +85		297-ball PBGA	
ADSP-BF561SKB600	600	2400	100 ³ /128	0 to 70		256-ball CSP_BGA	
ADSP-BF561SKBZ600	600	2400	100 ³ /128	0 to 70		256-ball CSP_BGA	
ADSP-BF561SKBCZ-6A	600	2400	100 ³ /128	0 to 70		256-ball CSP_BGA	
ADSP-BF561SKBCZ-6V	600	2400	100 ³ /128	0 to 70		256-ball CSP_BGA	

NOTES

¹Certain models available in automotive grade.

²Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

³Per core.

Z = RoHS compliant part.

ADSP-BF531/ADSP-BF532 Blackfin Processors

Low Power General-Purpose Applications

The ADSP-BF531 and ADSP-BF532 provide a low cost, power-efficient processor choice for today's most demanding convergent signal processing applications. With power consumption as low as 0.23 mW/MHz and performance of 400 MHz, applications can now add greater signal processing performance without sacrificing battery life.

The high performance 16-/32-bit Blackfin embedded processor core, the flexible cache architecture, the enhanced DMA subsystem, and the dynamic power management (DPM) functionality allow system designers a flexible platform to address a wide range of applications, including consumer, communications, automotive, and industrial/instrumentation.

Designed for Performance and Power Efficiency

Both the ADSP-BF531 and the ADSP-BF532 offer 400 MHz performance and up to 800 MMACS. This processor core is supported by an advanced DMA controller supporting one- and two-dimensional DMA transfers between on-chip memory, off-chip memory, and system peripherals. The combination of the processor core speed and the DMA controller allows for efficient processing of audio, voice, video, and image data.

Blackfin processors also offer enhanced power management capabilities by integrating on-chip core voltage regulation circuitry. This on-chip voltage regulator allows for the core and system clocks to be dynamically modified via a digital divider circuit, providing systems designers an additional tool for optimization of power and performance in their end products.

Designed for Flexibility

With multiple package and memory options, many pin-for-pin-compatible, designers can choose the price point and cost point to meet their system requirements. Combined with a number of standard peripherals, including multifunction serial ports supporting I²S audio capability, UART, SPI-compatible port, three multifunction timers, and a programmable parallel port interface (PPI) with ITU-656 video support, the ADSP-BF531/ADSP-BF532 can address a wide variety of existing and emerging applications.

Designed for Low Cost

Both the ADSP-BF531 and the ADSP-BF532 were designed for cost-sensitive applications. By efficiently processing both control and signal processing code on a single processor, the Blackfin architecture eliminates the additional cost of having a separate digital signal processor in the system. Each product offers LQFP package options to simplify board design and peripherals like an on-chip real-time clock and voltage regulation to further reduce systems costs. The Blackfin processor's combination of performance, flexibility, and low cost is ideally suited for the most demanding convergent processing applications.

This processor family, combined with ADI's investment in future Blackfin products, provides a robust platform for tomorrow's most challenging convergent applications.

Features

- Performance to 400 MHz/800 MMACS enables multichannel audio plus CIF video processing in multimedia applications
- Enhanced dynamic power management with on-chip core voltage regulation allows operation to 0.8 V, extending battery life in portable applications
- Application-tuned peripherals provide glueless connectivity to general-purpose converters in data acquisition applications
- Multiple low cost, pin- and code-compatible derivatives enable software differentiation in cost-sensitive consumer applications
- Pin compatible with the ADSP-BF533 (found on Page 41)
- Core voltage: 0.8 V to 1.2 V

Applications


- Biometric systems
- Consumer audio
- Email terminals
- Embedded modems
- Games/learning aids
- Information appliances
- Industrial control
- Portable test equipment
- Web tablets/terminals
- Automotive telematics
- Consumer multimedia
- Digital and satellite radio
- Point-of-sale terminals
- Medical instrumentation
- Professional audio
- Telephony and communications
- Video conferencing
- VoIP terminals



ADSP-BF531/ADSP-BF532 Blackfin Processors

Low Power General-Purpose Applications

ADSP-BF531/ADSP-BF532 Block Diagram

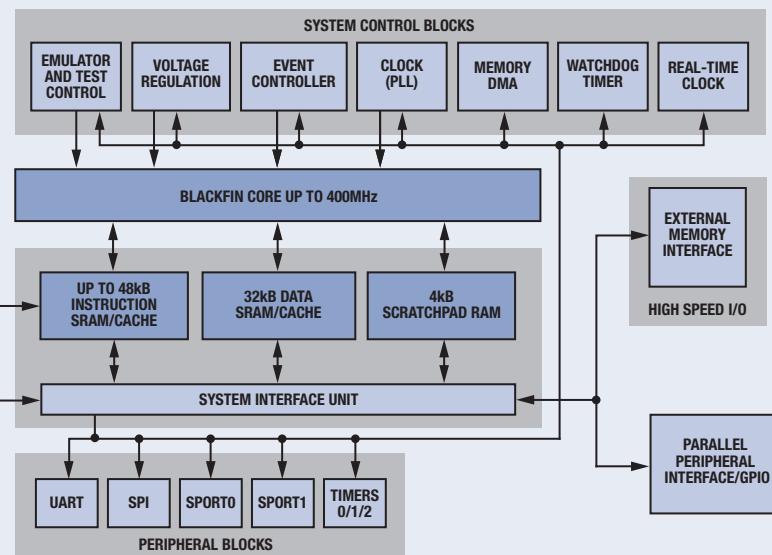

Part Number ¹	Max (MHz)	Max (MMACs)	L1 Memory (kB)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ²
ADSP-BF531SBBC400	400	800	52	-40 to +85		160-ball CSP_BGA	
ADSP-BF531SBBCZ400	400	800	52	-40 to +85		160-ball CSP_BGA	
ADSP-BF531SBSTZ400	400	800	52	-40 to +85		176-lead LQFP	5.70 to 12.81
ADSP-BF531SBB400	400	800	52	-40 to +85		169-ball PBGA	
ADSP-BF531SBBZ400	400	800	52	-40 to +85		169-ball PBGA	
ADSP-BF532SBBC400	400	800	84	-40 to +85	PPI, UART, SPI, 2 SPORTs, 3 timers, 16 GPIOs	160-ball CSP_BGA	
ADSP-BF532SBBCZ400	400	800	84	-40 to +85		160-ball CSP_BGA	
ADSP-BF532SBSTZ400	400	800	84	-40 to +85		176-lead LQFP	9.33 to 17.31
ADSP-BF532SBB400	400	800	84	-40 to +85		169-ball PBGA	
ADSP-BF532SBBZ400	400	800	84	-40 to +85		169-ball PBGA	

NOTES

¹Certain models available in automotive grade.

²Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.

ADSP-BF533 Blackfin Processor

High Performance General-Purpose Applications

The ADSP-BF533 provides a high performance, power-efficient processor choice for today's most demanding convergent signal processing applications. With performance up to 600 MHz (1200 MMACS), applications can now add greater signal processing performance without significantly increasing their system cost. The high performance 16-/32-bit Blackfin embedded processor core, the flexible cache architecture, the enhanced DMA subsystem and the dynamic power management (DPM) functionality allow system designers a flexible platform to address a wide range of applications, including consumer, communications, automotive, and industrial/instrumentation.

Designed for Performance

The ADSP-BF533 combines the high performance Blackfin core with large on-chip Level 1 cacheable instruction and data memories. This combination allows the ADSP-BF533 to achieve very high system performance for applications such as video or multimedia. This processor core is supported by an advanced DMA controller aiding one- and two-dimensional DMA transfers between on-chip memory, off-chip memory, and system peripherals. Blackfin processors also offer enhanced power management capabilities by integrating on-chip core voltage regulation circuitry. The on-chip voltage regulator and programmable PLL allow the core and system clocks to be dynamically modified via a digital divider circuit, providing systems designers an additional tool for optimization of power and performance in their end products.

Designed for Flexibility

With multiple package and memory options, designers can choose the price point and cost point to meet their system requirements. Combined with a number of standard peripherals, including multifunction serial ports supporting I^SS audio capability, UART, SPI-compatible port, three multifunction timers, and a programmable parallel port interface (PPI) with ITU-656 video support, the ADSP-BF533 can address a wide variety of existing and emerging applications. Also, the ADSP-BF533 is code-compatible with all of the Blackfin family of processors, providing more choices and offering greater leverage across developments. The Blackfin processor's combination of performance and flexibility is ideally suited for the most demanding convergent processing applications. This processor family, combined with Analog Devices' investment in future Blackfin products, provides a robust platform for tomorrow's most challenging convergent applications.

Features

- Up to 600 MHz performance
- 1200 MMACS
- Application-tuned peripherals provide glueless connectivity to general-purpose converters in data acquisition applications
- Large on-chip SRAM for maximum system performance
- Pin-compatible with the ADSP-BF531/ADSP-BF532 for scalable solutions
- Core voltage: 0.8 V to 1.45 V

Applications


- | | |
|--|--|
| <ul style="list-style-type: none"> • Multimedia • Home audio/video • Embedded modems • Instrumentation | <ul style="list-style-type: none"> • Imaging • Industrial control • Voice communication |
|--|--|



ADSP-BF533 Blackfin Processor

High Performance General-Purpose Applications

ADSP-BF533 Block Diagram

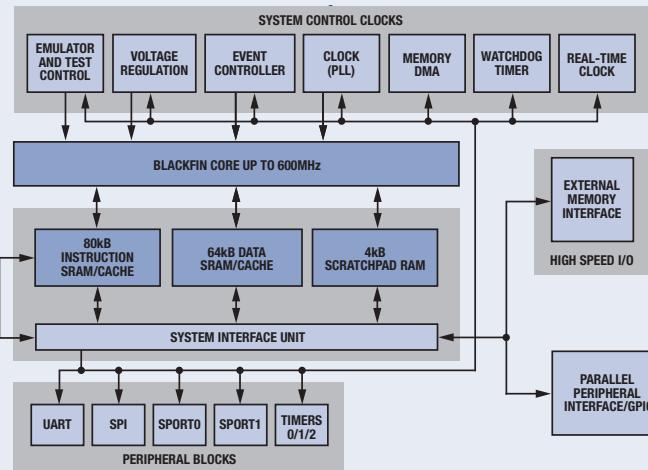

Part Number ¹	Max (MHz)	Max (MMACs)	L1 Memory (kB)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ²
ADSP-BF533SBB500	500	1000	148	-40 to +85		169-ball PBGA	
ADSP-BF533SBBC400	400	800	148	-40 to +85		160-ball CSP_BGA	
ADSP-BF533SBBC500	500	1000	148	-40 to +85		160-ball CSP_BGA	
ADSP-BF533SBBC-5V	533	1066	148	-40 to +85		160-ball CSP_BGA	
ADSP-BF533SBBCZ400	400	800	148	-40 to +85		160-ball CSP_BGA	
ADSP-BF533SBBCZ500	500	1000	148	-40 to +85	PPI, UART, SPI, 2 SPORTs,	160-ball CSP_BGA	
ADSP-BF533SBBCZ-5V	533	1066	148	-40 to +85	3 timers, 16 GPIOs	160-ball CSP_BGA	12.19 to 22.21
ADSP-BF533SBBZ400	400	800	148	-40 to +85		169-ball PBGA	
ADSP-BF533SBBZ500	500	1000	148	-40 to +85		169-ball PBGA	
ADSP-BF533SBST400	400	800	148	-40 to +85		176-lead LQFP	
ADSP-BF533SBSTZ400	400	800	148	-40 to +85		176-lead LQFP	
ADSP-BF533SKBC-6V	600	1200	148	0 to 70		160-ball CSP_BGA	
ADSP-BF533SKBCZ-6V	600	1200	148	0 to 70		160-ball CSP_BGA	

NOTES

¹Certain models available in automotive grade.

²Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.

ADSP-BF535 Blackfin Processor

High Performance Processor for Internet Appliances

The ADSP-BF535 high performance processor features dual MACs, high clock rates, and dynamic power management, allowing for optimization of system performance and power consumption. Additionally, through the advantages of a clean, orthogonal RISC instruction set, the ADSP-BF535 is optimized for programming in high level languages (HLL) like C/C++, resulting in extremely dense code.

At the heart of the Blackfin processor is ADI's most advanced 16-bit digital signal processing core architecture. This new core has three primary objectives—performance, power management, and ease of use.

High Performance

Blackfin processors employ a dual-MAC processor that also includes efficient RISC MCU system control functionality and multimedia processing capabilities. All are combined into one simple, optimized instruction set architecture.

Dynamic Power Management

Blackfin processor's dynamic power management offers a flexible, software controlled environment that delivers the required amount of performance to the processor via independent, dynamic variation of both voltage and frequency. Blackfin processors also employ a gated clock scheme and multiple power-down modes for minimal power consumption.

Ease of Use

Blackfin processors employ both an optimized compiler and architecture to support software development in HLL, for example, C/C++, thus delivering code densities comparable to those of traditional microcontrollers. The architecture also has embedded features to support efficient use of a real-time operating system (RTOS).

Features

- Up to 350 MHz/700 MMACS
- 16-bit dual-MAC processor core
- Flexible, software controlled dynamic power management
- Enhanced media instructions for audio, image, and video multimedia applications
- Integrated system peripherals, including USB device, PCI, serial ports, UARTs, SPI, and timers
- Core voltage: 0.95 V to 1.65 V

Blackfin Processors Utilize

- Single processor core
- Single instruction set
- Single programming model
- Single set of development tools

Applications

- Automotive applications
- Broadband home gateways
- Central office/network switch
- Digital imaging and printing
- Global positioning systems
- Home networking/wireless LAN
- Internet appliances
- Modem solutions
- PDAs and other portable handheld devices
- Video conferencing
- VoIP phone solutions
- Personal branch exchanges (PBX)
- Point-of-sale terminals
- Telecommunications

Part Number	Max (MHz)	Max (MMACS)	L1/L2 Memory (kB)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ¹
ADSP-BF535PBB-200	200	400	52/256	-40 to +85		260-ball PBGA	
ADSP-BF535PBB-300	300	600	52/256	-40 to +85		260-ball PBGA	
ADSP-BF535PBBZ-200	200	400	52/256	-40 to +85		260-ball PBGA	
ADSP-BF535PKB-300	300	600	52/256	0 to 70		260-ball PBGA	30.36 to 45.92
ADSP-BF535PKB-350	350	700	52/256	0 to 70	2 SPIs, 2 SPORTs, USB device, PCI	260-ball PBGA	
ADSP-BF535PKBZ-300	300	600	52/256	0 to 70		260-ball PBGA	
ADSP-BF535PKBZ-350	350	700	52/256	0 to 70		260-ball PBGA	

NOTES

¹Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.



SHARC Processor Family

Leadership in Floating-Point Applications

Analog Devices 32-bit floating-point SHARC processors are based on a Super Harvard Architecture that balances exceptional core and memory performance with outstanding I/O throughput capabilities. This Super Harvard Architecture extends the original concepts of separate program and data memory buses by adding an I/O processor with its associated dedicated buses. In addition to satisfying the demands of the most computationally intensive, real-time signal processing applications, SHARC processors integrate large memory arrays and application-specific peripherals designed to simplify product development and reduce time to market.

The SHARC processor portfolio currently consists of four generations of products providing code-compatible solutions ranging from entry-level to the high performance products offering fixed- and floating-point computational power. All SHARC processors provide a common set of features and functionality usable across many signal processing markets and applications, allowing designers an easy transition to the newest products with the latest features and the highest performance.

First Generation

First-generation SHARC processors offer performance to 66 MHz/198 MFLOPS. Their easy to use instruction set architecture supports both 32-bit fixed-point and 32-/40-bit floating-point data formats combined with large memory arrays, and sophisticated communications ports make them suitable for a wide array of parallel processing applications, including consumer audio, medical imaging, military, industrial, and instrumentation.

Second Generation

Second-generation SHARC processors double the level of signal processing performance (100 MHz/600 MFLOPS) by utilizing a single-instruction, multiple-data (SIMD) architecture. This hardware extension doubles the number of computational resources available to the system programmer. Second-generation products contain dual multipliers, ALUs, shifters, and data register files—significantly increasing overall system performance. This capability is especially relevant in consumer, automotive, and professional audio applications where the algorithms related to multi-channel processing can effectively utilize the SIMD architecture.

SHARC Processor Product Portfolio

	Highest Performance →								
	ADSP-21261 ADSP-21262	ADSP-21266	ADSP-21362 ADSP-21363 ¹ ADSP-21364	ADSP-21371 ADSP-21375	ADSP-21368 ² ADSP-21369	ADSP-21365 ADSP-21366 ADSP-21367 ²	ADSP-21467	ADSP-21469	Future
Performance > 2 GFLOPS					•	•	•	•	•
Application-Specific Peripherals			•	•	•	•	•	•	
Configurable Applications I/O Interface			•	•	•	•	•	•	
Low Cost (<\$10 @ 25k qty)	•			•					
Automotive Grade			•		•	•		•	•
Audio Decoders in ROM		•				•	•		
Hardware Accelerators			•		•	•	•	•	•
High Speed Interprocessor Communication (Link Ports)							•	•	

¹ADSP-21363 does not have hardware accelerators.

²Automotive grade not supported on these parts.

Third Generation

Third-generation SHARC processors are based on an enhanced SIMD architecture, which extends core performance to an impressive 400 MHz/2.4 GFLOPS. Third-generation SHARC audio processors feature a high level of integrated on-chip peripherals, such as multichannel audio surround sound decoders and postprocessing algorithms, S/PDIF transmitter/receiver, high performance asynchronous sample-rate conversion, PWM channels, code security, and DTCP cipher for protection of digital data in automobiles. A number of third-generation processors are also pin-compatible for use with a single hardware platform.

Fourth Generation

Fourth-generation SHARC processors not only increase the core performance to an industry-leading 450 MHz/2.7 GFLOPs but also boost the performance with the addition of accelerator logic to off-load core activities from being consumed by filter processing. Fourth-generation SHARC processors integrate some of the highest memory on-chip RAM with a capacity of 5 Mb. Extra memory capacity is further enhanced with the innovative VISA (variable instruction set architecture) mode where programs can save up to 30% of code size by reducing the opcodes for many instructions. For industrial and automotive applications, fourth-generation processors also incorporate a thermal diode to allow customers the flexibility to operate in higher ambient operating temperature conditions without sacrificing overall performance. DTCP cipher for protection of digital data in automotive applications is also integrated in automotive parts.

Integration of peripherals continues with serial ports, SPI ports, S/PDIF Tx/Rx, and an 8-channel asynchronous sample rate converter block. The fourth-generation SHARC processor allows data from the serial ports to be directly transferred to external memory by the DMA controller, again preserving internal memory space for code and data. The fourth-generation processor also incorporates link ports that allow processor to processor communication for data movement.

SHARC Processor Family

Leadership in Floating-Point Applications

All SHARC processors are code-compatible with previous generations of SHARC processors, so legacy code is easily ported to the newer products. In addition, a number of third-generation processors are also pin-compatible for use with a single hardware platform.

- Home theater applications—The ADSP-21266, ADSP-21363, ADSP-21366, ADSP-21367, and ADSP-21467 permit highly efficient software implementations of audio decode and postprocessing algorithms, such as Dolby Digital, Dolby Digital EX, DTS-ES Discrete 6.1, DTS-ES Matrix 6.1, DTS 96/24™ 5.1, DTS-HD, DTS Express, MPEG-2 AAC LC, MPEG-2 BC 2ch, Dolby Pro Logic II, Dolby Pro Logic 2x, Dolby True HD, DTS Neo:6, DDPlus DCV, Neural Audio, Audyssey room equalization, and WMA Pro. Libraries of all standard—and many proprietary—audio algorithms reside in on-chip ROM, eliminating the need for external ROM.
- Professional audio applications—A number of the third-generation (ADSP-2136x) and fourth-generation (ADSP-2146x) SHARC processors are well-suited for professional audio applications requiring high processing power and advanced on-chip peripherals such as sample rate conversion, S/PDIF transmitter/receiver, and BGA and LQFP package options.
- Broad market use—SHARC processors are available in commercial, industrial, and automotive temperature grade packages. They are used in a wide variety of signal processing applications, providing up to 450 MHz performance in a single instruction, multiple data (SIMD) architecture.

The combination of a high performance core surrounded by appropriate peripherals, a large software library, and award-winning CROSSCORE development tools makes the third-generation SHARC processors the ideal choice for audio and broad market processor applications.

SHARC Melody Platform

Analog Devices' SHARC Melody platform brings the highest quality audio processing available to audio receivers based on the premium performance of the third-generation SHARC processors. The SHARC Melody with floating-point capability provides the highest quality platform on which to build high fidelity audio decoders and are now widely available in home theater systems designed by a range of leading global brands. These programmable DSP-based platforms ensure that end equipment is always up to date and able to support the newest standards as soon as content is available.

Music enthusiasts love the quality of their living room surround sound systems. These audiophiles want that experience in their cars, necessitating a variety of audio-spatializer algorithms and equalizer functions that can be developed on SHARC Melody platforms. For midrange systems required in cars, Analog Devices also offers a SigmaDSP that integrates 24-bit DSP functionality with very high performance digital-to-analog converters to make an integrated, customizable equalizer.

ADI also offers a wide range of audio codec and amplifier components, plus software to support in-car music playing and recording.

SHARC Processor Family Selection Table

Part Number	Performance			Memory			Peripheral Options ¹			Packaging and Operating Temperature Range Options ^{4,5}			Price @ 1k (\$U.S.) ⁶	Availability	
	Clock Speeds (MHz)	32-Bit Floating Point/MACs	On-Chip L1 SRAM (B16)	On-Chip ROM (Bits)	DMA (Channels)	External Memory Type Supported	Serial Ports	Other Ports/Features	Number of GPIOs	Voltage (V) Nominal ⁷	Total Core Power Type (mW)	Temperature Range (Nonautomotive Grade)	Temperature Range Automotive Grade (W)		
ADSP-21261	150	300	1M	3M	Async		18	4 SPORTS, SPI		1.20	<600	0°C to +70°C	-40°C to +85°C	6.64	Production
ADSP-21262	150	300	2M	4M			22	6 SPORTS, SPI		1.20	3 GP	2 mm × 12 mm, 0.8 mm, 136-ball CSP_BGA; 20 mm × 20 mm, 0.5 mm 144-lead LQFP	-40°C to +85°C	21.94	Production
ADSP-21362	200	400								1.20	600	12 mm × 12 mm, 0.8 mm, 136-ball CSP_BGA; 20 mm × 20 mm, 0.5 mm 144-lead LQFP	0°C to +70°C	—	17.15
ADSP-21363	200	400						S/PDIF ASRC, PWM, 2 PCGs		1.00	800	12 mm × 12 mm, 0.8 mm, 136-ball CSP_BGA; 20 mm × 20 mm, 0.5 mm 144-lead LQFP_EP	-40°C to +105°C	32.55	Production
ADSP-21364	200	400						S/PDIF ASRC, PWM, 2 PCGs		1.00	960	12 mm × 12 mm, 0.8 mm, 136-ball CSP_BGA; 20 mm × 20 mm, 0.5 mm 144-lead LQFP_EP	-40°C to +85°C (BGA only)	27.12	Production
ADSP-21368	200	400						S/PDIF ASRC, PWM, 2 SPIs		1.00	800	12 mm × 12 mm, 0.5 mm, 136-ball CSP_BGA; 20 mm × 20 mm, 0.5 mm, 144-lead LQFP_EP	-40°C to +105°C	29.13	Production
ADSP-21371	200	400						S/PDIF ASRC, PWM, 4 PCGs, shared external memory		1.20	960	12 mm × 12 mm, 0.8 mm, 136-ball CSP_BGA; 20 mm × 20 mm, 0.5 mm, 144-lead LQFP_EP	-40°C to +85°C (BGA only)	20.22	Production
ADSP-21375	200	400						S/PDIF ASRC, PWM, 4 PCGs		1.20	1080	12 mm × 12 mm, 0.8 mm, 136-ball CSP_BGA; 20 mm × 20 mm, 0.5 mm, 144-lead LQFP_EP	-40°C to +85°C (BGA only)	31.04	Production
ADSP-21469	200	400						S/PDIF ASRC, PWM, 4 PCGs		1.30	1430	1.27 mm, 256-ball BGA	0°C to +70°C	—	41.39
ADSP-21469	266	532						S/PDIF ASRC, PWM, 4 PCGs		1.20	840	28 mm × 28 mm, 0.5 mm, 208-lead LQFP_EP	-40°C to +85°C	19.69	Production
ADSP-21369	266	532						S/PDIF ASRC, PWM, 4 PCGs		1.30	1080	27 mm × 27 mm, 1.27 mm, 256-ball SGBGA; 28 mm × 28 mm, 0.5 mm, 208-lead LQFP_EP	-40°C to +85°C	—	22.65
ADSP-21371	266	532						S/PDIF ASRC, PWM, 4 PCGs		1.30	1365	28 mm × 28 mm, 0.5 mm, 208-lead LQFP_EP	0°C to +70°C	—	26.05
ADSP-21375	266	532						S/PDIF ASRC, PWM, 4 PCGs		1.30	1404	27 mm × 27 mm, 1.27 mm, 256-ball SGBGA	0°C to +70°C	—	27.35
ADSP-21469	450	900						S/PDIF ASRC, PWM, 4 PCGs		1.30	1430	28 mm × 28 mm, 0.5 mm, 208-lead LQFP_EP	0°C to +70°C	—	32.81
ADSP-21371	200	400						S/PDIF ASRC, PWM, 4 PCGs		1.00	400	28 mm × 28 mm, 0.5 mm, 208-lead LQFP_EP	0°C to +70°C	—	13.27
ADSP-21375	200	400						S/PDIF ASRC, PWM, 4 PCGs		1.00	720	28 mm × 28 mm, 0.5 mm, 208-lead LQFP_EP	-40°C to +85°C (BGA only)	9.83	Production
ADSP-21469	400	800						S/PDIF ASRC, PWM, 4 PCGs		1.00	400	19 mm × 19 mm, 1.0 mm, 324-ball CSP_BGA	-40°C to +85°C	28.50 ⁸	Sampling
ADSP-21469	450	900						S/PDIF ASRC, PWM, 4 PCGs		1.10 ⁹	600 ⁹	19 mm × 19 mm, 1.0 mm, 324-ball CSP_BGA	0°C to +70°C	Contact ADI	31.50 ⁸

Part Number	Performance						Memory			Peripheral Options ¹			Voltage (V) Nominal ²	Core Power Type (mW) ³	Total Core Power Typ (mW) ⁴	Packaging and Operating Temperature Range Options ⁵		Price @ 1k (\$U.S.) ⁶	Availability
	Clock Speeds (MHz)	32-Bit Floating Point (MACs)	On-Chip L1 SRAM (B1s)	On-Chip ROM (Bits)	External Memory Type Supported	DMA (Channels)	Serial Ports	Other Parts/ Features	Number of GPIOs	Timers	Core V _{core} (Max Speed)	External I/O				Package ^{4,5}	Temperature Range (Nonautomotive Grade)	Temperature Range Automotive Grade (W)	
<i>SHARC Audio Processors (Include audio-specific peripherals and on-channel IP factory-programmed ROM. License agreement required from IP holder(s))</i>																			
ADSP-21266	150	300	2M	Audio Decoders	Async	22	6 SPORTS, SPI	PWM, 2 PCGs	Up to 16	3 GP	1.20	3.3	<600	12 mm × 12 mm, 0.8 mm, 136-ball CSP_BGA, 20 mm × 20 mm, 0.5 mm, 144-lead LQFP	0°C to +70°C	—	14.41	Production	
ADSP-21365	200	400									1.00		800	20 mm × 20 mm, 0.5 mm, 144-lead LQFP_EP	-40°C to +105°C	-40°C to +105°C	34.26		
ADSP-21366	200	400	3M	Audio Decoders	Async	25	6 SPORTS, 2 SPIs	S/PDIF, ASRC, PWM, 2 PCGs	Up to 16	3 GP	1.20	3.3	960	12 mm × 12 mm, 0.8 mm, 20 mm × 20 mm, 0.5 mm, 144-lead LQFP_EP	-40°C to +85°C (BGA only)	-40°C to +85°C (BGA only)	28.55	Production	
ADSP-21366	333	666									1.00		800	20 mm × 20 mm, 0.5 mm, 144-lead LQFP_EP	-40°C to +105°C	-40°C to +105°C	32.55		
ADSP-21367	266	532									1.20		960	12 mm × 12 mm, 0.8 mm, 20 mm × 20 mm, 0.5 mm, 144-lead LQFP_EP	-40°C to +85°C (BGA only)	-40°C to +85°C (BGA only)	22.60		
ADSP-21371	333	666	2M	Audio Decoders	Async, 32-bit SDRAM	34	8 SPORTS, 2 SPIs, 2 UARTs, TWI	S/PDIF, ASRC, PWM, 4 PCGs	Up to 16	3 GP	1.20	3.3	840	28 mm × 28 mm, 0.5 mm, 208-lead LQFP_EP	-40°C to +85°C (BGA only)	-40°C to +85°C (BGA only)	20.73		
ADSP-21375	350	700									1.30		1080	27 mm × 27 mm, 1.27 mm, 256-ball SBG_A; 28 mm × 28 mm, 1.5 mm, 208-lead LQFP_EP	-40°C to +85°C (BGA only)	-40°C to +85°C (BGA only)	22.68	Production	
ADSP-21467	400	800									1.30		1430	27 mm × 27 mm, 1.27 mm, 256-ball SBG_A	0°C to +70°C	0°C to +70°C	—		
ADSP-21371	266	532	1M	Audio Decoders	Async, 32-bit SDRAM	32	8 SPORTS, 2 SPIs, UART, TWI	S/PDIF, PWM, 4 PCGs	Up to 16	2 GP	1.20	3.3	720	28 mm × 28 mm, 0.5 mm, 208-lead LQFP_EP	-40°C to +85°C (BGA only)	-40°C to +85°C (BGA only)	15.92	Production	
ADSP-21375	266	532	0.5M	Audio Decoders	Async, 16-bit SDRAM	24	4 SPORTS, 2 SPIs, UART, TWI	PWM, 4 PCGs		3 GP	1.20		720	28 mm × 28 mm, 0.5 mm, 208-lead LQFP_EP	-40°C to +85°C (BGA only)	-40°C to +85°C (BGA only)	11.79		
ADSP-21467	450	900	5M	Audio Decoders	16-bit DDR2, Async	36	8 SPORTS, 2 SPIs, UART, TWI	S/PDIF, ASRC, PWM, 4 PCGs, 2 link ports, FIR/IIR/FFT accelerator	Up to 8	3 GP	1.05	3.3, 1.8 (DDR2)	486 ⁸	19 mm × 19 mm, 1.0 mm, 324-ball CSP_BGA	0°C to +70°C	0°C to +70°C	34.02	Sampling	
											1.10 ⁸		600 ⁸			—	37.80 ⁸		

¹ Due to pin muxing options, not all peripheral combinations may be available together. Please refer to data sheet and user manuals for full information.

² Automotive grade products may require different voltage conditions. Please refer to data sheet for full information.

³ Core power (mW) stated for max core operating speed of the device at $T_a = 25^\circ\text{C}$, ASF = 1.0 (V_{core} nominal), $I_{DDQ,\text{typ}}$ supply current. Typical activity is the core executing a multifunction instruction fetched from internal memory, with 4 core memory accesses per CLKIN cycle (DMx64) and DMA through 3 SPORTs running. The DMA is chained to itself (running continuously) and does not use interrupts. The bit pattern for each core memory access and DMA is random). Please refer to associated data sheet and EE notes for further details and complete power calculation information. Dynamic power management available via software programmable PLL.

⁴ All DSP products available in RoHS compliant options. Please refer to data sheet for complete information.

⁵ All packaging, operating temperature, and grade combinations may not be available. Please refer to data sheet for full information and contact ADI for options outside those listed.

⁶ Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate the lowest priced version of that particular speed device and will vary depending on package type and/or temperature range and grade.

⁷ Also available with an automotive grade. Automotive products in this family are: ADSP-21469W and ADSP-21465W (with DTOP and MBL options).

⁸ Preliminary product information; pricing, power, and core voltage are subject to change—please contact ADI for further information.



ADSP-21467/ADSP-21469 SHARC Processors

High Performance Fourth-Generation Processors

The fourth generation of SHARC processors, which includes the ADSP-21467 and ADSP-21469, offers increased performance, hardware-based filter accelerators, audio and application-focused peripherals, and new memory configurations capable of supporting the latest surround-sound decoder algorithms. All devices are pin-compatible with each other and completely code-compatible with all prior SHARC processors. These newest members of the SHARC processor family are based on a single-instruction, multiple-data (SIMD) core, which supports both 32-bit fixed-point and 32-/40-bit floating-point arithmetic formats, making them particularly suitable for high performance audio applications.

There is a new feature called variable instruction set architecture (VISA) that allows the code size to be decreased by 20% to 30% and increases the memory size availability. The fourth-generation SHARC processors allow the ability to connect to faster external memory by providing a glueless interface to DDR2 SDRAMs.

Fourth-generation SHARC processors also integrate application-specific peripherals designed to simplify hardware design, minimize design risks, and ultimately reduce time to market. Grouped together, and broadly named the digital applications interface (DAI), these functional blocks can be connected to each other or to external pins via the software-programmable signal routing unit (SRU). The SRU is an innovative architectural feature that enables complete and flexible routing among DAI blocks. Peripherals connected through the SRU include but are not limited to serial ports, SPI ports, S/PDIF Tx/Rx, and an 8-channel asynchronous sample rate converter block. The fourth-generation SHARC processors allow data from the serial ports to be directly transferred to external memory by the DMA controller. Other peripherals such as UART and 2-wire interface are routed through a digital peripheral interface (DPI).

Features

- 450 MHz core clock speed
- 5 Mb of on-chip RAM
- 4 Mb of on-chip ROM with industry-standard audio decoders (ADSP-21647 only)
- FIR, IIR, and FFT accelerators
- 16-bit wide DDR2 external memory interface
- Digital applications interface (DAI) enabling user-definable access to peripherals, including an S/PDIF Tx/Rx and 8-channel asynchronous sample rate converter
- Fully enhanced DMA engine including scatter/gather DMA, delay line DMA
- 2 link ports
- 8 serial ports (SPORTs) supporting I²S, left justified sample pair, and TDM modes
- 2 SPI-compatible ports supporting master and slave modes
- UART and 2-wire Interface
- 16 pulse width modulation (PWM) channels
- 3 full-featured timers
- 324-ball PBGA package
- Commercial and industrial temperature ranges
- Core voltage: 1.0 V to 1.1 V


Applications

- Industrial control
- Professional audio
- Medical applications
- Automotive audio
- Professional audio
- Consumer AVR
- Digital audio amplifiers

ADSP-21467/ADSP-21469 SHARC Processors

High Performance Fourth-Generation Processors

ADSP-2146x Block Diagram

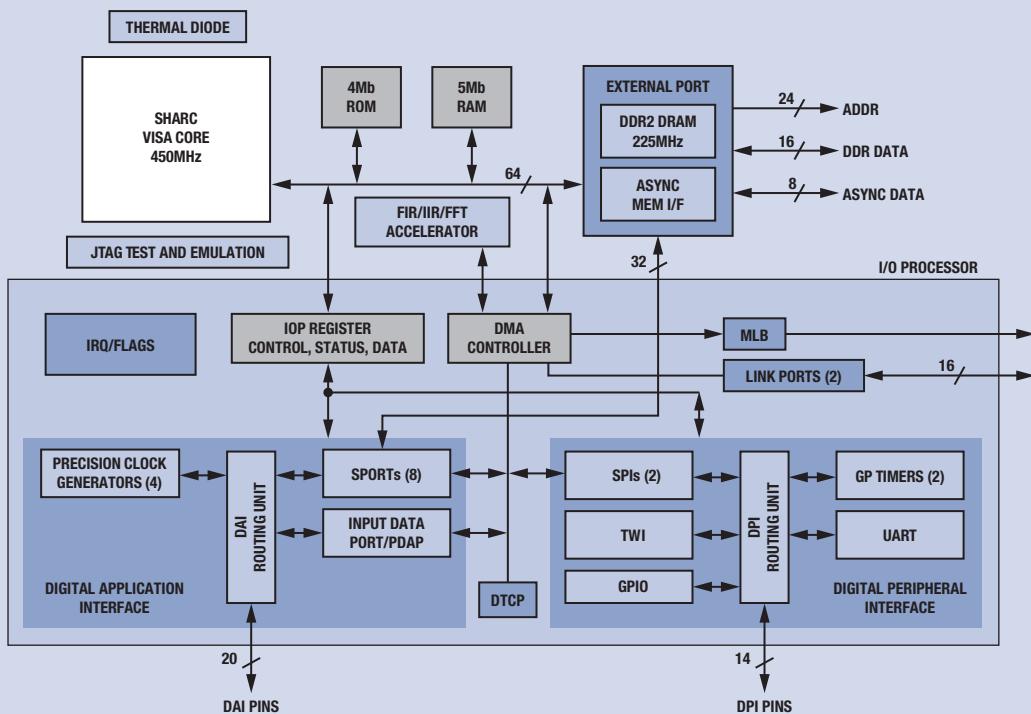

Part Number ¹	Speed (MHz)	On-Chip Memory SRAM/ROM (Mb)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @1k (\$U.S.) ²
ADSP-21467KBCZ-3A	400	5/4	0 to 70	2 timers, 1 UART, 8 SPORTs, 8-channel ASRC, 2 SPIs, 16-bit DDR2 interface,	324-ball CSP_BGA	
ADSP-21467KBCZ-4A	450	5/4	0 to 70	16-bit DDR2 interface, 1 TWI, 4 PCGs, PWM, S/PDIF Rx/Tx, DAI, DPI, link ports, integrated audio decoders (ADSP-21467 only)	324-ball CSP_BGA	
ADSP-21469BPCZ-3	400	5/4	-40 to +85		324-ball CSP_BGA	28.50 to 37.80 ³
ADSP-21469KBCZ-3	400	5/4	0 to 70		324-ball CSP_BGA	
ADSP-21469KBCZ-4	450	5/4	0 to 70		324-ball CSP_BGA	

NOTES

¹Certain models available in automotive grade.

²Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

³Preliminary product information. Pricing is subject to change. Please contact ADI for further information and release schedule.

Z = RoHS compliant part.

ADSP-21371/ADSP-21375 SHARC Processors

High Performance 32-Bit Floating-Point Processors

The ADSP-21371 and the ADSP-21375 provide the highest MFLOP/\$ performance for a variety of applications. Both the ADSP-21371 and the ADSP-21375 devices are pin-compatible and code-compatible with prior SHARC processors such as the ADSP-21367 and ADSP-21369. These members of the SHARC processor family are based on a single-instruction, multiple-data (SIMD) core, which supports both 32-bit fixed-point and 32-/40-bit floating-point arithmetic formats, making them particularly suitable for cost optimized high precision applications.

The ADSP-2137x SHARC processors also integrate many peripherals designed to simplify hardware design, minimize system design risks, and reduce end-customer time to market. Grouped together, and broadly named the digital applications interface (DAI), these functional blocks can be connected to each other or to external pins via the software-programmable signal routing unit (SRU). The SRU is an innovative architectural feature that enables complete and flexible routing among DAI blocks. Peripherals connected through the SRU include, but are not limited to, serial port and SPI port blocks.

The ADSP-21375 provides up to 266 MHz core clock performance with 0.5 Mb on-chip SRAM and four serial ports. The ADSP-21371 provides the same maximum core clock frequency with 1.0 Mb on-chip SRAM and eight serial ports.


Features

- 266 MHz SIMD SHARC core, capable of 1596 MFLOPS peak performance
- 0.5 Mb or 1.0 Mb SRAM
- 24 or 32 zero-overhead DMA channels
- Digital applications interface (DAI) enabling user-definable access to peripherals
- 4 or 8 serial ports (SPORTs) supporting I^S, left justified sample pair, and TDM modes
- 2 SPI-compatible ports supporting master and slave modes
- 1 UART
- 1 TWI
- 2 full-featured timers
- 208-lead LQFP E_Pad package
- Commercial and industrial temperature ranges
- Core voltage: 1.2 V

Applications

- Professional audio
- Medical applications
- Industrial and instrumentation

ADSP-21371 Block Diagram

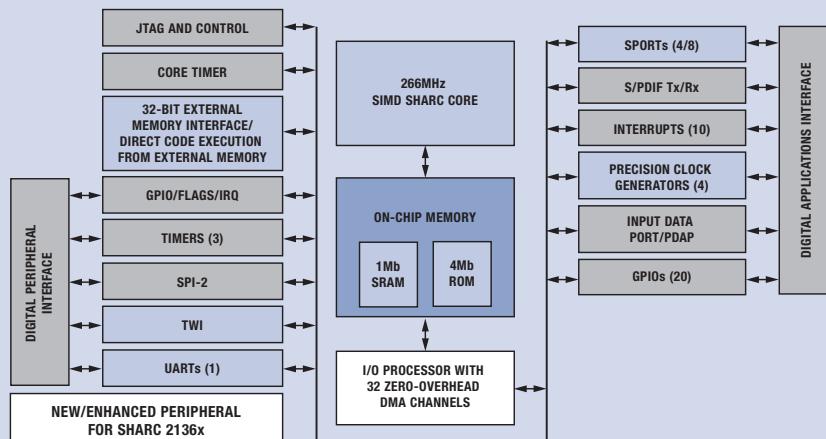

Part Number	Max (MHz)	On-Chip Memory SRAM (Mb)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ¹
ADSP-21371BSWZ-2B	266	1	-40 to +85		208-lead LQFP E_Pad	
ADSP-21371KSWZ-2A	266	1	0 to 70		208-lead LQFP E_Pad	13.27 to 15.92
ADSP-21371KSWZ-2B	266	1	0 to 70		208-lead LQFP E_Pad	
ADSP-21375BSWZ-2B	266	0.5	-40 to +85	2 timers, 1 UART, 4 SPORTs, 2 SPIs, 1 TWI, 4 PCGs, PWM, DAI, 16-bit SDRAM interface	208-lead LQFP E_Pad	9.83 to 11.79
ADSP-21375KSWZ-2B	266	0.5	0 to 70		208-lead LQFP E_Pad	

NOTES

¹Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.

ADSP-21367/ADSP-21368/ADSP-21369 SHARC Processors

Industry-Leading Performance for Floating-Point Applications

The ADSP-21367/ADSP-21368/ADSP-21369, at speeds up to 400 MHz/2.4 GFLOPS, deliver superior performance and a high degree of functional integration. These floating-point SHARC processors are designed to simplify audio product development, reduce time to market, and reduce product costs for a variety of applications, including multichannel A/V receivers, professional mixing consoles, and digital synthesizers. Using these SHARC processors, manufacturers can create differentiated products for their customers more quickly, more easily, and more cost-effectively than ever before.

With its 6 Mb on-chip ROM factory-programmed with industry-standard audio decoders and postprocessor algorithms from Dolby, DTS, Microsoft, and SRS, the ADSP-21367 is one of the industry's high performers in audio processors available today.

The 400 MHz ADSP-21368 adds shared memory capabilities, making it an ideal choice for professional audio applications and other processing intensive applications.

The ADSP-21369 provides high performance signal processing with audio and broad market peripherals, as well as a 32-bit external memory interface supporting SRAM, SDRAM, flash, and ROM memory. Along with the ADSP-21367 and ADSP-21368, the ADSP-21369 supports both 16-bit and 32-bit SDRAM at speeds up to 166 MHz. The ADSP-21369 is well-suited to address the needs of professional audio applications and other applications where high performance processing is essential.

Features

- 400 MHz/2.4 GFLOPS SIMD SHARC core supporting 32-bit floating-point, 40-bit floating-point, and 32-bit fixed-point data types
- 2 Mb SRAM, 6 Mb factory-programmed ROM (ADSP-21367 only)
- 32-bit external memory interface supports SDRAM, SRAM, flash, and ROM memory
- 8-channel, asynchronous sample rate conversion based on the AD1896
- S/PDIF transmitter and receiver
- 8 serial ports
- 2 precision clock generators
- 20 lines of digital I/O port
- 4 timers, UART, I²C-compatible interface
- ROM/JTAG security mode
- Available in 256-ball SBGA and 208-lead LQFP E_Pad package options
- Available in commercial and industrial temperature grades
- Core voltage: 1.2 V to 1.3 V

Applications


- Consumer A/V receivers
- Home theater systems
- Professional audio equipment
- Industrial and instrumentation



ADSP-21367/ADSP-21368/ADSP-21369 SHARC Processors

Industry-Leading Performance for Floating-Point Applications

ADSP-21368/ADSP-21369 Block Diagram

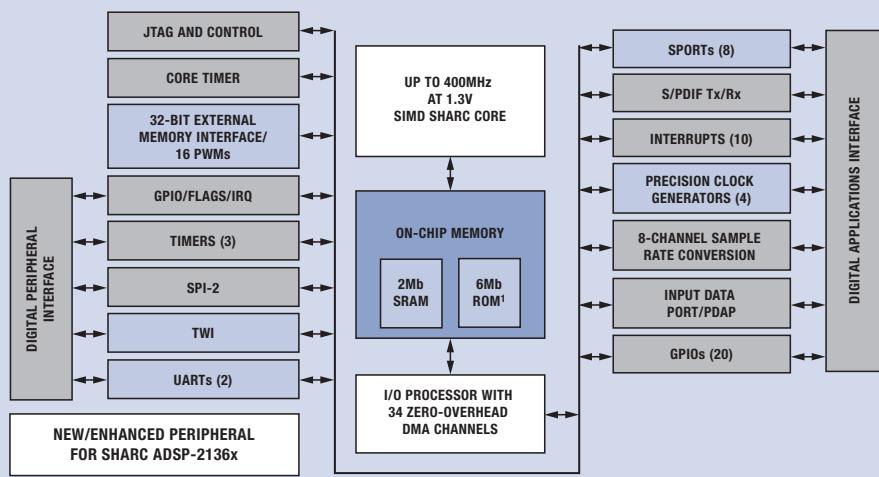¹FOR CONSUMER APPLICATIONS

Part Number	Max (MHz)	On-Chip Memory SRAM/ROM (Mb)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ¹
ADSP-21367BBP-2A	333	2/6	-40 to +85		256-ball SBGA	
ADSP-21367BBPZ-2A	333	2/6	-40 to +85		256-ball SBGA	
ADSP-21367BSWZ-1A	266	2/6	-40 to +85		208-lead LQFP E_Pad	
ADSP-21367KBP-2A	333	2/6	0 to 70		256-ball SBGA	
ADSP-21367KBPZ-2A	333	2/6	0 to 70		256-ball SBGA	
ADSP-21367KBPZ-3A	400	2/6	0 to 70		256-ball SBGA	20.73 to 37.99
ADSP-21367KSWZ-1A	266	2/6	0 to 70		208-lead LQFP E_Pad	
ADSP-21367KSWZ-2A	333	2/6	0 to 70		208-lead LQFP E_Pad	
ADSP-21367KSWZ-4A	350	2/6	0 to 70		208-lead LQFP E_Pad	
ADSP-21367KSWZ-5A	366	2/6	0 to 70		208-lead LQFP E_Pad	
ADSP-21368BBP-2A	333	2/6	-40 to +85		256-ball SBGA	
ADSP-21368BBPZ-2A	333	2/6	-40 to +85		256-ball SBGA	
ADSP-21368KBP-2A	333	2/6	0 to 70		256-ball SBGA	31.04 to 45.53
ADSP-21368KBPZ-2A	333	2/6	0 to 70		256-ball SBGA	
ADSP-21368KBPZ-3A	400	2/6	0 to 70		256-ball SBGA	
ADSP-21369BBP-2A	333	2/6	-40 to +85		256-ball SBGA	
ADSP-21369BBPZ-2A	333	2/6	-40 to +85		256-ball SBGA	
ADSP-21369BSWZ-1A	266	2/6	-40 to +85		208-lead LQFP E_Pad	
ADSP-21369BSWZ-2A	333	2/6	-40 to +85		208-lead LQFP E_Pad	
ADSP-21369KBP-2A	333	2/6	0 to 70		256-ball SBGA	
ADSP-21369KBPZ-2A	333	2/6	0 to 70		256-ball SBGA	19.69 to 36.10
ADSP-21369KBPZ-3A	400	2/6	0 to 70		256-ball SBGA	
ADSP-21369KSWZ-1A	266	2/6	0 to 70		208-lead LQFP E_Pad	
ADSP-21369KSWZ-2A	333	2/6	0 to 70		208-lead LQFP E_Pad	
ADSP-21369KSWZ-4A	350	2/6	0 to 70		208-lead LQFP E_Pad	
ADSP-21369KSWZ-5A	366	2/6	0 to 70		208-lead LQFP E_Pad	

NOTES

¹Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.


Customers must be current licensees of Dolby and DTS to obtain samples or purchase the ADSP-21367.

ADSP-21366 SHARC Processor

333 MHz Performance for Home Theater

The ADSP-21366 is particularly well-suited to address the increasing requirements of the professional audio and home theater market segments. In addition to its higher core performance, the ADSP-21366 includes peripherals such as 16-bit parallel ports, an S/PDIF transmitter/receiver, and an 8-channel asynchronous sample rate converter.

ADSP-21366 Block Diagram

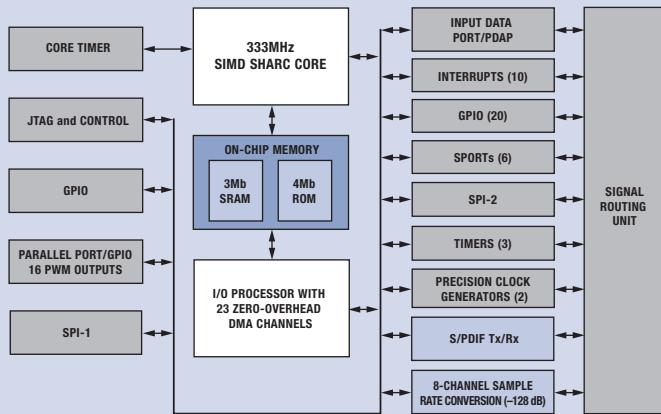

Features

- 333 MHz/2 GFLOPS SIMD SHARC core supporting IEEE 32-bit floating-point, 40-bit floating-point, and 32-bit fixed-point data types
- 3 Mb SRAM; 4 Mb ROM embedded with the latest industry-standard audio decode and postprocessing algorithms
- 25 zero-overhead DMA channels
- Digital applications interface (DAI) enabling user-definable access to peripherals, including an S/PDIF Tx/Rx, 8-channel asynchronous sample rate converter, and Digital Transmission Content Protection hardware accelerator
- 6 serial ports (SPORTs) supporting I²S, left justified sample pair, and TDM modes
- 2 SPI-compatible ports supporting master and slave modes
- 16 pulse-width modulation (PWM) channels
- 3 full-featured timers
- PLL capable of 1× to 32× frequency multiplication
- 16-bit parallel port
- Core voltage: 1.2 V

Applications

- Consumer home theater
- Digital audio amplifiers
- Professional audio

Part Number ¹	Max (MHz)	On-Chip Memory SRAM/ROM (Mb)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ²
ADSP-21366BBC-1AA	333	3/4	-40 to +85		136-ball CSP_BGA	
ADSP-21366BBCZ-1AA	333	3/4	-40 to +85	3 timers, 6 SPORTs, DAI,	136-ball CSP_BGA	
ADSP-21366BSWZ-1AA	333	3/4	-40 to +85	2 SPIs, 2 PCGs, PWM,	144-lead LQFP E_Pad	
ADSP-21366KBC-1AA	333	3/4	0 to 70	8-channel ASRC, S/PDIF,	136-ball CSP_BGA	22.60 to 32.55
ADSP-21366KBCZ-1AA	333	3/4	0 to 70	Rx/Tx, integrated audio decoders in ROM	136-ball CSP_BGA	
ADSP-21366KSWZ-1AA	333	3/4	0 to 70		144-lead LQFP E_Pad	
ADSP-21366YSWZ-2AA	200	3/4	-40 to +105		144-lead LQFP E_Pad	

NOTES

¹Certain models available in automotive grade.

²Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.


Customers must be current licensees of Dolby and DTS to obtain samples or purchase the ADSP-21366.

ADSP-21363/ADSP-21364 SHARC Processors

333 MHz Performance for Broad Market Applications

The ADSP-21363/ADSP-21364 provide superior performance—333 MHz/2 GFLOPS—within the third-generation SHARC processor family. This level of performance makes the ADSP-21363/ADSP-21364 particularly well-suited to address the increasing requirements of a broad range of applications. High core performance, combined with audio-centric peripherals, including a high precision, 8-channel asynchronous sample rate converter and 16-bit parallel port, makes the ADSP-21363/ADSP-21364 an excellent choice.

ADSP-21363/ADSP-21364 Block Diagram

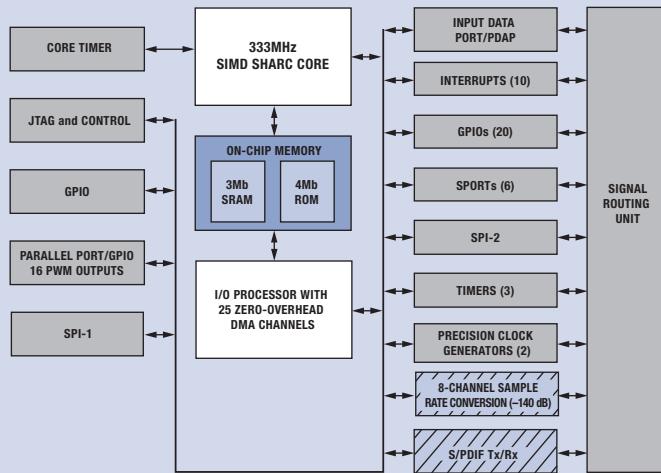

140dB SRC AVAILABLE FOR THE ADSP-21364 ONLY. S/PDIF AND SRC NOT AVAILABLE ON THE ADSP-21363.

Features

- 333 MHz/2 GFLOPS SIMD SHARC core supporting IEEE 32-bit floating-point, 40-bit floating-point, and 32-bit fixed-point data types
- 3 Mb SRAM, 4 Mb ROM
- 25 zero-overhead DMA channels
- High precision, 8-channel asynchronous sample rate converter based on the award-winning AD1896
- Digital applications interface (DAI) enabling user-definable access to peripherals, including an input data port (IDP) and general-purpose I/O
- 6 serial ports (SPORTs) supporting I^SS, left justified sample pair, and TDM modes
- 2 SPI-compatible ports supporting master and slave modes
- 16 pulse-width modulation (PWM) channels
- 3 full-featured timers
- PLL capable of 1× to 32× frequency multiplication
- 16-bit parallel port
- Core voltage: 1.2 V

Applications

- Automotive audio
- Consumer home theater
- Digital audio amplifiers
- Professional audio

Part Number ¹	Max (MHz)	On-Chip Memory SRAM/ROM (Mb)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ²
ADSP-21363BBC-1AA	333	3/4	-40 to +85		136-ball CSP_BGA	
ADSP-21363BBCZ-1AA	333	3/4	-40 to +85		136-ball CSP_BGA	
ADSP-21363BSWZ-1AA	333	3/4	-40 to +85		144-lead LQFP E_Pad	
ADSP-21363KBC-1AA	333	3/4	0 to 70		136-ball CSP_BGA	20.22 to 29.13
ADSP-21363KBCZ-1AA	333	3/4	0 to 70		136-ball CSP_BGA	
ADSP-21363KSWZ-1AA	333	3/4	0 to 70	(not available on ADSP-21363), 2 SPIs, S/PDIF Rx/Tx	144-lead LQFP E_Pad	
ADSP-21363YSWZ-2AA	200	3/4	-40 to +105		144-lead LQFP E_Pad	
ADSP-21364BBC-1AA	333	3/4	-40 to +85		136-ball CSP_BGA	
ADSP-21364BBCZ-1AA	333	3/4	-40 to +85		136-ball CSP_BGA	
ADSP-21364BSWZ-1AA	333	3/4	-40 to +85	8-channel ASRC (not available on ADSP-21363), 2 PCGs, PWM, DAI	144-lead LQFP E_Pad	
ADSP-21364KBC-1AA	333	3/4	0 to 70		136-ball CSP_BGA	29.75 to 42.85
ADSP-21364KBCZ-1AA	333	3/4	0 to 70		136-ball CSP_BGA	
ADSP-21364KSWZ-1AA	333	3/4	0 to 70		144-lead LQFP E_Pad	
ADSP-21364YSWZ-2AA	200	3/4	-40 to +105		144-lead LQFP E_Pad	

NOTES

¹Certain models available in automotive grade.

²Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.

ADSP-21266 SHARC Processor

32-Bit Floating-Point Processor for Home Theater

The ADSP-21266 is a third-generation SHARC processor optimized for consumer audio applications. This processor offers the same features as the ADSP-21262, with the addition of factory programmed ROM to contain the latest multichannel audio decoders from Dolby and DTS.

The ADSP-21266 is code-compatible with all prior SHARC processors and pin-compatible with third-generation processors. The ADSP-21266 is based on a SIMD core, which supports both 32-bit fixed-point and 32-/40-bit floating-point arithmetic formats, making them particularly suitable for high performance consumer audio applications, such as home theater systems and A/V receiver systems.

SHARC Melody Platform

The SHARC Melody platform combines high performance processors with optimized software, offering complete audio solutions to home theater manufacturers.

The ADSP-21266 is a large memory, high performance device targeted primarily at mid- to high-end home theater systems. SHARC Melody solutions are offered through on-chip ROM containing industry-standard audio decoder algorithms such as:

- PCM
- Dolby Digital
- Dolby Digital EX2
- Dolby Pro Logic® IIx
- DTS 5.1
- DTS ES®
- DTS Neo:6™ (cinema and music)
- DTS 96/24
- MPEG-2 AAC LC
- MPEG-2 (BC) 2 channel
- WMA Pro v7.1

Features

- 200 MHz (5 ns) SIMD SHARC core, capable of 1.2 GFLOPS
- Supports IEEE-compatible 32-bit floating-point, 40-bit floating-point, and 32-bit fixed-point data types
- 2 Mb SRAM; 4 Mb ROM embedded with industry-standard audio decode and postprocessing algorithms
- 16-bit parallel port
- 22 zero-overhead DMA channels
- Digital applications interface (DAI) enables user-definable access to peripherals, including precision clock generators, IDP, and general-purpose I/O
- 6 serial ports (SPORTs) supporting I²S, left justified sample pair, and TDM modes
- SPI-compatible, port-supporting master and slave modes
- 3 full-featured timers
- Software PLL capable of a variety of multiplier ratios
- 136-ball CSP_BGA (12 mm × 12 mm) and 144-lead LQFP (20 mm × 20 mm) packages
- Industrial grade BGA available
- Core voltage: 1.2 V

Applications

- Consumer home theater
- Professional audio
- Automotive audio

Part Number	Max (MHz)	On-Chip Memory SRAM/SROM (Mb)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ¹
ADSP-21266SKBCZ-2B	200	2/4	0 to 70		136-ball CSP_BGA	
ADSP-21266SKBCZ-2C	200	2/4	0 to 70		136-ball CSP_BGA	
ADSP-21266SKBCZ-2D	200	2/4	0 to 70		136-ball CSP_BGA	
ADSP-21266SKSTZ-1B	150	2/4	0 to 70	3 timers, 6 SPORTs,	144-lead LQFP	
ADSP-21266SKSTZ-1C	150	2/4	0 to 70	1 SPI, integrated audio decoders in ROM,	144-lead LQFP	14.41 to 18.01
ADSP-21266SKSTZ-1D	150	2/4	0 to 70	2 PCGs, DAI	144-lead LQFP	
ADSP-21266SKSTZ-2B	200	2/4	0 to 70		144-lead LQFP	
ADSP-21266SKSTZ-2C	200	2/4	0 to 70		144-lead LQFP	
ADSP-21266SKSTZ-2D	200	2/4	0 to 70		144-lead LQFP	

NOTES

¹Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.

Customers must be current licensees of Dolby and DTS to obtain samples or purchase the ADSP-21266.



ADSP-21262 SHARC Processor

200 MHz, Low Cost, 32-/40-Bit Floating-Point Processor

The ADSP-21262 is a third-generation SHARC programmable digital signal processor operating at up to 200 MHz. The design of the ADSP-21262 is based on a SIMD architecture that efficiently supports execution of 32-bit fixed-point and 32-/40-bit floating-point arithmetic formats.

With its SIMD core operating at 200 MHz (a 5 ns instruction cycle time), the processor actually operates at up to 400 MMACS/1200 MFLOPS. With such a high bandwidth core, the ADSP-21262 is capable of executing 1024-point complex FFT operations in just 46 μ s. This is more than 2.6 times faster than comparatively priced processors and provides optimal performance in audio as well as in broad market processor applications.

Digital Applications Interface (DAI) for Simplified I/O System Development

The ADSP-21262 introduces the DAI, an architecture that enables complete software programmability of various peripherals. The flexibility and ease of use of the SHARC programming model, combined with the DAI, allow manufacturers to deploy one hardware configuration into multiple product offerings with different I/O requirements.


Features

- 200 MHz (5 ns) SIMD SHARC core, capable of 1.2 GFLOPS
- Code-compatible with all SHARC processors
- Pin-compatible with all SHARC ADSP-2126x and ADSP-2136x processors
- Supports IEEE-compatible 32-bit floating-point, 40-bit floating-point, and 32-bit fixed-point data types
- 2 Mb on-chip, dual-ported SRAM
- 2.4 Gbps on-chip bandwidth
- 22 zero-overhead DMA channels
- 6 independent serial ports—supports standard DSP serial, I²S, left justified sample pair, and TDM modes
- SPI-compatible interface and a 16-bit parallel port
- Digital applications interface (DAI)
- 4 timers: 1 core and 3 general-purpose
- 136-ball CSP_BGA (12 mm \times 12 mm) and 144-lead LQFP (20 mm \times 20 mm) packages available in commercial and industrial temperature ranges
- Core voltage: 1.2 V

Applications

- Professional audio
- Consumer A/V receivers
- Automotive audio
- Medical appliances
- Voice recognition
- Test and measurement equipment
- Telephony
- Wireless communications

ADSP-21262 Block Diagram

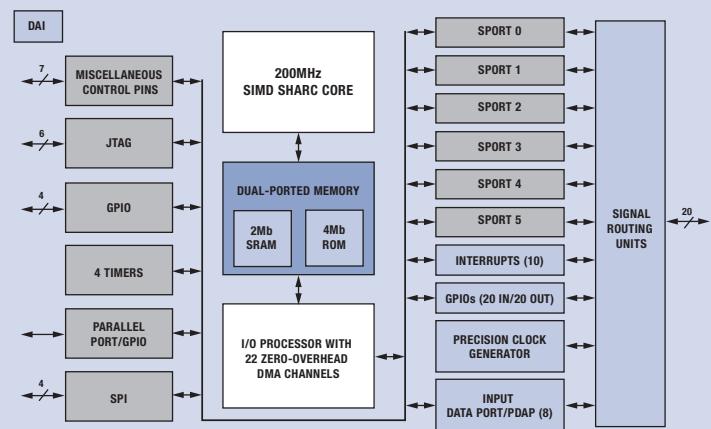

Part Number ¹	Max (MHz)	On-Chip Memory SRAM/SROM (Mb)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ²
ADSP-21262SBBC-150	150	2/4	-40 to +85		136-ball CSP_BGA	
ADSP-21262SBBCZ150	150	2/4	-40 to +85		136-ball CSP_BGA	
ADSP-21262SKBC-200	200	2/4	0 to 70	3 timers, 6 SPORTs, 1 SPI, 2 PCGs, DAI	136-ball CSP_BGA	17.15 to 24.14
ADSP-21262SKBCZ200	200	2/4	0 to 70		136-ball CSP_BGA	
ADSP-21262SKSTZ200	200	2/4	0 to 70		144-lead LQFP	

NOTES

¹Certain models available in automotive grade.

²Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.

ADSP-21261 SHARC Processor

150 MHz, Low Cost, 32-Bit Floating-Point Processor

The ADSP-21261 is the lowest cost member of the third-generation of SHARC programmable digital signal processors. It is based on the SIMD SHARC core that supports execution of 32-bit fixed-point and 32-/40-bit floating-point arithmetic formats.

With its core running at 150 MHz (6.67 ns instruction cycle time), the ADSP-21261 is capable of executing 1024-point complex FFT operations in 61 μ s. The processor's single-instruction, multiple-data (SIMD) mode effectively doubles the processor performance.

The ADSP-21261 is designed with a high level of functional integration, including 1 Mb of on-chip, dual-ported SRAM, which enables sustained processor and I/O performance without the need for external memory. System I/O is achieved through four full-duplex serial ports, four timers, a 16-bit parallel port, a serial peripheral interface (SPI), 18 zero-overhead direct memory access (DMA) channels delivering fast data transfers without processor intervention, and an innovative digital applications interface (DAI), which provides the user complete software control through its signal routing unit (SRU).


Features

- 150 MHz (6.67 ns) SIMD SHARC core, capable of 900 MFLOPS peak performance
- Code-compatible with all SHARC processors
- Supports IEEE-compatible 32-bit floating-point, 40-bit floating-point, and 32-bit fixed-point data types
- 1 Mb on-chip, dual-ported SRAM
- 18 zero-overhead DMA channels
- 4 independent serial ports that support standard DSP serial mode, I²S mode, left justified sample-pair mode, and TDM mode
- SPI-compatible interface and a 16-bit parallel port
- Digital applications interface (DAI)
- Software configurable PLL providing many possible multiplier ratios
- 4 timers: 1 core and 3 general-purpose
- 136-ball CSP_BGA (12 mm × 12 mm) and 144-lead LQFP (20 mm × 20 mm) packages available in commercial temperature range
- Core voltage: 1.2 V

Applications

- Medical appliances
- Test and measurement equipment
- Voice recognition
- Professional audio
- Consumer A/V receivers
- Automotive audio
- Telephony
- Wireless communications

ADSP-21261 Block Diagram

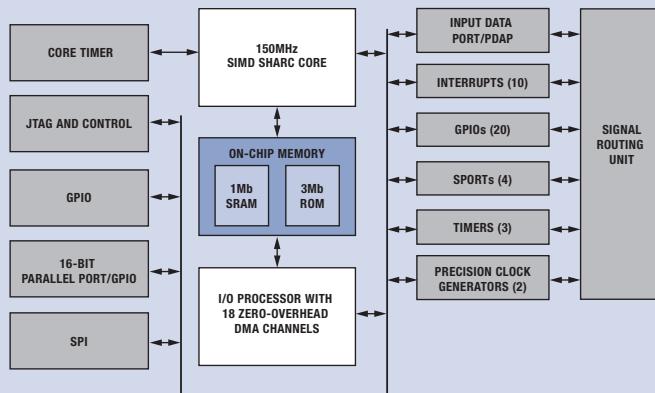

Part Number	Max (MHz)	On-Chip Memory SRAM/SROM (Mb)	Ambient Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ¹
ADSP-21261SKBC-150	150	1/3	0 to 70	3 timers, 4 SPORTs, 1 SPI, 2 PCGs, DAI, 4 SPORTs, 2 link ports, 1 SPI, DMA controller	136-ball CSP_BGA	
ADSP-21261SKBCZ150	150	1/3	0 to 70		136-ball CSP_BGA	6.64 to 7.31
ADSP-21261SKSTZ150	150	1/3	0 to 70		144-lead LQFP	

NOTES

¹Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.

ADSP-21161N SHARC Processor

100 MHz, Low Cost, 32-Bit Processor

The 32-bit floating-point programmable ADSP-21161N processor is based on a SIMD SHARC architecture and is optimized for single processor and small multiprocessor systems.

The ADSP-21161N core operates at up to 100 MHz and is capable of 600 MFLOPS. The core is supported by 12 GPIO flags, SPI ports, and serial ports, and it supports external SDRAM and SBSRAM, which make the ADSP-21161N an excellent choice for audio and broad market multiprocessing applications.

Benefits

- Cluster multiprocessing and two 100 MBps link ports simplify connection and communication for multiprocessing
- SDRAM controller improves large DRAM bank throughput
- 4 serial ports allow 16 channels of data to be transferred in/out of the processor


Features

- 100 MHz (10 ns) SIMD SHARC processor core
- 600 MFLOPS (32-bit floating-point data), 600 MOPS (32-bit fixed-point data)
- Code-compatible with ADSP-21x6x SHARC processors
- Supports IEEE-compatible 32-bit floating-point, 40-bit floating-point, and 32-bit fixed-point math
- Single-cycle instruction execution, including SIMD operations in both computational units
- 1 Mb on-chip, dual-ported SRAM
- 2.4 Gbps on-chip data bandwidth
- 14 zero-overhead DMA channels
- 4 synchronous serial ports with I²S support
- Serial ports support 128-channel TDM frames with selection of companding on a per channel basis
- Integrated support for SDRAM and SBSRAM external memories
- Support for single-cycle, 100 MHz instruction execution from 48-bit wide external memories
- Core voltage: 1.8 V

Applications

- Speech recognition
- Professional and high end consumer audio
- Automotive entertainment
- Fingerprint recognition
- Digital audio broadcast
- Wireless communications
- Motor control
- Global positioning systems
- Medical equipment
- Telephony
- Test equipment

ADSP-21161N Block Diagram

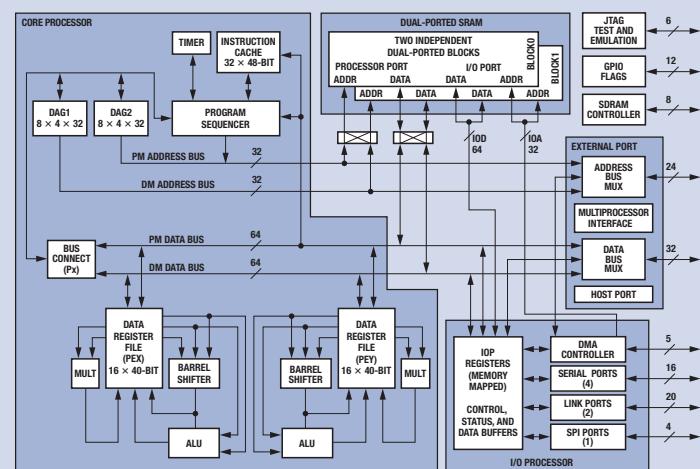

Part Number	Max (MHz)	On-Chip Memory SRAM (Mb)	Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ¹
ADSP-21161NCCA-100	100	1	-40 to +85 ambient	3 timers, 4 SPORTs,	225-ball CSP_BGA	
ADSP-21161NCCAZ100	100	1	-40 to +85 ambient	1 SPI, 2 PCGs, DAI,	225-ball CSP_BGA	26.17 to
ADSP-21161NKCA-100	100	1	0 to 85 case	4 SPORTs, 2 link ports,	225-ball CSP_BGA	34.54
ADSP-21161NKCAZ100	100	1	0 to 85 case	1 SPI, DMA controller	225-ball CSP_BGA	

NOTES

¹Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.

ADSP-21160 SHARC Processor

100 MHz, 32-Bit Processor for Multiprocessing Applications

The ADSP-21160 family introduces single-instruction, multiple-data (SIMD) processing to the SHARC processor family. While maintaining code compatibility with previous SHARC family members, the SIMD architecture provides up to a 2× increase in performance on a cycle-by-cycle basis. Like all SHARC processors, the ADSP-21160 offers native support of 32-bit fixed-point and 32-/40-bit floating-point data types.

Designed specifically for multiprocessing applications, the ADSP-21160 offers a balanced architecture with 600 MFLOPS core performance, 4 Mb on-chip SRAM, zero-overhead DMAs, large I/O bandwidth, and multiprocessing support through cluster and link port interfaces.


Applications

- Audio
- Medical
- Military
- 3D graphics
- Imaging
- Communications

Features

- Glueless clusters of up to 6 SHARC processors
- Link ports for 2D and 3D arrays
- Distributed bus arbitration
- Unified memory space
- Link ports provide up to 80 MBps I/O each
- 320 MBps external port
- Hardware support for semaphores
- 100 MHz (10.5 ns) core instruction rate
- Single-cycle instruction execution, including SIMD operations in both computational units
- 570 MFLOPS peak and 380 MFLOPS sustained performance (based on FIR)
- Dual data address generators (DAGs) with modulo and bit-reverse addressing
- 4 Mb dual-ported SRAM
- Zero-overhead looping and single-cycle loop setup, providing efficient program sequencing
- IEEE 1149.1 JTAG standard test access port and on-chip emulation
- Core voltage: 1.8 V to 2.5 V

ADSP-21160 Block Diagram

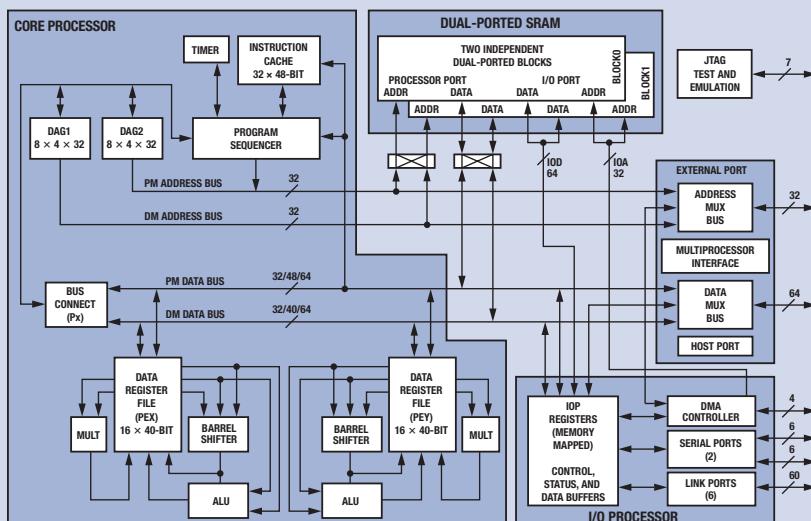

Part Number	Max (MHz)	On-Chip Memory SRAM (Mb)	Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ¹
ADSP-21160MKB-80	80	4	0 to 85 case		400-ball PBGA	
ADSP-21160MKBZ-80	80	4	0 to 85 case	2 SPORTs,	400-ball PBGA	
ADSP-21160NCB-100	100	4	-40 to +100 case	4 link ports,	400-ball PBGA	169.49 to 199.29
ADSP-21160NCBZ-100	100	4	-40 to +100 case	DMA controller	400-ball PBGA	
ADSP-21160NKB-100	100	4	0 to 85 case		400-ball PBGA	
ADSP-21160NKBZ-100	100	4	0 to 85 case		400-ball PBGA	

NOTES

¹Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

Z = RoHS compliant part.

ADSP-21065L SHARC Processor

32-Bit Processor

The ADSP-21065L is a broad market, programmable 32-bit SHARC processor that allows users to program with equal efficiency in both fixed-point and floating-point arithmetic. This programming flexibility, combined with the high performance core and integrated peripherals, make the ADSP-21065L an outstanding price/performance value for a broad base of consumer, communications, automotive, industrial, and computer applications.

The ADSP-21065L is code-compatible with the ADI SHARC processor family and, as such, customers have immediate access to software and hardware development tools from ADI and SHARC processor third parties.


Applications

- Keyless entry using voice analysis/recognition
- Barcode scanners
- Imaging
- Ultrasound equipment
- Digital oscilloscopes
- Fingerprint recognition
- Professional audio
- Automotive audio
- Consumer audio

Features

- 544 kb configurable, dual-ported, on-chip memory
- 64M × 32-bit word external address space
- 198 MFLOPS (32-bit floating-point)
- 198 MOPS (32-bit fixed-point)
- Glueless SDRAM interface
- 2 serial transmit/receive ports support 32-channel TDM
- I²S mode supports up to 16 channels
- 2 timers with event capture and PWM options
- 12 programmable I/O pins
- 10 DMA channels
- Glueless multiprocessing with two ADSP-21065L processors
- Code-compatible with all SHARC processors
- 208-lead MQFP, 196-ball CSP_BGA packages
- Core voltage: 3.3 V

ADSP-21065L Block Diagram

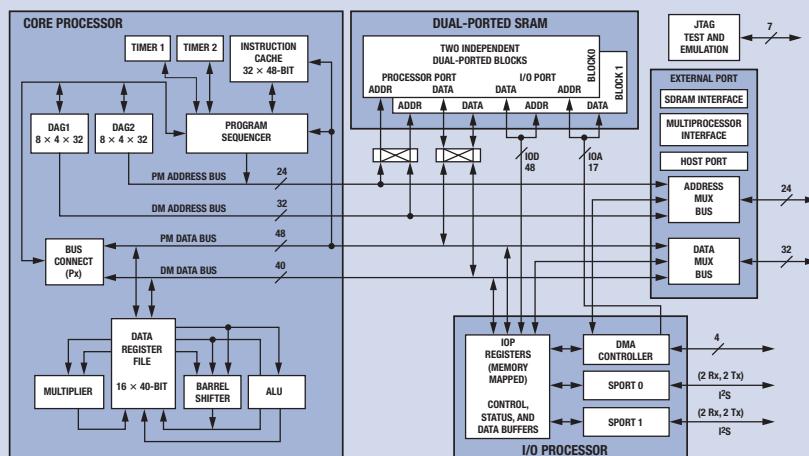

Part Number	Max (MHz)	On-Chip Memory SRAM (kb)	Temperature Range (°C)	Key Peripherals	Package	Price Range @ 1k (\$U.S.) ¹
ADSP-21065LCCA-240	60	544	-40 to +100 case		196-ball CSP_BGA	
ADSP-21065LCCA2-240	60	544	-40 to +100 case		196-ball CSP_BGA	
ADSP-21065LCSZ-240	60	544	-40 to +100 case		208-lead MQFP	
ADSP-21065LKCA-240	60	544	0 to 85 case	2 SPORTs,	196-ball CSP_BGA	
ADSP-21065LKCA-264	66	544	0 to 85 case	DMA controller,	196-ball CSP_BGA	22.85 to 66.63
ADSP-21065LKCAZ240	60	544	0 to 85 case	2 timers	196-ball CSP_BGA	
ADSP-21065LKCAZ264	66	544	0 to 85 case		196-ball CSP_BGA	
ADSP-21065LKSZ-240	60	544	0 to 85 case		208-lead MQFP	
ADSP-21065LKSZ-264	66	544	0 to 85 case		208-lead MQFP	

NOTES

¹Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

L = indicates 3.3 V operation.

Z = RoHS compliant part.

TigerSHARC Processor Family

Highest Performance Processor for Multiprocessor Systems

The TigerSHARC processor family offers the industry's highest performance per watt and per square inch of board space for the most demanding signal and image processing applications. Its patented link port technology allows glueless interprocessor communication within arrays of two or more TigerSHARC processors, delivering unbounded performance in terms of MMACS and MFLOPS.

Based on a 128-bit static superscalar architecture, TigerSHARC processors offer native support of fixed- and floating-point data types and a balanced combination of computational performance, I/O bandwidth, and memory integration. Together, this yields sustained DSP system-level performance that is two to four times greater than conventional DSPs or microprocessors with vector processing units.

By providing native support for 1-bit data formats used for chip-rate processing, TigerSHARC pioneers a new class of software-defined radios and serves applications that were previously the exclusive domain of expensive ASICs (application-specific integrated circuits) and FPGAs (field-programmable gate arrays). And by moving to a software-centric design model, TigerSHARC processors allow IP reuse, which greatly enhances R&D productivity throughout each successive product generation.


The TigerSHARC processors provide a broad range of price and performance points to meet the needs of many different applications. The ADSP-TS201 is offered at 500 MHz and 600 MHz with 24 Mb of on-chip memory, while the ADSP-TS202 and ADSP-TS203 are offered at 500 MHz with 12 Mb and 4 Mb of on-chip memory, respectively.

Soft Baseband Platform

The TigerSHARC processor supports the massive signal processing and memory demands of communications baseband modem implementations. It is the first general-purpose processor capable of homogeneous, low cost, flexible, and scalable baseband implementations without the use of external ASICs or memory and does not require an internal hardware accelerator.

The TigerSHARC processor is designed specifically to handle all of the demands of a various baseband implementation from a MIPS, memory and I/O perspective. This enables a compact, homogeneous implementation with a simple control interface that is flexible, scalable, and low cost.

TigerSHARC Processor Product Portfolio

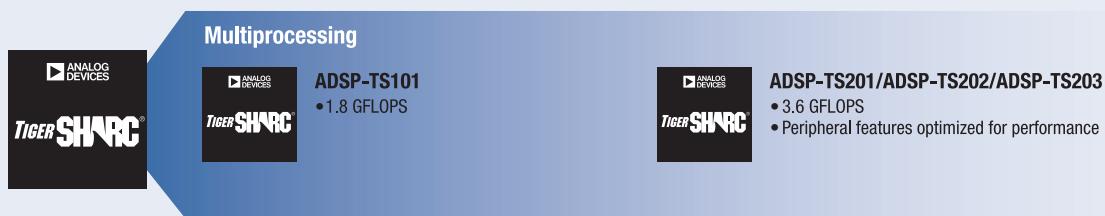

TigerSHARC Processor Family

Part Number	Performance		Memory		DMA (Channels)	Peripheral Options			Voltage (V) Nominal		Total Core Power ¹ Typ (mW)	Packaging and Temperature Range Options ^{2,3}	Temperature Range (Non-Automotive Grade)	Price @ 1k ⁴ (\$U.S.)	Availability
	Clock Speeds (MHz)	MMACs	On-Chip L1 DRAM (Bits)	External Memory Type Supported		Ports/Features	Number of GPIOs	Timers	Core V _{DDINT} (Max Speed)	External I/O					
ADSP-TS201	500	4000 (16-bit) 1000 (32-bit)	24M	Async, SDRAM	14	4 LVDS link ports, host port, cluster bus (up to 8)	4	2	1.05	2.5, 1.5 DRAM	2163	25 mm × 25 mm, 1.0 mm, 576-ball BGA_ED	−40°C to +105°C −40°C to +85°C	244.90	Production
	600	4800 (16-bit) 1200 (32-bit)							1.20	2.5, 1.6 DRAM			−40°C to +85°C	269.39	
	500	4000 (16-bit) 1000 (32-bit)	12M						1.05	2.5, 1.5 DRAM	2163	25 mm × 25 mm, 1.0 mm, 576-ball BGA_ED	−40°C to +85°C	203.41	
ADSP-TS203	500	4000 (16-bit) 1000 (32-bit)	4M	Async	10	2 LVDS link ports, host port, cluster bus (up to 8)	4	1	1.05		2163		−40°C to +85°C	179.12	
ADSP-TS101	250	2000 (16-bit) 500 (32-bit)	6M (SRAM)						1.25	3.3	1500	27 mm × 27 mm, 1.0 mm, 625-ball PBGA; 19 mm × 19 mm, 0.8 mm, 484-ball PBGA	−40°C to +85°C	188.23	Production
	300	2400 (16-bit) 600 (32-bit)	6M (SRAM)						1.25	1875	224.66				

¹ Power (mW) stated for maximum core operating speed of the device at T_{CASE} = 25°C (V_{DD} nominal, I_{DD-TYP} supply current). Please refer to associated data sheet and EE notes for further details and complete power calculation information.

²All DSP products available in RoHS compliant options. Please refer to data sheet for complete information.

³All packaging, operating temperature, and grade combinations may not be available. Please refer to data sheet for full information and contact ADI for options outside those listed.

⁴Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.



ADSP-TS203 TigerSHARC Processor

500 MHz Processor with 4 Mb On-Chip DRAM

The ADSP-TS203 TigerSHARC processor is targeted at numerous signal processing applications that rely on multiple processors working together to execute computationally intensive, real-time functions. The TigerSHARC processor is well-suited to video applications as well as defense, medical imaging, and industrial instrumentation.

The ADSP-TS203 features a static superscalar architecture that combines RISC, VLIW, and standard DSP functionality. Native support of fixed- and floating-point data types, coupled with leading-edge multiprocessing capabilities, allows the TigerSHARC processor to offer unrivaled performance. At a 500 MHz clock rate, the ADSP-TS203 offers the industry's highest 16-bit fixed-point and 32-bit floating-point performance. The ADSP-TS203 has a 32-bit floating-point 1024-point complex FFT time of 18.8 μ s and provides 1000 MFLOPS per watt.

ADSP-TS203 Performance

- 500 MHz, 2 ns instruction rate processor core
- Executes eight 16-bit MACs with 40-bit accumulation per cycle or two 32-bit MACs with 80-bit accumulation per cycle
- Executes six single-precision floating-point, or twenty-four 16-bit, fixed-point operations per cycle (3.0 GFLOPS or 12.0 GOPS performance)
- 2-cycle, interlocked execution pipe
- Parallelism allows the execution of up to four 32-bit instructions per cycle

Features

- Static superscalar architecture that supports 1-, 8-, 16-, and 32-bit fixed-point, as well as floating-point, data processing
- High performance 500 MHz, 2 ns instruction rate processor core
- 4 Mb on-chip embedded DRAM internally organized in 6 banks with user-defined partitioning
- 10-channel, zero-overhead DMA controller
- 4 internal 128-bit wide internal buses providing a total memory bandwidth of 32 GBps
- Single-instruction, multiple-data (SIMD) operation supported by 2 computation blocks, each with an ALU, multiplier, shifter, and 32-word register file
- 2 LVDS link ports with each operating up to 250 MBps per direction for serial interfacing
- 32-bit cluster bus with operation up to 500 MBps for parallel interfacing
- Assembly and C language programmability
- Core voltage: 1.05 V

Applications

- Video
- Medical imaging
- Industrial and instrumentation
- Military

Part Number	Max (MHz)	On-Chip Memory DRAM (Mb)	Package	Price Range @ 1k (\$U.S.) ¹
ADSP-TS203SABP-050	500	4	576-ball PBGA	179.12 to 197.04
ADSP-TS203SABPZ050	500	4	576-ball PBGA	

NOTES

¹Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

A = industrial temperature (-40°C to $+85^{\circ}\text{C}$ case).

Z = RoHS compliant part.

ADSP-TS202 TigerSHARC Processor

500 MHz Processor with 12 Mb On-Chip DRAM

The ADSP-TS202 TigerSHARC processor is targeted at numerous signal processing applications that rely on multiple processors working together to execute computationally intensive, real-time functions. The TigerSHARC processor is well-suited to video and communication applications as well as defense, medical imaging, and industrial instrumentation.

The ADSP-TS202 features a static superscalar architecture that combines RISC, VLIW, and standard DSP functionality. Native support of fixed- and floating-point data types, coupled with leading-edge multiprocessing capabilities, allows the TigerSHARC processor to offer unrivaled performance. At a 500 MHz clock rate, the ADSP-TS202 offers the industry's highest 16-bit fixed-point and 32-bit floating-point performance. The ADSP-TS202 has a 32-bit floating-point 1024-point complex FFT time of 18.8 μ s and provides 1000 MFLOPS per watt.

ADSP-TS202 Performance

- 500 MHz, 2 ns instruction rate processor core
- Executes eight 16-bit MACs with 40-bit accumulation per cycle or two 32-bit MACs with 80-bit accumulation per cycle
- Executes six single-precision floating-point, or twenty-four 16-bit fixed-point, operations per cycle (3.0 GFLOPS or 12.0 GOPS performance)
- 2-cycle, interlocked execution pipe
- Parallelism allows the execution of up to four 32-bit instructions per cycle

Features

- Static superscalar architecture that supports 1-, 8-, 16-, and 32-bit fixed-point, as well as floating-point, data processing
- High performance, 500 MHz, 2 ns instruction rate processor core
- 12 Mb on-chip embedded DRAM internally organized in 6 banks with user-defined partitioning
- 14-channel, zero-overhead DMA controller
- 4 internal 128-bit wide internal buses, providing a total memory bandwidth of 32.0 GBps
- SIMD operation supported by 2 computation blocks, each with an ALU, multiplier, shifter, and 32-word register file
- 4 LVDS link ports with each operating up to 500 MBps per direction for serial interfacing
- Configurable cluster bus (32- or 64-bit) with operation up to 1 GBps for parallel interfacing
- Assembly and C language programmability
- Core voltage: 1.05 V

Applications

- Communications
- Video
- Medical imaging
- Industrial and instrumentation
- Military

Part Number	Max (MHz)	On-Chip Memory DRAM (Mb)	Package	Price Range @ 1k (\$U.S.) ¹
ADSP-TS202SABP-050	500	12	576-ball PBGA	203.41 to 223.75
ADSP-TS202SABPZ050	500	12	576-ball PBGA	

NOTES

¹Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

A = industrial temperature (-40°C to +85°C case).

Z = RoHS compliant part.



ADSP-TS201 TigerSHARC Processor

600 MHz Processor with 24 Mb On-Chip DRAM

The ADSP-TS201 is targeted at numerous signal processing applications that rely on multiple processors working together to execute computationally intensive, real-time functions. The TigerSHARC processor is well-suited to video and communication markets, including the 3G cellular and broadband wireless base stations, as well as defense, medical imaging, and industrial instrumentation.

The ADSP-TS201 features a static superscalar architecture that combines RISC, VLIW, and standard DSP functionality. Native support of fixed- and floating-point data types, coupled with leading-edge multiprocessing capabilities, allows the TigerSHARC processor to offer unrivaled performance. At a 600 MHz clock rate, the ADSP-TS201 offers the industry's highest 16-bit fixed-point and 32-bit floating-point performance. The ADSP-TS201 has a 32-bit floating-point 1024-point complex FFT time of 15.7 μ s and provides 1000 MFLOPS per watt.

ADSP-TS201 Performance

- Executes eight 16-bit MACs with 40-bit accumulation per cycle or two 32-bit MACs with 80-bit accumulation per cycle
- Executes six single-precision floating-point, or twenty-four 16-bit fixed-point, operations per cycle (3.6 GFLOPS or 14.4 GOPS)
- 2-cycle, interlocked execution pipe
- Parallelism allows the execution of up to four 32-bit instructions per cycle


Applications

- Wireless infrastructure
- Performance driven embedded applications
 - Military hardware
 - Medical equipment
 - Industrial and instrumentation
 - Software-defined radios

Features

- Static superscalar architecture that supports 1-, 8-, 16-, and 32-bit fixed-point, as well as floating-point, data processing
- High performance, 600 MHz, 1.67 ns instruction rate processor core
- 24 Mb on-chip embedded DRAM internally organized in 6 banks with user-defined partitioning
- 14-channel, zero-overhead DMA controller
- Enhanced communications instruction set for wireless infrastructure applications allows for the TigerSHARC processor to offer complete baseband processing
- 4 internal 128-bit wide internal buses, providing a total memory bandwidth of 38.4 GBps
- Software radio approach allows the adoption of a single platform for multiple wireless telecommunication standards
- SIMD operation supported by 2 computation blocks, each with an ALU, multiplier, shifter, and 32-word register file
- 4 LVDS link ports with each operating up to 500 MBps per direction for serial interfacing
- Configurable cluster bus (32- or 64-bit) with operation up to 1 Gbps for parallel interfacing
- Assembly and C language programmability
- Core voltage: 1.05 V (500 MHz) or 1.2 V (600 MHz)

ADSP-TS201 Block Diagram

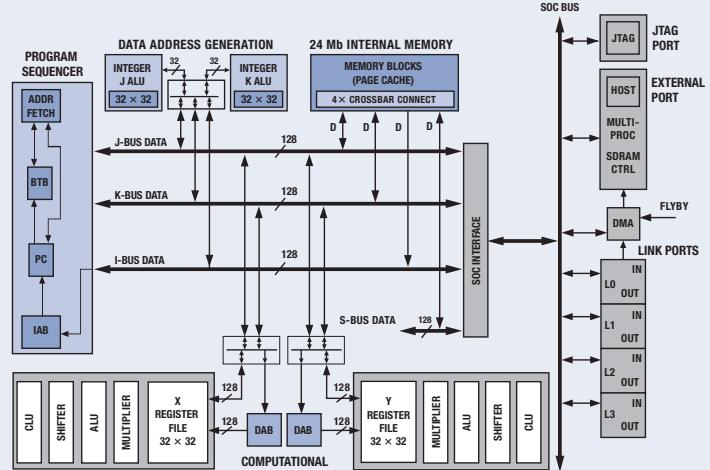

Part Number	Max (MHz)	On-Chip Memory DRAM (Mb)	Package	Price Range @ 1k (\$U.S.) ¹
ADSP-TS201SABP-050	500	24	576-ball PBGA	
ADSP-TS201SABP-060	600	24	576-ball PBGA	
ADSP-TS201SABPZ050	500	24	576-ball PBGA	
ADSP-TS201SABPZ060	600	24	576-ball PBGA	244.90 to 323.27
ADSP-TS201SYBP-050	500	24	576-ball PBGA	
ADSP-TS201SYBPZ050	500	24	576-ball PBGA	

NOTES

¹Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

A = industrial temperature (-40°C to +85°C case).

Y = automotive temperature (-40°C to +105°C case).

Z = RoHS compliant part.

ADSP-TS101 TigerSHARC Processor

300 MHz Processor with 6 Mb On-Chip SRAM

The ADSP-TS101 is the first member of the TigerSHARC processor family. It is targeted at numerous signal processing applications that rely on multiple processors working together to execute computationally intensive, real-time functions.

The ADSP-TS101 features a static superscalar architecture that combines RISC, VLIW, and standard DSP functionality. Native support of fixed- and floating-point data types, coupled with leading-edge multiprocessing capabilities, allows the TigerSHARC processor to offer unrivaled performance. At a 300 MHz clock rate, the ADSP-TS101 offers the 16-bit fixed-point performance and a 32-bit floating-point 1024-point complex FFT time of 32.5 μ s and 1000 MFLOPS per watt.

ADSP-TS101 Performance

- Executes eight 16-bit MACs with 40-bit accumulation per cycle or two 32-bit MACs with 80-bit accumulation per cycle
- Executes six single-precision floating-point, or twenty-four 16-bit, fixed-point operations per cycle (1800 MFLOPS or 7.2 GOPS performance)
- Parallelism allows the execution of up to four 32-bit instructions per cycle
- Core voltage: 1.2 V

Applications

- Wireless infrastructure
- Medical, CT, ultrasound
- Sonar and radar systems
- Flight simulators
- Infrastructure equipment
- Military smart munitions
- Test equipment
- Imaging, printers
- Wireless broadband access
- Industrial applications

Features

- Static superscalar architecture supports 1-, 8-, 16-, and 32-bit fixed-point, as well as floating-point, data processing
- SIMD operation supported by two computation blocks, each with an ALU, multiplier, shifter, and 32-word register file
- Assembly and C language programmability
- Up to 300 MHz, 3.3 ns instruction rate processor core
- 6 Mb on-chip SRAM internally organized in 3 banks with user-defined partitioning
- 14-channel, zero-overhead DMA controller
- 4 LVTL link ports operating up to 250 MBps for serial interfacing
- Configurable cluster bus (32- or 64-bit) with operation up to 800 MBps for parallel interfacing
- Enhanced communications instruction set for wireless infrastructure applications for complete baseband processing
- 3 internal 128-bit wide internal buses, providing a total memory bandwidth of 14.4 GBps
- Software radio approach allows for the adoption of a single platform for multiple wireless telecommunication standards

Part Number	Max (MHz)	On-Chip Memory SRAM (Mb)	Package	Price Range @ 1k (\$U.S.) ¹
ADSP-TS101SAB1-000	250	6	625-ball PBGA	
ADSP-TS101SAB1-100	300	6	625-ball PBGA	
ADSP-TS101SAB1Z000	250	6	625-ball PBGA	
ADSP-TS101SAB1Z100	300	6	625-ball PBGA	188.23 to 247.13
ADSP-TS101SAB2-000	250	6	484-ball PBGA	
ADSP-TS101SAB2-100	300	6	484-ball PBGA	
ADSP-TS101SAB2Z000	250	6	484-ball PBGA	
ADSP-TS101SAB2Z100	300	6	484-ball PBGA	

NOTES

¹Prices are quoted in U.S. dollars and represent year 2010 suggested resale pricing. All prices are budgetary and subject to change. Customers are advised to obtain the most current and complete pricing information from ADI prior to placing orders. Prices shown indicate a price range and will vary depending on speed, package type, and/or temperature range and grade.

A = industrial temperature (-40°C to $+85^{\circ}\text{C}$ case).

Z = RoHS compliant part.



ADI Complementary Parts Guide

Supervisory Devices and DSP Processors

NOTES

¹The ADM13305-4 and ADM13305-5 combine an adjustable reset threshold and a fixed reset threshold of 3.3 V and 2.5 V, respectively.

²DSP eDRAM Voltage = 1.5 V (nominal).

ADI Complementary Parts Guide

Power Management and DSP Processors

SC	Switching Regulators												
Linear Regulators													
	Max Current (mA)	V _{out} (V)	V _{in} (V)	Part Number	Max Current (mA)	V _{out} (V)	V _{in} (V)	Part Number	Max Current (mA)	V _{out} (V)	V _{in} (V)	Part Number	
Switching Regulators	5	N/A	3.15–14	ADP1864	20	N/A	3.0–18	ADP1829	600 mA, 150 mA, 3 outputs: 250 mA	N/A	2.4–5.5	ADP5020	
Linear Regulators	1	2.8–5.0	2.7–5.5	ADP2114	2	1.2–3.3	2.7–5.5	ADP2108	600 mA	1–3.3	2.3–5.5	ADP2107	
Linear Regulators	1.5	1.2–3.3	2.7–5.5	ADP2106	1.5	1.2–3.3	2.7–5.5	ADP2105	600 mA	0.8–1.875	2.7–5.5	ADP2102	
Linear Regulators	2	1.2–3.3	2.7–5.5	ADP2107	1	1.2–3.3	2.7–5.5	ADP2108	600 mA	0.4 single, or 2/2, 1/3,	0.8–3.3	2.7–5.5	ADP2114
Linear Regulators	500 mA	0.75–3.3	2.5–5.5	ADP1706	500 mA	0.75–3.3	2.5–5.5	ADP1707	800 mA	0.75–2.5	1.6–3.6	ADP1752	
Linear Regulators	500 mA	0.75–3.3	2.5–5.5	ADP1706	500 mA	0.75–3.3	2.5–5.5	ADP1707	1.2	0.75–2.5	1.6–3.6	ADP1754	
Linear Regulators	50 mA	1.225–5.0	4.0–28	ADP1720	50 mA	0.8–5.0	2.5–5.5	ADP1715	200 mA, 200 mA	0.8–2.8	2.5–5.5	ADP220	
Linear Regulators	300 mA	0.8–3.0	1.6–3.6	ADP1720	300 mA	1.2–3.3	2.5–5.5	ADP1721	300 mA	0.8–3.0	1.6–3.6	ADP1740	
Linear Regulators	150 mA	1.2–3.3	2.5–5.5	ADP1721	150 mA	1.2–3.3	2.5–5.5	ADP1741	500 mA	0.75–3.0	1.6–3.6	ADP1744	
Linear Regulators	300 mA	0.75–3.3	2.5–5.5	ADP1706	300 mA	0.75–3.3	2.5–5.5	ADP1707	800 mA	0.75–2.5	1.6–3.6	ADP1753	
Linear Regulators	500 mA	0.75–3.3	2.5–5.5	ADP1706	500 mA	0.75–3.3	2.5–5.5	ADP1707	1.2	0.75–2.5	1.6–3.6	ADP1755	

ADI power management products provide optimized power for Blackfin and SHARC products—whether it's a single processor or multiple processors, in handheld or high power applications, ADI has a solution to meet your needs.

How to Use This Guide

Determine the peak current requirement for each rail of your processor by referring to the relevant data sheets and engineer-to-engineer notes. Then, use this companion guide to select a power solution that offers the required V_{out} for that rail.

The ADIsimPower™ design tool offers a complete set of features to create a complete BOM for all of these solutions. Visit analog.com/ADIsimPower.

Blackfin Processors	Speed (MHz)	Min Voltage (V)	Max Voltage (V)	Max ID _{avr} (mA)
ADSP-BF51X	All	TBD	1.47	225
ADSP-BF522/ADSP-BF524/ADSP-BF526	All	TBD	1.47	250
ADSP-BF523/ADSP-BF525/ADSP-BF527	All	0.95	1.26	500
ADSP-BF531/ADSP-BF532/ADSP-BF533	400	0.8	1.32	350
ADSP-BF533	500, 533, 600	0.8	1.45	900
ADSP-BF534/ADSP-BF536	300, 400	0.8	1.32	400
ADSP-BF534/ADSP-BF536/ADSP-BF537	500, 533, 600	0.8	1.43	900
ADSP-BF538/ADSP-BF539	400, 533	0.8	1.375	850
ADSP-BF54X	400	0.9	1.43	750
ADSP-BF54X	533, 600	0.9	1.43	1350
ADSP-BF561	All	0.8	1.42	1600
Other Domains ^a	Max Current (mA)	Min Voltage (V)	Nominal Voltages (V)	Max Current (mA)
VDD _{Ext}	1.7	1.8–25, 33	3.6	NA
VDD _{MEM}	1.7	1.8–25, 33	3.6	NA
VDD _{BR}	2.5	2.6	2.7	NA
VDD _{USB}	3	3.3	3.6	30
VDD _{OMP}	2.25	2.5	2.75	25
SHARC Processors	Speed (MHz)	Min Voltage (V)	Max Voltage (V)	Typical ID _{avr} (mA)
ADSP-21261/ADSP-21262/ADSP-21266	150	1.14	1.26	<500
ADSP-21362/ADSP-21363/ADSP-21364/	200	1.14	1.26	500
ADSP-21365/ADSP-21366	333	0.95	>800	1280
ADSP-21366	266	1.14	1.26	150
ADSP-21367/ADSP-21368/ADSP-21369	333	1.14	1.35	900
ADSP-21369	350	1.14	1.365	1050
ADSP-21371/ADSP-21375	400	1.14	1.35	1900
ADSP-21375	266	1.14	1.26	1200
Other Domains ^a	Max Current (mA)	Min Voltage (V)	Nominal Values (V)	Max Current (mA)
VDD _{Ext}	—	—	—	—
VDD _{PL/ANALOG}	1.2	—	—	10

^aSC = switching controllers

^bRefer to the relevant data sheet and engineer-to-engineer note to determine the exact "other domain" requirements of each individual processor.


Many applications power more than one device or domain using a single regulator. Compute and add the maximum current draw for each device and domain in a particular application before choosing a regulator.

The regulators marked in this guide support the current draw at the maximum specified frequency, voltage, and industrial temperature. Regulators not marked as compatible with a particular processor may still be appropriate depending on the frequency, voltage, temperature, and application code used.

ADI Complementary Parts Guide

Power Management and DSP Processors

High Accuracy Is Critical When Monitoring Low Voltages

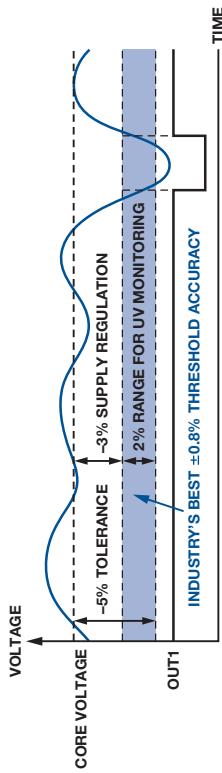

Analog Devices has an extensive portfolio of supervisory products, offering industry-leading threshold accuracy, suited to monitoring the multiple supplies commonly needed to power DSP and FPGA applications. There are several device families offering a combination of pretrimmed threshold and user adjustable inputs, with some including a watchdog timer function.


Supervisory Devices Power Companion

Number of Monitored Rails	ADI Part Number	Pretrimmed Threshold Accuracy ¹	Adjustable Threshold Accuracy ¹
Single ²	ADM6319	±2.5%	—
Single ²	ADM6384	±2.5%	—
Dual	ADM803	±2.7%	—
Dual	ADM13305	±2.7%	±0.80%
Triple	ADM13307	±2.7%	±0.80%
Quad	ADM1184	—	±0.80%
Quad	ADM6710	±2.8%	±1.50%

¹ Over temperature.

²This is just a sample selection of single-channel supervisory devices that are available. For further information, visit www.analog.com/supervisory.

Example* Power Solutions for SHARC and Blackfin Processors

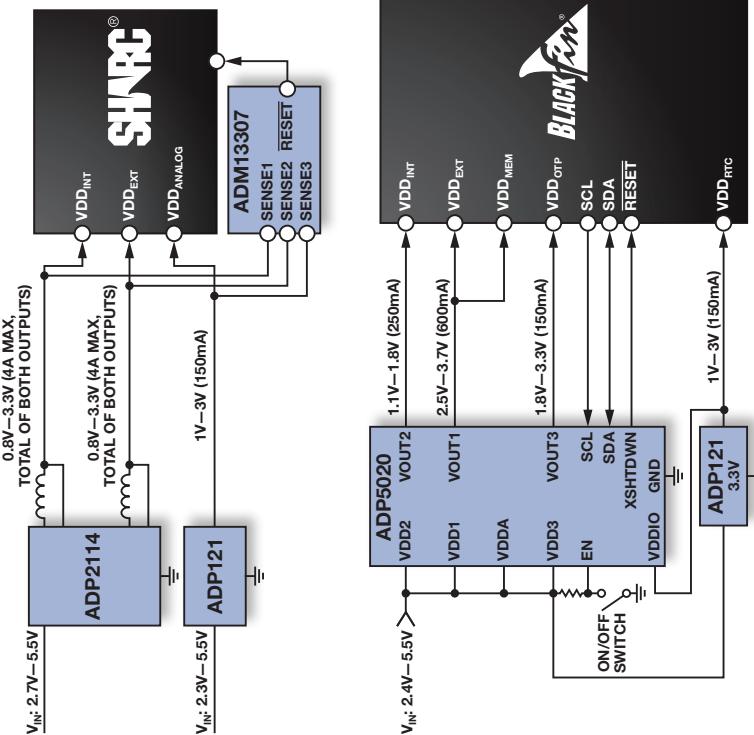

* Numerous variables affect the power requirements of an embedded system. Ambient temperature, core and system frequency, supply voltages, pin capacitance, power modes, application code, and peripheral utilization all contribute to the average power requirements; therefore, these are just two suggested solutions.



Notes



**Analog Devices, Inc.
Worldwide Headquarters**

Analog Devices, Inc.
One Technology Way
P.O. Box 9106
Norwood, MA 02062-9106
U.S.A.
Tel: 781.329.4700
(800.262.5643,
U.S.A. only)
Fax: 781.461.3113

**Analog Devices, Inc.
Europe Headquarters**

Analog Devices, Inc.
Wilhelm-Wagenfeld-Str. 6
80807 Munich
Germany
Tel: 49.89.76903.0
Fax: 49.89.76903.157

**Analog Devices, Inc.
Japan Headquarters**

Analog Devices, KK
New Pier Takeshiba
South Tower Building
1-16-1 Kaigan, Minato-ku,
Tokyo, 105-6891
Japan
Tel: 813.5402.8200
Fax: 813.5402.1064

**Analog Devices, Inc.
Southeast Asia
Headquarters**

Analog Devices
22/F One Corporate Avenue
222 Hu Bin Road
Shanghai, 200021
China
Tel: 86.21.2320.8000
Fax: 86.21.2320.8222

©2010 Analog Devices, Inc. All rights reserved.
Trademarks and registered trademarks are the property
of their respective owners.

Printed in the U.S.A. G02458-0-1/10(T)

www.analog.com/processors

