

Marking of parts

Trademark for marking of parts

Edited by

Martin Ruppel, Standardization

Printouts are not subject to the change service.

The user of this document is under obligation to verify its current validity.

Continued page 2 to 14

© BMW Group - All rights reserved

Contents

1	Scope and purpose	3
2	Normative references	3
3	Abbreviations, terms and definitions	3
3.1	Abbreviations	3
3.2	Terms.....	3
3.3	Definitions	3
4	Designation.....	3
5	General	4
6	BMW trademark	5
6.1	BMW symbol (Version A)	5
6.2	Proportions of the two dimensional BMW symbol	6
6.3	BMW Wordmark (Version B)	6
6.4	Location.....	6
6.5	Designing the rings for three dimensional versions	8
7	MINI trademark	9
7.1	General	9
7.2	MINI symbol (Version G)	9
7.3	MINI Wordmark (Version H).....	10
7.4	Location.....	10
8	Rolls-Royce Motor Cars trademark	11
8.1	General	11
8.2	Rolls-Royce Motor Cars Monogram (Version J).....	11
8.3	Rolls-Royce Motor Cars Wordmark	12
8.4	Badge of Honour	13
8.5	Location.....	13
9	Acceptance	14

Foreword

The German version is binding.

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved.

This Group Standard has been coordinated with the responsible departments of the BMW Group. The names of the persons creating, releasing and checking this Group Standard are filed and can be retrieved in the master data of the TEREK system.

Amendments

The following amendments have been made to GS 91002:2017-03:

- English title changed;
- Group Standard completely revised.

Previous editions

2000-12, 2001-08, 2017-03

1 Scope and purpose

Parts that are subject to mandatory labelling according to GS 91001 shall be marked with the trademark according to this Group Standard.

2 Normative references

This standard incorporates provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. The respective latest edition of the publication is applicable.

BMWS 11316.1	BMW symbol and wordmark; Three-dimensional representation;
GS 91001	Marking of parts with trademark and part identification data

3 Abbreviations, terms and definitions

3.1 Abbreviations

There are no abbreviations in this document.

3.2 Terms

There are no terms in this document.

3.3 Definitions

There are no definitions in this document.

4 Designation

There is no designation in this document.

5 General

All pictures of the trademark according to this Group Standard serve as illustration and better information and are not intended as reproduction templates.

Pictorial representation of the trademarks shall be designed according to the specifications or taken from the digital templates that are filed in the BMW Group Identity Net.

The BMW Group Identity Net can be accessed via the:

- BMW Group Intranet:
<https://smw.bmwgroup.net/group/idnet/identity-net;>
- Internet for suppliers (BMW Group Partner Portal (B2B)):
<https://smw.bmw.com/group/idnet/identity-net;>
- Internet for dealership and importers (S-Gate):
[https://smw.bmwgroup.com/group/idnet/identity-net.](https://smw.bmwgroup.com/group/idnet/identity-net;)

6 BMW trademark

6.1 BMW symbol (Version A)

6.1.1 General

When depicting the BMW symbol, a distinction is made between two dimensional (e.g. print, embossing or etching) and three dimensional (e.g. casting) version.

Two dimensional version:

In the 2-dimensional version of the symbol, all blue and black portions of the original BMW trademark shall be dark or black and the white portions shall be light-colored or white. Detailed instructions and templates are defined in the trademark design book and available via the BMW Group Identity Net (see section 5).

EXAMPLE The surfaces as circles shown in black in Figure 1 would be recessed in the embossed version.

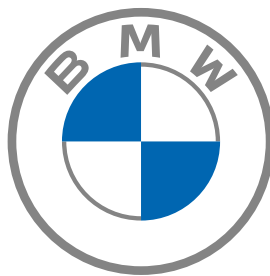


Figure 1: Two dimensional printed, embossed or etched depiction of the BMW symbol.

Table 1: Nominal sizes

Nominal diameter d in mm	7,5	10	13	18
Size M 1:1				

Reproduction documents are available via the BMW Group Identity Net (see section 5).

6.1.2 Symbol background

In the 2-dimensional version of the symbol, all black and blue portions of the original BMW trademark shall be dark or black and the white portions shall be light-colored or white. This causes the symbol to appear to rotate, making it more difficult to counterfeit.



Figure 2: BMW symbol on background

6.2 Proportions of the two dimensional BMW symbol

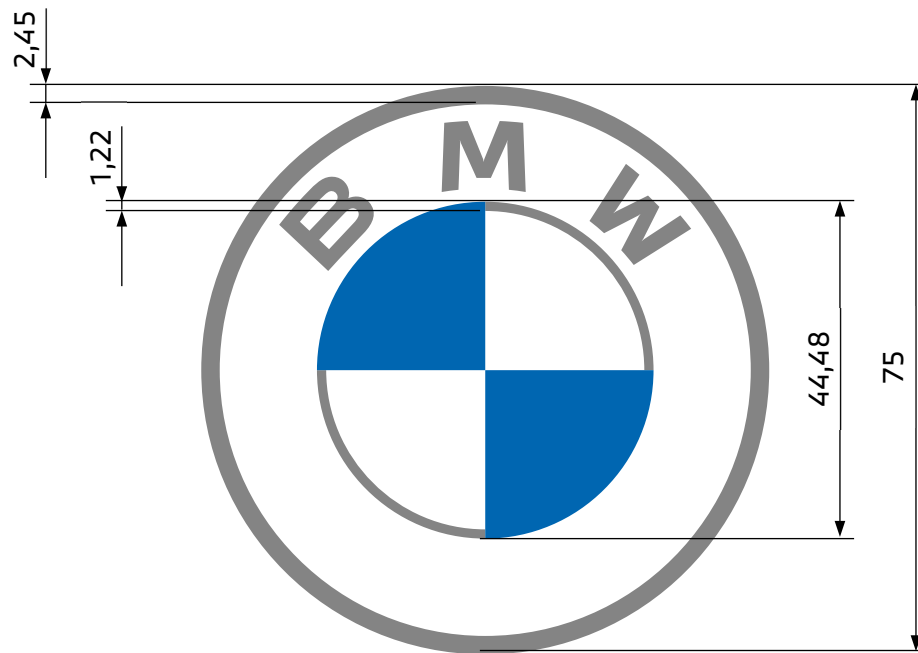


Figure 3: Dimensioning of the BMW symbol

6.3 BMW Wordmark (Version B)

The BMW Wordmark shall be produced in the typeface BMW Type Next Bold.



Figure 4: BMW Wordmark

Table 2: Nominal sizes

Nominal size in mm		3	3,5	4	5	6	8	10
Height x	pt	12	14	16	20	24	28	36
	mm	3,20	3,75	4,25	5,30	6,35	7,40	9,55
Space required l in mm		10,62	12,44	14,1	17,58	21,07	24,55	31,68

6.4 Location

Version A:



Figure 5: Marking with BMW symbol and identification data version A

Table 3: Recommended combinations d to h

Nominal diameter d in mm	7,5	10	13	18
Typeface size h in mm	3,3	4,4	5,8	8,0

Version B:

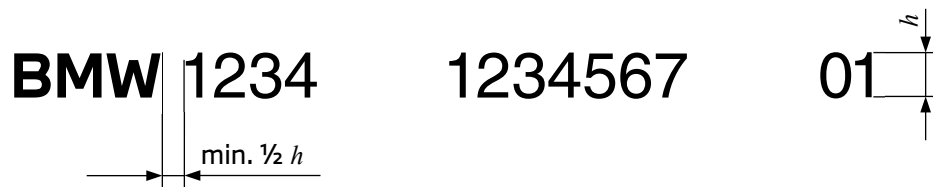


Figure 6: Marking with BMW symbol and identification data version B

Three dimensional version:

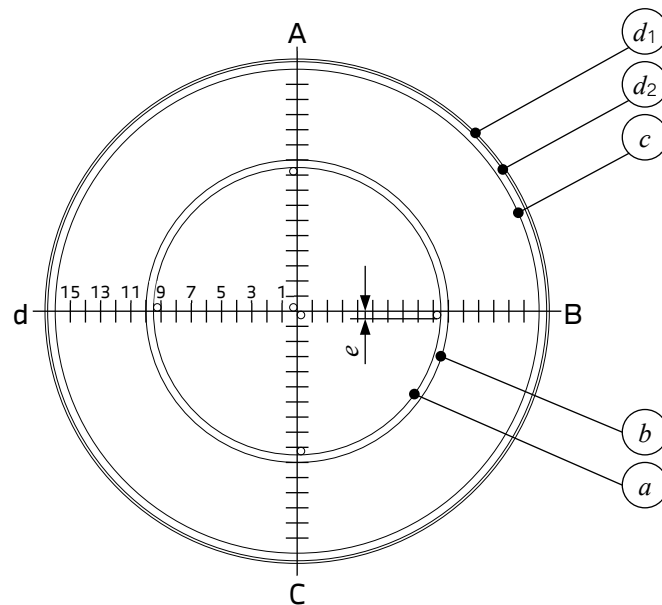


Figure 7: Three dimensional version ($d = 24$ mm see BMWS 11316.1)

The symbol illustrated in Figure 7 shows the pre-produced three dimensional BMW symbol, which is applied to the vehicle as a badge (e.g. on the hood, the trunk lid, the rims, the steering wheel or the engine block).

6.5 Designing the rings for three dimensional versions

The right-angled set of coordinate axes AC/BD is sub-divided into 32 identical units (= units or U). All sizes and distances are derived from this unit (U).



Legend:

<i>a</i>	19 U
<i>b</i>	20 U
<i>c</i>	32 U
<i>d</i> ₁	33 ¹ / ₃ U
<i>d</i> ₂	33 U

Figure 8: Circle (version with *d*₁ and *d*₂ different to BMWS 11316.1)

On three dimensional versions up to a nominal size 18 (see BMWS 11316.1) circles *d*₂ and *e* are omitted.

For design and placing of the letters see BMWS 11316.1.

7 MINI trademark

7.1 General

Parts shall be marked with the MINI symbol. Deviations shall be agreed with the specialist department "Brand Steering, Campaigns, Artwork".

7.2 MINI symbol (Version G)

When depicting the MINI symbol, a distinction is made between two dimensional (e.g. print) and three dimensional (e.g. casting) version.

Two dimensional version:

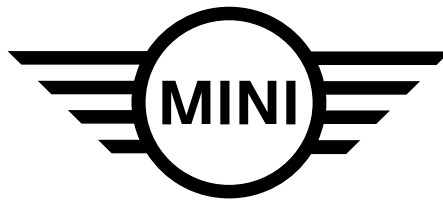


Figure 9: Two dimensional MINI symbol

Reproduction documents are available via the BMW Group Identity Net (see section 5).

In two dimensional versions, the black portions shall be rendered in black. In case of justified exceptions, the MINI symbol can also be white on a black background.

Three dimensional version:

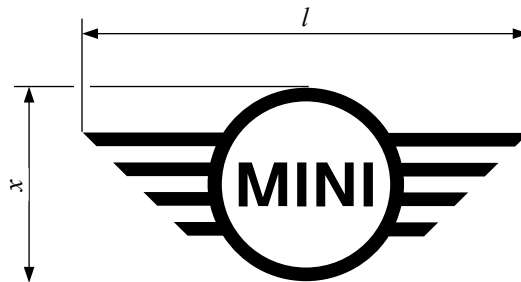



Figure 10: Three dimensional MINI symbol

The surfaces and circles shown black in Figure 10 are raised.

Detailed instructions and templates are available via the BMW Group Identity Net (see section 5).

Table 4: Nominal sizes

Nominal size x in mm	7,5	10	13	18
Space required l in mm	17,2	22,8	29,6	41,0
Size M 1:1				

7.3 MINI Wordmark (Version H)

The MINI Wordmark shall be produced in the typeface MINI Sans Serif Bold.

Refer to the CI regulations in the BMW Group Identity Net (see section 5).



Figure 11: MINI Wordmark

Table 5: Nominal sizes

Nominal size in mm		3	3,5	4	5	6	8	10
Height x	$\approx$ pt	12,86	15,70	17,08	21,31	25,53	29,74	38,39
	mm	3,20	3,75	4,25	5,30	6,35	7,40	9,55
Space required l in mm		9,81	11,5	13,03	16,25	19,47	22,69	29,29

7.4 Location

Location of symbols and Wordmarks corresponds to the specifications given in section 6.4.

8 Rolls-Royce Motor Cars trademark

8.1 General

Parts identification shall be done by applying the Rolls-Royce Motor Cars Monogram or the Wordmark.

The Badge of Honour shall only be used for parts that are not visible from the exterior of the vehicle.

8.2 Rolls-Royce Motor Cars Monogram (Version J)

The Rolls-Royce Motor Cars Monogram should always be placed with ample room surrounding it. The minimum clear zone is determined by the height x of the Monogram, see Figure 12.

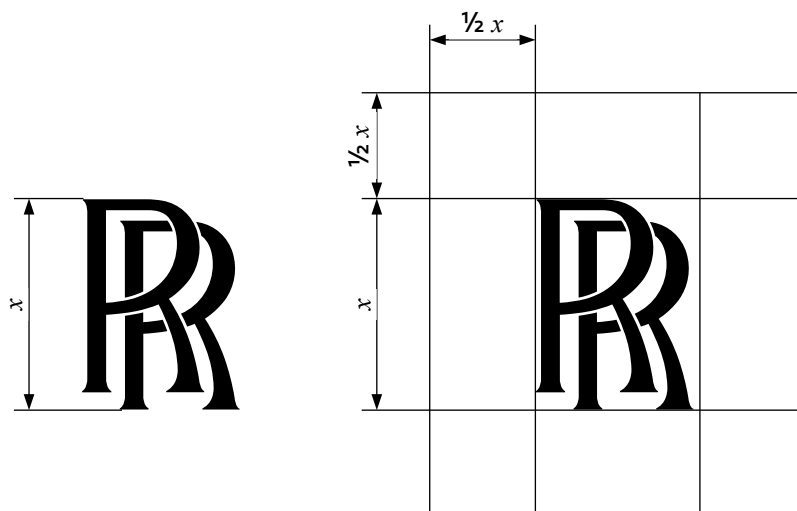


Figure 12: Rolls-Royce Motor Cars Monogram

Minimum size:

The Rolls-Royce Motor Cars Monogram should never be smaller than 8 mm in height.

The Monogram should never be placed on a patterned, photographic or high-contrast color background.

Table 6: Nominal sizes

Height x in mm	8	10	14
Space around the symbol in mm	4	5	7
Size M 1:1			

Reproduction documents are available from the specialist department "Brand Strategy, Communication".

8.3 Rolls-Royce Motor Cars Wordmark

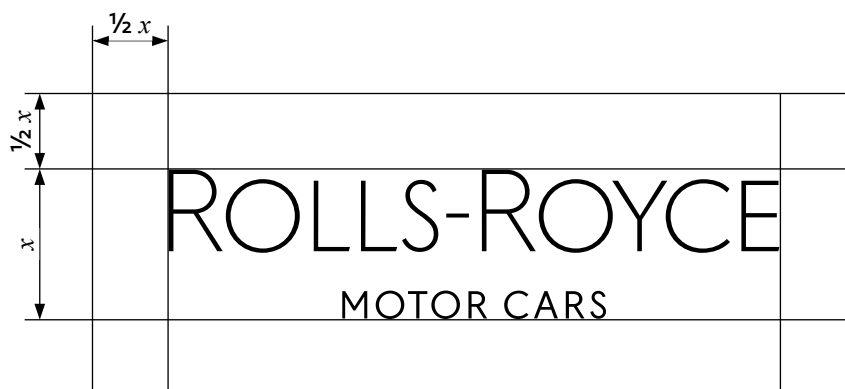


Figure 13: Rolls-Royce Motor Cars Wordmark

Table 7: Nominal sizes

Height x in mm	8	10	14
Space around the symbol in mm	4	5	7
Size M 1:1	ROLLS-ROYCE MOTOR CARS	ROLLS-ROYCE MOTOR CARS	ROLLS-ROYCE MOTOR CARS

The Rolls-Royce Motor Cars Wordmark is available in 2 font thicknesses. Bold type shall only be used for marking of parts.

8.4 Badge of Honour

The Badge of Honour should only be used rarely for marking. The Badge of Honour shall only be used for parts that are not visible from the exterior of the vehicle.

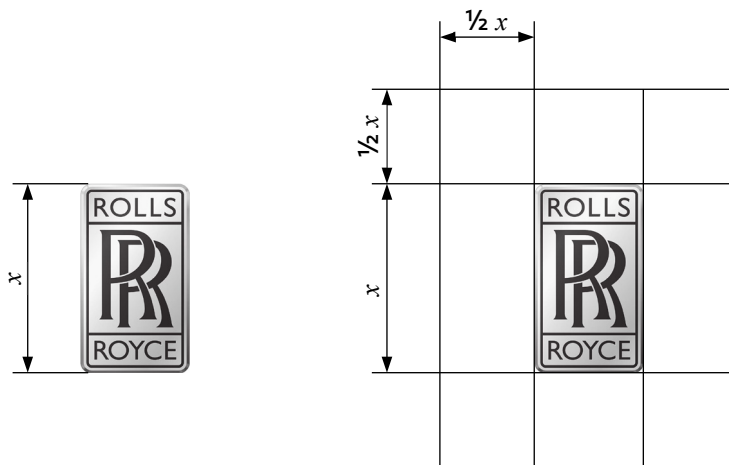


Figure 14: Badge of Honour

Height x in mm	12,5	18,0	20,0	25,0	50,0	70,7	125,0
---------------------	------	------	------	------	------	------	-------

8.5 Location

Version A:

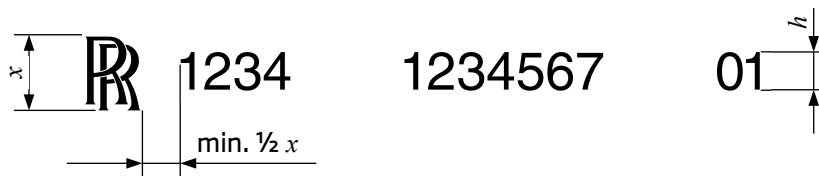


Figure 15: Marking with Rolls-Royce Motor Cars symbol and identification data version A

Table 8: Recommended combinations x to h

Height of symbol x in mm	8	10	14
Font height h in mm	4	5	7

Version B:

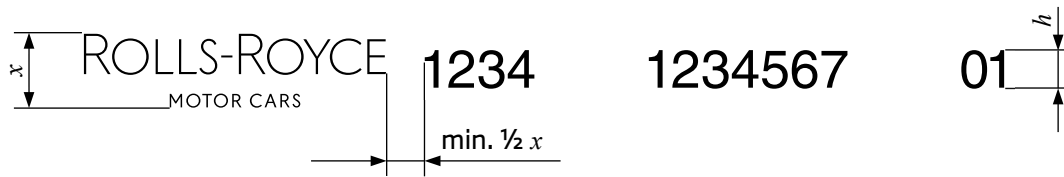


Figure 16: Marking with Rolls-Royce Motor Cars symbol and identification data version B

Table 9: Recommended combinations x to h

Height of Wordmark x in mm	8	10	14
Font height h in mm	4	5	7

Version C:

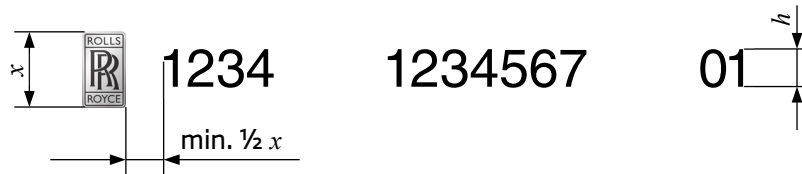


Figure 17: Marking with Rolls-Royce Motor Cars Badge of Honour and identification data version C

Table 10: Recommended combinations x to h

Height of Wordmark x in mm	8	10	14
Font height h in mm	4	5	7

9 Acceptance

The design of the initial sample is decisive for the acceptance.

Any change is to be initiated by a new sampling inspection and requires a renewed release in written form.