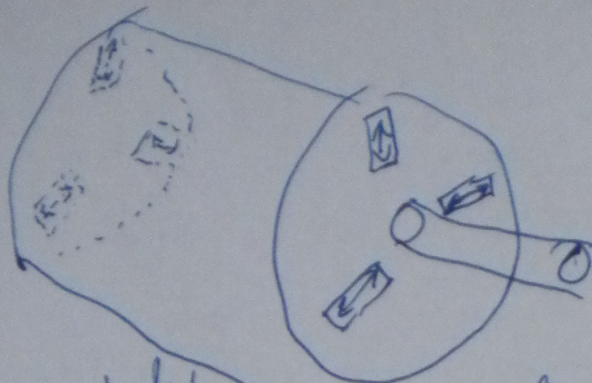# Dynamitally Balancing Rotor

acceleration sensor

potential sensor placement
locations

weight setup

- 3 weights are moved in and out
  independently on screws
- Triangulation would be used to calculate
  and adjust an imbalance off-axis