



Effective Date: 2017.01.25

Author: MQMFC0

Version: 0

Document Chinese Title: 10.1 " (G101EVT Series TFT-LCD & TP) 進料檢驗規範 (A grade)

Document English Title: Incoming Inspection Standard For 10.1 " (G101EVT Series TFT-LCD & TP) (A)

**AU OPTRONICS CORPORATION**  
**Specification for Approval**  
**INCOMING INSPECTION STANDARD FOR**  
**10.1" TFT-LCD MODULES & TP ( A grade)**  
**Model Name: G101EVT Series**

| Approved By         | Prepared By      |
|---------------------|------------------|
| <i>Hunglin Tsai</i> | <i>Shuwei Hu</i> |

General Display Business Unit/AU Optronics

| Customer | Checked and Approved by |
|----------|-------------------------|
|          |                         |



Effective Date: 2017.01.25

Author: MQMFC0

Version: 0

Document Chinese Title: 10.1 " (G101EVT Series TFT-LCD & TP) 進料檢驗規範 (A grade)

Document English Title: Incoming Inspection Standard For 10.1 " (G101EVT Series TFT-LCD & TP) (A)

### Inspection criteria change record

| Inspection criteria's change record      |      |                    |                          |                       |
|------------------------------------------|------|--------------------|--------------------------|-----------------------|
| Version/<br>Effective Date<br>(Approval) | Page | Inspection<br>Item | Previous Inspection Spec | New Inspection Spec   |
| 2017/01/25                               | All  | All                |                          | Initial Specification |
|                                          |      |                    |                          |                       |
|                                          |      |                    |                          |                       |
|                                          |      |                    |                          |                       |
|                                          |      |                    |                          |                       |
|                                          |      |                    |                          |                       |
|                                          |      |                    |                          |                       |
|                                          |      |                    |                          |                       |
|                                          |      |                    |                          |                       |
|                                          |      |                    |                          |                       |
|                                          |      |                    |                          |                       |
|                                          |      |                    |                          |                       |
|                                          |      |                    |                          |                       |

## 1. Scope:

1.1 The incoming inspection standards shall be applied to TFT-LCD Modules&TP (hereinafter called "Modules") that supplied by AU Optonics Corporation (hereinafter called "seller").

1.2 Specifications contains

- Electrical inspection specification
- Appearance specification
- Outside dimension specification

## 2. Incoming inspection:

The buyer (customer) shall inspect the modules within twenty calendar days since the delivery date (the "inspection period") at its own cost. The results of the inspection (acceptance or rejection) shall be recorded in writing, and a copy of this writing will be promptly sent to the seller.

The buyer may, under commercially reasonable reject procedures, reject an entire lot in the delivery involved. Within the inspection period, if the samples of modules within a lot show a number of unacceptable defects in accordance with this incoming inspection standards, the buyer must notify the seller in writing of any such rejection promptly, and not later than within three business days in the end of the inspection period.

Should the buyer fail to notify the seller within the inspection period, the buyer's right to reject the modules shall be lapsed and the modules shall be deemed to have been accepted by the buyer.

## 3. Inspection sampling method:

Unless otherwise agree in writing, the method of incoming inspection shall be based on MIL-STD-105E.

3.1 Lot size: Quantity per shipment lot per model.

3.2 Sampling type: Normal inspection, single sampling.

3.3 Sampling level: Level II.

3.4 Acceptable quality level (AQL):

Major defect: AQL=1.0%.

Minor defect: AQL=2.5%.

Rig.1: Inspection Sampling standard :

| 表14-1 MIL-STD-105E 樣本代字 |        |     |     |     |        |    |     |  |
|-------------------------|--------|-----|-----|-----|--------|----|-----|--|
| 批量                      | 特殊檢驗水準 |     |     |     | 一般檢驗水準 |    |     |  |
|                         | S-1    | S-2 | S-3 | S-4 | I      | II | III |  |
| 2~8                     | A      | A   | A   | A   | A      | A  | B   |  |
| 9~15                    | A      | A   | A   | A   | A      | B  | C   |  |
| 16~25                   | A      | A   | B   | B   | B      | C  | D   |  |
| 26~50                   | A      | B   | B   | C   | C      | D  | E   |  |
| 51~90                   | B      | B   | C   | C   | C      | E  | F   |  |
| 91~150                  | B      | B   | C   | D   | D      | F  | G   |  |
| 151~280                 | B      | C   | D   | E   | E      | G  | H   |  |
| 281~500                 | B      | C   | D   | E   | F      | H  | J   |  |
| 501~1,200               | C      | C   | E   | F   | G      | J  | K   |  |
| 1,201~3,200             | C      | D   | E   | G   | H      | K  | L   |  |
| 3,201~10,000            | C      | D   | F   | G   | J      | L  | M   |  |
| 10,001~35,000           | C      | D   | F   | H   | K      | M  | N   |  |
| 35,001~150,000          | D      | E   | G   | J   | L      | N  | P   |  |
| 150,001~500,000         | D      | E   | G   | J   | M      | P  | Q   |  |
| 500,000以上               | D      | E   | H   | K   | N      | Q  | R   |  |

Fig.2 Incoming inspection judgment method :

|      |      | 表14-2 MIL-STD-105E正常檢驗單次抽樣計畫 |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |         |       |       |       |       |       |       |
|------|------|------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---------|-------|-------|-------|-------|-------|-------|
| 樣本代字 | 樣本數  | 允收品質水準 (AQL · %)             |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |         |       |       |       |       |       |       |
|      |      | 0.010                        | 0.015 | 0.025 | 0.040 | 0.065 | 0.10  | 0.15  | 0.25  | 0.40  | 0.65  | 1.0   | 1.5   | 2.5   | 4.0   | 6.5   | 10    | 15    | 25    | 40    | 65    | 100   | 150     | 250   | 400   | 650   | 1000  |       |       |
|      |      | Ac Re                        | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re   | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re | Ac Re |
| A    | 2    | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |
| B    | 3    | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |
| C    | 5    | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |
| D    | 8    | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |
| E    | 13   | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |
| F    | 20   | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |
| G    | 32   | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |
| H    | 50   | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |
| J    | 80   | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |
| K    | 125  | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |
| L    | 200  | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |
| M    | 315  | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |
| N    | 500  | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |
| P    | 800  | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |
| Q    | 1250 | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |
| R    | 2000 | ↓                            | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | ↓     | 0 1   | ↓     | ↓     | 1 2 2 | 3 3   | 4 5   | 6 7   | 8 10 11 | 14 15 | 21 22 | 30 31 | 44 45 | ↑     | ↑     |

↓ — 採用表頭下第一個抽樣計畫，如樣本大小等於或超過數量時，則用全數檢驗。  
 ↑ — 採用表頭上第一個抽樣計畫。Ac = 允收數、Re = 拒收數。

#### 4. Inspection instruments:

4.1 Pattern generator: LD-2000 or equivalent model.

4.2 Video board: AU video board or equivalent. The output of the signal should comply with the specification provided by AU.

4.3 Luminance colorimeter: Topcon BM-7 or equivalent model

#### 5. Inspection environment conditions:

5.1 Room temperature : 20 ~ 25 C.

5.2 Humidity: 65±5% RH.

5.3 Illumination: Fluorescent light (Day-Light Type) display surface illumination to be 300 ~ 700 lux. (standard 500 lux.)

5.4 To be a distance about 35 ± 5 cm in front of LCD unit, viewing line should be perpendicular to the surface of the module judge the visual appearance with human's eyes. (±10° viewing edge will be allowed)

5.5 Take off the protector of polarizer while judging the display area.

5.6 If there is any question while judging, check the panel again while operating.

## 6. Classification of defects:

Defects are classified as major defects and minor defects according to the degree of defectiveness defined herein.

### Major defects:

A major defect is a defect that is likely to result in failure, or to reduce materially the usability of the product for its intended purpose.

### Minor defects:

A minor defect is either a defect that is not likely to reduce materially the usability of the product for its intended purpose, or a departure from an intended purpose with little bearing on the effective use or operation of the product.

### 6.1 Electrical inspection specification

| Inspection Item   | Specification                                                                                |                    |
|-------------------|----------------------------------------------------------------------------------------------|--------------------|
| Line defect       | Not allowed                                                                                  |                    |
| Bright dots       | $\leq 2$ dots (note 1&2)                                                                     |                    |
| Dark dots         | $\leq 3$ dots                                                                                |                    |
| Total dots defect | $\leq 4$ dots                                                                                |                    |
| Continuous defect | Two continuous bright dots :                                                                 | $\leq 1$ pair      |
|                   | Over three continuous bright dots (vertical, horizontal, oblique) :                          | Not allowed        |
|                   | Two continuous dark dots (vertical, horizontal, oblique) :                                   | $\leq 1$ pair      |
|                   | Over three continuous dark dots (vertical, horizontal, oblique) :                            | Not allowed        |
|                   | Two continuous dark dots and bright dots (vertical, horizontal, oblique) :                   | $\leq 1$ pair      |
|                   | Distance between 2 Bright dots :                                                             | $\geq 20\text{mm}$ |
|                   | Distance between 2 Dark dots :                                                               | $\geq 20\text{mm}$ |
|                   | Distance between Dark dot and Bright Dot :                                                   | $\geq 20\text{mm}$ |
| Image retention   | 5secs Test pattern and Image sticking must be disappeared within 5secs after pattern changed |                    |
| Mura              | Use 5% ND filter or judged by equivalent limit sample (note 6)                               |                    |

Note 1) For bright dot defect, bright area should be larger than 1/2 area of a sub-pixel to be count as 1 dot defect.

The bright dot defect must be visible through 5% ND filter.

Note 2) A dot defect which is smaller than the defined dot defect will be treated as small bright dot.

It should be accepted if  $N \leq 10$  which invisible through 5% ND filter.

The drawing of 1/2 area sub-pixel definition: The 1/2 area sub-pixel can be defined as below one or more of specific shapes (Fig.1).



Fig.1

Note 3) Adjacent-dot defect should be observed under the same display pattern in any one of Black/Green/Blue/Red pattern.

\*Inspection pattern: Standard inspection patterns of dot defect are listed below. AU uses these patterns as standard criteria for judging dot defect. Please inform AU if any other pattern is to be used to examine dot defect.


| Test Pattern              | Defect                     |
|---------------------------|----------------------------|
| Full Black                | For bright dot(s)          |
| Full White                | For dark dot(s)            |
| Monotone Red /Green /Blue | For bright and dark dot(s) |

Definition of two continuous bright dots: Only for two continuous dots (included vertical, horizontal, oblique type) (Fig.2)

Note 5) In three (or more) adjacent dot defect, for any 3<sup>rd</sup> dot that adjacent to 2 continuous defective dots (can be of any combination of bright dots and dark dots), the 3<sup>rd</sup> dot, no matter how large it may be, should be viewed as a dot.

Note 6) Unless otherwise specified by written document or limit samples, Mura (display un-uniformity) should be inspected under the ND filter and shall be accepted when it is invisible 5% ND filter is applied.

ND filter use method: The inspection method of ND Filter - holding ND filter in front of the panel around 5 cm and examine the panel from 35±5 cm in the front view for 3 seconds.

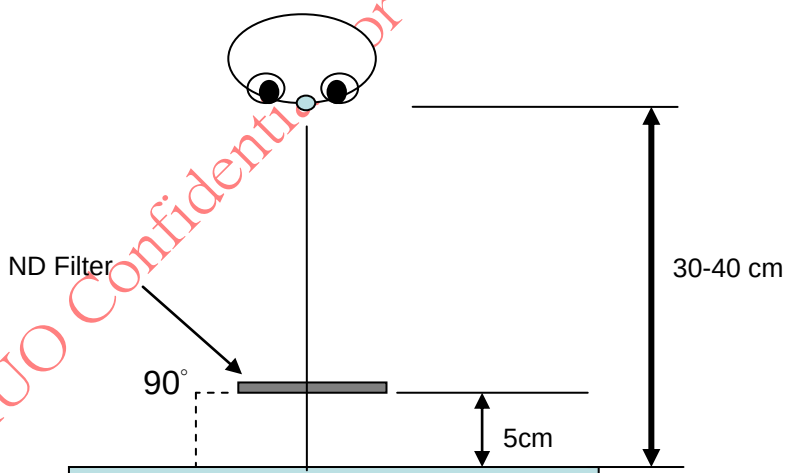

Note 7) Defect criteria diagram

7-1) Adjacent Dot defect diagram:


Adjacent-dot defect : refer to Figure 2, dot  
1,2,...,8 around A are all A's adjacent dots



Fig.2

7-2) Definition of distance between defect dots as following:

Fig.3

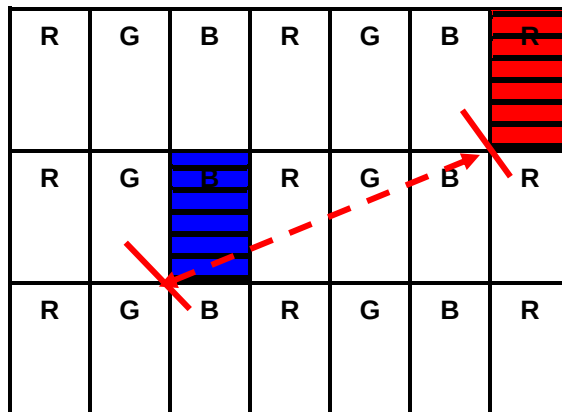

A: Distance between  
defect dots



Defect Dot

Note 8) While operating over 50°C ambient temperature, there should be no function failure occur and Mura (display un-uniformity) should be invisible under 1% ND filter applied.

## 6.2 Scratches, dent, extraneous substances and Appearance inspection specification

| Judge area  | Judge item                                    |                                                                                                                                                                 | Inspection specification        |                    |             | Judge criterion |       |
|-------------|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|--------------------|-------------|-----------------|-------|
|             |                                               |                                                                                                                                                                 |                                 |                    |             | Major           | Minor |
| Active area | Particles on the polarizer                    | Circular                                                                                                                                                        | Average diameter: D (mm)        |                    | Numbers     |                 | ○     |
|             |                                               |                                                                                                                                                                 | $D \leq 0.15$                   |                    | Disregarded |                 |       |
|             |                                               |                                                                                                                                                                 | $0.15 < D \leq 0.50$            |                    | $n \leq 2$  |                 |       |
|             |                                               |                                                                                                                                                                 | $0.50 < D$                      |                    | $n = 0$     |                 |       |
|             |                                               | Linear                                                                                                                                                          | Width: W (mm)<br>Length: L (mm) |                    | Numbers     |                 | ○     |
|             |                                               |                                                                                                                                                                 | $W \leq 0.03$                   | $L \leq 0.5$       | Disregarded |                 |       |
|             |                                               |                                                                                                                                                                 | $0.03 < W \leq 0.07$            | $0.5 < L \leq 2.0$ | $n \leq 2$  |                 |       |
|             |                                               |                                                                                                                                                                 | $0.07 < W$                      | $2.0 < L$          | $n = 0$     |                 |       |
|             | Scratch/Dent on the polarizer                 | Circular                                                                                                                                                        | Average diameter: D (mm)        |                    | Numbers     |                 | ○     |
|             |                                               |                                                                                                                                                                 | $D \leq 0.15$                   |                    | Disregarded |                 |       |
|             |                                               |                                                                                                                                                                 | $0.15 < D \leq 0.50$            |                    | $n \leq 2$  |                 |       |
|             |                                               |                                                                                                                                                                 | $0.50 < D$                      |                    | $n = 0$     |                 |       |
|             |                                               | Linear                                                                                                                                                          | Width: W (mm)<br>Length: L (mm) |                    | Numbers     |                 | ○     |
|             |                                               |                                                                                                                                                                 | $W \leq 0.03$                   | $L \leq 0.5$       | Disregarded |                 |       |
|             |                                               |                                                                                                                                                                 | $0.03 < W \leq 0.07$            | $0.5 < L \leq 2.0$ | $n \leq 2$  |                 |       |
|             |                                               |                                                                                                                                                                 | $0.07 < W$                      | $2.0 < L$          | $n = 0$     |                 |       |
|             | Bubble on the polarizer                       | Circular                                                                                                                                                        | Average diameter: D (mm)        |                    | Numbers     |                 | ○     |
|             |                                               |                                                                                                                                                                 | $D \leq 0.15$                   |                    | Disregarded |                 |       |
|             |                                               |                                                                                                                                                                 | $0.15 < D \leq 0.50$            |                    | $n \leq 2$  |                 |       |
|             |                                               |                                                                                                                                                                 | $0.50 < D$                      |                    | $n = 0$     |                 |       |
|             | Extraneous substances                         | Circular                                                                                                                                                        | Average diameter: D (mm)        |                    | Numbers     |                 | ○     |
|             |                                               |                                                                                                                                                                 | $D \leq 0.15$                   |                    | Disregarded |                 |       |
|             |                                               |                                                                                                                                                                 | $0.15 < D \leq 0.50$            |                    | $n \leq 3$  |                 |       |
|             |                                               |                                                                                                                                                                 | $0.50 < D$                      |                    | $n = 0$     |                 |       |
|             |                                               | Linear                                                                                                                                                          | Width: W (mm)<br>Length: L (mm) |                    | Numbers     |                 | ○     |
|             |                                               |                                                                                                                                                                 | $W \leq 0.03$                   | $L \leq 0.5$       | Disregarded |                 |       |
|             |                                               |                                                                                                                                                                 | $0.03 < W \leq 0.07$            | $0.5 < L \leq 2.0$ | $n \leq 3$  |                 |       |
|             |                                               |                                                                                                                                                                 | $0.07 < W$                      | $2.0 < L$          | $n = 0$     |                 |       |
| Bezel       | Gap between front and back bezel on all sides | 1. No sharp burr/edge to cause safety issue;<br>2. The bezel defect to be accepted if it is not affecting display performance, quality and mechanical property. |                                 |                    |             |                 | ○     |
|             | Scratches, Wrap and Sunken                    | No harm, dangerous                                                                                                                                              |                                 |                    |             |                 | ○     |
|             | Assembly Fail                                 | Not allowed                                                                                                                                                     |                                 |                    |             | ○               |       |
| Label (S/N, | No label                                      | Not allowed                                                                                                                                                     |                                 |                    |             | ○               |       |
|             | Invert label                                  |                                                                                                                                                                 |                                 |                    |             | ○               |       |




|               |                   |                                                             |                       |                       |
|---------------|-------------------|-------------------------------------------------------------|-----------------------|-----------------------|
| B/L,<br>WEEK) | Content Error     |                                                             | <input type="radio"/> |                       |
|               | Dirt              | Word can be read. Barcode can be scanned.                   |                       | <input type="radio"/> |
|               | Not clear         |                                                             |                       | <input type="radio"/> |
|               | Word out of shape |                                                             |                       | <input type="radio"/> |
|               | Broken            |                                                             |                       | <input type="radio"/> |
|               | Crease            |                                                             |                       | <input type="radio"/> |
|               | Label overlapping |                                                             |                       | <input type="radio"/> |
|               | Position          | Be attached on right position                               |                       | <input type="radio"/> |
| Screw         | Not enough (Q'ty) | Not allowed                                                 | <input type="radio"/> |                       |
|               | Loose             | Not allowed                                                 | <input type="radio"/> |                       |
| Connector     | Appearance        | No display function impacted<br>broken, rising, deformation | <input type="radio"/> |                       |

Note 1 : Extraneous substances which can be wiped out, such as fingerprint and particles are not considered as a defect.

Note 2 : Defects on the Black Matrix (exceed the area outside Active Area 0.5mm) are not considered as a defect.

Note 3 : Defect size definition: (Unit:mm)

D: Average Diameter; L: Length W: Width

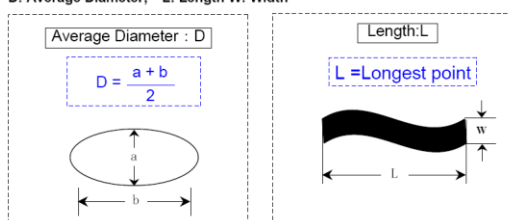


### 6.3 Touch panel appearance inspection specification :

#### Defect Item and definition

#### Defects count method 、 number and distance between defects


#### A. Linear defects scale by the length / width



| Size                                                                      | Pass Criteria                                   |
|---------------------------------------------------------------------------|-------------------------------------------------|
| $L \leq 5\text{mm}$ or $W \leq 0.1\text{mm}$                              | Ignore                                          |
| $5\text{mm} < L \leq 10\text{mm}$ or $0.1\text{mm} < W \leq 0.2\text{mm}$ | $N \leq 5$ , $10\text{mm} \leq \text{distance}$ |
| $L > 10\text{mm}$ or $W > 0.2\text{mm}$                                   | Not Allowed                                     |

\* Linear defects include Scratch / Line shape defect ( Stain, Dirt, Dent, Foreign material)

**B. Dot defects is counted in active area only, and scaled by diameter "D" as below.**



| Size                                  | Acceptable Q'TY                                 |
|---------------------------------------|-------------------------------------------------|
| $D \leq 0.4\text{mm}$                 | Ignore                                          |
| $0.4\text{mm} < D \leq 0.8\text{ mm}$ | $N \leq 5$ , $10\text{mm} \leq \text{distance}$ |
| $D > 0.8\text{ mm}$                   | Not Allowed                                     |


**C. BM pin hole**




| Size                                  | Acceptable Q'TY                           |
|---------------------------------------|-------------------------------------------|
| $D \leq 0.1\text{mm}$                 | Ignore                                    |
| $0.1\text{mm} < D \leq 0.2\text{ mm}$ | $N \leq 2$ (distance $\geq 10\text{mm}$ ) |
| $D > 0.2\text{mm}$                    | Not Allowed                               |

**D. Chipping**

|       | Judge item      | Inspection specification                                                                                    |
|-------|-----------------|-------------------------------------------------------------------------------------------------------------|
| Glass | Wire (on array) | No damaged $\leq 1/3$ lead length of efficient circuit                                                      |
|       | Edge            | No extended crack                                                                                           |
|       |                 | Chipping in Corner : $X \leq 2\text{mm}$ , $Y \leq 2\text{mm}$ , $Z \leq 1/2$ Glass thickness (Fig.1)       |
|       |                 | Chipping around the edge : $X \leq 5\text{mm}$ , $Y \leq 2\text{mm}$ , $Z \leq 1/2$ Glass thickness (Fig.2) |



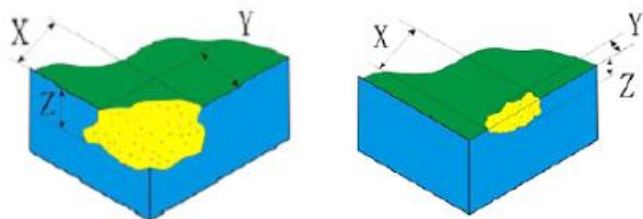

### Glass crack

#### Glass crack



-No glass cracks of any kind allowed (including creeping/extending cracks)

## 7. Inspection judgement:

- 7-1 The judgement of the shipped lot (acceptance or rejection) should follow the sampling plan of MIL-STD-105E, single sampling, normal inspection, level II.
- 7-2 If the number of defects is equal to or less than the applicable acceptance level, the lot shall be accepted.
- 7-3 If the number of defects is more than the applicable acceptance level, the lot shall be rejected and the buyer should inform the seller of the result of incoming inspection in writing.

## 8. Precaution:

Please pay attention to the following items when you use the Modules.

1. Do not twist or bend the module and prevent the unsuitable external force for display module during assembly.
2. Adopt measures in adequately ventilated environment. Be sure to use the module in the specified temperature range.
3. Avoid dust or oil mist during assembly.
4. Follow the correct power sequence while operating. Do not apply the invalid signal, otherwise, it will cause improper shut down and damage the module.
5. Try to avoid the electrical magnetic interference, and it will be more safety and less noise.
6. Please operate module in suitable temperature. The response time & brightness will drift by different temperature.
7. Avoid displaying the fixed pattern (exclude the white pattern) in a long period, otherwise, it will cause image sticking.
8. Be sure to turn off the power when connecting or disconnecting the circuit.
9. Display module surface could be scratched easily, please avoid dirt and stains carefully.
10. A dewdrop may lead to destruction. Please wipe off any moisture before using modules.



Effective Date: 2017.01.25

Author: MQMFC0

Version: 0

Document Chinese Title: 10.1 " (G101EVT Series TFT-LCD & TP) 進料檢驗規範 (A grade)

Document English Title: Incoming Inspection Standard For 10.1 " (G101EVT Series TFT-LCD & TP) (A)

11. Sudden temperature changes cause condensation, and it will cause polarizer damaged.
12. High temperature and humidity may degrade performance. Please do not expose the module to the direct sunlight and so on.
13. Avoid any acid or chlorine compounds, which are harmful to the LCD module.
14. Static electricity will damage the modules; please do not touch the module without any grounded device connected.
15. Do not disassemble and reassemble the module by self.
16. Do not touch the rear side directly to avoid the electrical shock by the backlight high voltage.
17. Avoid strong vibration or shock. or it will cause the module broken.
18. Store the modules in suitable environment with regular packing.
19. Be careful of injury from a broken display module. Please avoid the pressure adding to the surface (front or rear side) of modules, because it will cause the non-uniformity or other function issue to display.
20. Please softly tear the sticking tape of protective film to prevent bezel out of shape and un-uniformity display.

**AU Optronics Corp.**

**No. 1, Li-Hsin Rd. II,**

**Science-Based Industrial Park,**

**Hsin-Chu City, Taiwan, R.O.C. Tel :886-3-500-8800**

**Fax:886-3-666-9320**