



P270HAN02.0 One Page Spec

ADP G&P


2025/04/15

General Product Specification

Model	27" High Brightness
Display Mode	AHVA, Normally Black
Resolution	1920 x 1080
Brightness (nit)	1,300 (Typ.)
C.T.	6000K (Wx:0.32, Wy:0.35)
Interface	2Ch LVDS
Frequency	60 Hz
Contrast Ratio	1000:1
Color Gamut	NTSC 72%
Panel Surface Treatment	AG25%
Display Color	6bit+Hi-FRC
Active Area (mm)	597.888 (H) x 336.312 (V)
Border (U/D/L/R) (mm)	10.6/10.6/10.6/10.6
Module Outline	623.7(H)×362.1(V)×12.0(D)
Backlight type	ELED
LED MTTF	50K hours
LED Driving Board	No
Operation Temp	-30°C ~ 70°C
Storage Temp	-30°C ~ 80°C
Power Consumption	42W (TBC)


LVDS pin info

PIN #	SIGNAL NAME	DESCRIPTION
1	RxO0-	Negative LVDS differential data input (Odd data)
2	RxO0+	Positive LVDS differential data input (Odd data)
3	RxO1-	Negative LVDS differential data input (Odd data)
4	RxO1+	Positive LVDS differential data input (Odd data)
5	RxO2-	Negative LVDS differential data input (Odd data)
6	RxO2+	Positive LVDS differential data input (Odd data)
7	GND	Ground
8	RxOCLK-	Negative LVDS differential clock input (Odd clock)
9	RxOCLK+	Positive LVDS differential clock input (Odd clock)
10	RxO3-	Negative LVDS differential data input (Odd data)
11	RxO3+	Positive LVDS differential data input (Odd data)
12	RxE0-	Negative LVDS differential data input (Even data)
13	RxE0+	Positive LVDS differential data input (Even data)
14	GND	Ground
15	RxE1-	Negative LVDS differential data input (Even data)
16	RxE1+	Positive LVDS differential data input (Even data)
17	GND	Ground
18	RxE2-	Negative LVDS differential data input (Even data)
19	RxE2+	Positive LVDS differential data input (Even data)
20	RxECLK-	Negative LVDS differential clock input (Even clock)
21	RxECLK+	Positive LVDS differential clock input (Even clock)
22	RxE3-	Negative LVDS differential data input (Even data)
23	RxE3+	Positive LVDS differential data input (Even data)
24	GND	Ground
25	NC	No connection (for AUO test only. Do not connect)
26	NC	No connection (for AUO test only. Do not connect)
27	NC	No connection (for AUO test only. Do not connect)
28	VDD	Power Supply Input Voltage
29	VDD	Power Supply Input Voltage
30	VDD	Power Supply Input Voltage

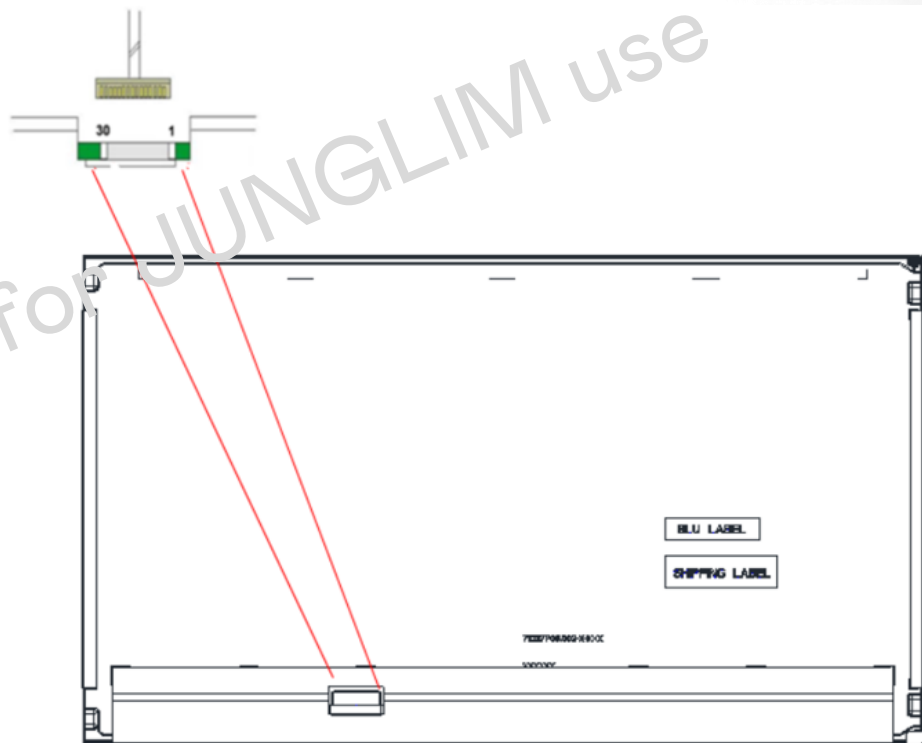

LED pin info

Pin#↵	Symbol↵	Description↵
1↵	Ch1↵	LED Current Feedback Terminal (Channel 1)↵
2↵	Ch2↵	LED Current Feedback Terminal (Channel 2)↵
3↵	VSLED↵	LED Power Supply Voltage Input Terminal↵
4↵	VSLED↵	LED Power Supply Voltage Input Terminal↵
5↵	Ch3↵	LED Current Feedback Terminal (Channel 3)↵
6↵	Ch4↵	LED Current Feedback Terminal (Channel 4)↵

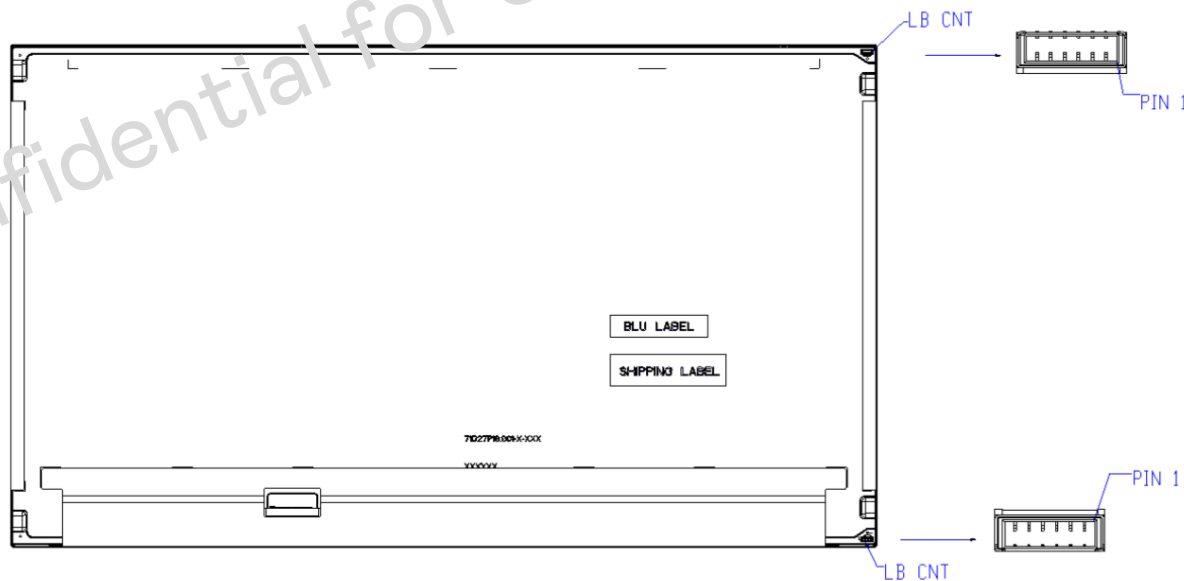



Tap Into The Possibilities