



Products

CR-39 SPHERIC LENS

SPH	CYL	
		
INDEX (ND) 1.49		
ABBE VALUE (VD) 58		
SPECIFIC GRAVITY 1.32		
MATERIAL CR-39		
COATED COLOR GREEN		
DIAMETER 70, 65mm		

This CR-39 Spheric lens has excellent properties and high Abbe value as a plastic spectacle lens the most suitable for the human eyes. It's thick and weighty as compared with other lens, though it's low price.

-CYL										SPH	+CYL									
2,00	1,75	1,50	1,25	1,00	0,75	0,50	0,25	0,00	-/+	0,00	0,25	0,50	0,75	1,00	1,25	1,50	1,75	2,00		
									0,00											
									0,25											
									0,50											
									0,75											
									1,00											
									1,25											
									1,50											
									1,75				6 5 mm							
									2,00											
									2,25											
								7 0 mm	2,50											
									2,75											
									3,00											
									3,25											
									3,50											
									3,75											
									4,00											

Products

MID-INDEX SPHERIC LENS



INDEX (ND)	1.56
ABBEVALUE (VD)	38
SPECIFIC GRAVITY	1.28
MATERIAL	NK 55
COATED COLOR	GREEN
DIAMETER	72, 70, 65mm

Mid-Index Spheric EMI lens protect your eyes by blocking of harmful electric wave created from computer. And it's good for children and office workers in front of computer for a long time particularly.

Avista Thinner and Lighter Lenses

- C Y L										SPH +/+	+ C Y L									
2,00	1,75	1,50	1,25	1,00	0,75	0,50	0,25	0,00	0,00		0,25	0,50	0,75	1,00	1,25	1,50	1,75	2,00		
									0,00											
									0,25											
									0,50											
									0,75											
									1,00											
									1,25											
									1,50											
									1,75											
									2,00											
									2,25											
									2,50											
									2,75											
									3,00											
									3,25											
									3,50											
									3,75											
									4,00											
									4,25											
									4,50											
									4,50											
									5,00											
									5,25											
									5,50											
									5,75											
									6,00											
									6,25											
									6,50											
									6,75											
									7,00											
									7,25											
									7,50											
									7,75											
									8,00											

- C Y L										SPH +/+
0,50	0,75	1,00	1,25	1,50	1,75	2,00				
									0,25	
									0,50	
									0,75	
									1,00	
									1,25	
									1,50	
									1,75	

Products

MID-INDEX SPHERIC UV-400 EMI LENS

	INDEX (ND)	1.56
	ABBEVALUE (VD)	38
	SPECIFIC GRAVITY	1.28
	MATERIAL	NK-55
	COATED COLOR	GREEN
	DIAMETER	72, 70, 65mm

Our new developed product, MID-INDEX UV-400 & EMI lens is enable to protect our eyes from harmful ultraviolet rays, wave and help wearer to clear and clarity your view because of Hard/Multi Coating. It's popular items, high quality products for young generation especially because of making less stain dust.

- CYL										SPH +/+	+ CYL									
2,00	1,75	1,50	1,25	1,00	0,75	0,50	0,25	0,00	0,00		0,25	0,50	0,75	1,00	1,25	1,50	1,75	2,00		
										0,00										
										0,25										
										0,50										
										0,75										
										1,00										
										1,25										
										1,50										
										1,75										
										2,00										
										2,25										
										2,50										
										2,75										
										3,00										
										3,25										
										3,50										
										3,75										
										4,00										
										4,25										
										4,50										
										4,50										
										5,00										
										5,25										
										5,50										
										5,75										
										6,00										
										6,25										
										6,50										
										6,75										
										7,00										
										7,25										
										7,50										
										7,75										
										8,00										


SPH +/+	- CYL							
	0,50	0,75	1,00	1,25	1,50	1,75	2,00	
0,25								
0,50								
0,75								
1,00								
1,25								
1,50								
1,75								

Products

MID-INDEX ASPHERIC LENS

SPH	CYL	
		
INDEX (ND)		1.56
ADDCVALUE (VD)		30
SPECIFIC GRAVITY		1.28
MATERIAL		NK-55
COATED COLOR		GREEN
DIAMETER		72, 70, 65mm

Aspheric lens are, thinner and lighter than normal lens and distortion free, wearer feel comfortable through aspheric lenses.



Normal lens

Aspheric lens

- C Y L									S P H -/+	+ C Y L								
2,00	1,75	1,50	1,25	1,00	0,75	0,50	0,25	0,00		0,00	0,25	0,50	0,75	1,00	1,25	1,50	1,75	2,00
									0,00									
									0,25									
									0,50									
									0,75									
									1,00									
									1,25									
									1,50									
									1,75									
									2,00									
									2,25									
									2,50									
									2,75									
									3,00									
									3,25									
									3,50									
									3,75									
									4,00									
									4,25									
									4,50									
									4,50									
									5,00									
									5,25									
									5,50									
									5,75									
									6,00									
									6,25									
									6,50									
									6,75									
									7,00									
									7,25									
									7,50									
									7,75									
									8,00									

S P H -/+	- C Y L							
	0,50	0,75	1,00	1,25	1,50	1,75	2,00	
0,25								
0,50								
0,75								
1,00								
1,25								
1,50								
1,75								
2,00								

SPH ~/+	-CYL						
	0,50	0,75	1,00	1,25	1,50	1,75	2,00
0,25							
0,50							
0,75							
1,00							
1,25							
1,50							
1,75							


Products

HI-INDEX ASPHERIC UV-400 & EMI LENS



INDEX (ND)	1.61
ABBEVALUE (VD)	42
SPECIFIC GRAVITY	1.34
MATERIAL	MR-8
COATED COLOR	GREEN
DIAMETER	75, 70, 65mm

Avista Hi-Index Aspheric UV-400 & HMC EMI lens protect your eyes by blocking harmful ultraviolet rays. It's guaranteed clearness due to aspheric design. It has get rid of distorting phenomenon and it is for high character and elegant image.



Avista Thinner and Lighter Lenses

- C Y L									S P H	- C Y L								
2,00	1,75	1,50	1,25	1,00	0,75	0,50	0,25	0,00	- / +	0,00	0,25	0,50	0,75	1,00	1,25	1,50	1,75	2,00
									0,00									
									0,25									
									0,50									
									0,75									
									1,00									
									1,25									
									1,50									
									1,75									
									2,00									
									2,25									
									2,50									
									2,75									
									3,00									
									3,25									
									3,50									
									3,75									
									4,00									
									4,25									
									4,50									
									4,50									
									5,00									
									5,25									
									5,50									
									5,75									
									6,00									
									6,25									
									6,50									
									6,75									
									7,00									
									7,25									
									7,50									
									7,75									
									8,00									
									8,25									
									8,50									
									8,75									
									9,00									
									9,25									
									9,50									
									9,75									
									10,00									

* High CYL Power *

→ S -0.00/-6.00~C -2.25/-4.00(75mm)

→ S -6.25/-8.00~C -2.25/-4.00(70mm)


Products

SUPER HI-INDEX ASPHERIC UV-400 & EMI LENS



INDEX (ND)	1.67
ABBEVALUE (VD)	32
SPECIFIC GRAVITY	1.35
MATERIAL	MR-7
COATED COLOR	GREEN
DIAMETER	75, 70mm

Avist Super Hi-Index Aspheric UV 400 lens is the best lens helping to clear and clarify your view by treatment of 'water repellent' cannot be spotted and scratched. It's developed and produced for seek best character, highest quality by the highest technology and it's more comfortable for wearing a pair of glasses as thin and light weight.

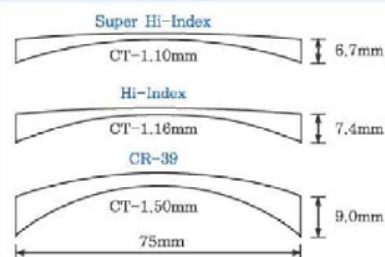

Avista Thinner and Lighter Lenses

SPH	- C Y L								
-	0.00	0.25	0.50	0.75	1.00	1.25	1.50	1.75	2.00
0.00									
0.25									
0.50									
0.75									
1.00									
1.25									
1.50									
1.75									
2.00									
2.25									
2.50									
2.75									
3.00									
3.25									
3.50									
3.75				75mm					
4.00									
4.25									
4.50									
4.75									
5.00									
5.25									
5.50									
5.75									
6.00									
6.25									
6.50									
6.75									
7.00									
7.25									
7.50									
7.75									
8.00									
8.25				70mm					
8.50									
8.75									
9.00									
9.25									
9.50									
9.75									
10.00									
10.25									
10.50									
10.75									
11.00									
11.25									
11.50									
11.75									
12.00									
12.25									
12.50									
12.75									
13.00									
13.25									
13.50									
13.75									
14.00									
14.25									
14.50									
14.75									
15.00									

* High CYL Power *

→ S -0.00+8.00~C -2.25+4.00(75mm)

→ S -6.25+8.00~C -2.25+4.00(70mm)

* High CYL Power *

→ S -0.00/-8.00-C -2.25/-4.00(75mm)
→ S -6.25/-8.00-C -2.25/-4.00(70mm)

SPECIFICATIONS OF SEMI-FINISHED LENS

1. N-1.67 ASPHERIC LENS

Material: 1.67 Index Resin (nd=1.660,) abbe value=32, Density=1.35)

CONVEX SURFACE			CONCAVE SURFACE		C.T (mm)	E.T (mm)	Dia (mm)
Normal	T.B.C	Radius sagitta:40mm	B.C				
0.50	0.445	1483.58	5.50		8.8	15.5	70
1.00	1.028	642.23			8.7	14.4	
2.00	2.192	301.08			8.8	13.5	
3.00	3.382	195.16			8.6	12.8	
4.00	5.344	123.51			8.8	12.2	
5.00	6.407	103.02			9.7	10.7	
6.00	7.428	88.85			9.9	10.3	
7.00	8.029	82.20			10.3	9.8	
8.00	9.187	71.84			11.0	9.7	
9.00	10.504	62.24			13.1	9.5	
10.00	11.924	55.35			13.7	9.0	

■ Center Thickness: $\pm 0.3\text{mm}$ ■ Edge Thickness: ± 0.3 ■ Diameter Ranges: $\pm 0.5\text{mm}$

TOP ↑

2. N-1.61 ASPHERIC LENS

Material: 1.61 Index Resin (nd=1.592,) abbe value=42, Density=1.30)

CONVEX SURFACE			CONCAVE SURFACE		C.T (mm)	E.T (mm)	Dia (mm)
Normal	T.B.C	Radius sagitta:40mm	B.C				
0.50	0.399	1483.58	5.50		8.8	15.5	70
1.00	0.922	642.23			8.7	14.4	
2.00	1.966	301.08			8.8	13.5	
3.00	3.033	195.16			8.6	12.8	
4.00	4.793	123.51			8.8	12.2	
5.00	5.746	103.02			9.7	10.7	
6.00	6.663	88.85			9.9	10.3	
7.00	7.202	82.20			10.3	9.8	
8.00	8.241	71.84			11.0	9.7	
9.00	9.512	62.24			13.1	9.5	
10.00	10.695	55.35			13.7	9.0	

■ Center Thickness: $\pm 0.3\text{mm}$ ■ Edge Thickness: $\pm 0.3\text{mm}$ ■ Diameter Ranges: $\pm 0.5\text{mm}$

3. N-1.61 SPHERIC LENS

Material: 1.61 Index Resin (nd=1.592,) abbe value=42, Density=1.30)

CONVEX SURFACE			CONCAVE SURFACE	C.T (mm)	E.T (mm)	Dia (mm)
Normal	T.B.C	Radius sagitta:40mm	B.C			
0.50	0.520	1180.20	5.50	8.7	15.5	70
1.00	1.129	524.44		8.7	14.0	
2.00	2.173	272.48		8.7	13.7	
3.00	3.190	185.56		8.7	11.9	
4.00	4.259	138.99		8.6	10.6	
5.00	5.282	112.07		9.7	10.7	
6.00	6.387	92.69		9.4	9.3	
7.00	7.320	80.87		10.7	9.5	
8.00	8.601	68.83		12.3	9.5	
9.00	10.375	57.06		13.7	8.9	
10.00	11.195	52.88		14.0	7.8	
12.00	12.797	46.26		15.0	8.1	65

■ Center Thickness: $\pm 0.3\text{mm}$ ■ Edge Thickness: $\pm 0.3\text{mm}$ ■ Diameter Ranges: $\pm 0.5\text{mm}$

SPECIFICATIONS OF SEMI-FINISHED LENS

7. Flat Top Bifocal Semi Finished Lens

Specifications and Availability

Material : 1.56 Index Resin (nd=1.549, Abbe=38, Density=1.28)

Lens Size : 75mm diameter with optics centered

Base Curve : 4.25, 6.25

Add Power : +1.00 to +3.00 in 0.25D steps.

Segment Placement : 5mm down - 3mm in

Segment Size : 28mm

Addition		+1.00	+1.25	+1.50	+1.75	+2.00	+2.25
4C	Radius	108.11	102.56	97.40	94.04	90.36	86.33
	Back Curve 6.25 / R =89.708 Center Thickness : 9.3±0.5mm/Edge Thickness : 12.0 ±0.5mm						
6C	Radius	77.52	75.19	72.73	70.09	68.10	66.23
	Back Curve 6.25 / R =132.070 Center Thickness : 912.0 ±0.5mm/±Edge Thickness : 9.3 ±0.5mm						

Addition		+2.50	+2.75	+3.00	+3.25	+3.50	+3.75	+4.00
4C	Radius	83.68	80.65	77.89	75.17	72.63	70.26	68.38
	Back Curve 6.25 / R =89.708 Center Thickness : 9.3±0.5mm/Edge Thickness : 12.0 ±0.5mm							
6C	Radius	64.45	62.76	60.65	59.26	57.73	56.28	54.90
	Back Curve 6.25 / R =132.070 Center Thickness : 912.0 ±0.5mm/±Edge Thickness : 9.3 ±0.5mm							

SPECIFICATIONS OF SEMI-FINISHED LENS

8. Blended Bifocal Semi Finished Lens

Specifications and Availability

Material : 1.56 Index Resin (nd=1.549, Abbe=38, Density=1.28)

Lens Size : 75mm diameter with optics centered

Base Curve : 4.25, 6.25

Add Power : +1.00 to +3.00 in 0.25D steps.

Segment Placement : 5mm down - 3mm in

Segment Size : 28mm

Addition		+1.00	+1.25	+1.50	+1.75	+2.00	+2.25
4C	Radius	106.67	101.82	131.76	93.56	89.89	89.29
	Back Curve 6.25 / R =89.708 Center Thickness : 9.3±0.5mm/Edge Thickness : 12.0 ±0.5mm						
6C	Radius	77.56	75.07	72.70	70.44	68.29	66.27
	Back Curve 6.25 / R =132.070 Center Thickness : 912.0 ±0.5mm/±Edge Thickness : 9.3 ±0.5mm						

Addition		+2.50	+2.75	+3.00	+3.25	+3.50	+3.75	+4.00
4C	Radius	82.96	80.23	77.56	74.97	72.63	70.42	68.42
	Back Curve 6.25 / R =89.708 Center Thickness : 9.3±0.5mm/Edge Thickness : 12.0 ±0.5mm							
6C	Radius	64.37	62.57	60.67	58.26	57.73	56.29	54.95
	Back Curve 6.25 / R =132.070 Center Thickness : 912.0 ±0.5mm/±Edge Thickness : 9.3 ±0.5mm							

Products

SPECIFICATIONS OF SEMI-FINISHED LENS

9. Progressive Short Corridor Semi Finished Lens

Specifications and Availability

Material : 1.56 Index Resin ($n_d=1.549$, Abbe=38, Density=1.28)

Lens Size : 75mm diameter with optics centered

Add Power : +1.00 to +3.00 in 0.25D steps.


Base Curve : 1.50, 3.50, 5.75, 7.75

Normal Base Curve	Actual Base Curve (1.53)	Actual Base Radius (1.53)	Sagitta (40mm)	Back Curve (1.53)	Reference Center Thickness	Edge Thickness
1.50	1.16	456.8965	0.437	6.25	8.9	14.8
3.50	3.20	165.6250	1.200	6.25	9.6	13.0
5.75	5.54	96.6678	2.103	6.25	9.8	9.7
7.75	7.57	70.0132	2.896	6.25	13.5	9.9

Edge Thickness

ADD	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00
Prism	0.25	0.50	0.50	0.50	0.75	0.75	0.75	1.00	1.00


Avista Thinner and Lighter Lenses

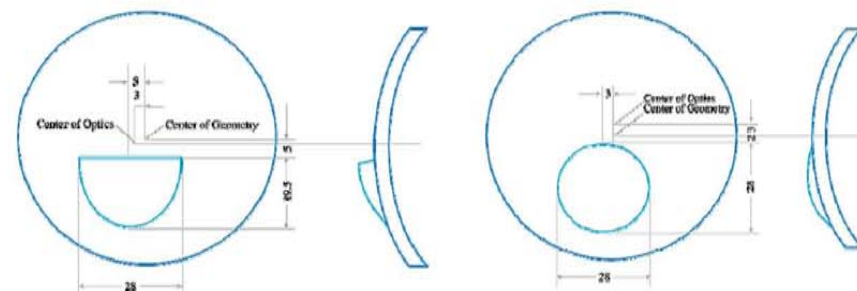

Prescription Range : -8.00D to +7.00D combined with -400D Cyl.

Power(Sphere)
-4.25D to -8.00D
+2.00D to -4.00D
+2.25D to +4.50D
+4.75D to +7.00D

Recommended Base Curve

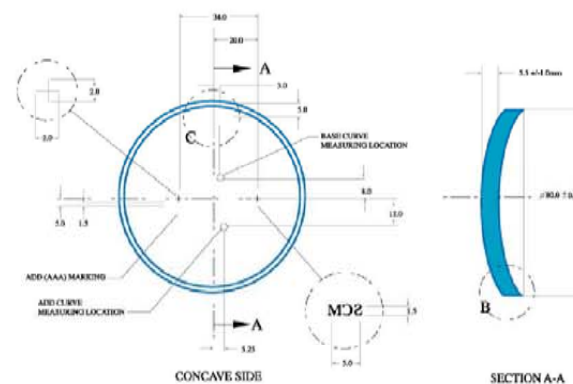



THANK YOU!

OPTITECH CORP.
#403-17, GALMA-DONG, SEO-GU,
DAEJON, 302-809, KOREA
TEL : 82-42-523-9786 FAX : 82-42-523-9787

avista@optitech.co.kr