


Shielded Room

Modular and Prefabricated PAN Type Shielding

Frankonia shielded rooms and anechoic chambers are designed based on a modular construction system. Prefabricated high quality shielding panels guarantee a maximum of flexibility regarding possible dimensions. All PAN type modules allow an easy handling and entry via standard building doors. The standard modules are bolted from inside every 75 mm with high conductivity mesh gasket inserted for sealing the joints of the panels. This facilitates an installation close to the walls of the parent building. The short screwing distance and the precise tightening of the screws with predefined torque guarantee long life shielding attenuation characteristics.

Features

- › PAN Type shielding modules made of 2,0 mm thick galvanized steel
- › Modular and prefabricated standard
- › Self-supporting stability or with static steel structure for any seismic condition
- › Mounted from the inside
- › Reverse installation possible (flat surface inside)
- › Interior finishing (walls and ceiling) possible
- › Raised floor systems, or welded floor systems
- › Long life shielding attenuation characteristics
- › No glue, no welding
- › Dismountable without any damage, easy modifications and maintenance
- › A complete transfer or future modification is possibility
- › Turnkey solution

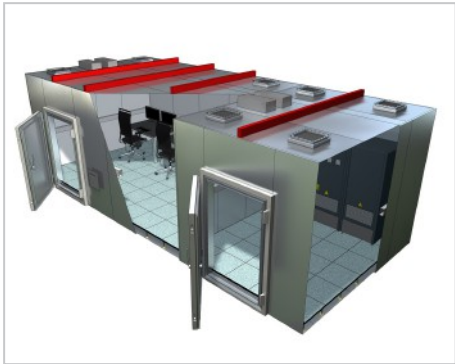

Shielding standards

- › Frequency range acc. to EN 50147-1 or IEEE-299 (option) from 10 kHz up to 18 GHz or 40 GHz
- › Equal performance for any kind of feed-through components, honeycombs, doors and gates, filters, etc.
- › Perfectly adapted for Frankosorb® Absorbers
- › Any size of shielding is possible
- › Acoustic panels with absorption per ISO 354 $\alpha_w=0,65$ (MH)

Guaranteed Performance

Frequency	Attenuation	Field
10 kHz	≥ 90 dB	Magnetic Field
100 kHz	≥ 100 dB	Magnetic Field
1 MHz	≥ 110 dB	Magnetic Field
100 MHz	≥ 120 dB	Plane Wave
400 MHz	≥ 120 dB	Plane Wave
1 GHz	≥ 110 dB	Plane Wave
18 GHz	≥ 100 dB	Microwave
40 GHz	≥ 100 dB	Microwave