


iDraw 2.0 Plotter Software User Manual V1.9

Introduction:

iDraw 2.0 Pen plotter is high performance drawing and writing machines. For tech support, part support and anything else, please reach out to us at uunatek@gmail.com

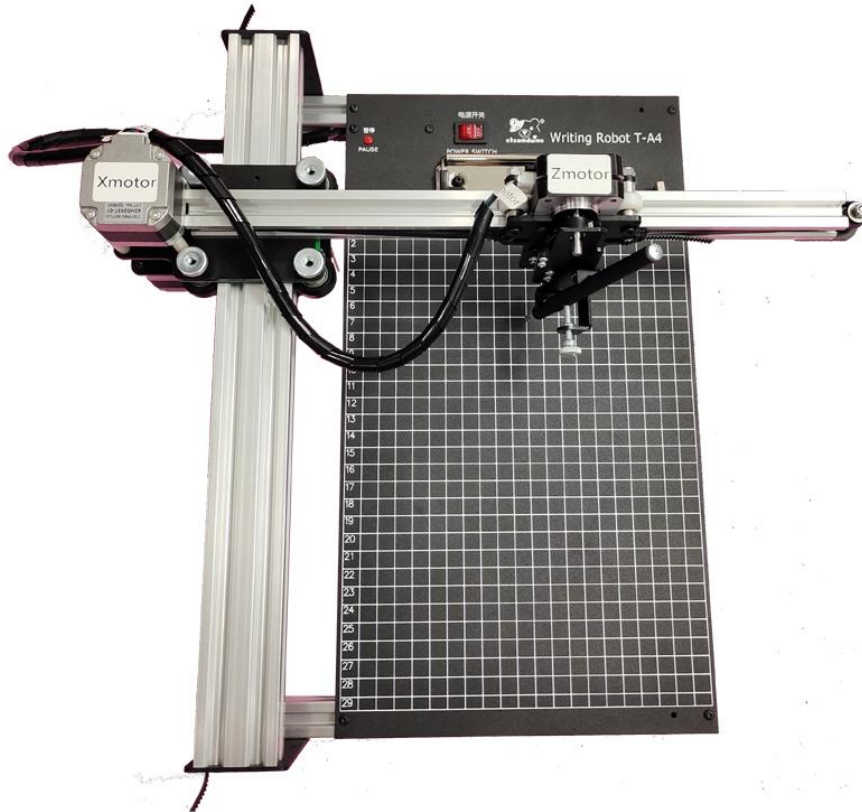

User Guide

Models

iDraw2.0 H-Structure A3 Machine

iDraw2.0 T-Structure A3 Machine

iDraw2.0 T-Structure A4 Machine


Contents

1.Easy Assembling	3
1. 1Check the assemble video for easy assembling	3
1.2 Organize cables.	3
1. 3 Move to the Home Corner.	4
2.software operation	6
2.1 Software Installation	6
2.2 Pen up and down test.....	6
2.3 Make your first plot.....	9
2.4 Input your own text.....	11
2.5 Plot an image	14
2.6 Plot an centerline image	17
2.7 Single stroke font “Hershey”	20
2.8 Change Portrait or Landscape to Write	22
2.9 Temporary Stop	22
2.10 How to select iDraw model	23
2.11 iDraw Naming	23
2.11.1 Read iDraw Name	24
2.11.2 Write iDraw name	24
2.11.3 Using Nickname	25
3.Service, and parts support	25

1.Easy Assembling

1. 1Check the assemble video for easy assembling


To assemble the machine, please refer to the video in the **Assembly video** directory, unboxing video.

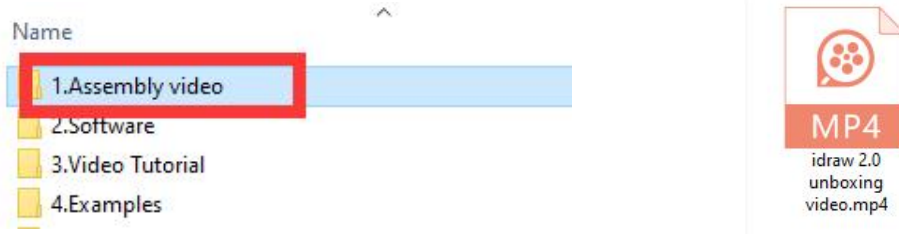


1.2 Organize cables.

IMPORTANT: Use cable zip ties to hold the cables in place so that the motor wires are not damaged.


Use cable zip ties to secure the cables to the ABS Round Spacer at the bottom of the X motors.

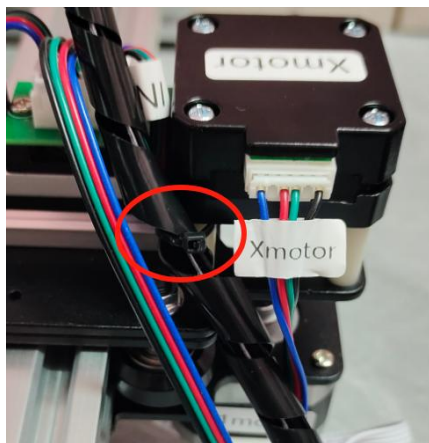

First, stand up the Z motor cable, and then use an R-type cable clamp to secure the Z motor cable to the Z motor.

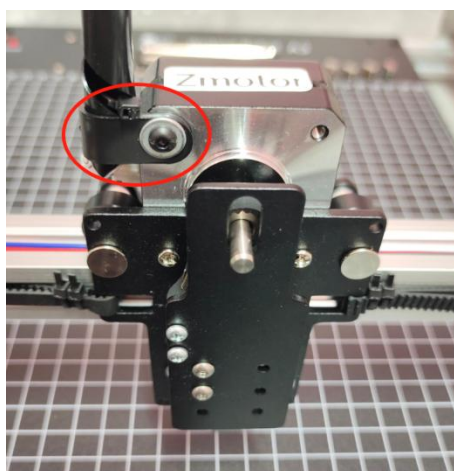


Cables organized

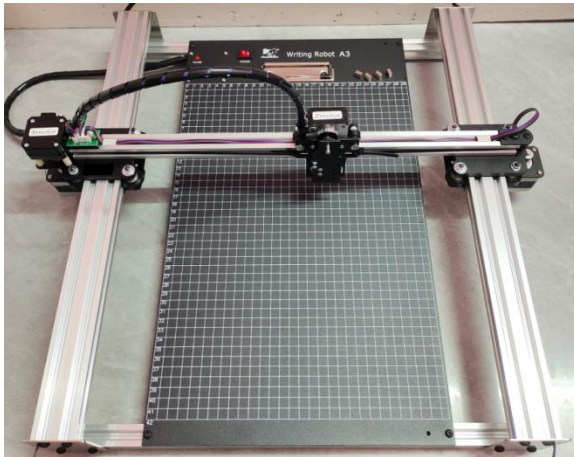


1. 3 Move to the Home Corner.


The default home corner is in the rear right corner , it is necessary to move the carriage to the **Home Corner**. This is where the carriage is as far right and as far back as it can go.

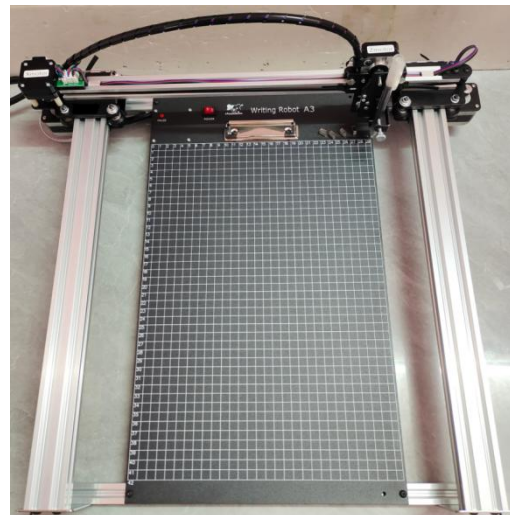

If the paper is relatively small, you can move the carriage to reach the upper right corner of the paper.

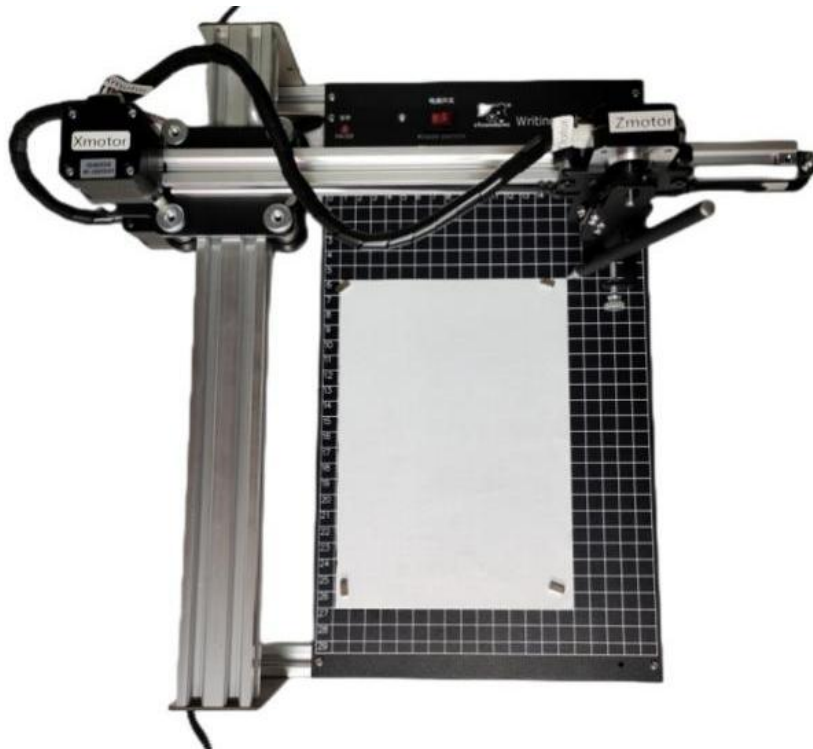

The iDraw 2.0 machine is equipped with two contact switches that allow the carriage to automatically move to the home corner.

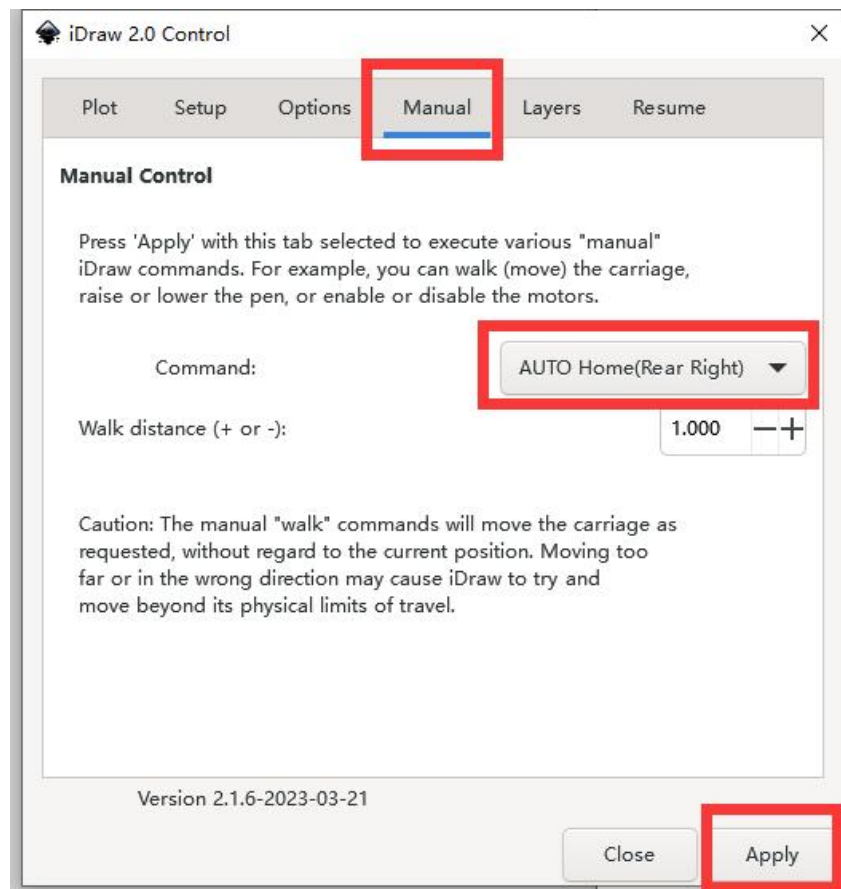

2.software operation

2.1 Software Installation


Please refer to the installation manual under the software directory for software installation

2.2 Pen up and down test


Step1. Open “Inkscape”.




software interface as below :

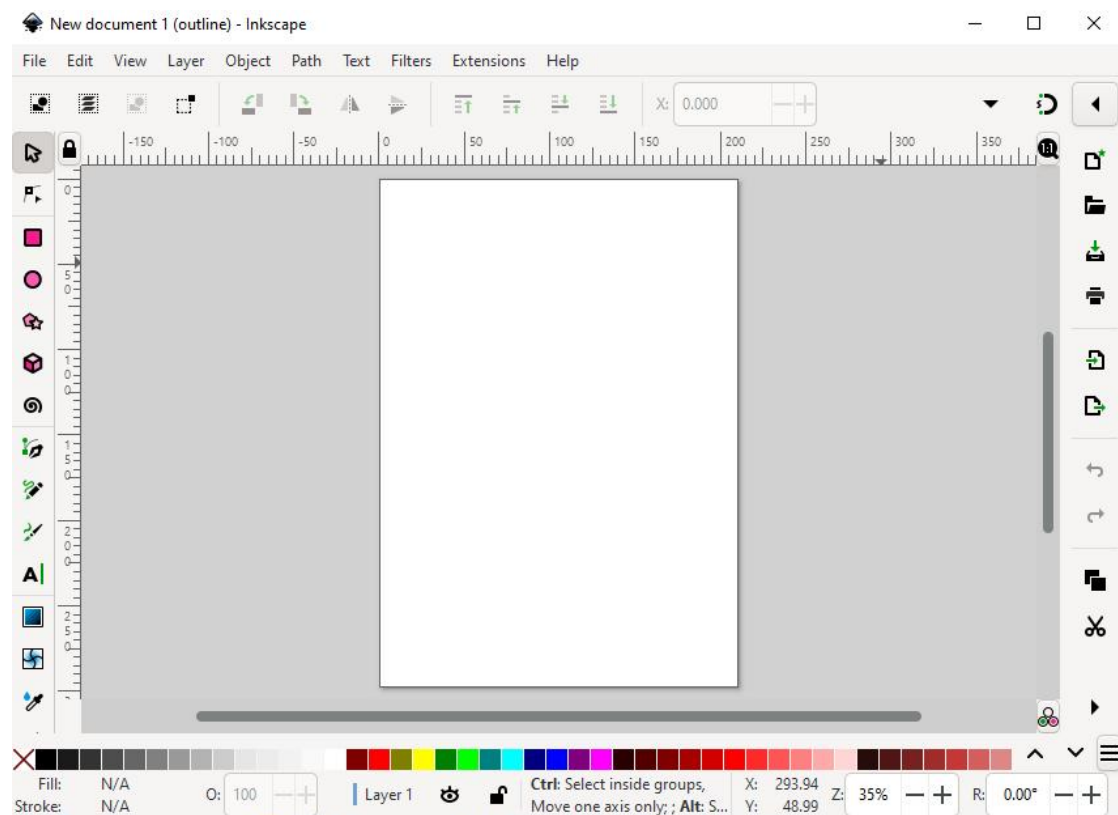


Step 2. Click “Extensions” - “iDraw 2.0 Control”.

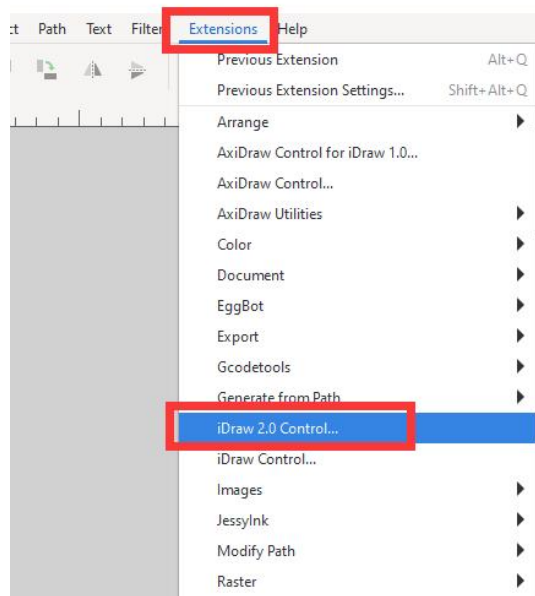


Step 3. The interface as below, then click “Setup”.

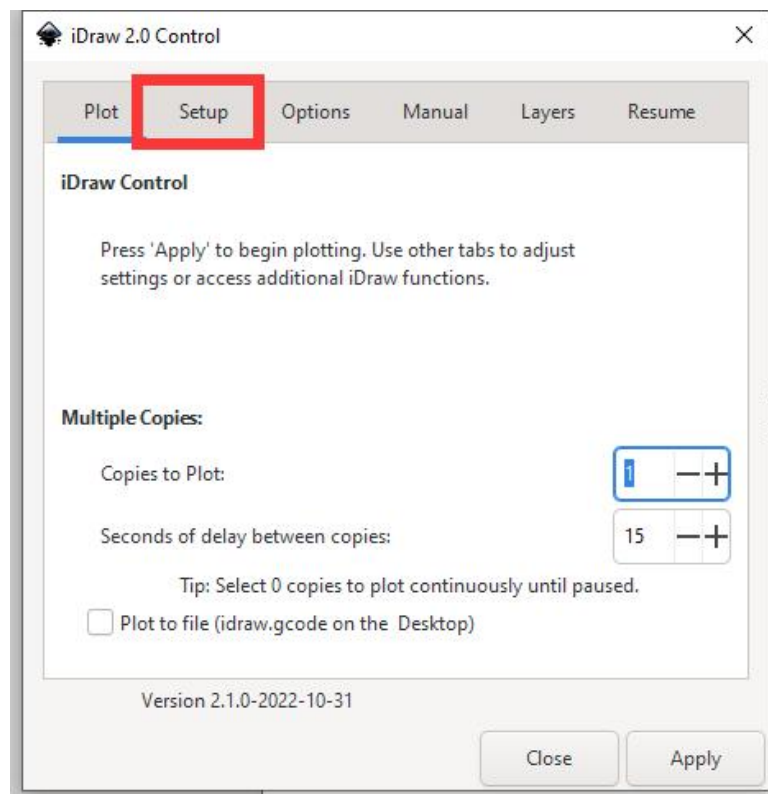

Step 4. Data as the following should be “0.5” and “5” after clicking “setup”, or you can adjust them within a **small range (up: 0.5~5; down: 3~9)** . Then Click “Apply” several times, the pen holder will go up and down.

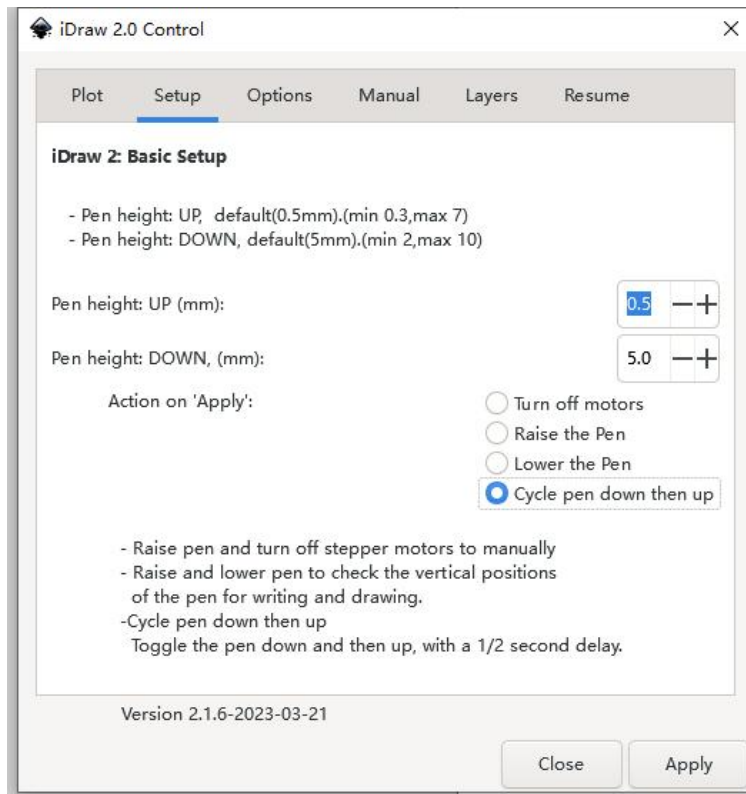


Adjust the height of the pen according to the actual situation. Make sure that the distance between pen head and paper is **3~5mm** when the pen is in the Up situation.

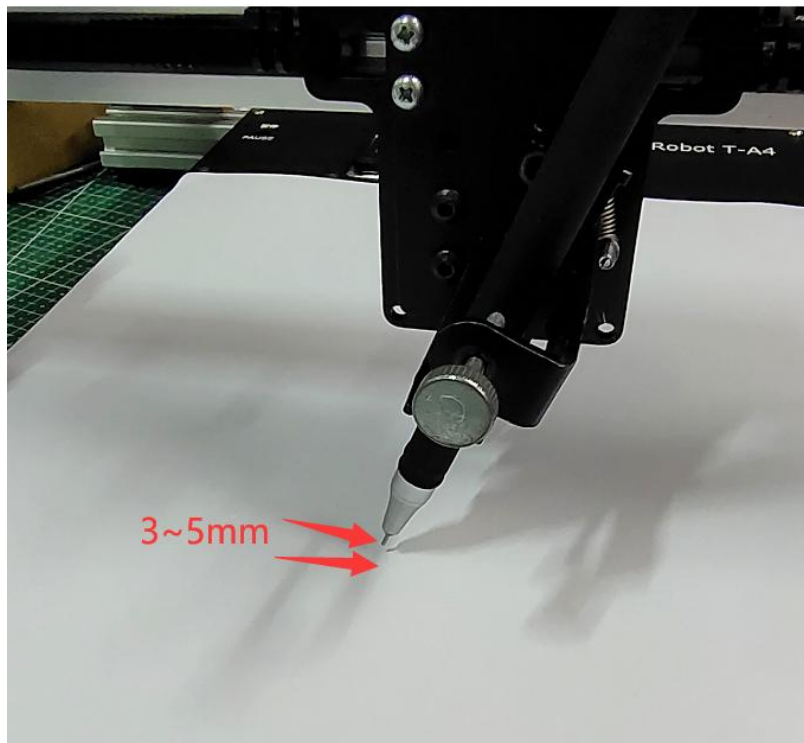


2.3 Make your first plot

Step 1. Click "File" - "Open".

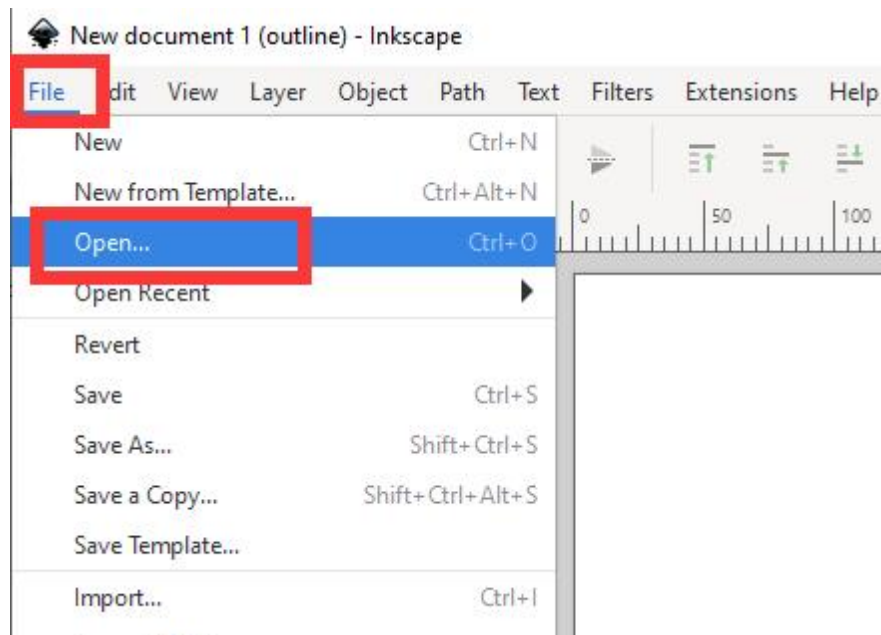


Step 2. Choose the file idraw.svg in "Examples" folder.

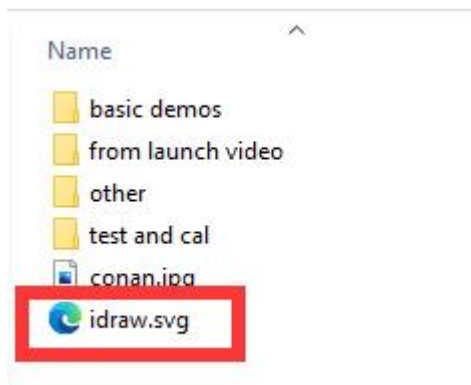


Interface as below:



Step 3. Click “Extensions” - “iDraw2.0 Control”.

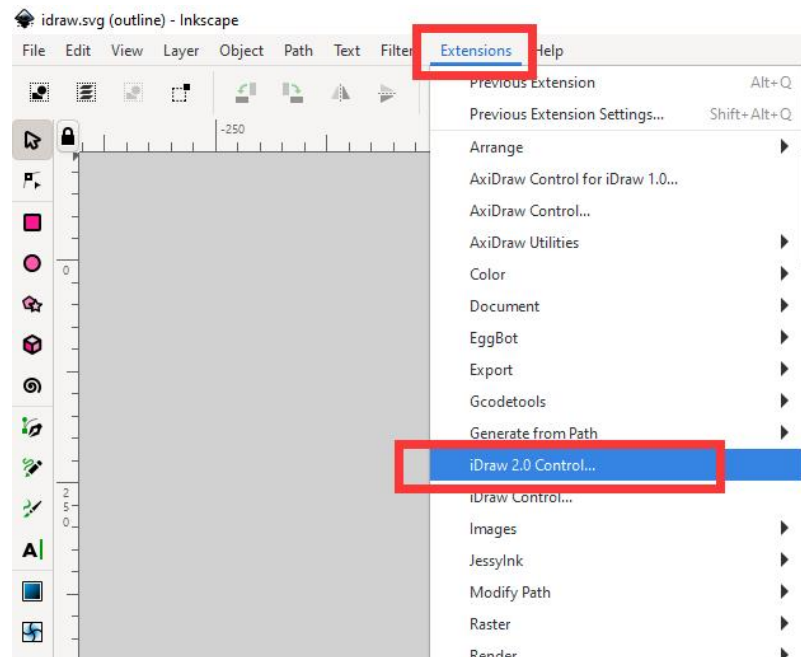


Step 4. Choose “Plot” and click “Apply” to start. (Please move the carriage to the home corner manually before starting to get it work.)

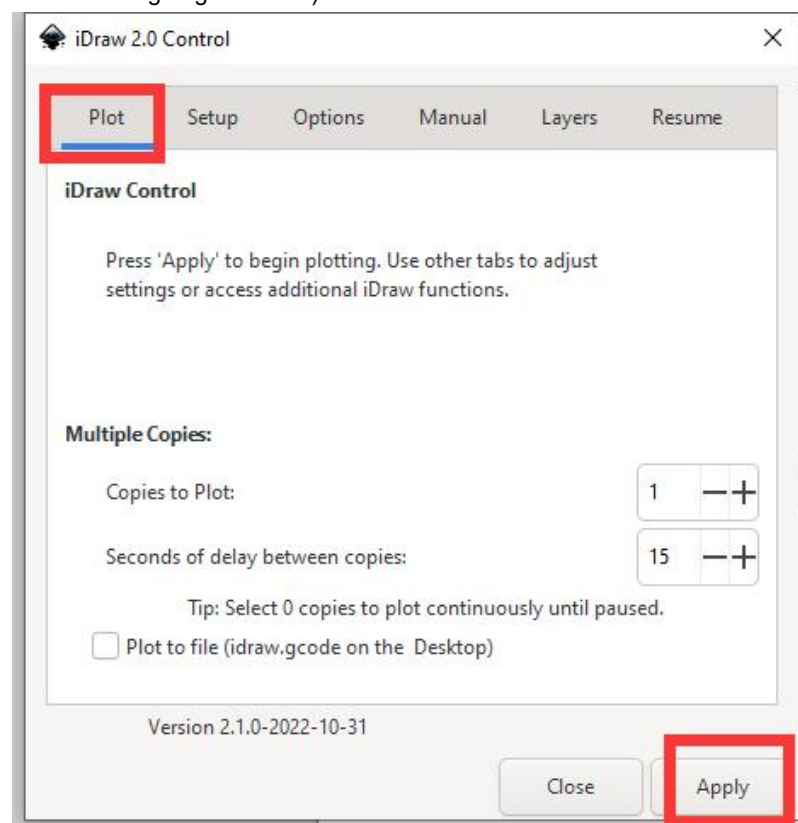



Step 5. You could also try other examples.

2.4 Input your own text


Step 1. Create text objects.




Step 2. Selected text Set up the font and size.

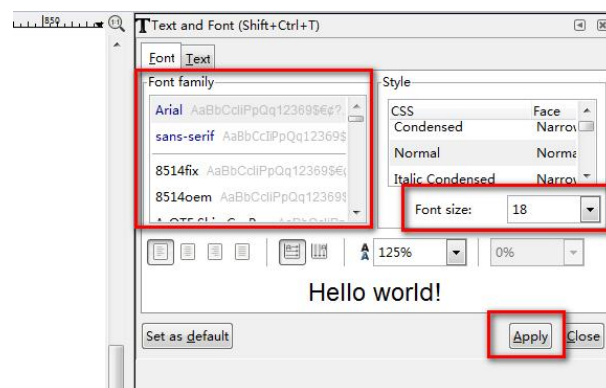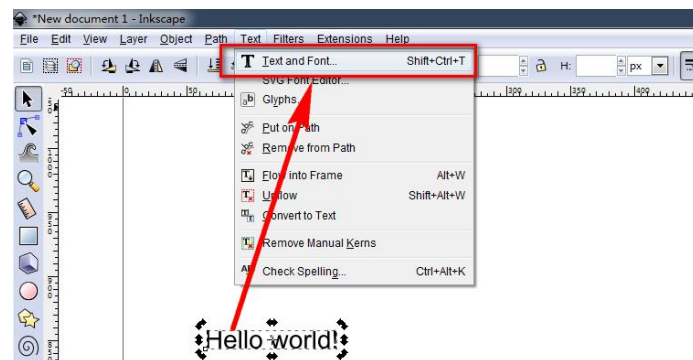


Step 3. Transform object to path.

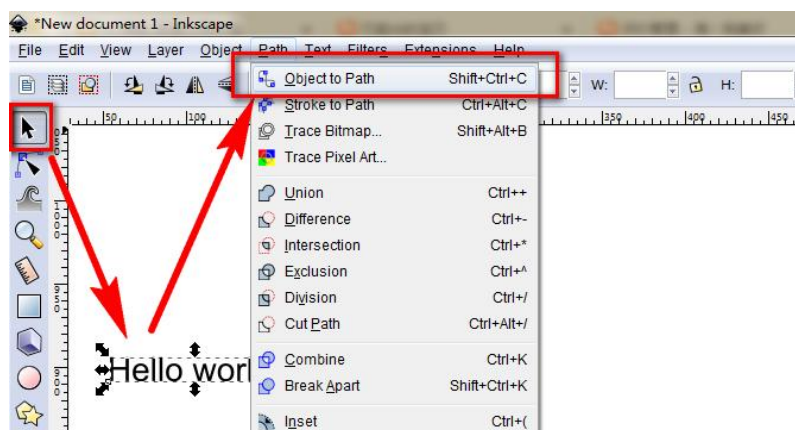


Step 4. Click “Extensions” - “iDraw2.0 Control”. Choose “Plot” option. Then click “Apply” to get it to work.

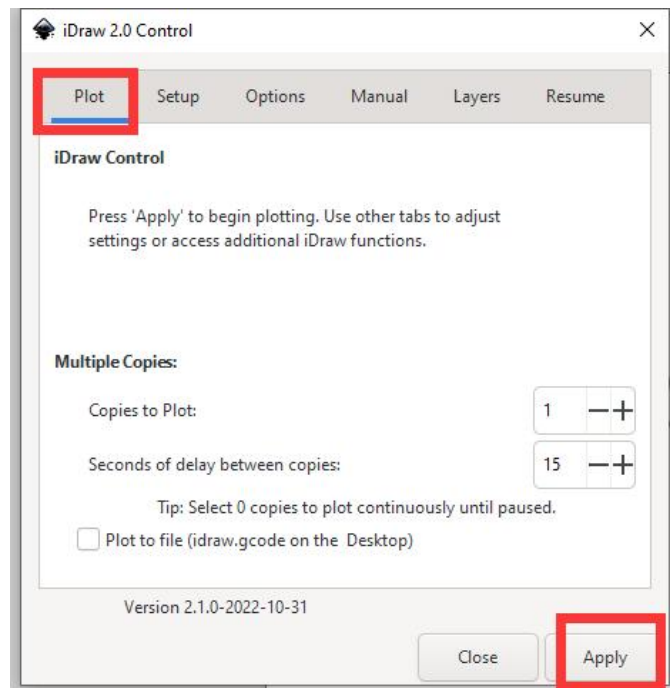


Step 5. You can also hatch fill. First change display mode, select Outline mode.

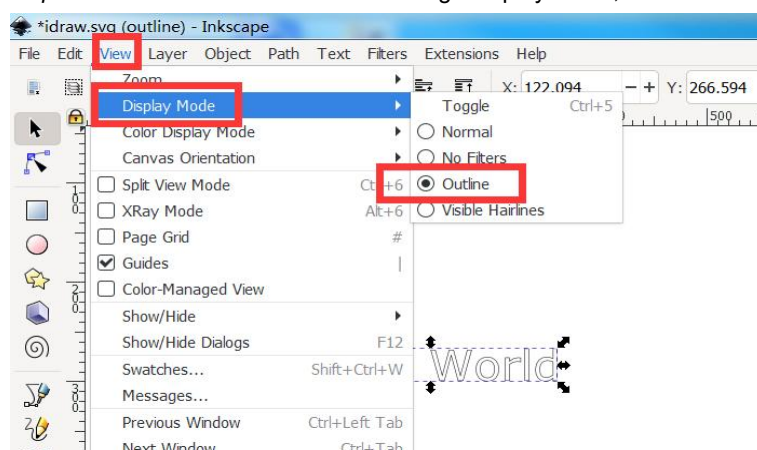


Then click “Extensions” - “iDraw Utilities” – “Hatch fill”.

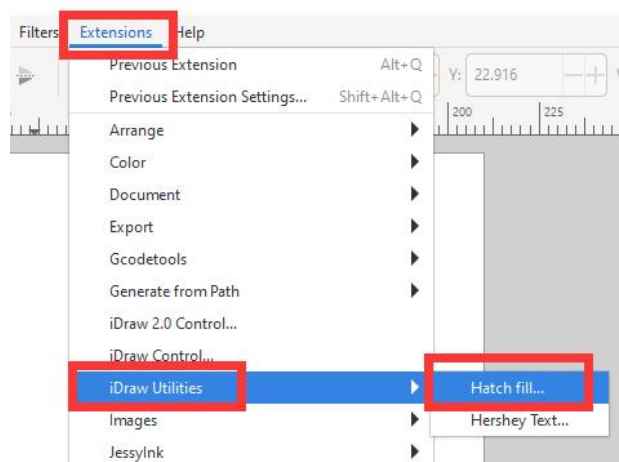

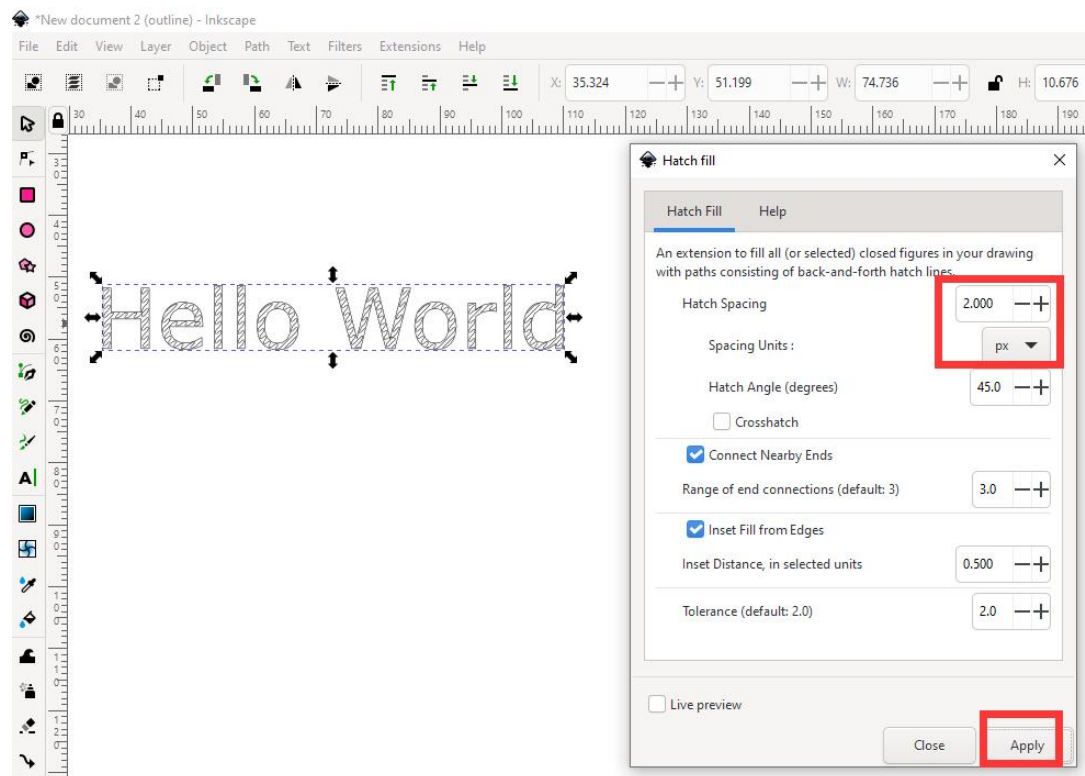


Click "Extensions" - "iDraw2.0 Control". Choose "Plot" option. Then click "Apply" to get it to work.

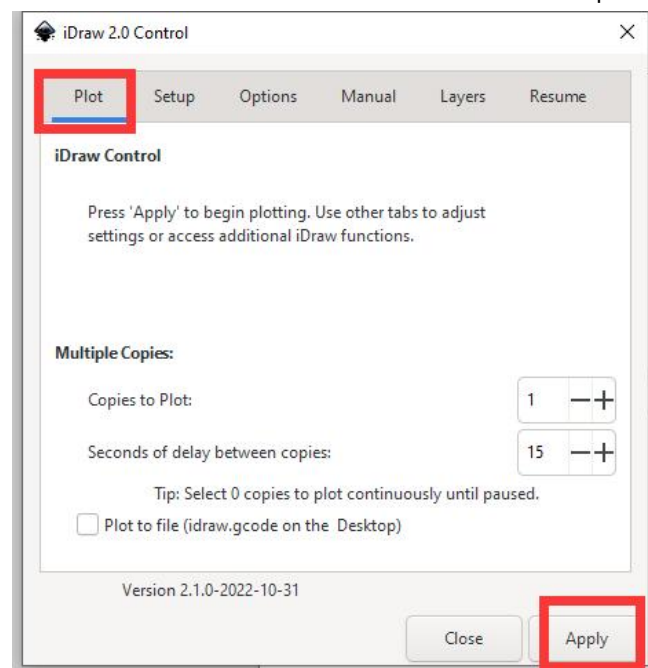


2.5 Plot an image


Step 1. Drag the image to Inkscape, or Click “File” to import image to Inkscape, you can change its size as bellow.

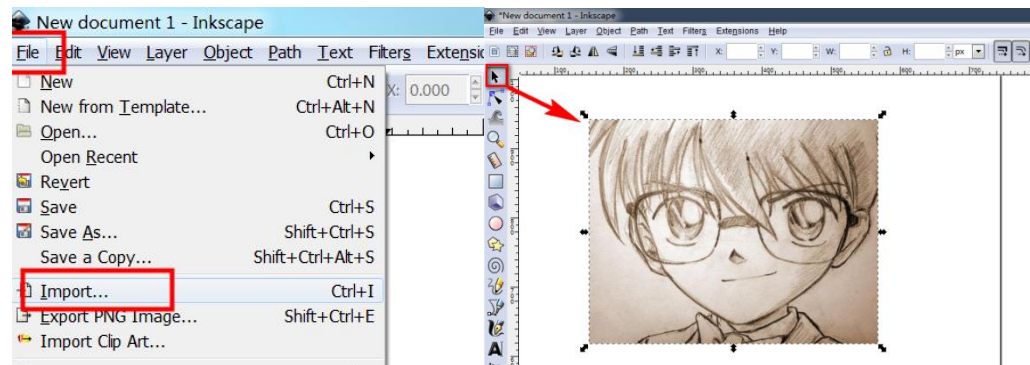


Step 2. Click “Path” – “Trace Bitmap”.

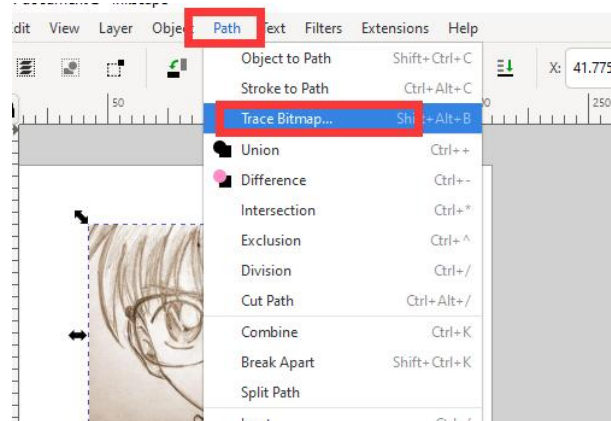


Step 3. Change the parameter and click “Update” until the picture is shown clearly. Finally, click “OK”.

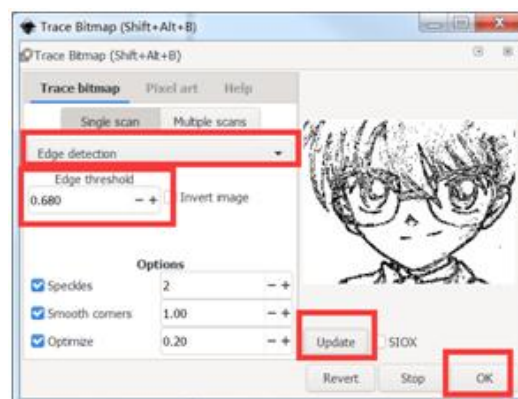


Step 4. Drag out the generated vector-graph and delete original bitmap.

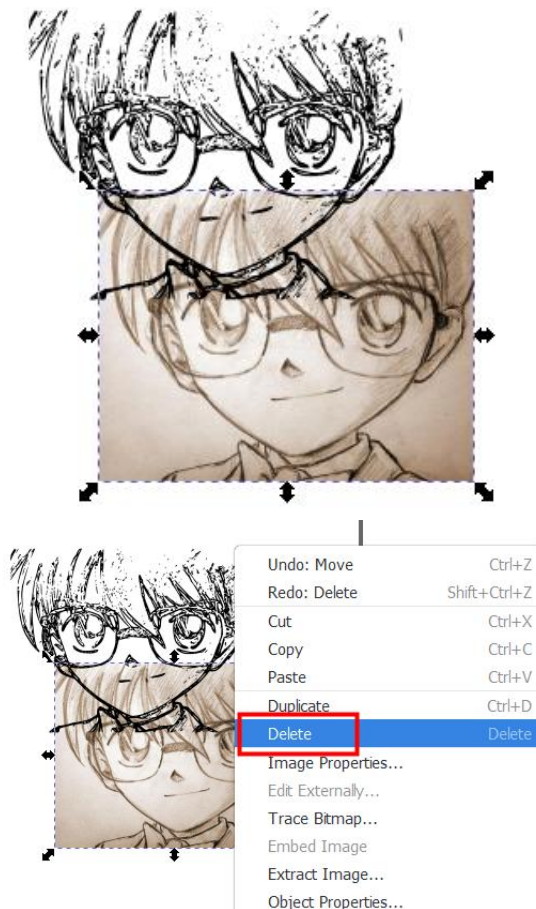


Step 5. Filling in areas with paths. Click “Extensions” - “iDraw Utilities” – “Hatch fill”.

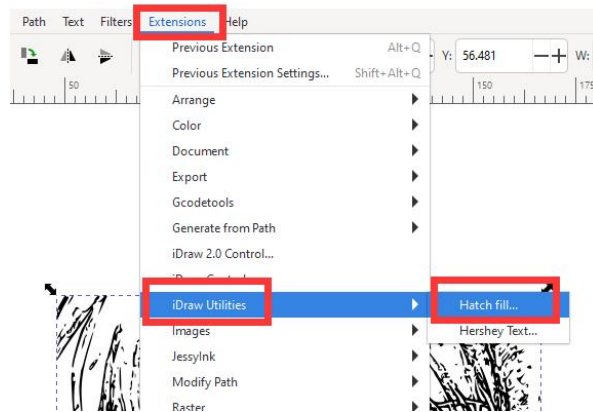

Step 6. Change the parameter. A lower spacing will produce a more uniform fill, and a higher spacing will produce a more traditional hatch fill for shading.

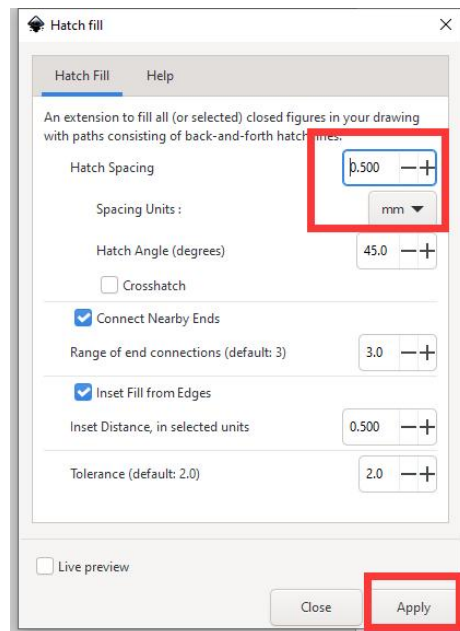


Step 7. Click “Extensions” - “iDraw2.0 Control”. Choose Plot option. Then click “Apply” to get it to work.

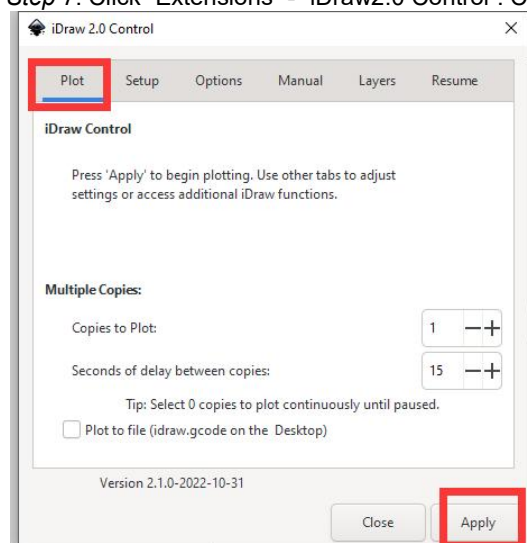


2.6 Plot an centerline image


Step 1. Drag the image to Inkscape, or Click “File” to import image to Inkscape, you can change its size as bellow.

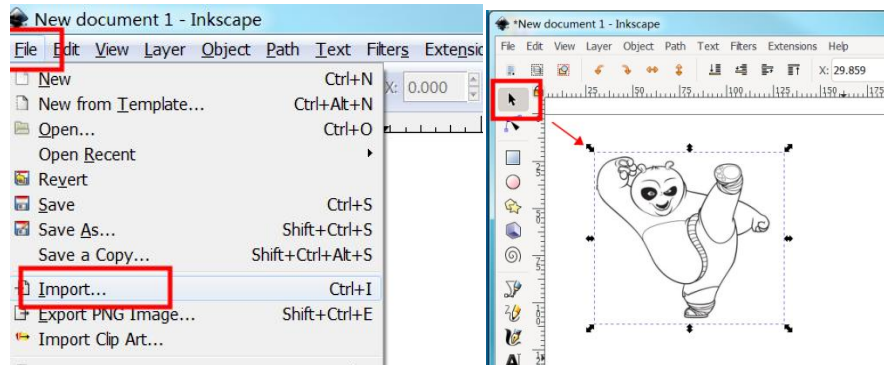


Step 2. Select the image and click “Path” – “Trace Bitmap”.

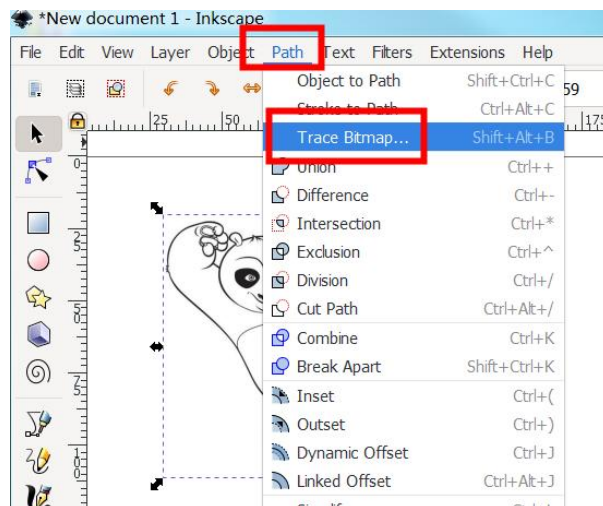


Step 3. Select the Centerline tracing. Finally, click “OK”.

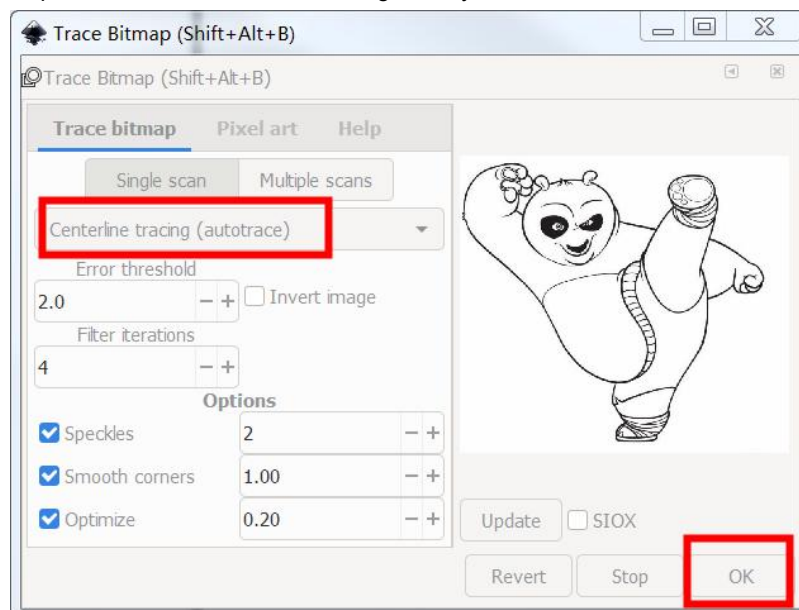


Step 4. Drag out the generated vector-graph..

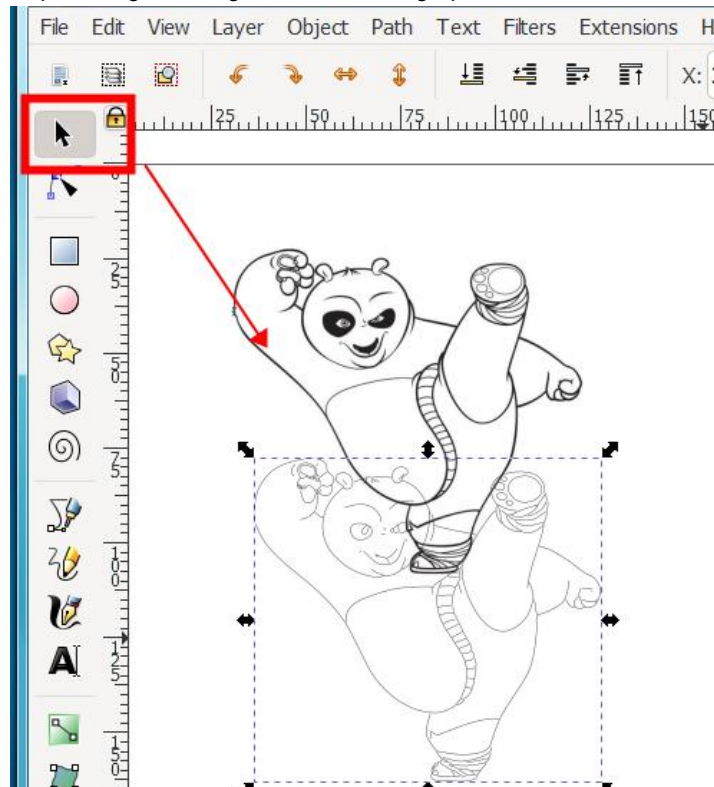


Step 5.,Delete the original image

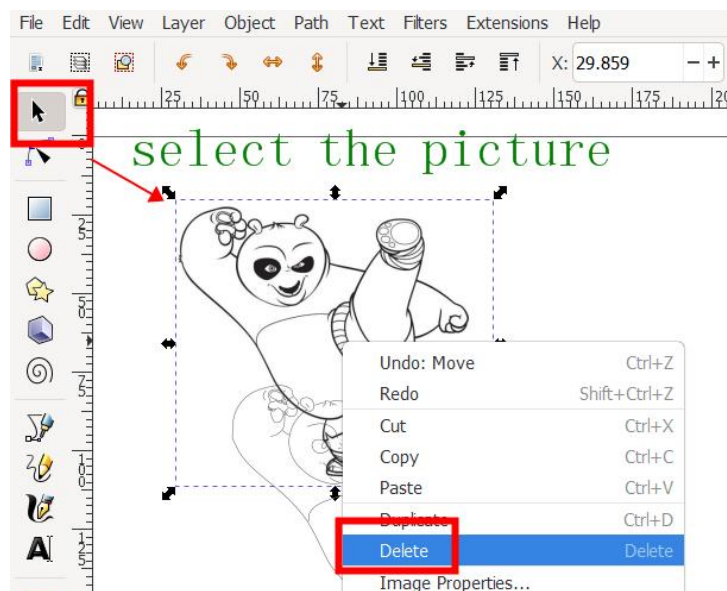

Interface as below

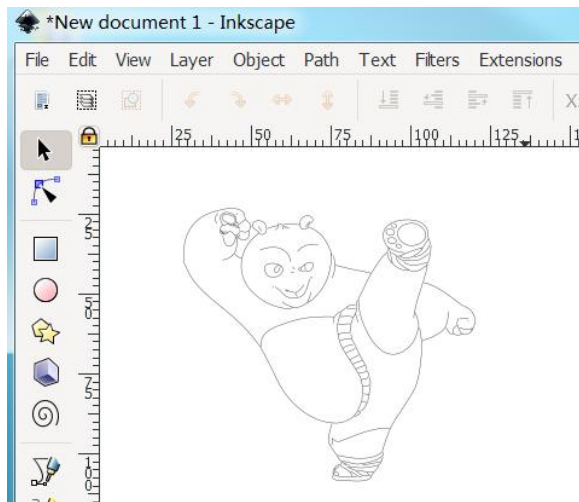


Step 6. Click “Extensions” - “iDraw 2.0Control”. Choose Plot option. Then click “Apply” to get it to work.

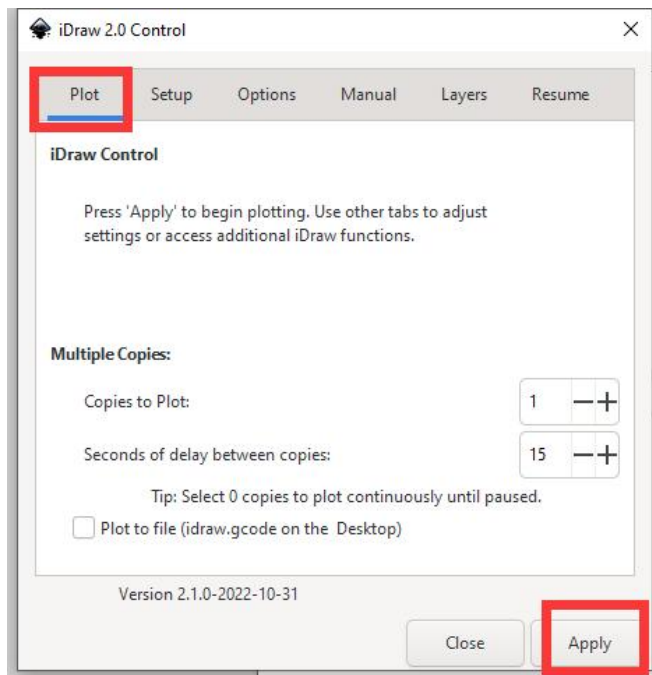


2.7 Single stroke font “Hershey”


Step 1. Add text and typeset.

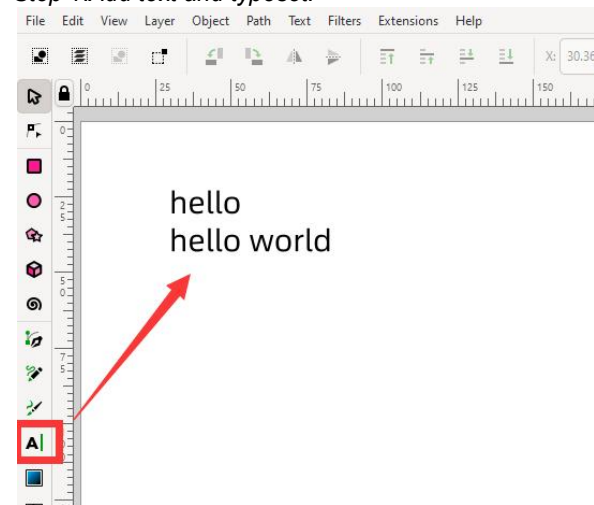


Step 2. Selected text .and click “Extensions” - “iDraw Utilities” - “Hershey Text”.

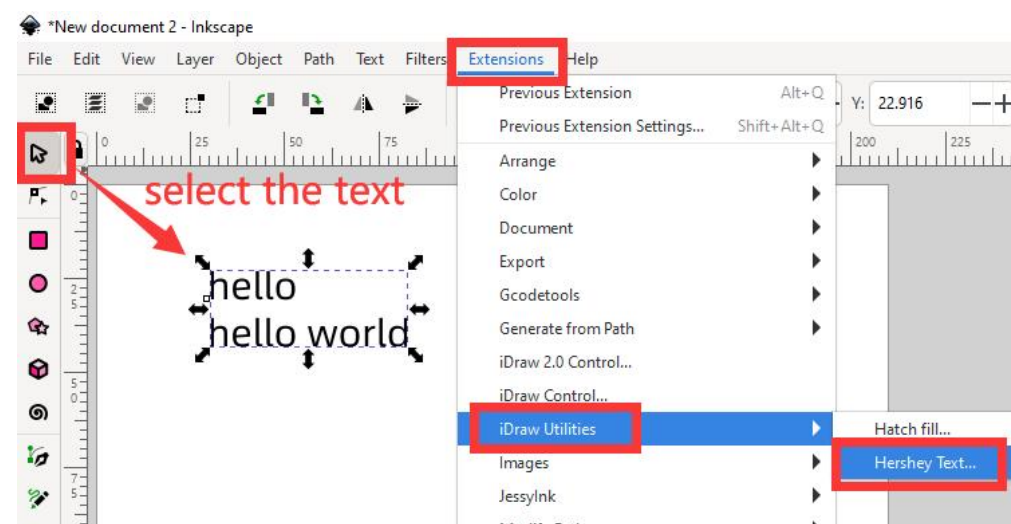


Step 3. Select the Font, and click “Apply”.

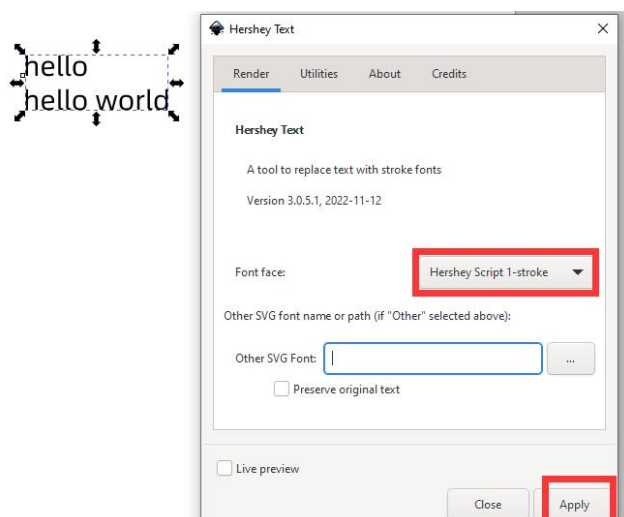


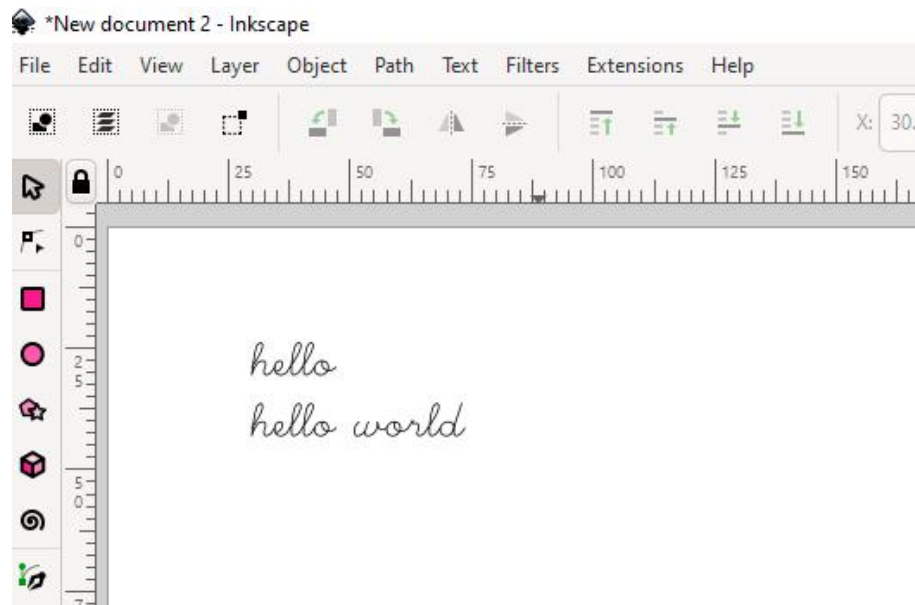


Step 4. Click “Extensions” - “iDraw2.0 Control”. Choose Plot option. Then click “Apply” to get it to work.

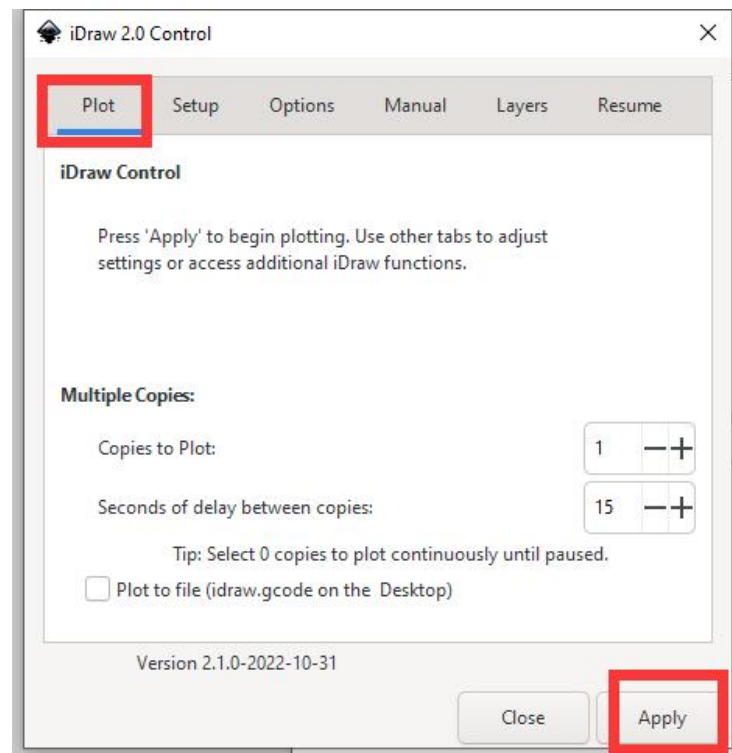

For more information, see the documents under **HersheyText**

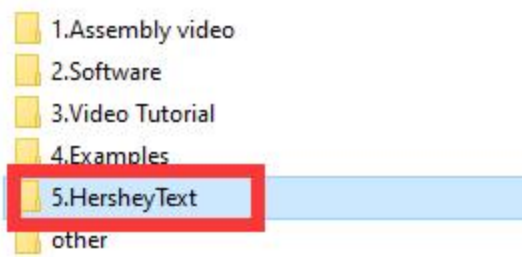


2.8 Change Portrait or Landscape to Write

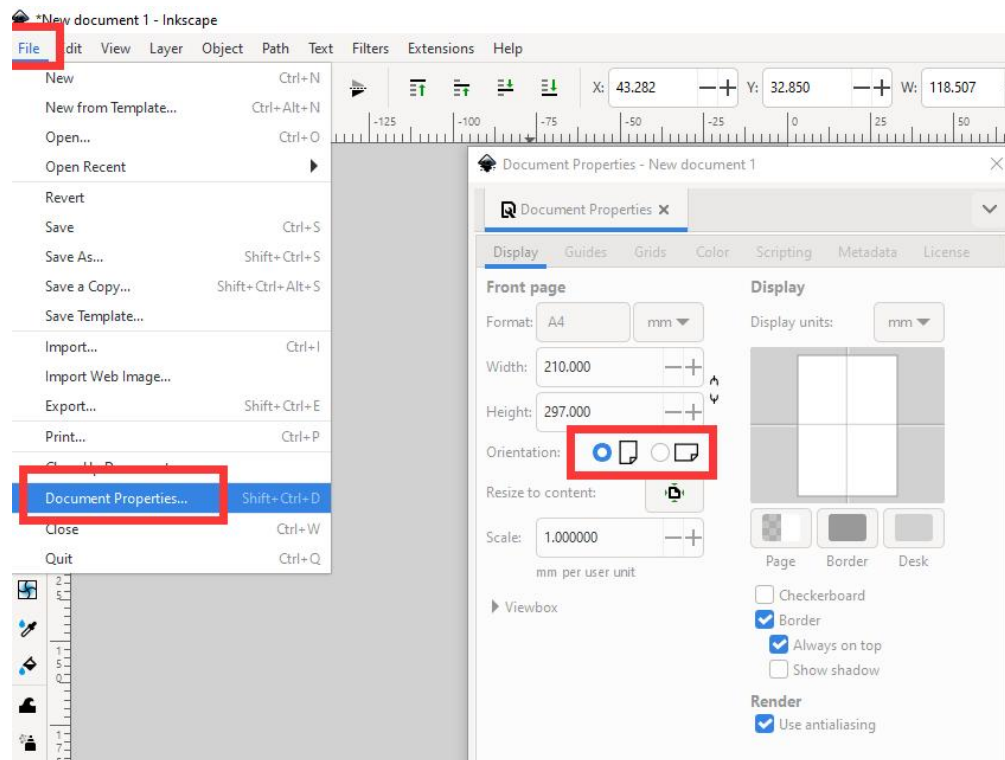

2.9 Temporary Stop

When the XY Pen plotter is working and you want to stop it, please press PAUSE button on main board to temporarily stop it.


To resume writing at "Resume" option.

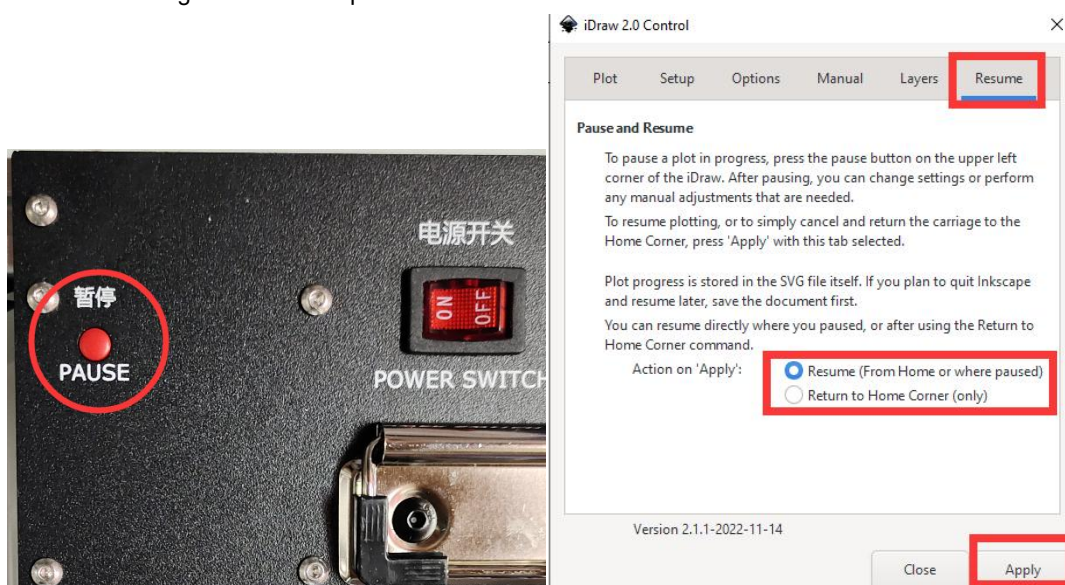

2.10 How to select iDraw model


The default iDraw model is iDraw A4, if you use a larger range of machines, you can redo other models.

Choose “Options”,click “Config” ,select the iDraw model.

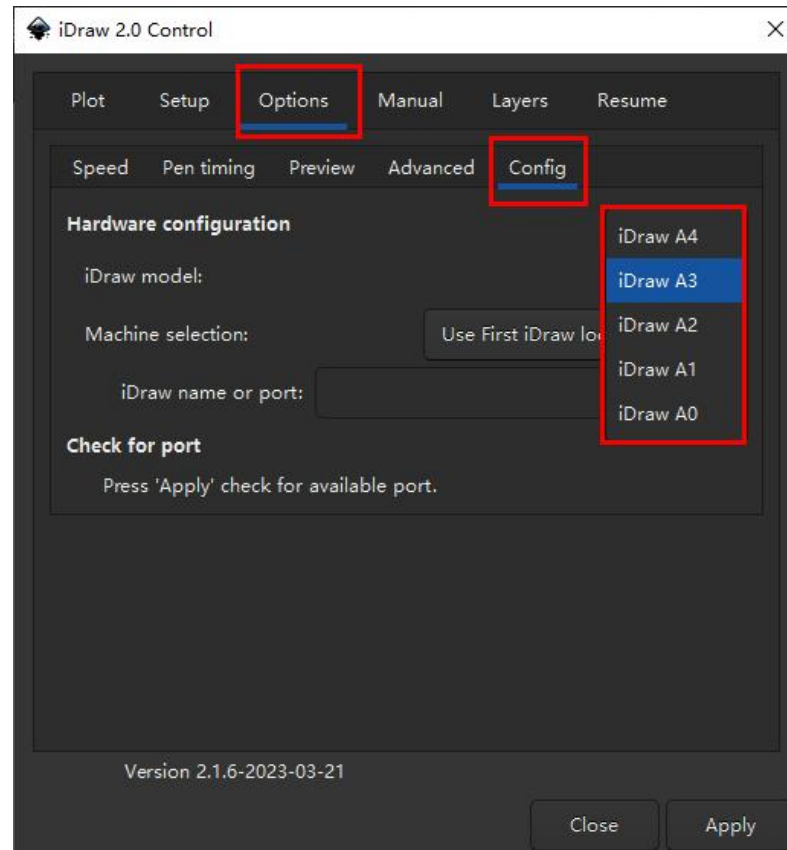

2.11 iDraw Naming


The iDraw Naming utility allows you to assign a nickname to a specific iDraw. It can be found in the menu at Extensions > iDraw Utilities > iDraw2 Naming.

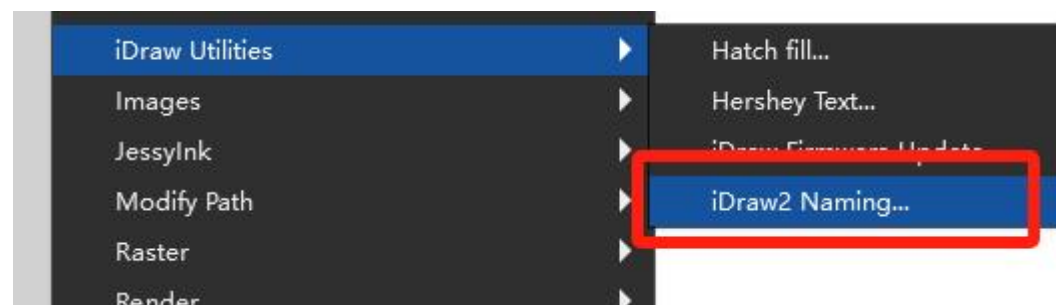

A nickname is a semi-permanent label, stored in the iDraw's flash memory, that may be used to identify and address it. Nicknames are not required, but can be helpful if you have more than one iDraw connected: You can use them to specify which iDraw to plot to when using **iDraw 2.0 Control**.

2.11.1 Read iDraw Name

If you click Apply with the “Read iDraw Name” tab selected, it will search for all attached iDraw units and list them. iDraw machines will be listed by their USB nickname or by their USB port numeration, if no nickname has been assigned. This tool can be useful for listing available iDraw units, even if you are not using USB nicknames.

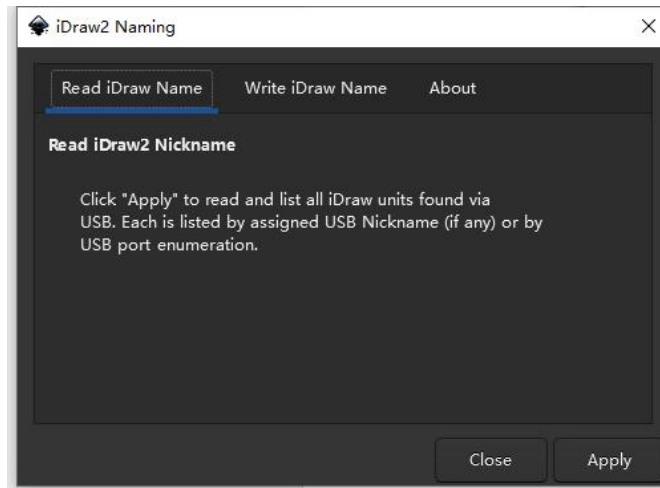


2.11.2 Write iDraw name

The second tab, “Write iDraw Name,” is for assigning a nickname.

To assign the nickname, enter a name between in the text box (here “idraw1”) and click Apply. Before writing the name, it is recommended that you disconnect any other connected iDraw units, so that you can be sure of which iDraw you are communicating with. Writing an empty name will clear the nickname.


You can use the “Read iDraw Name” tab to verify that the name has been written correctly. Assigning USB nicknames requires that your iDraw2 has firmware version 2.13 or newer. If you are unsure what version you have, you can check with iDraw2.0 Control; Check for updates.

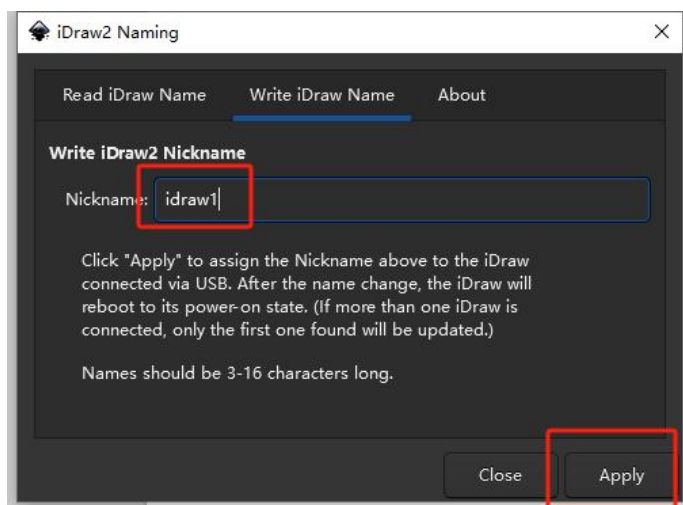

2.11.3 Using Nickname

If Use iDraw port named below is selected, iDraw2.0 Control will only look for and drive a specific iDraw unit, as entered in the iDraw name or port entry box. Use this method when you have multiple iDraw machines and want to plot to a specific machine.

The name or port may be specified with a nickname – like “idraw1” as entered above – or with a traditional enumerated serial port name like “COM3” on Windows or “/dev/cu.usbmodem1441” on a Mac. Since serial port names can change, it is best practice to use a nickname when working with multiple iDraw machines.

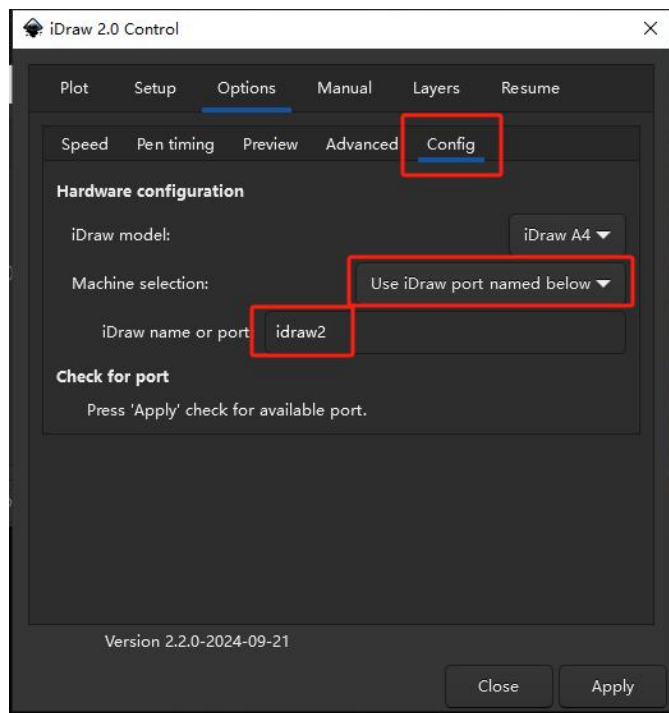

3. Service, and parts support

The iDraw is designed to be serviceable, and we are here to help. Please contact technical support directly if you need assistance with troubleshooting or repairing a mechanical issue. Technical support uunatek@gmail.com.