



H 420

Technical Specifications

L.O.A.	12.9 M	42' 2"
Maximum Beam	4.9 M	16' 0"
Draft	0.6 M	2' 10"
Displacement	12.7 Ton	27,900 lbs
Fuel Tank	1,515 L	400 gals
Water Tank	600 L	158 gals

Propulsion System & Main Equipment

Boat sets up to install twin outboard engines ranging from 300 hp ~ 425 hp.
Bow thruster: LEWMAR® 12V electric thruster, Model # TT 185, 3.0KW GEN 2.
One (1) Onan® 9kw 110/240V 60Hz diesel generator, Model # MDKDL.
FOUR (4) units of 16k BTU reverse cycle, marine air conditions.

Hull & Decks

1. 5083 -H116 Aluminum magnesium alloy, are used on hull, Deck & structure frames, ranging from 4 to 10mm in thickness.
2. Longitudinal and transverse stringer system.
3. Non-skid exterior deck surface.
4. Self-draining deck & scuppers.
5. Step lights: HELLA® LED lights on each exterior steps.
6. Exterior surface paint: HAMPEL® solid color paint.
7. Anti-fouling bottom painted with 2 coats of epoxy primer barrier coat and 3 coats of anti-fouling paint.
8. Seat cushions: exterior vinyl or fabrics covered over non-water absorbing foam.
9. Cockpit wet bar with stainless steel sink & hot/cold folding faucet.
10. Six 316 Stainless steel cleats are bolted down to the deck with back plate & proper barrier coating & isolation pads.
11. Handrails are 1 1/2" in diameter and 36' high from deck.
12. Raw water deck wash outlet at fore deck.
13. Retractable swim ladder.
14. Vacuum infused FRP composite hardtop is cored with high strength PVC foam, and is properly bonded to the structure.
15. 55 lb (25 kg) polished stainless-steel anchor.
16. Anchor chain locker with 200' (60 m) anchor rode (8mm HT chain) fixed to the deck structure by a quick-release 3/8" shackle, near the locker opening.
17. Anchor windlass: LEWMAR® 12V DC electric windlass.
18. Reinforced bow pulpit with anchor roller & chain stopper.



Electrical System

1. 12V DC system.
2. 120V/ 60 Hz AC system.
3. Batteries:
 - Two (2) sealed gel (12V/250AH) batteries for service battery bank;
 - Two (2) sealed gel (12V/250AH) batteries for bow thruster / windlass bank;
 - Two (2) sealed gel (12V/250AH) batteries; one for each engine.
4. Inverter / chargers: One (1) MASTERVOLT® model # COMBIMASTER 12/3000-160, features 12V DC charging @ 160amp & 3000w, 110V AC output.
5. Battery chargers: MASTERVOLT® model # CHARGEMASTER 12/50-3, features 12V charging @50amp.
6. Backlighted AC/DC distribution panels with marine grade wirings.
7. Battery selection switches on a management panel.
8. Charging relays system, one for each engine's alternator, that charges the dedicated house battery bank automatically once the engine's starting battery is fully charged.
9. Electrical bonding system.
10. Galvanic Isolator: VICTRON® VDI galvanic isolator, one (1) unit.
11. Isolation transformer: 220V AC / 50 amp shore power isolation transformer, one (1) unit.
12. Navigation lights: HELLA® and / or AQUA SIGNAL® LED lights.
13. Search light: One (1) search light w/ wired remote control.
14. LED (12 V DC) recessed & indirect accent lights throughout vessel.
15. Steps & walk path lights: HELLA® LED courtesy lights along walk path & steps.

16. Shore Power: One (1) 50-amp connection.


Mechanical System & Equipment

1. Mechanical room ventilation system with two (2) 12V DC blowers.
2. Mechanical room acoustical insulation.
3. Fire extinguisher system for Mechanical room.
4. Marine grade sea strainers for raw water intakes & sea cocks for through hulls
5. Pumps:
 - Fresh water pump: One (1) SEAFLO® 12VDC 5.5 GPM w/ 2 Gallon Accumulator Tank;
 - Waste discharge pumps: Two (1) SEAFLO® 12V DC pump;
 - Grey water pumps: Two (2) JOHNSON® 12V DC self-priming diaphragm pumps;
 - Bilge pumps: Six (6) RULE® 1100gph, 12V DC pumps w/ float switches;
 - Emergency pump: Two (2) manual bilge pumps.
6. Tanks (with level sensors & gauges, except for grey water tanks) :
 - Aluminum fuel tanks: 400 gallons total;
 - Aluminum holding tanks: 100 gallons total;
 - Aluminum grey water tanks: 60 gallons total;
 - Aluminum water tanks: 160 gallons total;
 - Aluminum diesel tank: 80 gallons total,
7. Water heater: One (1) 30 – gallon electric water heater.
8. Windshield wiper system: ROCA® twin arm wiper with windscreen wash & water reservoir.

Interior Decoration & Finishes

GENERAL FEATURES

1. Cherry, oak or walnut grain veneer on interior carpentry surface.
2. Hanging Lockers with automatic lights.
3. Durable & waterproof synthetic wood flooring.
4. Removable ceiling panels covered with synthetic leather.
5. Smoke & CO detectors & fire extinguishers.
6. Solid wood steps on interior staircase.

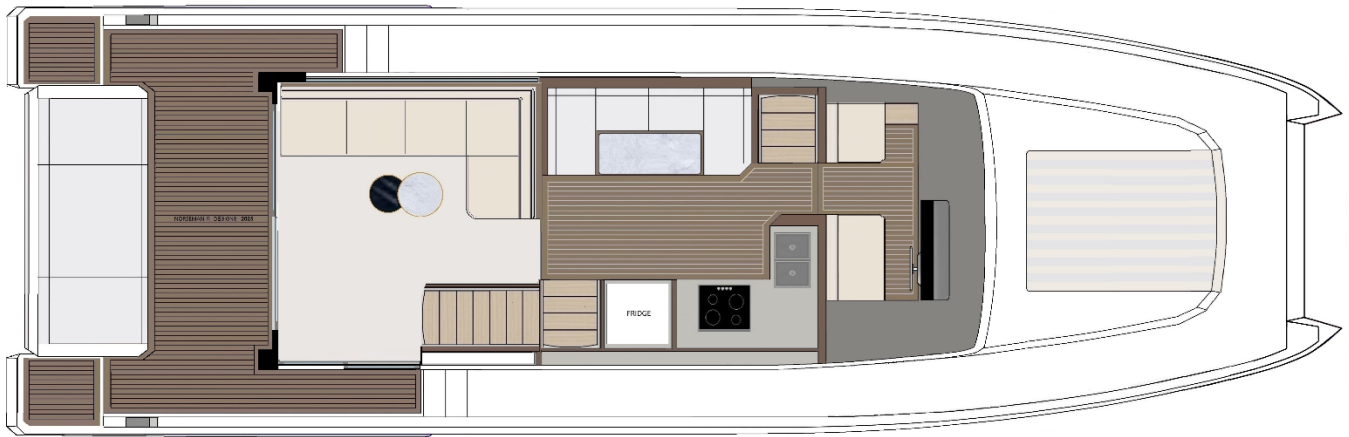

Main Deck Plan

HELM STATION & SALON

7. Helm station with steering wheel, compass and engine controls & various switches for equipment.
8. Custom adjustable helm seat.
9. Custom Dinette table with built-in U settee & quality cushions.

GALLEY


10. Appliance: One (1) refrigerator;
One (1) microwave oven;
One (1) kitchen sink &
One (1) electric stove.
11. Custom storage cabinets.
12. Galley with synthetic granite counter top, undermounted stainless-steel sink, and faucet.
13. Two (2) GFCI electric outlets.

HEADS : (2 heads per W430 GA plan)

14. Exhaust vent.
15. Marine head: two (2) TACMA® electric toilets.
16. Molded FRP walk-in shower stall.
17. One (1) GFCI electric outlet in each head inside vanity locker.
18. Storage lockers under vanity top.
19. Shower faucets: GROHE® in chrome finish.
20. Sink faucets: GROHE® in chrome finish.
21. Synthetic marble vanity top with ceramic sink.

CABINS – 2 cabins

- 22. Bedside reading lights & USB port for phone charging. PI
- 23. High quality foam mattress.
- 24. Upholstered bed head board.

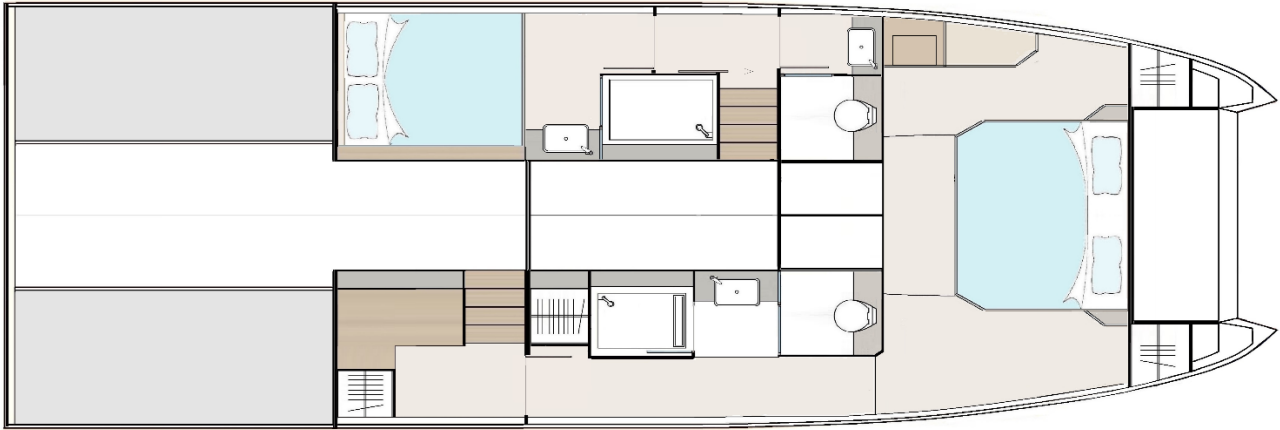

Lower Deck Plan



Fly Bridge Deck

