


TECHTOP MOTOR

Enterprise Profile

A brief and concise introduction to Techtop Motor Enterprise profile.

2025

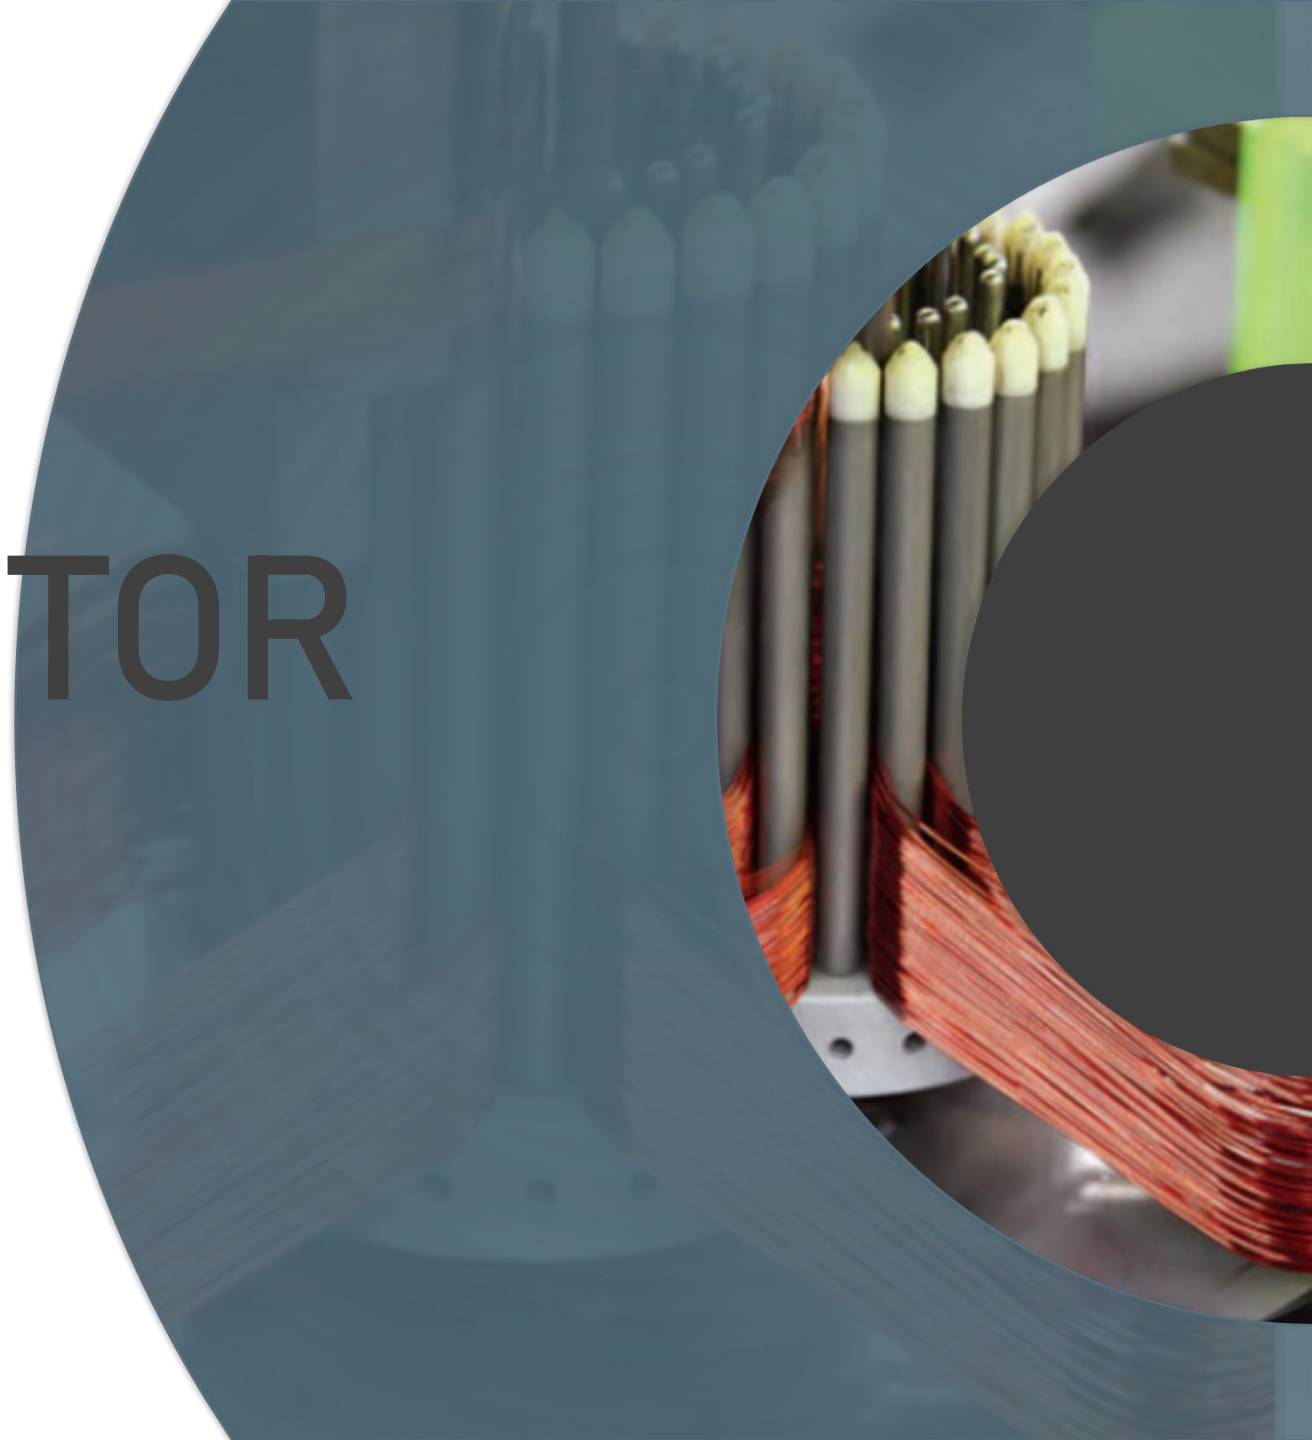

CONTENTS

01

Enterprise
Profile

02

Product
Interduction

03

Application
Market

04

Main
Advantage

05

Service &
Support

Enterprise Profile

An overview of the company's profile, showing the fundamental aspects of the enterprise, including the three domestic manufacturing facilities, the international service locations, and accompanying images of these venues.

01





Enterprise Profile

Who we are



WHO WE ARE

Techtop is a professional factory with 38-years of history in motor manufacturing. The company headquarters is located in Pudong, Shanghai, China, with a global workforce of over 2,000 employees and three manufacturing bases nationwide, all equipped with advanced automated manufacturing systems. Techtop's electrical apparatus, processing machinery and precision instruments are all using the most advanced technology available in the industry. Techtop is capable of producing over 2.5 million IEC and NEMA standard electric motors annually.

Techtop has established service networks in industrialized countries such as the United States, Canada, and Italy, which enables Techtop to provide local inventory and distribution, customized products and technical solutions, and superior customer service support to our global clients.

Today, Techtop is a customer-centric manufacturing company with a global reputation and has earned high respect among peers and partners. To this day, Techtop has become one of the China's largest exporters of high-end brand low-voltage motors.

[MORE](#)



Enterprise Profile

Company Profile



Production Capacity
2,500,000+ units/Year



Manufacturing&service
2000+employees



Enterprise Profile

Factory profile

- Shanghai Techtop Motor

Production Capacity: 1,200,000+units/year

- Ningde Techtop Motor

Production Capacity: 800,000+units/year

- Shanghai Himak Motor

Production Capacity: 500,000+units/year





Enterprise Profile

Global network of techtop

Global Network of ECHTOP®



 **CHINA** - Shanghai Top Motor Co.,LTD.

 **USA** - Techtop Industries, inc.

 **ITALY** - Simotop Group SpA.

Halotop **U.A.E.** - Global Power Engineering Co. Ltd.

 **SPAIN** - Dimotor S.A.

 **New Zealand** -Techtop New Zealand Pty.Ltd.

 **CANADA** -Techtop Canada inc.

 **THE NETHERLANDS** - Simotop N.V.

 **AUSTRALIA**- Techtop Australia Pty Ltd.

 **UK** - TEC Electric Motors Ltd.*

 **GERMANY** -Techtop ADDA MOTOR GmbH.

 **SINGAPORE** -Elektrim Techtop Motors Pte Ltd.



Enterprise Profile

Picture of those network

Australia Techtop
Australia Pty Ltd.



Netherlands
SIMOTOP NV.



Italy Simotop
Group Spa



Germany Techtop
Adda Motor GmbH.



Spain Dimotor S.A.



Canada Techtop
Canada Inc.



Singapore Elektrim
Techtop Motors Pte Ltd.



U.S.A Techtop
Industries Inc.



U.K. TEC Electric
Motors Ltd.





02

Product Introduction

Techtop's product line is very rich, capable of covering most of the needs for small and medium-sized motor applications. The following is a brief introduction to Techtop's product line, for specific and detailed product information, please refer to the Techtop product catalog.



Product Introduction

IEC / NEMA

IEC

IEC series standard motor

- Frame height: 56~355
- Rated voltage: 20V-750V
- Rated frequency: 5~200Hz
- Rated power: 0.06~630Kw
- Energy efficiency rating: IE1~IE5
- Service factor: 1~1.25

NEMA

NEMA series standard motor

- Frame height: 48~587T
- Rated voltage: 20V-690V
- Rated frequency: 5~200Hz
- Rated power: 1/4~500Hp
- Service factor: 1~1.25

Techtop standard motors

The mainstream products produced by Techtop Motors can be divided into two major branches that comply with international standards:

1. **IEC** series standard motors
2. **NEMA** series standard motors





Product Introduction

Aluminum / Cast iron / Steel casing / Stainless steel / Drawn Aluminum

Alum-
inum

Aluminum Housing Motors

Light weight, convenient for installation and transportation; good heat dissipation performance; as long as the surface has been painted or plastic-sprayed, it can also be used in environments with slight corrosion.

Cast
Iron

Cast Iron Housing Motors

High strength, capable of withstanding large external force impacts without deformation; good casting properties, can be made into various complex shapes; low cost, high cost performance.

Other

Other

- Steel Casing
- Stainless Steel
- Drawn Aluminum

Techtop standard motors

In addition, based on the structure of the housing material, can also be classified as:

1. **Aluminum** Housing motors
2. **Cast Iron** Housing Motors
3. other: **Steel Casing**、**Stainless Steel**、**Drawn Aluminum**





Product Introduction

Standard Motor **IEC** series

IEC Three-phase series

Series: MS

Rated power: 0.06~45Kw

Pole: 2/4/6/8/10/12

Frame size: 56~200

Housing material: Aluminum

Frequency: 50/60Hz

Voltage: 230/400V 400/690V

Efficiency Class: IE1~IE2



IEC Single-phase series

Series: ML/MY/MYT/MC1

Rated power: 0.9~4Kw

Pole: 2/4/6


Frame size: 56~112

Housing material: Aluminum

Frequency: 50/60Hz

Voltage: 110V~240V

Efficiency Class: IE1~IE2

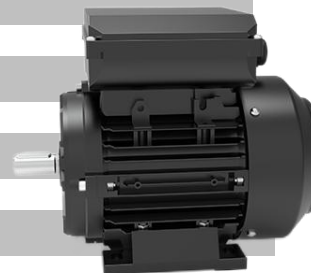

IEC "ECOL" series(cast iron)

Series: TC/TCI/TCP

Rated power: 0.75~355Kw

Pole: 2/4/6/8/10/12


Frame size: 80~355

Housing material: cast iron

Frequency: 50/60Hz

Voltage: 230/400V 400/690V

Efficiency Class: IE1~IE5

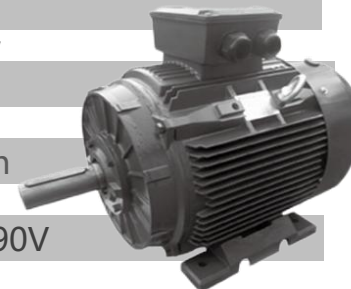

IEC TSSN series

Series: TSSN

Rated power: 0.12~1.5Kw

Pole: 4

Frame size: 63~90


Housing material:

Stainless Steel

Frequency: 50

Voltage: 230/400V

Efficiency Class: IE3

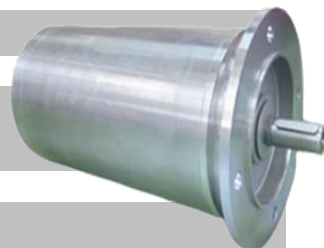

IEC "ECOL" series(aluminum)

Series: TA/TAI/TAP

Rated power: 0.06~37Kw

Pole: 2/4/6/8/10/12

Frame size: 56~200

Housing material: Aluminum

Frequency: 50/60Hz

Voltage: 230/400V 400/690V

Efficiency Class: IE1~IE2





Product Introduction

Standard Motor **NEMA** series

NEMA TLF/TLD Single-phase series

Series: TLF/TLD

Rated power: 1/4~10Hp

Service factor: 1.15

Frame size: 56~210T

Housing Materials: Aluminum

Frequency: 60Hz

Voltage: 115/230V;230V

Cooling type: ODP&TEFC



NEMA TXA/TDA Three-phase series

Series: TXA/TDA

Rated power: 1/4~60Hp

Service factor: 1.25


Frame size: 56~320T

Housing Materials: Aluminum

Frequency: 60Hz

Voltage: 208~230/460V;575V

Cooling type: ODP&TEFC



NEMA TEC/TDC Three-phase series

Series: TXC/TDC

Rated power: 1~500Hp

Service factor: 1.15~1.25

Frame size: 143T~449T

Housing Materials: cast iron

Frequency: 60Hz

Voltage: 208~230/460V;575V

Cooling type: ODP&TEFC



NEMA SLD/SLF Single-phase series

Series: SLD/SLF

Rated power: 1/4~10Hp

Service factor: 1.15

Frame size: 48~210T


Housing Materials:

Steel Casing&Drawn Aluminum

Frequency: 60Hz

Voltage: 110/220V;115/230V;220V;230V

Cooling type: ODP&TEFC

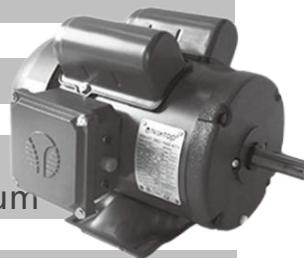

NEMA TF/TXD series

Series: TF/TXD

Rated power: 1/4~15Hp

Service factor: 1.15

Frame size: 48~210T

Housing Materials:

Steel Casing&Drawn Aluminum

Frequency: 60Hz

Voltage: 230/460V 575V

Cooling type: ODP&TEFC



NEMA TSS series

Series: TSS

Rated power: 1/4~15Hp

Service factor: 1.25

Frame size: 56~210T

Housing Materials:

Stainless Steel

Frequency: 60Hz

Voltage: 230/460V;575V

Cooling type: TENV&TEFC





Product Introduction

Special motor and derivative product

NEMA EC series

Phase: Three-phase & Single-phase

Power: Max 21.98Kw

Housing Material: Cast/Aluminum

Frame size: 71/90/100/132

Frequency: 50/60Hz

Voltage (3phase) : 360~460V;

20~240V;230/400V

Voltage (1phase) : 200~240V;

115V;115/230V

NEMA ECI series

Phase: Three-phase & Single-phase

Power: Max2.2Kw(1phase)

Max 3.54Kw(3phase)


Housing Material: Cast/Aluminum

Frame size: 71/90/100/132

Frequency: 50/60Hz

Voltage(3phase): 360~460V; 200~240V


Voltage(1phase): 200~240V

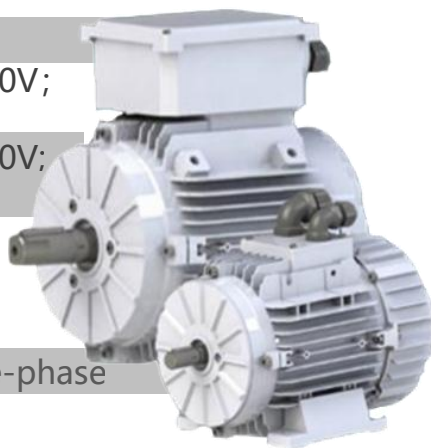

Partial display of specialized motors & derived products



Cutting Motor

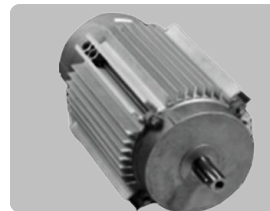


Fan Motor



Cobra Line



Brake Motor

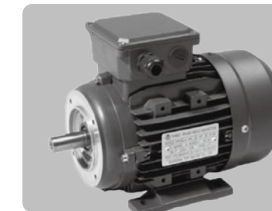

Multi-Polarity
Motor



Fire Pump Motor



Vertical Hollow Shaft
Motor



GOST Motor



High-Temperature
Smoke-extraction Motor



HVAC Resilient
Cradle Motor



AUGER Motor



Crusher Duty Motor



Oil Pump Motor



IEEE-841 Motor



JM/JP Motor



Product Introduction

Products catalog

Alum- inum


1. MS series motor
2. TA series motor
3. ML series single-phase motor
4. MY/MYT series motor
5. MC series single-phase capacitor motor
6. MSC/MYC series saw motor
7. MSV/MYV series pad mout motor
8. TAB/MSB series brake motor
9. TAI/TAP series MEPS2 motor
10. TAD/MSD series double-polarity motor
11. TXA series TEFC motor
12. TDA series ODP motor
13. TL series motor
14. TLF series TEFC motor
15. TLD series ODP motor
16. EC/ECI series PMS motor
17. TLB/TLFB series brake motor
18. TXA COBRA series motor

Cast Iron

1. TC series motor
2. TCI/TCP series MEPS2 motor
3. TDC series ODP motor
4. Fire Pump motor
5. TG series GOST motor
6. S-TC/TCD series high-temp smoke exhaust motor
7. TXC series TEFC motor
8. TFC series crusher duty motor
9. TOC series oil pumper motor
10. TXC series IEEE-841 motor
11. JM/JP long shaft motor
12. TDC series ODP motor
13. TPC series motor
14. CT3 cooling tower motor

Other

1. VHS(vertical hollow shaft) series motor
2. TSS series stainless-steel motor
3. TSSN series hygienic motor
4. HVAC series resilient cradle motor
5. SLD series single-phase rolled steel frame ODP motor
6. SLF series single-phase rolled steel frame TEFC motor
7. AUGER motor
8. TXD series rolled steel frame ODP motor
9. TF series rolled steel frame TEFC motor
10. TT series cradle motor

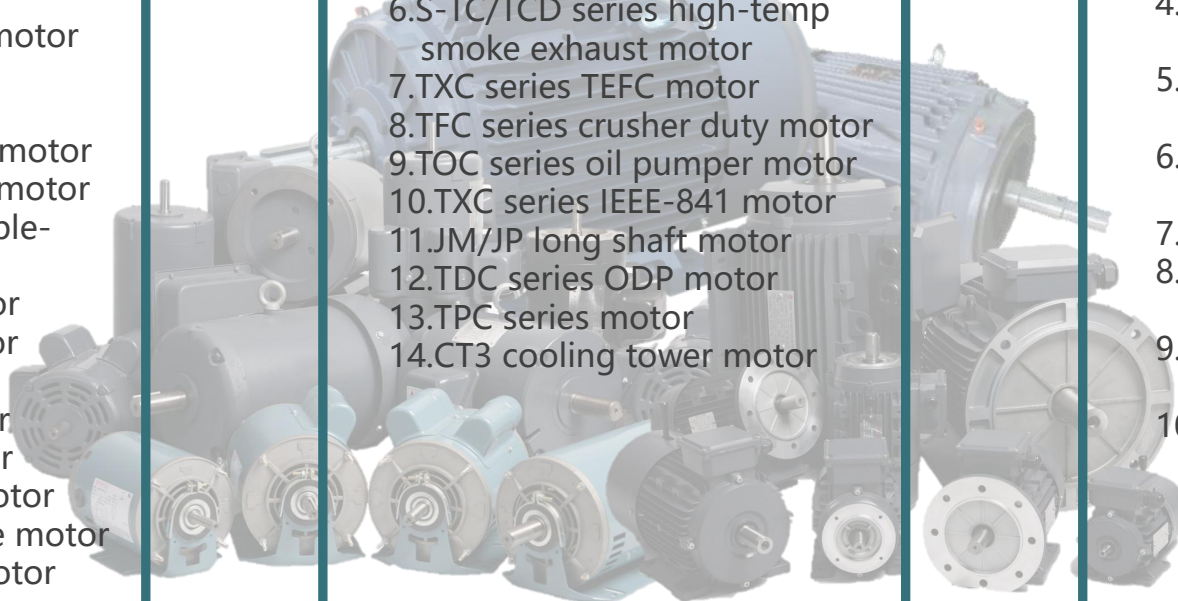

The background features two large, semi-circular architectural elements. The left one is a light gray, semi-transparent image of a modern building's interior with a complex, white, geometric steel truss structure. The right one is a teal-colored semi-circle containing a photograph of a city skyline, with the Petronas Towers in Kuala Lumpur being the most prominent feature.

Application Market

Due to the diversification of the Tectop motor product line, our motor applications possess an exceptionally extensive market reach.

03



Application Market

application market



MINING



**MARINE
APPLICATIONS**



NEW ENERGY



ROBOTS



Application Market

application market



**TRANSPORTA-
TION**



METALLURY



**ELECTRIC
VEHICLE**



ELECTRICITY




Application Market

application market



**CONSTRUCTI-
ON**

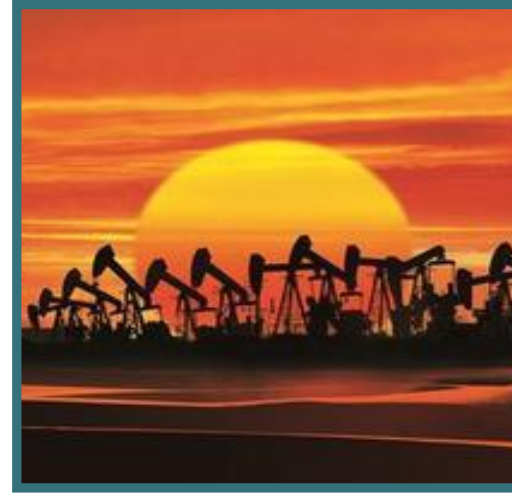

OIL/GAS



AGRICULTURE



CHEMICAL



04

Main Advantage

As a customer-centric enterprise, our core strength lies not only in having a professional service team but also in being able to provide rich and flexible customization services based on customer usage needs or scenarios.



Main Advantage

Our team




Sales Team

A sales team of over 100 people, with experienced team members, outstanding professional skills, and keen market sense. They are able to accurately grasp customer needs.

Technical Team

The Techtop technology team is committed to rigorous and meticulous work, striving for excellence. They ensure that every project is completed with high quality.

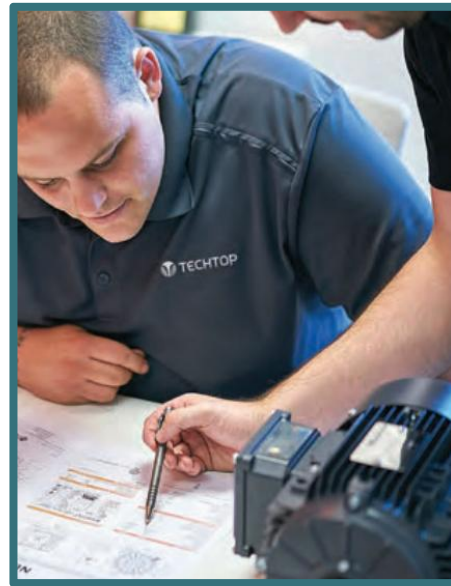


Production Team

Techtop takes great pride in its outstanding production capacity, boasting advanced production lines and efficient management systems, with annual output consistently ranking among the top in the industry.

After-sales Team


Techtop offers the most comprehensive after-sales support services, ensuring that customers can receive timely technical support and solutions at any point during their use.

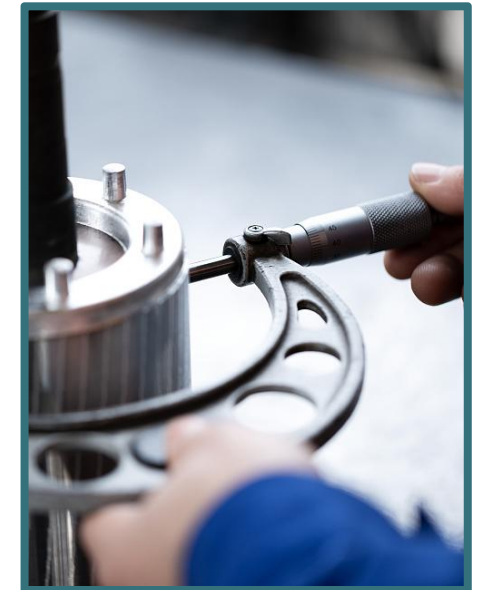



Main Advantage

Product features

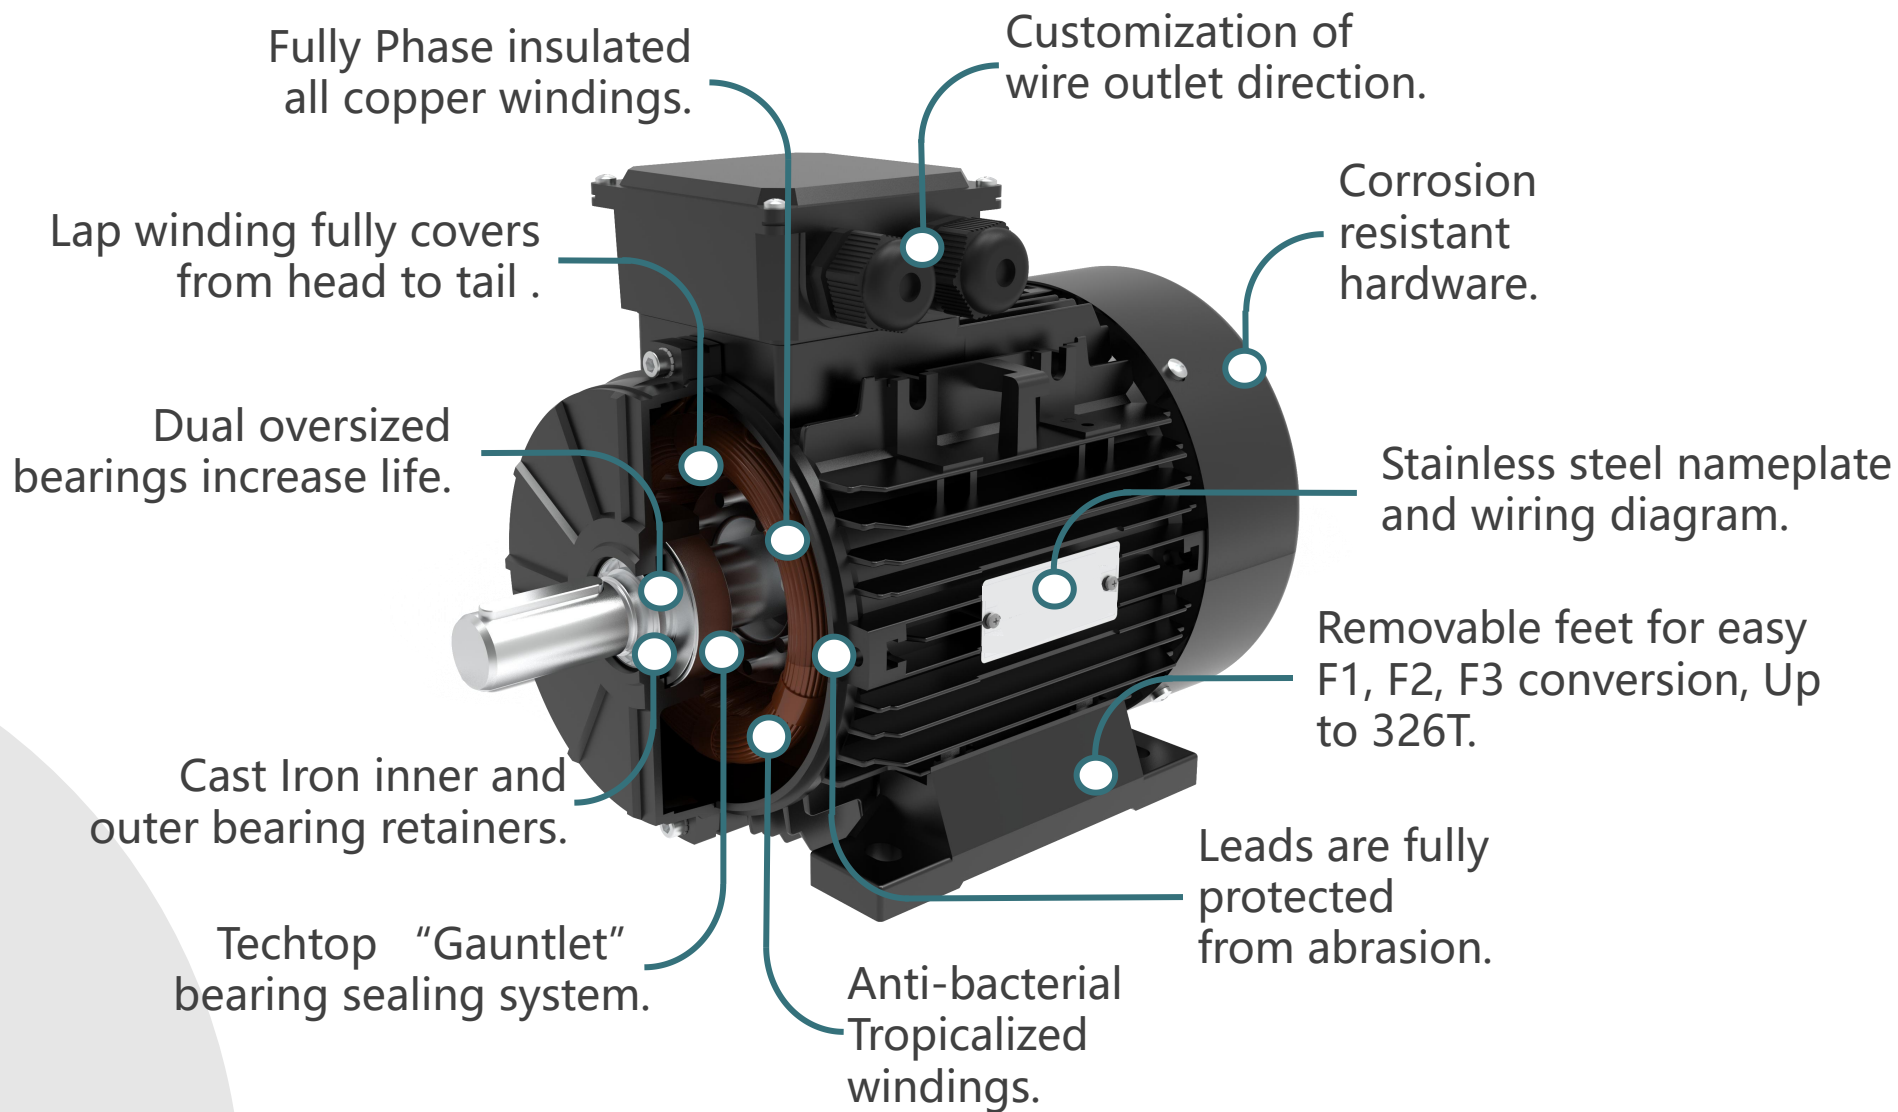



Main Advantage

Customized services



Techtop can provide customization or optional services for all motor products in the entire series for certain components (accessories) to adapt to different usage scenarios or needs of customers.



Customizable

- Special shaft extension customization

- 1.The design of the motor shaft can be lengthened or shortened, with a maximum length of 1810mm.
- 2.The motor shaft extension material can be made of: steel 45, stainless steel 304, or welding.
- 3.Rear axle with no exposed design (fully enclosed without fan blades).

- Special flange customization

- 1.The installation dimensions of the front flange of the motor can be designed arbitrarily as special requirements.
- 2.The material for the front flange of the motor can be selected as aluminum alloy and cast iron materials.

- Bearing brand selection

C&U, HCH, SKF, NSK, FAG, or other customer-specified brands.

- Fan material selection

The motor fan can choose aluminum or plastic blades.

- Length of fan cover customization


For special motors, the fan cover can be extended.

- Can be equipped with speed sensor

Mount a photoelectric encoder on the non-shaft extension end of the motor.

- Drainage hole customization

Allows for adding drainage holes at any location on the machine cover or body.

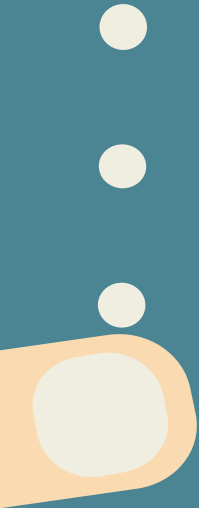

Customizable

- Customization of wire outlet direction

Facing the shaft extension, the wire-outlet can from the top, left, right, or the rear side (towards the fan cover direction).

- Rain cover customization

For vertical installed motors, the fan cover can be equipped with a rainproof cap.

- Can be customized sprayed in any color according to customer needs

- Optional protection level/insulation level/corrosion resistance level

Protection level: IP20、IP22、IP23、IP44、IP54、IP55、IP56、IP65、IP66、IP67

insulation level: B、F、H、C

corrosion resistance level: C2、C3、C4、C5

- Rated voltage range customization

20V~750V

- Rated frequency range customization

5~200Hz

- Rated power range customization

0.06~630kW; 0.25~500Hp

- Optional installation method

IMB3、B35、B5B、B6、B7、B8、B14、V1、V3、V5、V6、V15、V18、V19



Main Advantage

Display of partial customized motor




Special shaft and taps



Double shafts




No fan cover

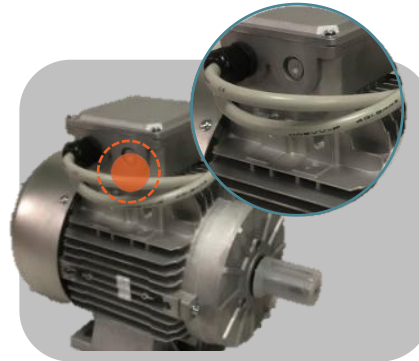

Long lead wire




Attached capacitor

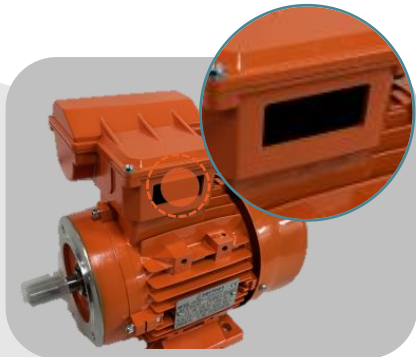

Special TB for overload protection



Square flange

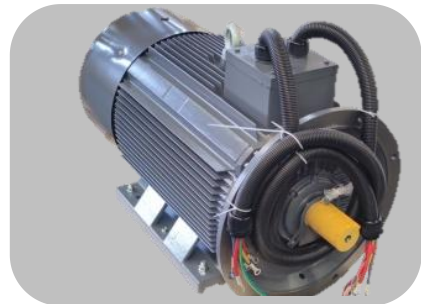

Special TB and lead wire



TEAO with special TB



Special support frame



05

Service & Support

The following two pages are Techtop's standard product selection table and all the certifications Techtop has currently obtained.



Service & Support


Standard Product Selection Form

1	Housing material	☐ Aluminum ☐ cast iron ☐ stainless steel ☐		11	Efficiency	☐ IE1 ☐ IE2 ☐ IE3 ☐ IE4 ☐ IE5 ☐ ☐ MEPS2(Aus) High Efficiency ☐ MEPS2(Aus) Premium Efficiency ☐ NEMA Premium Efficiency ☐
2	Phase	☐ Three ☐ Single		12	Service duty	☐ S1 ☐ S2 ☐ S3 ☐ S4 ☐ S6 ☐ _____
3	Frame size	IEC	☐ 56 ☐ 63 ☐ 71 ☐ 80 ☐ 90 ☐ 100 ☐ 112 ☐ 132 ☐ 160 ☐ 180 ☐ 200 ☐ 250 ☐ 280 ☐ 315 ☐ 355 ☐ 400 ☐ 450 ☐	13	Protection degree	☐ IP20 ☐ IP22 ☐ IP23 ☐ IP44 ☐ IP54 ☐ IP55 ☐ IP56 ☐ IP65 ☐ IP66 ☐ IP67 ☐ _____
4	Frame size	NEMA	☐ 56 ☐ 56H ☐ 140T ☐ 180T ☐ 210T ☐ 254T ☐ 256T ☐ 280T ☐ 320T ☐ _____	14	Insulation class	☐ B ☐ F ☐ H ☐ C ☐ _____
5	Rated Power (kW)	☐ 0.12 ☐ 0.18 ☐ 0.2 ☐ 0.25 ☐ 0.37 ☐ 0.4 ☐ 0.55 ☐ 0.75 ☐ 1.1 ☐ 1.5 ☐ 2.2 ☐ 3 ☐ 3.7 ☐ 4 ☐ 5.5 ☐ 7.5 ☐ 11 ☐ 15 ☐ 18.5 ☐ 22 ☐ 30 ☐ 37 ☐ 45 ☐ 55 ☐ 75 ☐ 90 ☐ 110 ☐ 132 ☐ 150 ☐ 160 ☐ 185 ☐ 200 ☐ 220 ☐ 250 ☐ _____		15	Service Factor	☐ 1.0 ☐ 1.1 ☐ 1.15 ☐ 1.2 ☐ 1.3 ☐ 1.35 ☐ 1.4 ☐
6	Rated Frequency	Fixed frequency : ☐ 50Hz ☐ 60Hz ☐ _____ Constant torque frequency range : _____ Hz Constant power frequency range : _____ Hz		16	Ambient Temp.	☐ -20°C ~ +40°C ☐ ____°C ~ ____°C
7	Rated Voltage	☐ 230/400V ☐ 400/690 V ☐ 230/460 V ☐ _____		17	Environment & Corrosive level	☐ Indoors ☐ Outdoors ☐ TH (Humid tropical climate) ☐ No requirements ☐ C1H ☐ C2H ☐ C3H ☐ C4H ☐ C5H ☐ _____
8	Number of poles	Single speed	☐ 2 ☐ 4 ☐ 6 ☐ 8 ☐ 10 ☐ 12 ☐ _____	18	Maximum altitude	☐ ≤1000 m ☐ ≤1500 m ☐ ≤2000 m ☐ ≤3000 m ☐ ≤4000 m
8	Number of poles	Multi-speed	☐ 2/4 ☐ 4/8 ☐ 4/6 ☐ 6/8 ☐ 2/8 ☐ 6/12 ☐ 2/4/6 ☐ 2/4/8 ☐ 4/6/8 ☐ 4/6/8/12 ☐	19	Bearing brand	☐ C&U ☐ HCH ☐ SKF ☐ NSK ☐ FAG ☐ NMB ☐ _____
9	Mounting type	IM	☐ B3 ☐ B5 ☐ B35 ☐ B14 ☐ B5R ☐ B14B ☐ V1 ☐ V3 ☐ V5 ☐	20	Rotation direction	☐ CW (Clockwise) ☐ CCW (Counter Clockwise)
10	Cooling method	IC	☐ 411 ☐ 416 ☐ 418 ☐ 410 ☐ _____	21	Thermal protection	☐ No need ☐ PTO____°C ☐ PTC____°C ☐ PT100 ☐ PT1000 ☐
				22	Cable glands	☐ Standard configuration ☐ _____



Service & Support

Certification

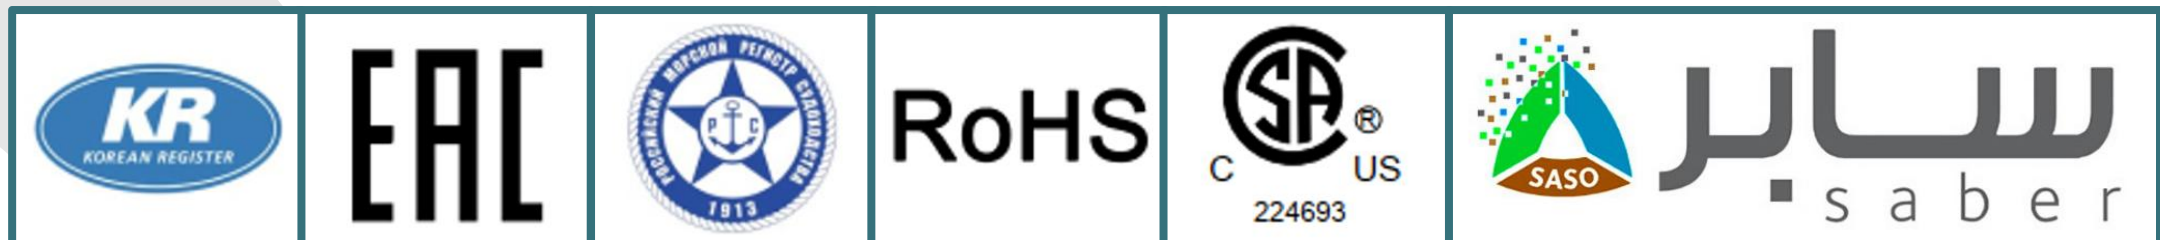

THANK YOU !

