




# WIRING DIAGRAM

## WDM BULLETIN

No. 1776 (7/44) Ref. 10A28-596

| NO. | DATE | REFERENCE | CHG LTR | SIG. |
|-----|------|-----------|---------|------|
|     |      |           |         |      |
|     |      |           |         |      |
|     |      |           |         |      |
|     |      |           |         |      |

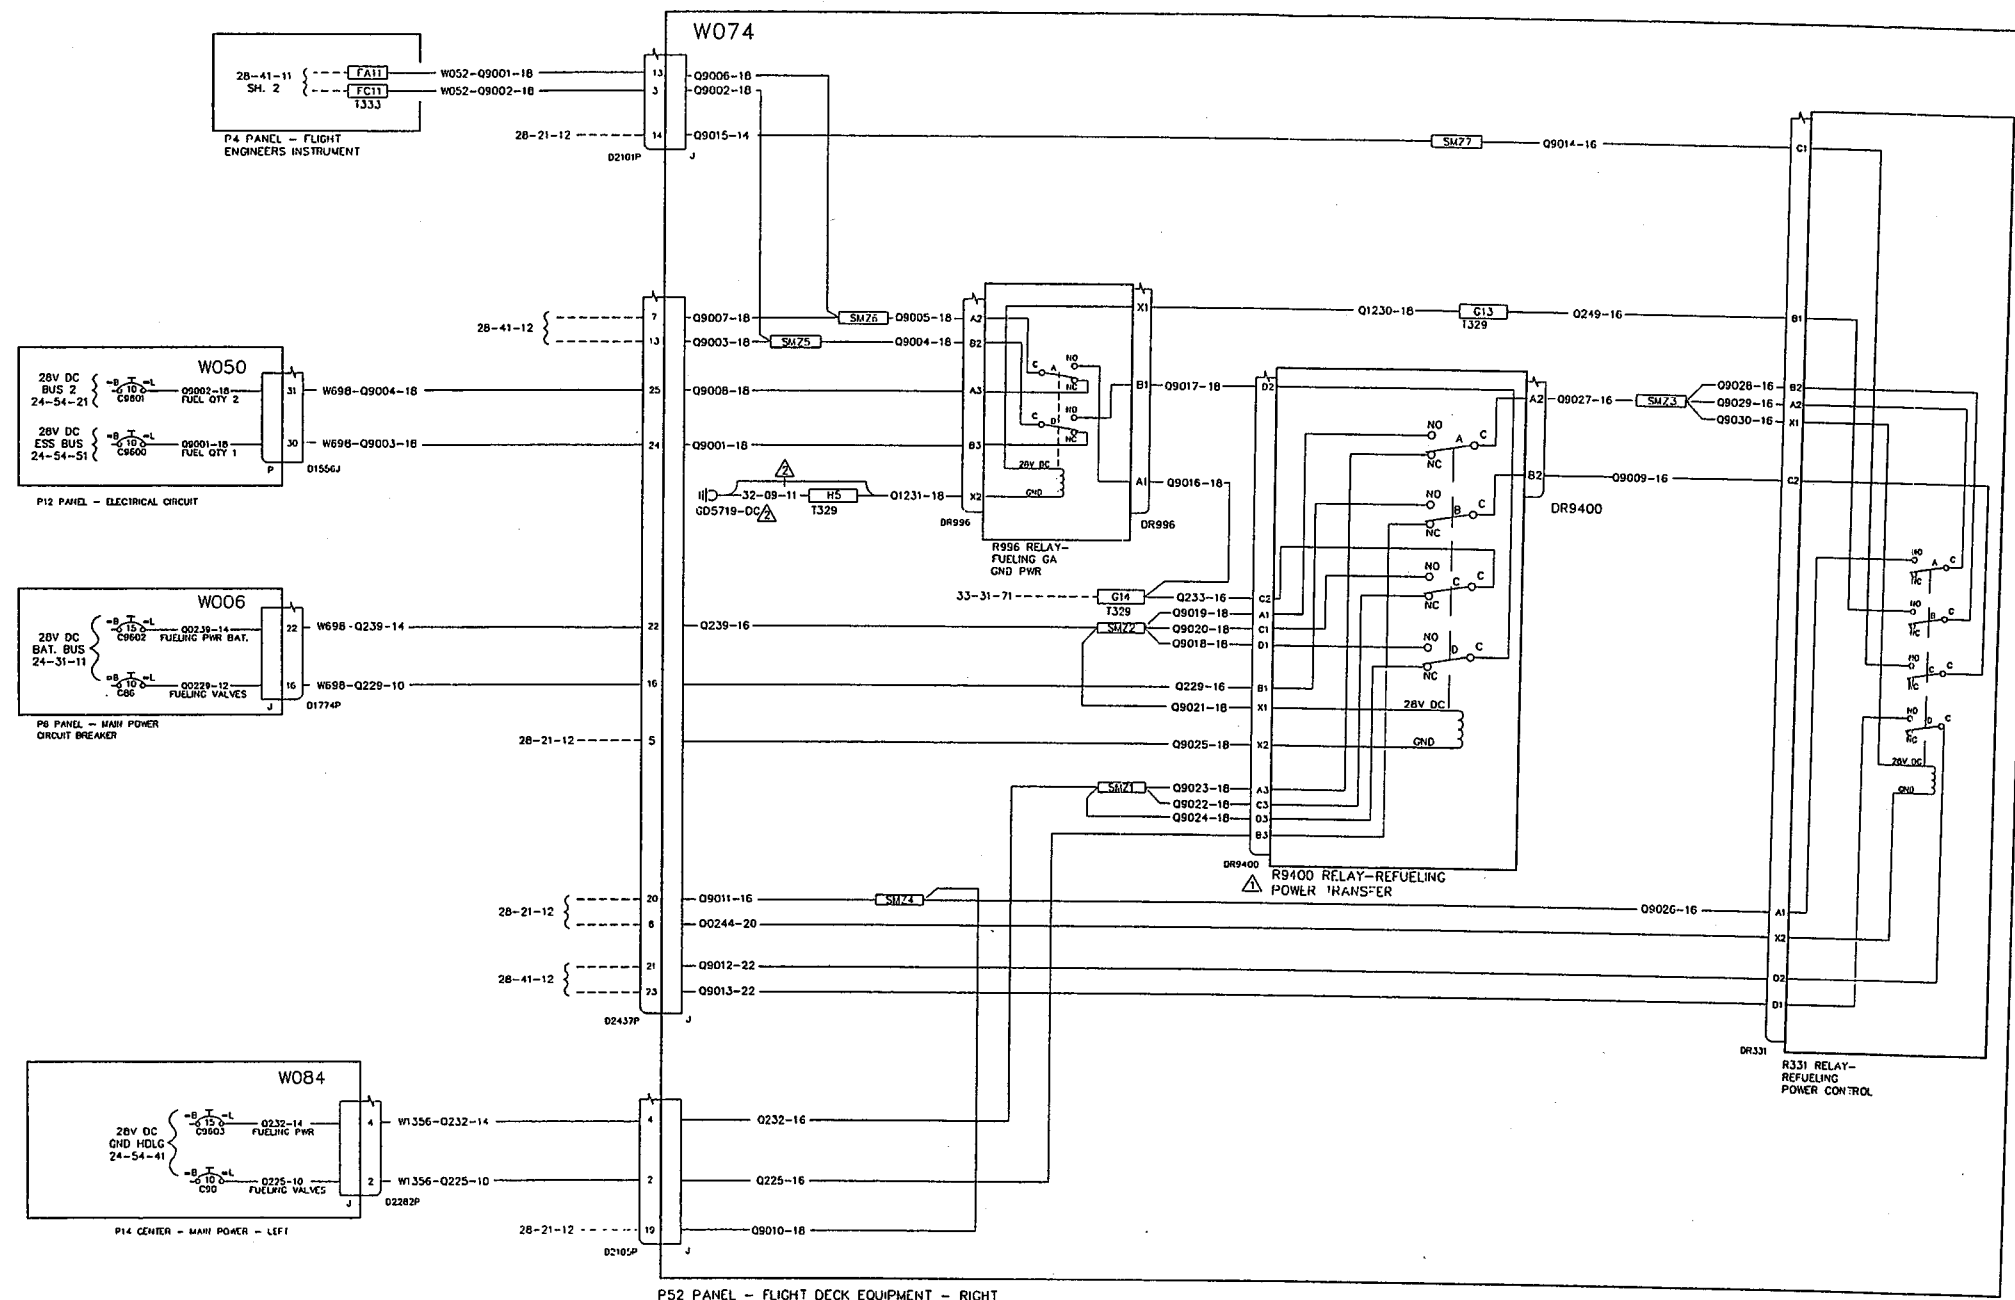

△ FOR RS251-RS259, RS263, RS265-RS268. (163, 166, 173, 177-179, 183-189, 212-213)  
△ RELAY OPERATING VOLTAGE KEYING CHANGE.

INCORPORATES:  
E.O. 28-41-747-003 (10A 28-596)

|                   |                   |                    |
|-------------------|-------------------|--------------------|
| DFTSM<br>T. Sueda | CHECK<br>E. Uyama | APPRV<br>Y. Kitada |
|-------------------|-------------------|--------------------|

|                         |     |              |
|-------------------------|-----|--------------|
| DIAGRAM NO.<br>28-21-11 | SHT | PAGE<br>12 A |
|-------------------------|-----|--------------|

Effective for aircraft with COA28-596 incorporated

02.5.07

|                                                                     |                    |
|---------------------------------------------------------------------|--------------------|
| TITLE:<br>FUEL QUANTITY<br>AC AND DC POWER                          | CHG LTR<br>JL      |
| EFFECTIVITY:<br>161,163,166,169,173,<br>177-179,183-187,189,212-213 | DATE<br>2002-05-02 |
| DIAGRAM NO.<br>28-21-11                                             | PAGE<br>12 A       |