


A



B

C

D

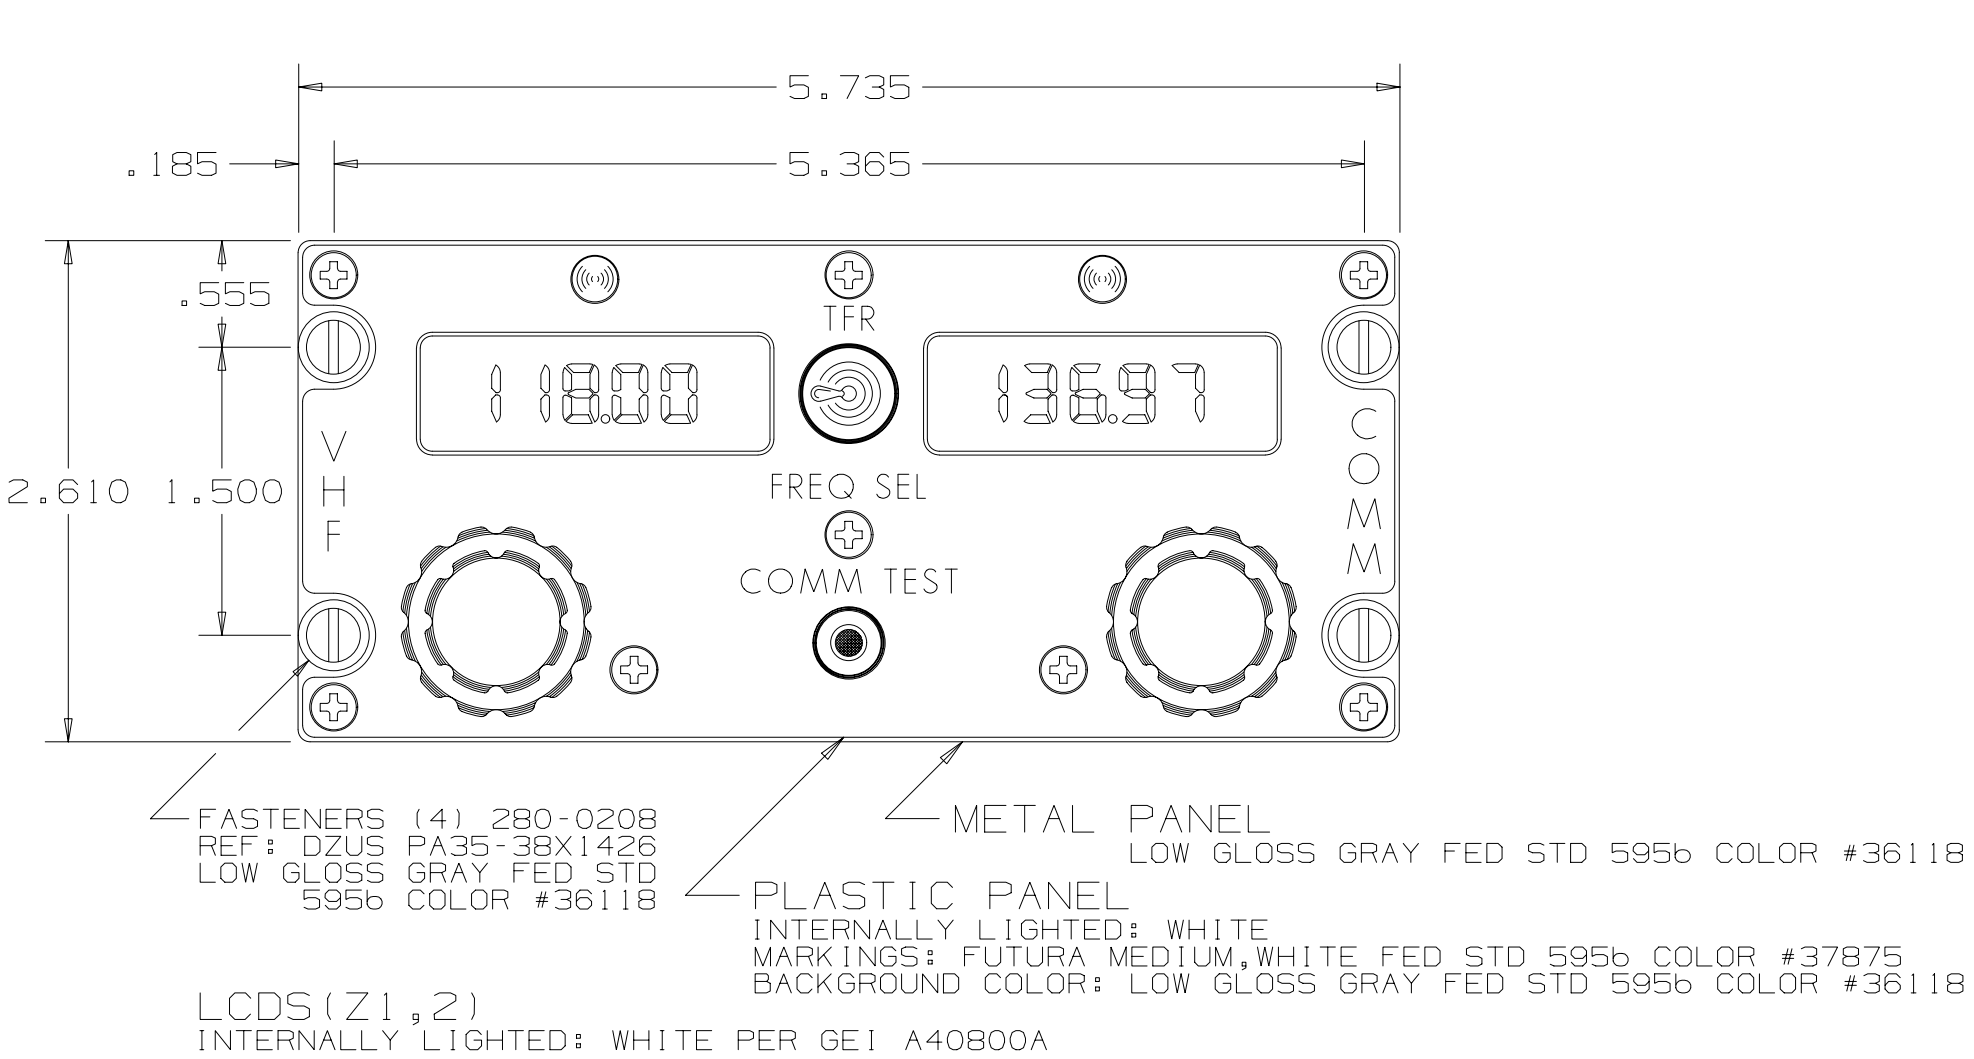


FRONT VIEW
FULL SCALE

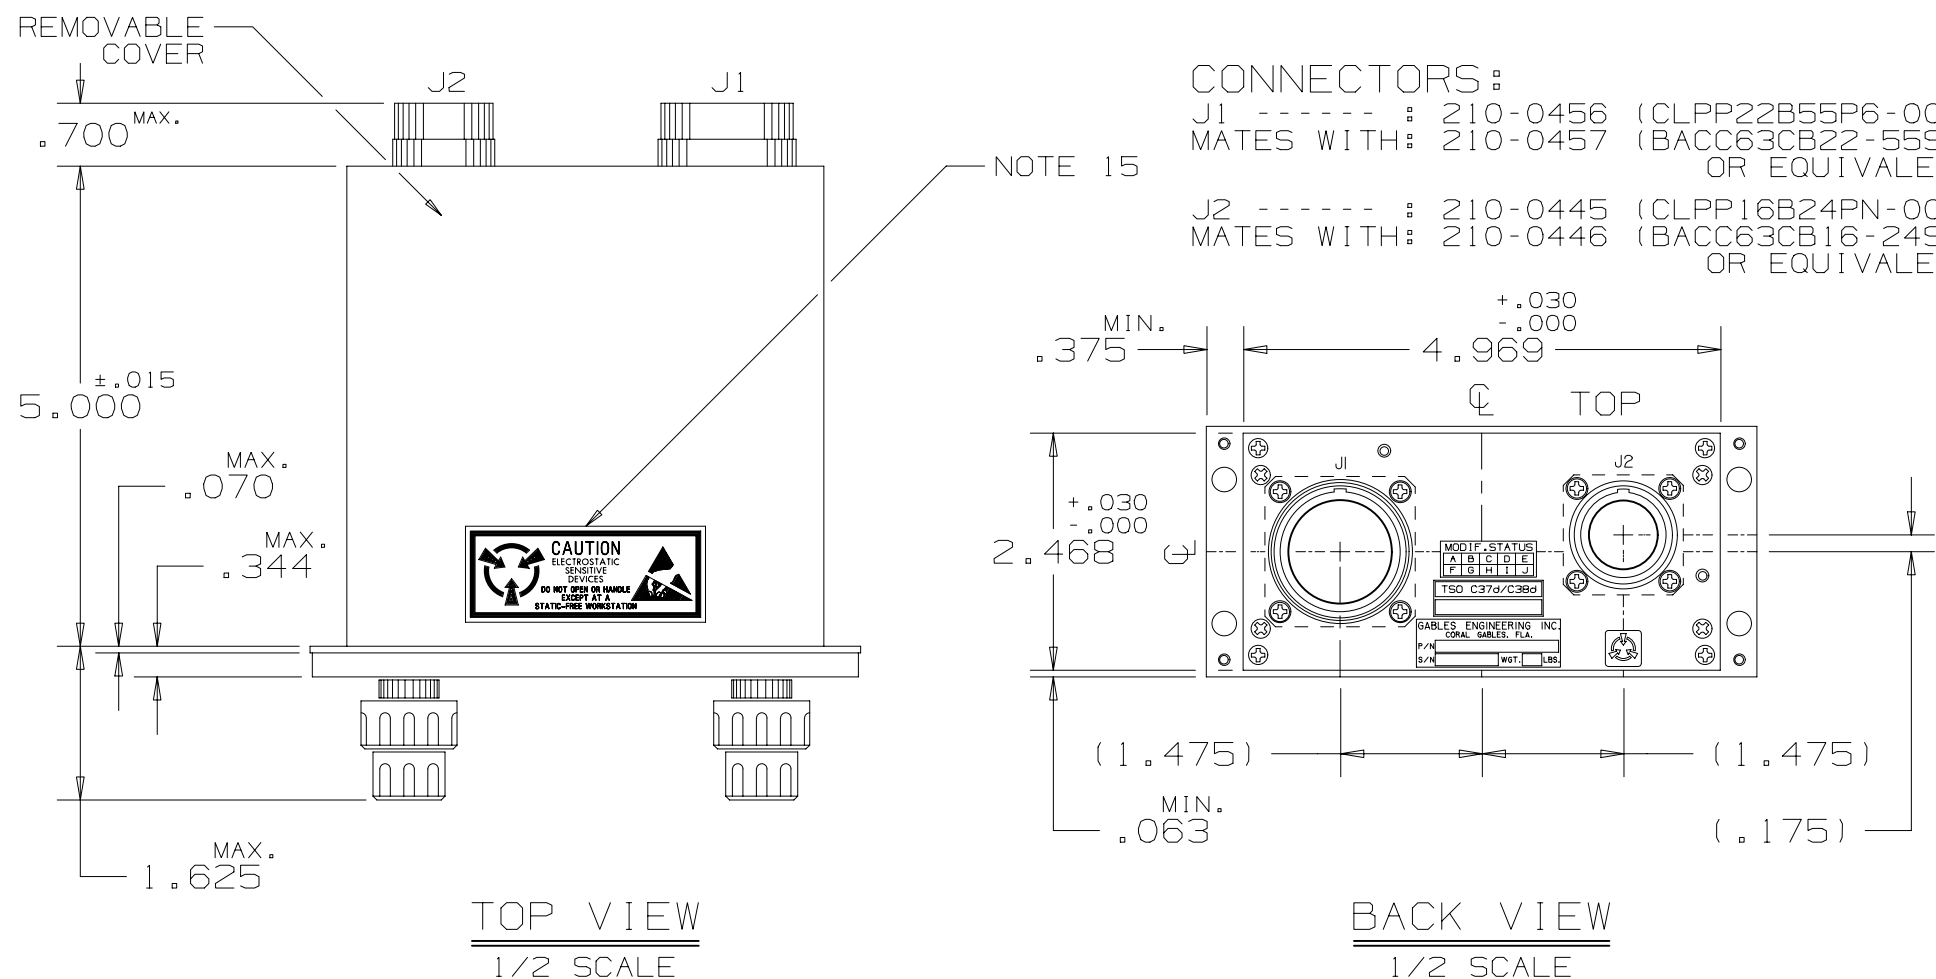

NOTES:

- REFER TO GD-SCD-G7406-() VHF/COMM CONTROL PANEL FOR J1 AND J2 PIN CONFIGURATION.
- THIS PANEL CONFORMS TO ARINC 716 AND ARINC 566A (INCLUDING SUPPLEMENT B) SPECS.
- LIGHTPLATE LAMPS ARE 5V, 60MA, CLEAR.
- ALL DISPLAY LAMPS ARE 5V, 75MA, CLEAR.
- ALL COMPONENTS ARE VIEWED FROM KNOB (FRONT) END.
- ALL KNOBS ARE GRAY, FED STD 595b COLOR #36440.
- INDICATOR LENSES (11,12) ARE WHITE; LAMPS ARE 5V, 115MA EACH.
- ALL TOGGLE SWITCHES MAKE CONTACT ON SIDE OPPOSITE TO POSITION OF BAT HANDLE.
- ALL TOGGLE SWITCHES ARE MAINTAINED IN DIRECTION THROWN.
- ALL TOGGLE SWITCHES ARE EQUIPPED WITH A WHITE CAP.
- EXTENDED FREQUENCY RANGE OF THIS PANEL IS 118.00(0) THRU 136.97(5) AT 25 KHz SPACING.
OPTIONAL FREQUENCY RANGE:
a. 118.00(0) THRU 135.97(5) AT 25 KHz SPACING, DIGIT IN PARENTHESES NOT DISPLAYED.
b. 118.0000 THRU 136.9916 AT 8.33 KHz SPACING; DISPLAYED FREQUENCY IS 118.000 THRU 136.990.
- THIS PANEL IS EQUIPPED WITH HIGH CONTRAST, BACKLIGHTED LIQUID CRYSTAL DISPLAYS.
- THIS PANEL IS EQUIPPED WITH NON-GLARE WINDOWS.
- MAXIMUM WEIGHT OF THIS PANEL 2.5 LBS.
- THIS PANEL IS EQUIPPED WITH STATIC SENSITIVE DEVICES.
FOR SERVICE HANDLE ONLY AT STATIC SAFE WORK STATIONS.
- PLASTIC COLOR, BRIGHTNESS AND CONTRAST SHALL BE IN ACCORDANCE WITH GE1 SPECIFICATION A40800A.
- A LIGHT RING .020 WIDE, IS ENGRAVED AROUND COMM TEST (S3) PUSH BUTTON AND TFR/FREQ SEL (S4) TOGGLE SWITCH.
- COMM TEST (S3) PUSH BUTTON IS BLACK FED STD 595b COLOR #37038.
- USE NUMBER 24 WIRE FOR PANEL HARNESS.
- CHASSIS GROUND TERMINAL AT BACKPLATE 1 3/8 INCH MAXIMUM USE NUMBER 20 WIRE.
- MAXIMUM POWER CONSUMPTION OF THIS PANEL; ELECTRONICS: 7.0W AT 28V DC.
LIGHTING---: PANEL LIGHTING: 4.2W MAX. AT 5V AC.
LCD LIGHTING--: 4.5W MAX. AT 5V AC.

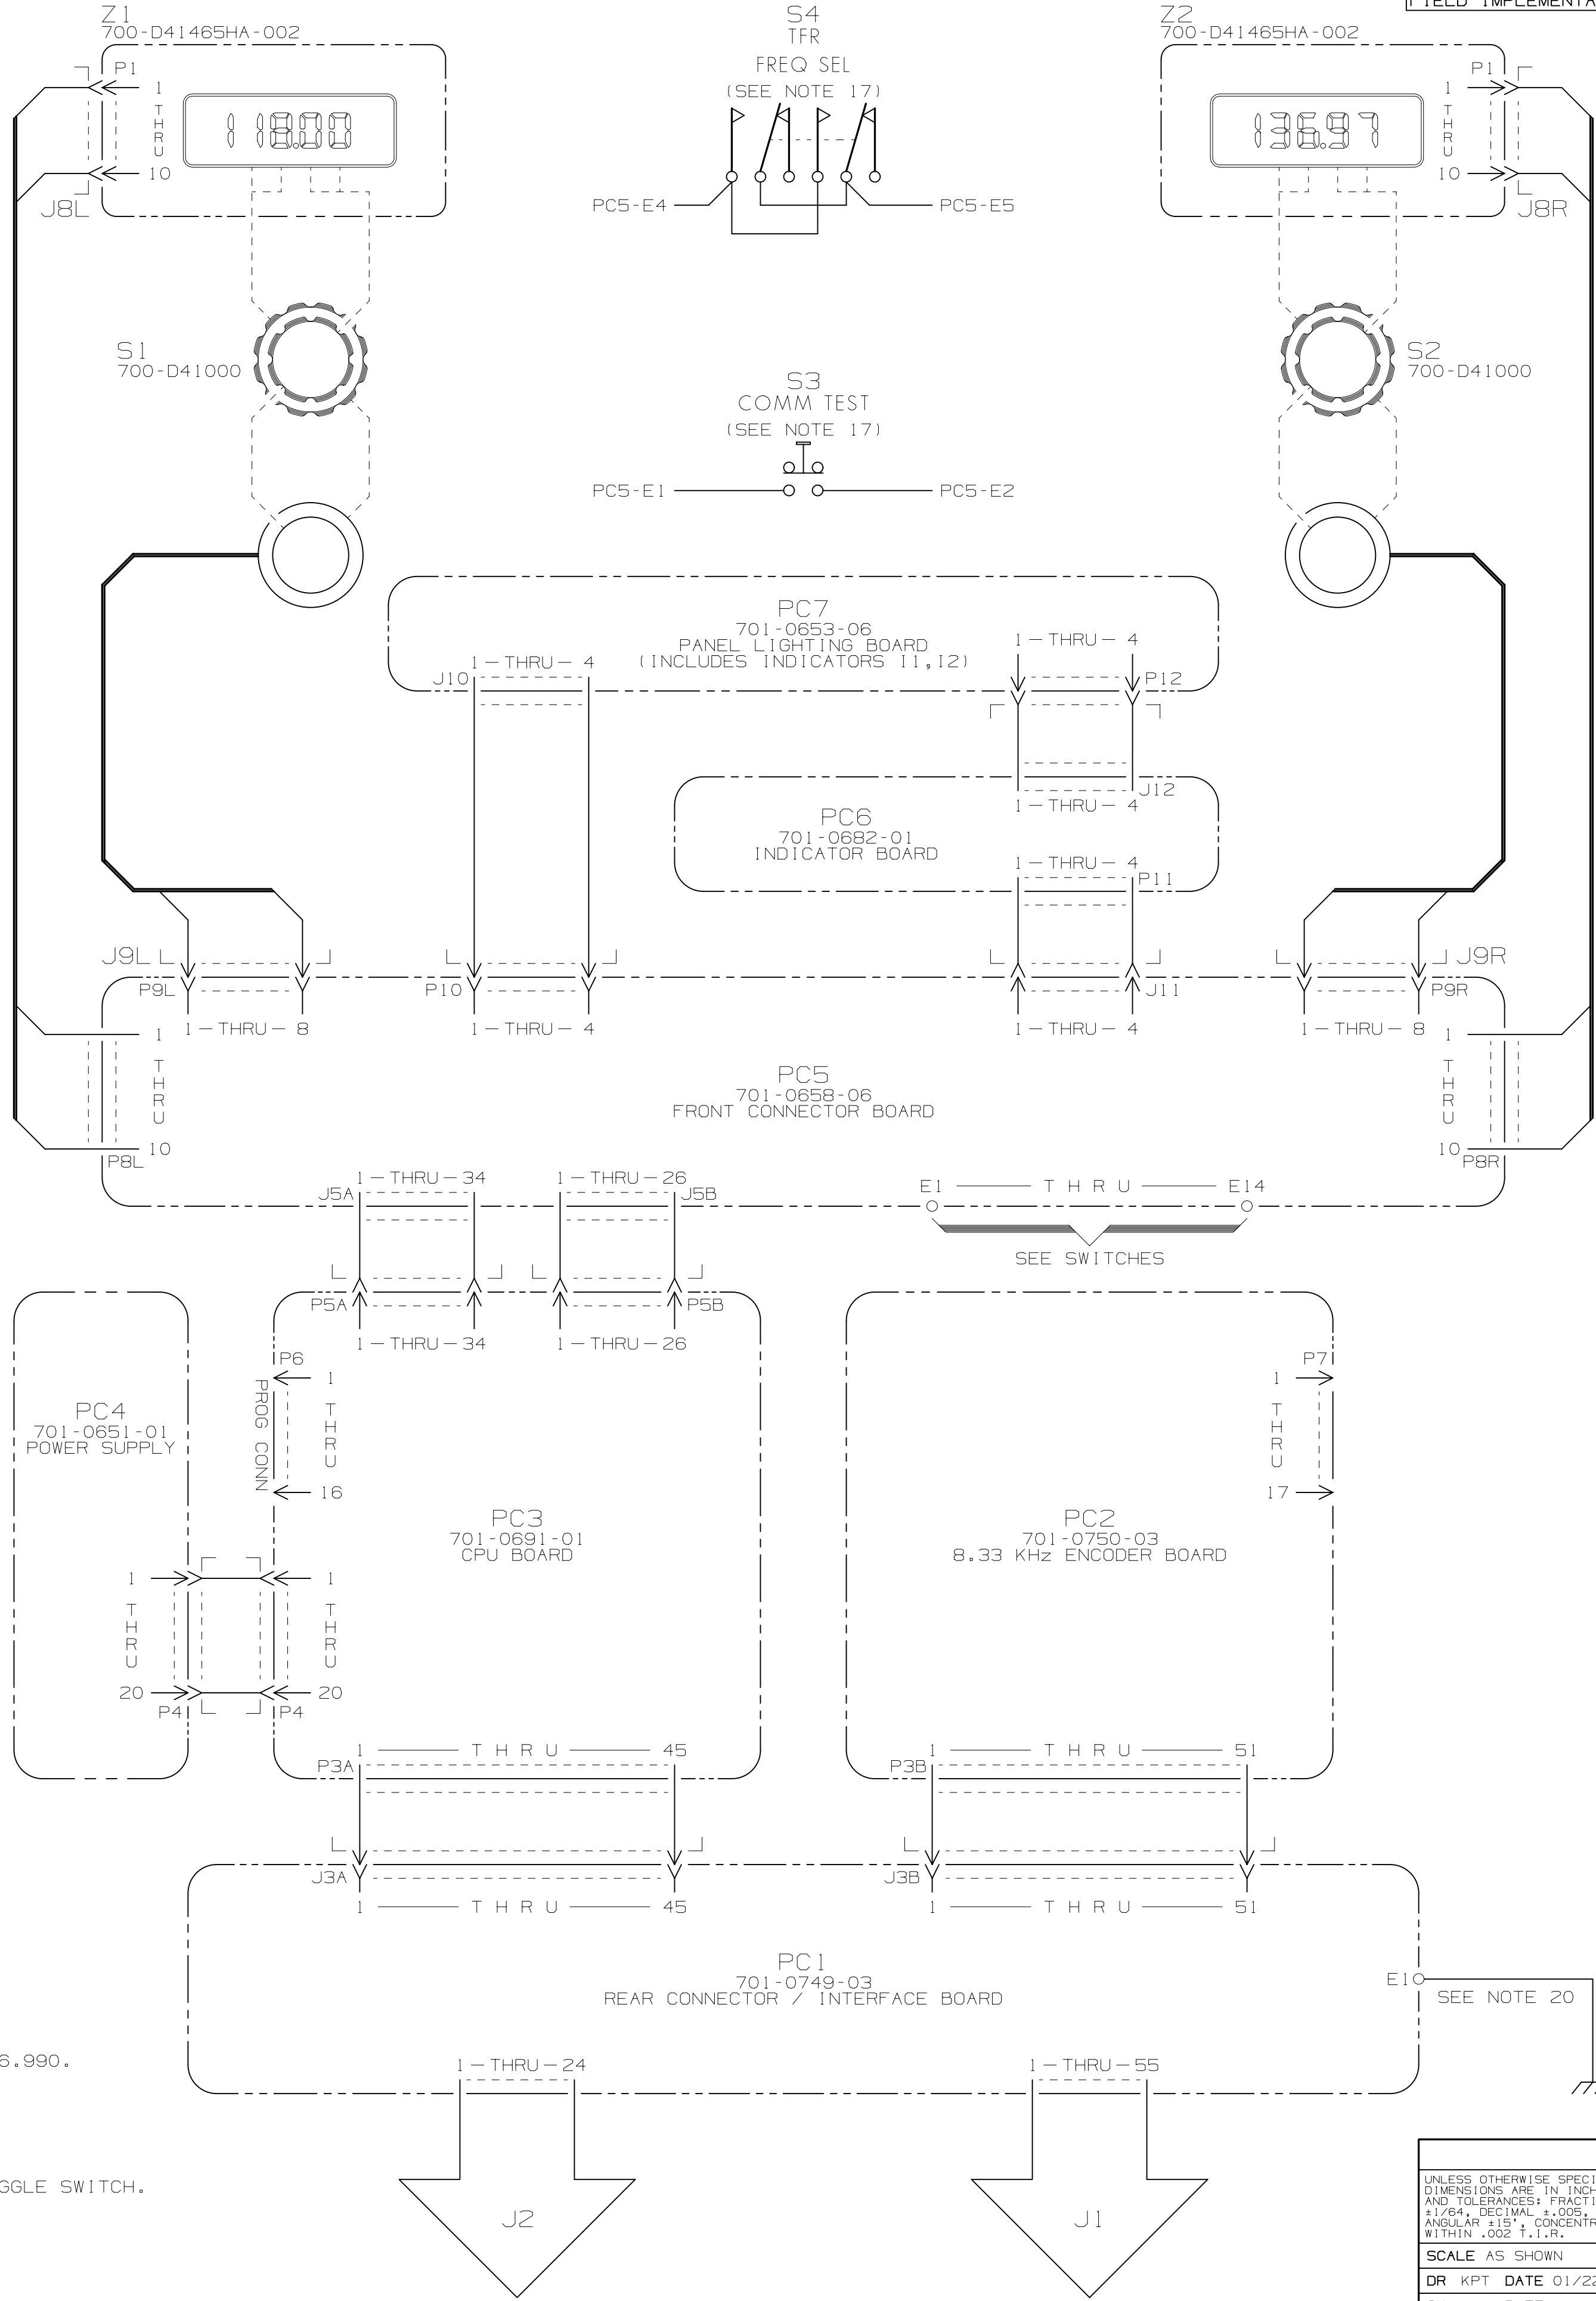

UNLESS OTHERWISE NOTED: ALL MODS ARE IMPLEMENTED IN PRODUCTION — FIELD IMPLEMENTATION IS OPTIONAL					MOD STATUS				
REVISION RECORD					REV	CHANGE	BY	DATE	APP
A	0	FIRST ISSUE.					KPT	01/23/97	DMS
B	1	REV'D J1 PIN 29,43,46,49-55					KPT	03/03/97	DMS
C	2	PC1 P/N WAS 701-0749-01, PC5 WAS 701-0658-04, CHANGED MOD STATUS TO B, ECO 12592, 12630					KPT	06/10/97	DMS
D	3	PC2 PART NO WAS 701-0750-01 MOD STATUS WAS B, ECO 13146 DEL'D NOTE 19, J1 PIN 25 WAS NO COMM, J1 PIN 34 WAS 28VDC					KPT	06/30/98	DMS
E	4	DUE TO FLEX JUMPERS CHANGE, MOD STATUS WAS C, ECO 13209					KPT	09/19/98	EJO
F	05	Z1,2 WAS D41465-001, BOEING SPEC CHNG WAS A40800, NOTE 4 75MA WAS 115MA, LCD WAS 3.8W ON NOTE 21, MOD STATUS WAS D "FIELD MOD ONLY", ECO 15245					KPT	11/01/00	LP
	06	DUE TO FLEX JUMPERS CHNG ON PC5, DEL CONN ASSY NO A45939 MOD STATUS WAS E, ECO 15320					KPT	02/07/01	LP

PIN	FUNCTION
1	WHOLE TENS MHz-WIRE A
2	WHOLE TENS MHz-WIRE B
3	WHOLE TENS MHz-WIRE C
4	WHOLE TENS MHz-WIRE D
5	WHOLE UNITS MHz-WIRE A
6	WHOLE UNITS MHz-WIRE B
7	WHOLE UNITS MHz-WIRE C
8	WHOLE UNITS MHz-WIRE D
9	WHOLE UNITS MHz-WIRE E
10	FRAC TENTHS MHz-WIRE A
11	FRAC TENTHS MHz-WIRE B
12	FRAC TENTHS MHz-WIRE C
13	FRAC TENTHS MHz-WIRE D
14	FRAC TENTHS MHz-WIRE E
15	FRAC HUNDREDTHS MHz-WIRE A
16	FRAC HUNDREDTHS MHz-WIRE B
17	FRAC HUNDREDTHS MHz-WIRE C
18	FRAC HUNDREDTHS MHz-WIRE D
19	FRAC HUNDREDTHS MHz-WIRE E / 8.33 ENABLE
20	RESERVED
21	FREQUENCY SELECTOR COMMON
22	RESERVED
23	RESERVED
24	RESERVED
25	RESERVED (NO COMM)
26	WHOLE TENS MHz-WIRE E
27	RESERVED
28	RESERVED
29	RESERVED (FAULT CODE DISPLAY ENABLE FCDE)
30	RESERVED
31	RESERVED
32	5V AC PANEL LIGHTS HI
33	5V AC PANEL LIGHTS LO
34	DC / CHASSIS GROUND
35	+26.5V DC / 12V DC DIMMING BUS
36	SPARE
37	SPARE
38	COMM TEST (SQUELCH DISABLE)
39	RESERVED
40	RESERVED
41	RESERVED
42	RESERVED
43	RESERVED (ACARS OUT)
44	RESERVED
45	RESERVED
46	RESERVED (ACARS ACTIVE)
47	RESERVED
48	+28V DC POWER IN
49	RESERVED (LAMP/DISPLAY TEST)
50	RESERVED (ARINC 429 B OUT)
51	RESERVED (ARINC 429 A OUT)
52	RESERVED (8.33 KHz ENABLE)
53	RESERVED
54	RESERVED (ARINC 429 B IN)
55	RESERVED (ARINC 429 A IN)

PIN	FUNCTION
1	5V AC LIGHT PWR HIGH
2	5V AC LIGHT PWR LOW
3	VHF EXTENDED RANGE DISABLE
4	8.33 KHz SPACING
5	FAULT CODE DISPLAY ENABLE
6	NO COMM
7	RESERVED
8	DATA MODE ENABLE (RESERVED)
9	RESERVED
10	RESERVED
11	RESERVED
12	CHASSIS GROUND
13	28V DC POWER
14	DC GROUND
15	VOICE MODE ANNUNCIATOR
16	VOICE/DATA SELECT (RESERVED)
17	429 A OUT (PORT B)
18	429 B OUT (PORT B)
19	RESERVED
20	26.5/12V DC INDICATOR DIM BUS
21	429A OUT PORT A
22	429B OUT PORT A
23	TRANSFER LIGHTS/DISPLAY TEST
24	DATA SELECT DISCRETE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND TOLERANCES: FRACTIONAL ±1/64, DECIMAL ±.002, ANGULAR ±15° CONCENTRICITY WITHIN .002 I.T.R.				REFERENCE INFORMATION	
SCALE AS SHOWN				PARTS LIST : B43802	
DR KPT DATE 01/22/97				ENGRVG SFC : B42482P	
CK JAS DATE 01/23/97				PLASTIC ASSY: B42483P	
APP DMS DATE 01/23/97				ASSEMBLY DWG: D43803	
P.O. BOX 140880				SHEET 1 OF 1 SHEETS	
CORAL GABLES, FLA. 33114				DRAWING NO	
				REV	