

EMV

Integrated Circuit Card

Specifications for Payment Systems

Book 1

Application Independent ICC to Terminal Interface Requirements

Version 4.3
November 2011

EMV^{®*}

Integrated Circuit Card Specifications for Payment Systems

Book 1

Application Independent ICC to Terminal Interface Requirements

Version 4.3
November 2011

* EMV is a registered trademark in the U.S. and other countries and an unregistered trademark elsewhere. The EMV trademark is owned by EMVCo.

© 2011 EMVCo, LLC ("EMVCo"). All rights reserved. Any and all uses of these Specifications are subject to the terms and conditions of the EMVCo Terms of Use agreement available at www.emvco.com. These Specifications are provided "AS IS" without warranties of any kind, and EMVCo neither assumes nor accepts any liability for any errors or omissions contained in these Specifications. EMVCO DISCLAIMS ALL REPRESENTATIONS AND WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT, AS TO THESE SPECIFICATIONS.

EMVCo makes no representations or warranties with respect to intellectual property rights of any third parties in or in relation to the Specifications. EMVCo undertakes no responsibility to determine whether any implementation of these Specifications may violate, infringe, or otherwise exercise the patent, copyright, trademark, trade secret, know-how, or other intellectual property rights of third parties, and thus any person who implements any part of these Specifications should consult an intellectual property attorney before any such implementation.

Without limiting the foregoing, the Specifications may provide for the use of public key encryption and other technology, which may be the subject matter of patents in several countries. Any party seeking to implement these Specifications is solely responsible for determining whether its activities require a license to any such technology, including for patents on public key encryption technology. EMVCo shall not be liable under any theory for any party's infringement of any intellectual property rights in connection with these Specifications.

Revision Log - Version 4.3

The following changes have been made to Book 1 since the publication of Version 4.2. Numbering and cross references in this version have been updated to reflect changes introduced by the published bulletins.

Incorporated changes described in the following Specification Updates:

- Specification Update Bulletin no. 68: '61 La' response when using T=1
- Specification Update Bulletin no. 69 Second Edition: Padding of BER-TLV Encoded Constructed Data Objects
- Specification Update Bulletin no. 71 Second Edition: Change the status of the 'Presence' of the Application Label data element in the FCI of an ADF to mandatory

Incorporated changes described in the following Specification Bulletins:

- Specification Bulletin no. 75: Terminal AID
- Specification Bulletin no. 78: Removal of DDF Entries from PSE Records
- Specification Bulletin no. 88: Application Selection Updates

Minor editorial clarifications, including those described in the following Specification Bulletin:

- Specification Bulletin no. 80: Editorial Errors in Release 4.2 of the EMV Specifications

Contents

Part I - General

1	Scope	3
1.1	Changes in Version 4.2	3
1.2	Structure	3
1.3	Underlying Standards	4
1.4	Audience	4
2	Normative References	5
3	Definitions	9
4	Abbreviations, Notations, Conventions, and Terminology	19
4.1	Abbreviations	19
4.2	Notations	27
4.3	Data Element Format Conventions	29
4.4	Terminology	31

Part II - Electromechanical Characteristics, Logical Interface, and Transmission Protocols

5	Electromechanical Interface	35
5.1	Lower Voltage ICC Migration	36
5.2	Mechanical Characteristics of the ICC	37
5.2.1	Physical Characteristics	37
5.2.2	Dimensions and Location of Contacts	38
5.2.3	Contact Assignment	39
5.3	Electrical Characteristics of the ICC	40
5.3.1	Measurement Conventions	40
5.3.2	Input/Output (I/O)	40
5.3.3	Programming Voltage (VPP)	42
5.3.4	Clock (CLK)	43
5.3.5	Reset (RST)	44
5.3.6	Supply Voltage (VCC)	45
5.3.7	Contact Resistance	46
5.4	Mechanical Characteristics of the Terminal	47
5.4.1	Interface Device	47
5.4.2	Contact Forces	48
5.4.3	Contact Assignment	48
5.5	Electrical Characteristics of the Terminal	48

5.5.1	Measurement Conventions	48
5.5.2	Input/Output (I/O)	49
5.5.3	Programming Voltage (VPP)	51
5.5.4	Clock (CLK)	52
5.5.5	Reset (RST)	53
5.5.6	Supply Voltage (VCC)	54
5.5.7	Contact Resistance	56
5.5.8	Short Circuit Resilience	56
5.5.9	Powering and Depowering of Terminal with ICC in Place	57
6	Card Session	59
6.1	Normal Card Session	59
6.1.1	Stages of a Card Session	59
6.1.2	ICC Insertion and Contact Activation Sequence	59
6.1.3	ICC Reset	61
6.1.4	Execution of a Transaction	62
6.1.5	Contact Deactivation Sequence	63
6.2	Abnormal Termination of Transaction Process	64
7	Physical Transportation of Characters	65
7.1	Bit Duration	65
7.2	Character Frame	66
8	Answer to Reset	69
8.1	Physical Transportation of Characters Returned at Answer to Reset	69
8.2	Characters Returned by ICC at Answer to Reset	70
8.3	Character Definitions	72
8.3.1	TS - Initial Character	73
8.3.2	T0 - Format Character	74
8.3.3	TA1 to TC3 - Interface Characters	74
8.3.4	TCK - Check Character	83
8.4	Terminal Behaviour during Answer to Reset	83
8.5	Answer to Reset - Flow at the Terminal	85
9	Transmission Protocols	87
9.1	Physical Layer	87
9.2	Data Link Layer	88
9.2.1	Character Frame	88
9.2.2	Character Protocol T=0	88
9.2.3	Error Detection and Correction for T=0	92
9.2.4	Block Protocol T=1	93
9.2.5	Error Detection and Correction for T=1	103
9.3	Terminal Transport Layer (TTL)	106
9.3.1	Transport of APDUs by T=0	106
9.3.2	Transportation of APDUs by T=1	114

9.4	Application Layer	114
9.4.1	C-APDU	115
9.4.2	R-APDU	116

Part III - Files, Commands, and Application Selection

10	Files	119
10.1	File Structure	119
10.1.1	Application Definition Files	119
10.1.2	Application Elementary Files	120
10.1.3	Mapping of Files onto ISO/IEC 7816-4 File Structure	120
10.1.4	Directory Structure	120
10.2	File Referencing	121
10.2.1	Referencing by Name	121
10.2.2	Referencing by SFI	121
11	Commands	123
11.1	Message Structure	123
11.1.1	Command APDU Format	124
11.1.2	Response APDU Format	125
11.2	READ RECORD Command-Response APDUs	125
11.2.1	Definition and Scope	125
11.2.2	Command Message	126
11.2.3	Data Field Sent in the Command Message	126
11.2.4	Data Field Returned in the Response Message	126
11.2.5	Processing State Returned in the Response Message	126
11.3	SELECT Command-Response APDUs	127
11.3.1	Definition and Scope	127
11.3.2	Command Message	128
11.3.3	Data Field Sent in the Command Message	129
11.3.4	Data Field Returned in the Response Message	129
11.3.5	Processing State Returned in the Response Message	131
12	Application Selection	133
12.1	Overview of Application Selection	133
12.2	Data in the ICC Used for Application Selection	135
12.2.1	Coding of Payment System Application Identifier	135
12.2.2	Structure of the PSE	136
12.2.3	Coding of a Payment System Directory	137
12.2.4	Error Handling for FCI Response Data	139
12.3	Building the Candidate List	140
12.3.1	Matching Terminal Applications to ICC Applications	140

12.3.2	Using the PSE	141
12.3.3	Using a List of AIDs	144
12.4	Final Selection	147
 Part IV - Annexes		
Annex A	Examples of Exchanges Using T=0	151
A1	Case 1 Command	151
A2	Case 2 Command	152
A3	Case 3 Command	152
A4	Case 4 Command	152
A5	Case 2 Command Using the '61' and '6C' Procedure Bytes	153
A6	Case 4 Command Using the '61' Procedure Byte	153
A7	Case 4 Command with Warning Condition	154
Annex B	Data Elements Table	155
B1	Data Elements by Name	155
B2	Data Elements by Tag	161
Annex C	Examples of Directory Structures	163
C1	Single Application Card	163
C2	Single Level Directory	164
C3	Multi-Level Directory	165
C4	Coding of Proprietary Directories	165
 Part V - Common Core Definitions		
Common Core Definitions		169
<i>Changed Sections</i>		169
11	Commands	170
11.3	SELECT Command-Response APDUs	170
11.3.5	Processing State Returned in the Response Message	170
Index		171

Tables

Table 1: Lower Voltage Card Migration	36
Table 2: ICC Contact Assignment	39
Table 3: Electrical Characteristics of I/O for ICC Reception	41
Table 4: Electrical Characteristics of I/O for ICC Transmission	42
Table 5: Electrical Characteristics of CLK to ICC	43
Table 6: Electrical Characteristics of RST to ICC	44
Table 7: Classes of Operation	45
Table 8: Mandatory and Optional Operating Voltage Ranges	46
Table 9: IFD Contact Assignment	48
Table 10: Electrical Characteristics of I/O for Terminal Transmission	50
Table 11: Electrical Characteristics of I/O for Terminal Reception	51
Table 12: Electrical Characteristics of CLK from Terminal	52
Table 13: Electrical Characteristics of RST from Terminal	53
Table 14: Terminal Supply Voltage and Current	55
Table 15: Basic ATR for T=0 Only	70
Table 16: Basic ATR for T=1 Only	71
Table 17: Terminal Behaviour	73
Table 18: Basic Response Coding of Character T0	74
Table 19: Basic Response Coding of Character TB1	76
Table 20: Basic Response Coding of Character TC1	77
Table 21: Basic Response Coding of Character TD1	78
Table 22: Basic Response Coding of Character TD2	80
Table 23: Basic Response Coding of Character TA3	81
Table 24: Basic Response Coding of Character TB3	82
Table 25: Terminal Response to Procedure Byte	90
Table 26: Status Byte Coding	91
Table 27: Structure of a Block	93
Table 28: Types of Blocks	94
Table 29: Coding of the PCB of an I-block	95
Table 30: Coding of the PCB of a R-block	95
Table 31: Coding of the PCB of a S-block	95
Table 32: Structure of Command Message	113
Table 33: GET RESPONSE Error Conditions	113
Table 34: Definition of Cases for Data in APDUs	114
Table 35: C-APDU Structures	115
Table 36: Command APDU Content	124
Table 37: Response APDU Content	125
Table 38: READ RECORD Command Message	126
Table 39: READ RECORD Command Reference Control Parameter	126
Table 40: SELECT Command Message	128
Table 41: SELECT Command Reference Control Parameter	128
Table 42: SELECT Command Options Parameter	128
Table 43: SELECT Response Message Data Field (FCI) of the PSE	129
Table 44: SELECT Response Message Data Field (FCI) of a DDF	130
Table 45: SELECT Response Message Data Field (FCI) of an ADF	131

Table 46: Payment System Directory Record Format	137
Table 47: ADF Directory Entry Format	138
Table 48: Format of Application Priority Indicator	138
Table 49: Data Elements Table	155
Table 50: Data Elements Tags	161
Table 51: Example of a DDF Directory Entry Format	166

Figures

Figure 1: ICC Contact Location and Dimensions	38
Figure 2: Layout of Contacts	39
Figure 3: Terminal Contact Location and Dimensions	47
Figure 4: Maximum Current Pulse Envelope	54
Figure 5: Maximum Current Pulse Envelopes	56
Figure 6: Contact Activation Sequence	60
Figure 7: Cold Reset Sequence	61
Figure 8: Warm Reset Sequence	62
Figure 9: Contact Deactivation Sequence	63
Figure 10: Character Frame	66
Figure 11: ATR - Example Flow at the Terminal	85
Figure 12: Character Repetition Timing	92
Figure 13: Chaining C-APDU	102
Figure 14: Chaining I-Blocks	102
Figure 15: Command APDU Structure	124
Figure 16: Response APDU Structure	125
Figure 17: Terminal Logic Using Directories	143
Figure 18: Using the List of AIDs in the Terminal	146
Figure 19: Simplest Card Structure Single Application	163
Figure 20: Single Level Directory	164
Figure 21: Third Level Directory	165

Part I

General

1 Scope

This document, the *Integrated Circuit Card (ICC) Specifications for Payment Systems - Book 1, Application Independent ICC to Terminal Interface Requirements*, describes the minimum functionality required of integrated circuit cards (ICCs) and terminals to ensure correct operation and interoperability independent of the application to be used. Additional proprietary functionality and features may be provided, but these are beyond the scope of this specification and interoperability cannot be guaranteed.

The *Integrated Circuit Card Specifications for Payment Systems* includes the following additional documents, all available on <http://www.emvco.com>:

- Book 2 - Security and Key Management
- Book 3 - Application Specification
- Book 4 - Cardholder, Attendant, and Acquirer Interface Requirements

1.1 Changes in Version 4.3

This release incorporates all relevant Specification Update Bulletins, Application Notes, amendments, etc. published up to the date of this release.

The Revision Log at the beginning of the Book provides additional detail about changes to this Book.

1.2 Structure

Book 1 consists of the following parts:

- Part I - **General**
- Part II - **Electromechanical Characteristics, Logical Interface, and Transmission Protocols**
- Part III - **Files, Commands, and Application Selection**
- Part IV - **Annexes**
- Part V - **Common Core Definitions**

Part I includes this introduction, as well as data applicable to all Books: normative references, definitions, abbreviations, notations, data element format convention, and terminology.

Part II defines electromechanical characteristics, logical interface, and transmission protocols as they apply to the exchange of information between an ICC and a terminal. In particular it covers:

- Mechanical characteristics, voltage levels, and signal parameters as they apply to both ICCs and terminals.
- An overview of the card session.
- Establishment of communication between the ICC and the terminal by means of the answer to reset.
- Character- and block-oriented asynchronous transmission protocols.

Part III defines data elements, files, and commands as they apply to the exchange of information between an ICC and a terminal. In particular it covers:

- Data elements and their mapping onto data objects.
- Structure and referencing of files.
- Structure and coding of messages between the ICC and the terminal to achieve application selection.

Part III also defines the application selection process from the standpoint of both the card and the terminal. The logical structure of data and files within the card that is required for the process is specified, as is the terminal logic using the card structure.

Part IV includes examples of exchanges using T=0, a data elements table specific to application selection, and example directory structures.

Part V defines an optional extension to be used when implementing the Common Core Definitions (CCD).

The Book also includes a revision log and an index.

1.3 Underlying Standards

This specification is based on the ISO/IEC 7816 series of standards and should be read in conjunction with those standards. However, if any of the provisions or definitions in this specification differ from those standards, the provisions herein shall take precedence.

1.4 Audience

This specification is intended for use by manufacturers of ICCs and terminals, system designers in payment systems, and financial institution staff responsible for implementing financial applications in ICCs.

2 Normative References

The following standards contain provisions that are referenced in these specifications. The latest version shall apply unless a publication date is explicitly stated.

ISO 639-1	Codes for the representation of names of languages – Part 1: Alpha-2 Code Note: This standard is updated continuously by ISO. Additions/changes to ISO 639-1:1988: Codes for the Representation of Names of Languages are available on: http://www.loc.gov/standards/iso639-2/php/code_changes.php
ISO 3166	Codes for the representation of names of countries and their subdivisions
ISO 4217	Codes for the representation of currencies and funds
ISO/IEC 7811-1	Identification cards – Recording technique – Part 1: Embossing
ISO/IEC 7811-3	Identification cards – Recording technique – Part 3: Location of embossed characters on ID-1 cards
ISO/IEC 7813	Identification cards – Financial transaction cards
ISO/IEC 7816-1	Identification cards – Integrated circuit(s) cards with contacts – Part 1: Physical characteristics
ISO/IEC 7816-2	Information technology – Identification cards – Integrated circuit(s) cards with contacts – Part 2: Dimensions and location of contacts
ISO/IEC 7816-3	Identification cards — Integrated circuit cards — Part 3: Cards with contacts — Electrical interface and transmission protocols

ISO/IEC 7816-4	Identification cards — Integrated circuit cards — Part 4: Organization, security and commands for interchange
ISO/IEC 7816-5	Identification cards — Integrated circuit cards — Part 5: Registration of application providers
ISO/IEC 7816-6	Identification cards — Integrated circuit cards — Part 6: Interindustry data elements for interchange
ISO 8583:1987	Bank card originated messages — Interchange message specifications — Content for financial transactions
ISO 8583:1993	Financial transaction card originated messages — Interchange message specifications
ISO/IEC 8825-1	Information technology — ASN.1 encoding rules: Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER) and Distinguished Encoding Rules (DER)
ISO/IEC 8859	Information processing — 8-bit single-byte coded graphic character sets
ISO 9362	Banking — Banking telecommunication messages — Bank identifier codes
ISO 9564-1:2011	Financial services — Personal Identification Number (PIN) management and security — Part 1: Basic principles and requirements for PINs in card-based systems
ISO/IEC 9796-2:2010	Information technology — Security techniques — Digital signature schemes giving message recovery — Part 2: Integer factorization based mechanisms
ISO/IEC 9797-1:2011	Information technology — Security techniques — Message Authentication Codes — Part 1: Mechanisms using a block cipher
ISO/IEC 10116	Information technology — Security techniques — Modes of operation for an n-bit block cipher
ISO/IEC 10118-3	Information technology — Security techniques — Hash-functions — Part 3: Dedicated hash-functions

ISO/IEC 10373	Identification cards – Test methods
ISO 13491-1	Banking – Secure cryptographic devices (retail) – Part 1: Concepts, requirements and evaluation methods
ISO 13616	Banking and related financial services – International bank account number (IBAN)
ISO 16609	Banking – Requirements for message authentication using symmetric techniques
ISO/IEC 18031	Information technology - Security techniques - Random bit generation
ISO/IEC 18033-3	Information technology – Security techniques – Encryption algorithms – Part 3: Block ciphers

3 Definitions

The following terms are used in one or more books of these specifications.

Accelerated Revocation	A key revocation performed on a date sooner than the published key expiry date.
Application	The application protocol between the card and the terminal and its related set of data.
Application Authentication Cryptogram	An Application Cryptogram generated by the card when declining a transaction
Application Cryptogram	<p>A cryptogram generated by the card in response to a GENERATE AC command. See also:</p> <ul style="list-style-type: none">• Application Authentication Cryptogram• Authorisation Request Cryptogram• Transaction Certificate
Authorisation Request Cryptogram	An Application Cryptogram generated by the card when requesting online authorisation
Authorisation Response Cryptogram	A cryptogram generated by the issuer in response to an Authorisation Request Cryptogram.
Asymmetric Cryptographic Technique	A cryptographic technique that uses two related transformations, a public transformation (defined by the public key) and a private transformation (defined by the private key). The two transformations have the property that, given the public transformation, it is computationally infeasible to derive the private transformation.
Authentication	The provision of assurance of the claimed identity of an entity or of data origin.
Block	A succession of characters comprising two or three fields defined as prologue field, information field, and epilogue field.
Byte	8 bits.

Card	A payment card as defined by a payment system.
Certificate	The public key and identity of an entity together with some other information, rendered unforgeable by signing with the private key of the certification authority which issued that certificate.
Certification Authority	Trusted third party that establishes a proof that links a public key and other relevant information to its owner.
Ciphertext	Enciphered information.
Cold Reset	The reset of the ICC that occurs when the supply voltage (VCC) and other signals to the ICC are raised from the inactive state and the reset (RST) signal is applied.
Combined DDA/Application Cryptogram Generation	A form of offline dynamic data authentication.
Command	A message sent by the terminal to the ICC that initiates an action and solicits a response from the ICC.
Compromise	The breaching of secrecy or security.
Concatenation	Two elements are concatenated by appending the bytes from the second element to the end of the first. Bytes from each element are represented in the resulting string in the same sequence in which they were presented to the terminal by the ICC, that is, most significant byte first. Within each byte bits are ordered from most significant bit to least significant. A list of elements or objects may be concatenated by concatenating the first pair to form a new element, using that as the first element to concatenate with the next in the list, and so on.
Contact	A conducting element ensuring galvanic continuity between integrated circuit(s) and external interfacing equipment.
Cryptogram	Result of a cryptographic operation.

Cryptographic Algorithm	An algorithm that transforms data in order to hide or reveal its information content.
Data Integrity	The property that data has not been altered or destroyed in an unauthorised manner.
Deactivation Sequence	The deactivation sequence defined in section 6.1.5.
Decipherment	The reversal of a corresponding encipherment.
Digital Signature	An asymmetric cryptographic transformation of data that allows the recipient of the data to prove the origin and integrity of the data, and protect the sender and the recipient of the data against forgery by third parties, and the sender against forgery by the recipient.
Dynamic Data Authentication	A form of offline dynamic data authentication
Embossing	Characters raised in relief from the front surface of a card.
Encipherment	The reversible transformation of data by a cryptographic algorithm to produce ciphertext.
Epilogue Field	The final field of a block. It contains the error detection code (EDC) byte(s).
Exclusive-OR	Binary addition with no carry, giving the following values: $\begin{array}{l} 0 + 0 = 0 \\ 0 + 1 = 1 \\ 1 + 0 = 1 \\ 1 + 1 = 0 \end{array}$
Financial Transaction	The act between a cardholder and a merchant or acquirer that results in the exchange of goods or services against payment.
Function	A process accomplished by one or more commands and resultant actions that are used to perform all or part of a transaction.

Guardtime	The minimum time between the trailing edge of the parity bit of a character and the leading edge of the start bit of the following character sent in the same direction.
Hash Function	<p>A function that maps strings of bits to fixed-length strings of bits, satisfying the following two properties:</p> <ul style="list-style-type: none">• It is computationally infeasible to find for a given output an input which maps to this output.• It is computationally infeasible to find for a given input a second input that maps to the same output. <p>Additionally, if the hash function is required to be collision-resistant, it must also satisfy the following property:</p> <ul style="list-style-type: none">• It is computationally infeasible to find any two distinct inputs that map to the same output.
Hash Result	The string of bits that is the output of a hash function.
Inactive	The supply voltage (VCC) and other signals to the ICC are in the inactive state when they are at a potential of 0.4 V or less with respect to ground (GND).
Integrated Circuit Module	The sub-assembly embedded into the ICC comprising the IC, the IC carrier, bonding wires, and contacts.
Integrated Circuit(s)	Electronic component(s) designed to perform processing and/or memory functions.
Integrated Circuit(s) Card	A card into which one or more integrated circuits are inserted to perform processing and memory functions.
Interface Device	That part of a terminal into which the ICC is inserted, including such mechanical and electrical devices as may be considered part of it.
Issuer Action Code	<p>Any of the following, which reflect the issuer-selected action to be taken upon analysis of the TVR:</p> <ul style="list-style-type: none">• Issuer Action Code - Default• Issuer Action Code - Denial• Issuer Action Code - Online

Kernel	The set of functions required to be present on every terminal implementing a specific interpreter. The kernel contains device drivers, interface routines, security and control functions, and the software for translating from the virtual machine language to the language used by the real machine. In other words, the kernel is the implementation of the virtual machine on a specific real machine.
Key	A sequence of symbols that controls the operation of a cryptographic transformation.
Key Expiry Date	The date after which a signature made with a particular key is no longer valid. Issuer certificates signed by the key must expire on or before this date. Keys may be removed from terminals after this date has passed.
Key Introduction	The process of generating, distributing, and beginning use of a key pair.
Key Life Cycle	All phases of key management, from planning and generation, through revocation, destruction, and archiving.
Key Replacement	The simultaneous revocation of a key and introduction of a key to replace the revoked one.
Key Revocation	The key management process of withdrawing a key from service and dealing with the legacy of its use. Key revocation can be as scheduled or accelerated.
Key Revocation Date	The date after which no legitimate cards still in use should contain certificates signed by this key, and therefore the date after which this key can be deleted from terminals. For a planned revocation the Key Revocation Date is the same as the key expiry date.
Key Withdrawal	The process of removing a key from service as part of its revocation.
Keypad	Arrangement of numeric, command, and, where required, function and/or alphanumeric keys laid out in a specific manner.

Library	A set of high-level software functions with a published interface, providing general support for terminal programs and/or applications.
Logical Compromise	The compromise of a key through application of improved cryptanalytic techniques, increases in computing power, or combination of the two.
Magnetic Stripe	The stripe containing magnetically encoded information.
Message	A string of bytes sent by the terminal to the card or vice versa, excluding transmission-control characters.
Message Authentication Code	A symmetric cryptographic transformation of data that protects the sender and the recipient of the data against forgery by third parties.
Nibble	The four most significant or least significant bits of a byte.
Padding	Appending extra bits to either side of a data string.
Path	Concatenation of file identifiers without delimitation.
Payment System Environment	A logical construct within the ICC, the entry point to which is a Directory Definition File (DDF) named 1PAY.SYS.DDF01. This DDF contains a Payment System Directory which in turn contains entries for one or more Application Definition Files (ADFs) which are formatted according to this specification.
Physical Compromise	The compromise of a key resulting from the fact that it has not been securely guarded, or a hardware security module has been stolen or accessed by unauthorised persons.
PIN Pad	Arrangement of numeric and command keys to be used for personal identification number (PIN) entry.
Plaintext	Unenciphered information.
Planned Revocation	A key revocation performed as scheduled by the published key expiry date.

Potential Compromise	A condition where cryptanalytic techniques and/or computing power has advanced to the point that compromise of a key of a certain length is feasible or even likely.
Private Key	That key of an entity's asymmetric key pair that should only be used by that entity. In the case of a digital signature scheme, the private key defines the signature function.
Prologue Field	The first field of a block. It contains subfields for node address (NAD), protocol control byte (PCB), and length (LEN).
Public Key	That key of an entity's asymmetric key pair that can be made public. In the case of a digital signature scheme, the public key defines the verification function.
Public Key Certificate	The public key information of an entity signed by the certification authority and thereby rendered unforgeable.
Response	A message returned by the ICC to the terminal after the processing of a command message received by the ICC.
Script	A command or a string of commands transmitted by the issuer to the terminal for the purpose of being sent serially to the ICC as commands.
Secret Key	A key used with symmetric cryptographic techniques and usable only by a set of specified entities.
Signal Amplitude	The difference between the high and low voltages of a signal.
Signal Perturbations	Abnormalities occurring on a signal during normal operation such as undershoot/overshoot, electrical noise, ripple, spikes, crosstalk, etc. Random perturbations introduced from external sources are beyond the scope of this specification.
Socket	An execution vector defined at a particular point in an application and assigned a unique number for reference.

State H	Voltage high on a signal line. May indicate a logic one or logic zero depending on the logic convention used with the ICC.
State L	Voltage low on a signal line. May indicate a logic one or logic zero depending on the logic convention used with the ICC.
Static Data Authentication	Offline static data authentication
Symmetric Cryptographic Technique	A cryptographic technique that uses the same secret key for both the originator's and recipient's transformation. Without knowledge of the secret key, it is computationally infeasible to compute either the originator's or the recipient's transformation.
T=0	Character-oriented asynchronous half duplex transmission protocol.
T=1	Block-oriented asynchronous half duplex transmission protocol.
Template	Value field of a constructed data object, defined to give a logical grouping of data objects.
Terminal	The device used in conjunction with the ICC at the point of transaction to perform a financial transaction. The terminal incorporates the interface device and may also include other components and interfaces such as host communications.
Terminal Action Code	<p>Any of the following, which reflect the acquirer-selected action to be taken upon analysis of the TVR:</p> <ul style="list-style-type: none">• Terminal Action Code - Default• Terminal Action Code - Denial• Terminal Action Code - Online
Terminate Card Session	End the card session by deactivating the IFD contacts according to section 6.1.5, and displaying a message indicating that the ICC cannot be used to complete the transaction
Terminate Transaction	Stop the current application and deactivate the card.

Transaction	An action taken by a terminal at the user's request. For a POS terminal, a transaction might be payment for goods, etc. A transaction selects among one or more applications as part of its processing flow.
Transaction Certificate	An Application Cryptogram generated by the card when accepting a transaction
Virtual Machine	A theoretical microprocessor architecture that forms the basis for writing application programs in a specific interpreter software implementation.
Warm Reset	The reset that occurs when the reset (RST) signal is applied to the ICC while the clock (CLK) and supply voltage (VCC) lines are maintained in their active state.

4 Abbreviations, Notations, Conventions, and Terminology

4.1 Abbreviations

μ A	Microampere
μ m	Micrometre
μ s	Microsecond
a	Alphabetic (see section 4.3, Data Element Format Conventions)
AAC	Application Authentication Cryptogram
AC	Application Cryptogram
ACK	Acknowledgment
ADF	Application Definition File
AEF	Application Elementary File
AFL	Application File Locator
AID	Application Identifier
AIP	Application Interchange Profile
an	Alphanumeric (see section 4.3)
ans	Alphanumeric Special (see section 4.3)
APDU	Application Protocol Data Unit
API	Application Program Interface
ARC	Authorisation Response Code
ARPC	Authorisation Response Cryptogram
ARQC	Authorisation Request Cryptogram
ASI	Application Selection Indicator
ASN	Abstract Syntax Notation
ATC	Application Transaction Counter

ATM	Automated Teller Machine
ATR	Answer to Reset
AUC	Application Usage Control
b	Binary (see section 4.3)
BCD	Binary Coded Decimal
BER	Basic Encoding Rules (defined in ISO/IEC 8825–1)
BIC	Bank Identifier Code
BGT	Block Guardtime
BWI	Block Waiting Time Integer
BWT	Block Waiting Time
C	Celsius or Centigrade
CAD	Card Accepting Device
C-APDU	Command APDU
CBC	Cipher Block Chaining
CCD	Common Core Definitions
CCI	Common Core Identifier
CDA	Combined DDA/Application Cryptogram Generation
CDOL	Card Risk Management Data Object List
CID	Cryptogram Information Data
C _{IN}	Input Capacitance
CLA	Class Byte of the Command Message
CLK	Clock
cn	Compressed Numeric (see section 4.3)
CPU	Central Processing Unit
CRL	Certificate Revocation List
CSU	Card Status Update
C-TPDU	Command TPDU
CV	Cryptogram Version

CVM	Cardholder Verification Method
CVR	Card Verification Results
CV Rule	Cardholder Verification Rule
CWI	Character Waiting Time Integer
CWT	Character Waiting Time
D	Bit Rate Adjustment Factor
DAD	Destination Node Address
DC	Direct Current
DDA	Dynamic Data Authentication
DDF	Directory Definition File
DDOL	Dynamic Data Authentication Data Object List
DES	Data Encryption Standard
DF	Dedicated File
DIR	Directory
DOL	Data Object List
ECB	Electronic Code Book
EDC	Error Detection Code
EF	Elementary File
EN	European Norm
etu	Elementary Time Unit
f	Frequency
FC	Format Code
FCI	File Control Information
GND	Ground
GP	Grandparent key for session key generation
Hex	Hexadecimal
HHMMSS	Hours, Minutes, Seconds
I/O	Input/Output

IAC	Issuer Action Code (Denial, Default, Online)
IAD	Issuer Application Data
IBAN	International Bank Account Number
I-block	Information Block
IC	Integrated Circuit
ICC	Integrated Circuit(s) Card
I_{CC}	Current drawn from VCC
IEC	International Electrotechnical Commission
IFD	Interface Device
IFS	Information Field Size
IFSC	Information Field Size for the ICC
IFSD	Information Field Size for the Terminal
IFSI	Information Field Size Integer
IIN	Issuer Identification Number
IK	Intermediate Key for session key generation
INF	Information Field
INS	Instruction Byte of Command Message
I_{OH}	High Level Output Current
I_{OL}	Low Level Output Current
ISO	International Organization for Standardization
IV	Initial Vector for session key generation
K_M	Master Key
K_S	Session Key
L	Length
l.s.	Least Significant
Lc	Exact Length of Data Sent by the TAL in a Case 3 or 4 Command
LCOL	Lower Consecutive Offline Limit

L _{DD}	Length of the ICC Dynamic Data
Le	Maximum Length of Data Expected by the TAL in Response to a Case 2 or 4 Command
LEN	Length
Licc	Exact Length of Data Available or Remaining in the ICC (as Determined by the ICC) to be Returned in Response to the Case 2 or 4 Command Received by the ICC
Lr	Length of Response Data Field
LRC	Longitudinal Redundancy Check
M	Mandatory
mΩ	Milliohm
MΩ	Megohm
m.s.	Most Significant
m/s	Meters per Second
mA	Milliampere
MAC	Message Authentication Code
max.	Maximum
MF	Master File
MHz	Megahertz
min.	Minimum
MK	ICC Master Key for session key generation
mm	Millimetre
MMDD	Month, Day
MMYY	Month, Year
N	Newton
n	Numeric (see section 4.3)
NAD	Node Address
NAK	Negative Acknowledgment
nAs	Nanoampere-second

N_{CA}	Length of the Certification Authority Public Key Modulus
NF	Norme Française
N_I	Length of the Issuer Public Key Modulus
N_{IC}	Length of the ICC Public Key Modulus
NIST	National Institute for Standards and Technology
N_{PE}	Length of the ICC PIN Encipherment Public Key Modulus
ns	Nanosecond
O	Optional
O/S	Operating System
P	Parent key for session key generation
P1	Parameter 1
P2	Parameter 2
P3	Parameter 3
PAN	Primary Account Number
PC	Personal Computer
P_{CA}	Certification Authority Public Key
PCB	Protocol Control Byte
PDOL	Processing Options Data Object List
pF	Picofarad
P_I	Issuer Public Key
P_{IC}	ICC Public Key
PIN	Personal Identification Number
PIX	Proprietary Application Identifier Extension
POS	Point of Service
pos.	Position
PSE	Payment System Environment
PTS	Protocol Type Selection

R-APDU	Response APDU
R-block	Receive Ready Block
RFU	Reserved for Future Use
RID	Registered Application Provider Identifier
RSA	Rivest, Shamir, Adleman Algorithm
RST	Reset
SAD	Source Node Address
S-block	Supervisory Block
S _{CA}	Certification Authority Private Key
SDA	Static Data Authentication
SFI	Short File Identifier
SHA-1	Secure Hash Algorithm 1
S _I	Issuer Private Key
S _{IC}	ICC Private Key
SK	Session Key for session key generation
SW1	Status Byte One
SW2	Status Byte Two
TAC	Terminal Action Code(s) (Default, Denial, Online)
TAL	Terminal Application Layer
TC	Transaction Certificate
TCK	Check Character
TDOL	Transaction Certificate Data Object List
t _F	Fall Time Between 90% and 10% of Signal Amplitude
TLV	Tag Length Value
TPDU	Transport Protocol Data Unit
t _R	Rise Time Between 10% and 90% of Signal Amplitude
TS	Initial Character

TSI	Transaction Status Information
TTL	Terminal Transport Layer
TVR	Terminal Verification Results
UCOL	Upper Consecutive Offline Limit
UL	Underwriters Laboratories Incorporated
V	Volt
var.	Variable (see section 4.3)
V _{CC}	Voltage Measured on VCC Contact
VCC	Supply Voltage
V _{IH}	High Level Input Voltage
V _{IL}	Low Level Input Voltage
V _{OH}	High Level Output Voltage
V _{OL}	Low Level Output Voltage
VPP	Programming Voltage
V _{PP}	Voltage Measured on VPP contact
WI	Waiting Time Integer
WTX	Waiting Time Extension
WWT	Work Waiting Time
YYMM	Year, Month
YYMMDD	Year, Month, Day

4.2 Notations

'0' to '9' and 'A' to 'F'	16 hexadecimal characters
xx	Any value
$A := B$	A is assigned the value of B
$A = B$	Value of A is equal to the value of B
$A \equiv B \bmod n$	Integers A and B are congruent modulo the integer n, that is, there exists an integer d such that $(A - B) = dn$
$A \bmod n$	The reduction of the integer A modulo the integer n, that is, the unique integer r, $0 \leq r < n$, for which there exists an integer d such that $A = dn + r$
A / n	The integer division of A by n, that is, the unique integer d for which there exists an integer r, $0 \leq r < n$, such that $A = dn + r$
$Y := \text{ALG}(K)[X]$	Encipherment of a data block X with a block cipher as specified in Annex A1 of Book 2, using a secret key K
$X = \text{ALG}^{-1}(K)[Y]$	Decipherment of a data block Y with a block cipher as specified in Annex A1 of Book 2, using a secret key K
$Y := \text{Sign}(S_K)[X]$	The signing of a data block X with an asymmetric reversible algorithm as specified in Annex A2 of Book 2, using the private key S_K
$X = \text{Recover}(P_K)[Y]$	The recovery of the data block X with an asymmetric reversible algorithm as specified in Annex A2 of Book 2, using the public key P_K
$C := (A \parallel B)$	The concatenation of an n-bit number A and an m-bit number B, which is defined as $C = 2^m A + B$.

Leftmost	Applies to a sequence of bits, bytes, or digits and used interchangeably with the term “most significant”. If $C = (A \parallel B)$ as above, then A is the leftmost n bits of C.
Rightmost	Applies to a sequence of bits, bytes, or digits and used interchangeably with the term “least significant”. If $C = (A \parallel B)$ as above, then B is the rightmost m bits of C.
$H := \text{Hash}[MSG]$	Hashing of a message MSG of arbitrary length using a 160-bit hash function
$X \oplus Y$	<p>The symbol '\oplus' denotes bit-wise exclusive-OR and is defined as follows:</p> <p>$X \oplus Y$ The bit-wise exclusive-OR of the data blocks X and Y. If one data block is shorter than the other, then it is first padded to the left with sufficient binary zeros to make it the same length as the other.</p>

4.3 Data Element Format Conventions

The EMV specifications use the following data element formats:

- a Alphabetic data elements contain a single character per byte. The permitted characters are alphabetic only (a to z and A to Z, upper and lower case).
- an Alphanumeric data elements contain a single character per byte. The permitted characters are alphabetic (a to z and A to Z, upper and lower case) and numeric (0 to 9).
- ans Alphanumeric Special data elements contain a single character per byte. The permitted characters and their coding are shown in the Common Character Set table in Annex B of Book 4.

There is one exception: The permitted characters for Application Preferred Name are the non-control characters defined in the ISO/IEC 8859 part designated in the Issuer Code Table Index associated with the Application Preferred Name.

- b These data elements consist of either unsigned binary numbers or bit combinations that are defined elsewhere in the specification.

Binary example: The Application Transaction Counter (ATC) is defined as “b” with a length of two bytes. An ATC value of 19 is stored as Hex '00 13'.

Bit combination example: Processing Options Data Object List (PDOL) is defined as “b” with the format shown in Book 3, section 5.4.

- cn Compressed numeric data elements consist of two numeric digits (having values in the range Hex '0'–'9') per byte. These data elements are left justified and padded with trailing hexadecimal 'F's.

Example: The Application Primary Account Number (PAN) is defined as “cn” with a length of up to ten bytes. A value of 1234567890123 may be stored in the Application PAN as Hex '12 34 56 78 90 12 3F FF' with a length of 8.

- n Numeric data elements consist of two numeric digits (having values in the range Hex '0'–'9') per byte. These digits are right justified and padded with leading hexadecimal zeroes. Other specifications sometimes refer to this data format as Binary Coded Decimal (“BCD”) or unsigned packed.

Example: Amount, Authorised (Numeric) is defined as “n 12” with a length of six bytes. A value of 12345 is stored in Amount, Authorised (Numeric) as Hex '00 00 00 01 23 45'.

var. Variable data elements are variable length and may contain any bit combination. Additional information on the formats of specific variable data elements is available elsewhere.

4.4 Terminology

proprietary	Not defined in this specification and/or outside the scope of this specification
shall	Denotes a mandatory requirement
should	Denotes a recommendation

Part II

Electromechanical Characteristics, Logical Interface, and Transmission Protocols

5 Electromechanical Interface

This section covers the electrical and mechanical characteristics of the ICC and the terminal. ICC and terminal specifications differ to allow a safety margin to prevent damage to the ICC.

The ICC characteristics defined herein are based on the ISO/IEC 7816 series of standards with some small variations.

5.1 Lower Voltage ICC Migration

A phased migration to lower voltage cards is underway. Cards that support class A only are being phased out and shall be replaced by class AB or class ABC cards by end December 2013. When all cards in use support class AB or class ABC, it will be possible to deploy terminals that support class B only in addition to class A only terminals. Refer to General Bulletin 11 on the EMVCo website at <http://www.emvco.com> for details of the migration schedule.

Section 5 describes the requirements for cards and terminals as the transition occurs. Differences are indicated using the notations shown in Table 1:

Notation	Information applies:	Values:
class A cards until end December 2013	to class A cards	are permitted for cards in circulation until end December 2013. From January 2014, all cards in circulation shall be either class AB or class ABC.
new card values from January 2014	to the following cards: ¹ <ul style="list-style-type: none"> class A (until end December 2013) class AB class ABC 	are permitted immediately and until further notice. No class A cards shall be in circulation from January 2014; only class AB or class ABC cards shall be in circulation from January 2014.
class A terminals until end December 2013	to class A terminals (or the class A component of multi-class terminals)	shall be used for class A terminals until end December 2013. From January 2014, there is no requirement to update terminals already in the field built using these values.
new terminal values from January 2014	to class A, class B, and class C terminals	shall not be used before end December 2013. From January 2014, shall be used for new class A or class B terminals. Class C terminals shall not be deployed until stated by EMVCo (except for proprietary purposes outside the scope of EMV).

Table 1: Lower Voltage Card Migration

¹ Class B, class C, class AC, and class BC cards are not allowed.

5.2 Mechanical Characteristics of the ICC

This section describes the physical characteristics, contact assignment, and mechanical strength of the ICC.

5.2.1 Physical Characteristics

Except as otherwise specified herein, the ICC shall comply with the physical characteristics for ICCs as defined in ISO/IEC 7816-1. The ICC shall also comply with the additional characteristics defined in ISO/IEC 7816-1 as related to ultraviolet light, X-rays, surface profile of the contacts, mechanical strength, electromagnetic characteristics, and static electricity and shall continue to function correctly electrically under the conditions defined therein.

5.2.1.1 Module Height

The highest point on the IC module surface shall not be greater than 0.10mm above the plane of the card surface.

The lowest point on the IC module surface shall not be greater than 0.10mm below the plane of the card surface.

5.2.2 Dimensions and Location of Contacts

The dimensions and location of the contacts shall be as shown in Figure 1:

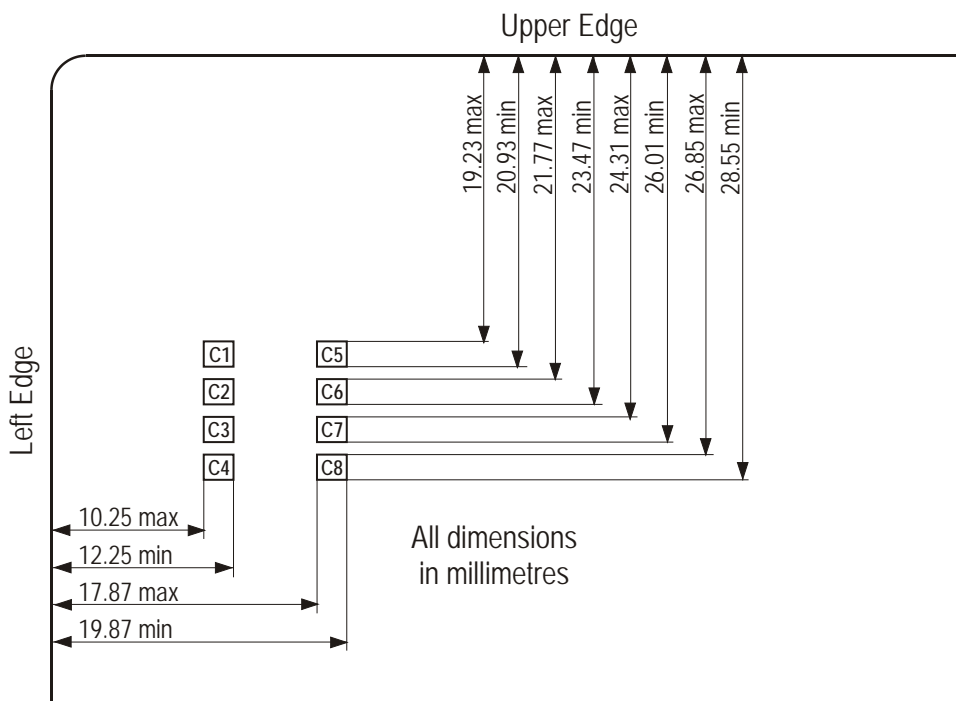


Figure 1: ICC Contact Location and Dimensions

Areas C1, C2, C3, C5, and C7 shall be fully covered by conductive surfaces forming the minimum ICC contacts. Areas C4, C6, C8, and areas Z1 to Z8 as defined in ISO/IEC 7816-2 Annex B may optionally have conductive surfaces, but it is strongly recommended that no conductive surfaces exist in areas Z1 to Z8. If conductive surfaces exist in areas C6, and Z1 to Z8, they shall be electrically isolated from the integrated circuit (IC), from one another, and from any other contact area. (Electrically isolated means that the resistance measured between the conductive surface and any other conductive surface shall be $\geq 10\text{M}\Omega$ with an applied voltage of 5V DC.) In addition, there shall be no connection between the conductive surface of any area and the conductive surface of any other area, other than via the IC. The minimum ICC contacts shall be connected to the IC contacts as shown in Table 2.

The layout of the contacts relative to embossing and/or magnetic stripe shall be as shown in Figure 2:

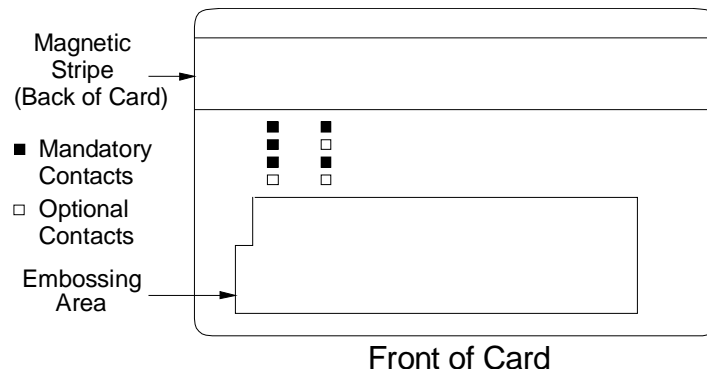


Figure 2: Layout of Contacts

Note: Care should be taken that card embossing does not damage the IC. Further, positioning of the signature panel behind the IC may lead to damage due to heavy pressure being applied during signature.

5.2.3 Contact Assignment

The assignment of the ICC contacts shall be as defined in ISO/IEC 7816-2 and is shown in Table 2:

C1	Supply voltage (VCC)	C5	Ground (GND)
C2	Reset (RST)	C6	RFU ²
C3	Clock (CLK)	C7	Input/output (I/O)
C4	Not used; need not be physically present	C8	Not used; need not be physically present

Table 2: ICC Contact Assignment

² Defined in ISO/IEC 7816-3:1997 as programming voltage (VPP) for class A.

5.3 Electrical Characteristics of the ICC

This section describes the electrical characteristics of the signals as measured at the ICC contacts.

5.3.1 Measurement Conventions

All measurements are made at the point of contact between the ICC and the interface device (IFD) contacts and are defined with respect to the GND contact over an ambient temperature range 0° C to 50° C. ICCs shall be capable of correct operation over an ambient temperature range of at minimum 0° C to 50° C.

All currents flowing into the ICC are considered positive.

Note: The temperature range limits are dictated primarily by the thermal characteristics of polyvinyl chloride (which is used for the majority of cards that are embossed) rather than by constraints imposed by the characteristics of the IC.

5.3.2 Input/Output (I/O)

This contact is used as an input (reception mode) to receive data from the terminal or as an output (transmission mode) to transmit data to the terminal. During operation, the ICC and the terminal shall not both be in transmission mode. In the event that this condition occurs, the state (voltage level) of the I/O contact is indeterminate and no damage shall occur to the ICC.

5.3.2.1 Reception Mode

When in reception mode, and with the supply voltage (V_{CC}) for the applicable class in the range specified in section 5.3.6, the ICC shall correctly interpret signals from the terminal having the characteristics shown in Table 3:

Symbol	Conditions	Minimum	Maximum	Unit
V_{IH}		$0.7 \times V_{CC}$	V_{CC}	V
V_{IL}		0	0.8	V
t_R and t_F		—	1.0	μs
The ICC shall not be damaged by signal perturbations on the I/O line in the range -0.3 V to $V_{CC} + 0.3$ V.				

class A cards
until end
December
2013; see
Table 1

Symbol	Conditions	Minimum	Maximum	Unit
V_{IH}		$0.7 \times V_{CC}$	V_{CC}	V
V_{IL}		0	$0.2 \times V_{CC}$	V
t_R and t_F		—	1.0	μs
The ICC shall not be damaged by signal perturbations on the I/O line in the range -0.3 V to $V_{CC} + 0.3$ V.				

new card
values from
January
2014; see
Table 1

Table 3: Electrical Characteristics of I/O for ICC Reception

5.3.2.2 Transmission Mode

When in transmission mode, the ICC shall send data to the terminal with the characteristics shown in Table 4:

Symbol	Conditions	Minimum	Maximum	Unit
V_{OH}	$-20 \mu A < I_{OH} < 0$, V_{CC} = min.	$0.7 \times V_{CC}$	V_{CC}	V
V_{OL}	$0 < I_{OL} < 1 \text{ mA}$, $V_{CC} = \text{min.}$	0	0.4	V
t_R and t_F	$C_{IN (terminal)} =$ 30 pF max.	—	1.0	μs

class A
cards until
end
December
2013; see
Table 1

Symbol	Conditions	Minimum	Maximum	Unit
V_{OH}	$-20 \mu A < I_{OH} < 0$	$0.7 \times V_{CC}$	V_{CC}	V
V_{OL}	Class A: $0 < I_{OL} < 1 \text{ mA}$ Classes B and C: $0 < I_{OL} < 0.5 \text{ mA}$	0 0	$0.08 \times V_{CC}$ $0.15 \times V_{CC}$	V
t_R and t_F	$C_{IN (terminal)} =$ 30 pF max.	—	1.0	μs

new card
values
from
January
2014; see
Table 1

Table 4: Electrical Characteristics of I/O for ICC Transmission

Unless transmitting, the ICC shall set its I/O line driver to reception mode. There is no requirement for the ICC to have any current source capability to I/O.

5.3.3 Programming Voltage (VPP)

The ICC shall not require VPP (see note in section 5.4.3).

5.3.4 Clock (CLK)

With VCC in the range specified for the applicable class in section 5.3.6, the ICC shall operate correctly with a CLK signal having the characteristics shown in Table 5:

Symbol	Conditions	Minimum	Maximum	Unit
V_{IH}		$V_{CC} - 0.7$	V_{CC}	V
V_{IL}		0	0.5	V
t_R and t_F	$V_{CC} = \text{min. to max.}$	—	9% of clock period	
The ICC shall not be damaged by signal perturbations on the CLK line in the range -0.3 V to $V_{CC} + 0.3 \text{ V}$.				

class A
cards
until end
December
2013; see
Table 1

Symbol	Conditions	Minimum	Maximum	Unit
V_{IH}		$0.7 \times V_{CC}$	V_{CC}	V
V_{IL}		0	$0.2 \times V_{CC}$	V
t_R and t_F		—	9% of clock period	
The ICC shall not be damaged by signal perturbations on the CLK line in the range -0.3 V to $V_{CC} + 0.3 \text{ V}$.				

new card
values
from
January
2014; see
Table 1

Table 5: Electrical Characteristics of CLK to ICC

The ICC shall operate correctly with a CLK duty cycle of between 44% and 56% of the period during stable operation.

The ICC shall operate correctly with a CLK frequency in the range 1 MHz to 5 MHz.

Note: Frequency shall be maintained by the terminal to within $\pm 1\%$ of that used during the answer to reset throughout the card session.

5.3.5 Reset (RST)

With VCC in the range specified for the applicable class in section 5.3.6, the ICC shall correctly interpret a RST signal having the characteristics shown in Table 6:

Symbol	Conditions	Minimum	Maximum	Unit
V_{IH}		$V_{CC} - 0.7$	V_{CC}	V
V_{IL}		0	0.6	V
t_R and t_F	$V_{CC} = \text{min. to max.}$	—	1.0	μs
The ICC shall not be damaged by signal perturbations on the RST line in the range -0.3 V to $V_{CC} + 0.3 \text{ V}$.				

class A
cards
until end
December
2013; see
Table 1

Symbol	Conditions	Minimum	Maximum	Unit
V_{IH}		$0.7 \times V_{CC}$	V_{CC}	V
V_{IL}		0	$0.2 \times V_{CC}$	V
t_R and t_F	$V_{CC} = \text{min. to max.}$	—	1.0	μs
The ICC shall not be damaged by signal perturbations on the RST line in the range -0.3 V to $V_{CC} + 0.3 \text{ V}$.				

new card
values
from
January
2014; see
Table 1

Table 6: Electrical Characteristics of RST to ICC

The ICC shall answer to reset asynchronously using active low reset.

5.3.6 Supply Voltage (VCC)

The ICC shall operate correctly with a supply voltage V_{CC} of $5\text{ V} \pm 0.5\text{ V}$ DC and have a maximum current requirement of 50 mA when operating at any frequency within the range specified in section 5.3.4.

class A
cards
until end
December
2013; see
Table 1

Three classes of operation are defined based on the nominal supply voltage applied to the ICC. These are defined in Table 7. The ICC shall support class A and may optionally support one or more additional consecutive classes. The ICC shall operate correctly on any supply voltage lying within the range(s) specified for the class(es) it supports.

Symbol	Conditions	Minimum	Maximum	Unit
V _{CC}	Class A	4.50	5.50	V
	Class B	2.70	3.30	
	Class C	1.62	1.98	
I _{CC}	Class A		50	mA
	Class B		50	
	Class C		30	
The maximum current consumptions shown apply when operating at any frequency within the range specified in section 5.3.4.				

new card
values
from
January
2014; see
Table 1

Table 7: Classes of Operation

The ICC shall not be damaged if it is operated under classes that it does not support (the ICC is considered to be damaged if it no longer operates as specified, or if it contains corrupt data).

If the ICC supports more than one class, it may optionally operate correctly on any supply voltage lying between the ranges specified for the supported classes (see Table 8 below).

Supported Classes	ICC Shall Operate	ICC May Operate	Unit
A and B	4.50–5.50 2.70–3.30	3.30–4.50	V
A, B, and C	4.50–5.50 2.70–3.30 1.62–1.98	3.30–4.50 1.98–2.70	V

new card values from
January 2014; see
Table 1

Table 8: Mandatory and Optional Operating Voltage Ranges

For proprietary reasons terminals may support the capability to negotiate with the ICC the voltage class to be used, but this is outside the scope of EMV, and there is no requirement for ICCs conforming to this specification to support such negotiation. If the ICC returns a class indicator in the ATR as defined in ISO/IEC 7816-3, the ATR may be rejected in an EMV compliant terminal. To avoid interoperability problems, any class indicator used should be returned in the cold ATR; to guarantee that the ICC will be accepted in the event that the cold ATR is rejected, the warm ATR should be one of the basic ATRs defined in section 8.

Note: It is strongly recommended that the current consumption of ICCs is maintained at as low a value as possible, since the maximum current consumption allowable for the ICC may be reduced in future versions of this specification. Issuers of ICCs bearing multisector applications should ensure that the IC used has a current requirement compatible with all terminals (from all sectors) in which the ICC might be used.

5.3.7 Contact Resistance

The contact resistance as measured across a pair of clean ICC and clean nominal IFD contacts shall be less than 500 mΩ throughout the design life of an ICC (see ISO/IEC 10373 for test method).

Note: A nominal IFD contact may be taken as a minimum of 1.25 μm of gold over 5.00 μm of nickel.

5.4 Mechanical Characteristics of the Terminal

This section describes the mechanical characteristics of the terminal interface device.

5.4.1 Interface Device

The IFD into which the ICC is inserted shall be capable of accepting ICCs having the following characteristics:

- Physical characteristics compliant with ISO/IEC 7816-1
- Contacts on the front, in the position compliant with Figure 2 of ISO/IEC 7816-2
- Embossing compliant with ISO/IEC 7811-1 and ISO/IEC 7811-3

The IFD contacts shall be located such that if an ICC having contacts with the dimensions and locations specified in Figure 3 is inserted into the IFD, correct connection of all contacts shall be made. The IFD should have no contacts present other than those needed to connect to ICC contacts C1 to C8.

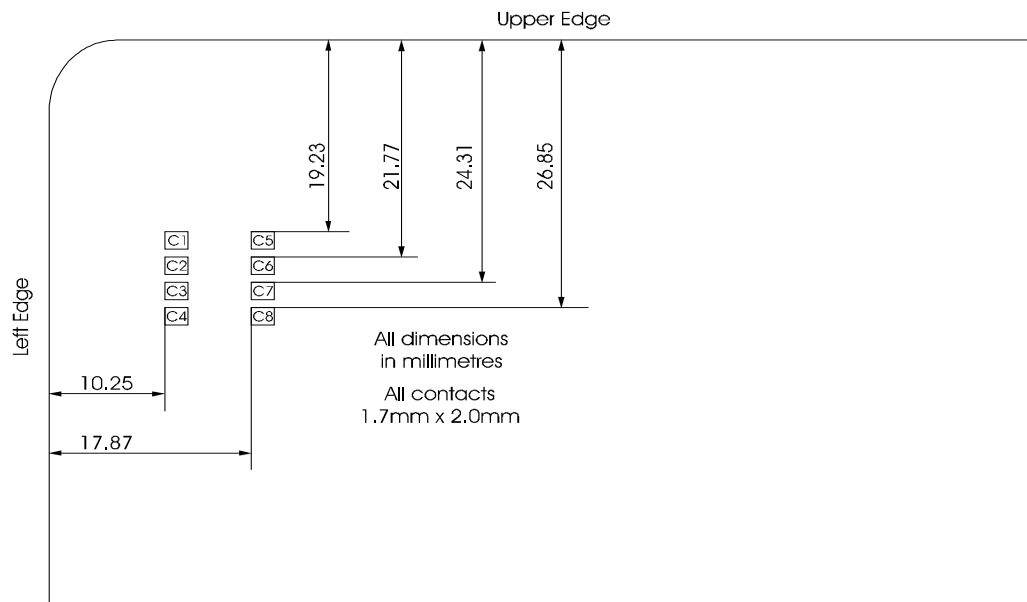


Figure 3: Terminal Contact Location and Dimensions

Location guides and clamps (if used) should cause no damage to ICCs, particularly in the areas of the magnetic stripe, signature panel, embossing, and hologram.

Note: As a general principle, an ICC should be accessible to the cardholder at all times. Where the ICC is drawn into the IFD, a mechanism should exist to return the ICC to the cardholder in the event of a failure (for example, loss of power).

5.4.2 Contact Forces

The force exerted by any one IFD contact on the corresponding ICC contact shall be in the range 0.2 N to 0.6 N.

5.4.3 Contact Assignment

The assignment of the IFD contacts shall be as shown in Table 9:

C1	VCC	C5	GND
C2	RST	C6	Not used for class A ³ RFU for classes B and C
C3	CLK	C7	I/O
C4	Not used; need not be physically present	C8	Not used; need not be physically present

Table 9: IFD Contact Assignment

5.5 Electrical Characteristics of the Terminal

This section describes the electrical characteristics of the signals as measured at the IFD contacts.

5.5.1 Measurement Conventions

All measurements are made at the point of contact between the ICC and the IFD contacts and are defined with respect to GND contact over an ambient temperature range 5° C to 40° C unless otherwise specified by the manufacturer. The internal temperature of the terminal should be limited to avoid damage to ICCs.

All currents flowing out of the terminal are considered positive.

³ Defined in ISO/IEC 7816-3:1997 as programming voltage (VPP) for class A.

5.5.2 Input/Output (I/O)

This contact is used as an output (transmission mode) to transmit data to the ICC or as an input (reception mode) to receive data from the ICC. During operation, the terminal and the ICC should not both be in transmission mode. In the event that this condition occurs, the state (voltage level) of the contact is indeterminate and no damage shall occur to the terminal.

When both the terminal and the ICC are in reception mode, the contact shall be in the high state. The terminal shall not pull I/O high unless VCC is powered and stable within the tolerances specified in section 5.5.6. See the contact activation sequence specified in section 6.1.2.

The terminal shall limit the current flowing into or out of the I/O contact to ± 15 mA at all times.

5.5.2.1 Transmission Mode

When in transmission mode, the terminal shall send data to the ICC with the characteristics shown in Table 10:

Symbol	Conditions	Minimum	Maximum	Unit
V_{OH}	$0 < I_{OH} < 20 \mu A$, $V_{CC} = \text{min.}$	$0.8 \times V_{CC}$	V_{CC}	V
V_{OL}	$-0.5 \text{ mA} < I_{OL} < 0$, $V_{CC} = \text{min.}$	0	0.4	V
t_R and t_F	$C_{IN(ICC)} = 30 \text{ pF}$ max.	—	0.8	μs
Signal perturbations	Signal low	-0.25	0.4	V
	Signal high	$0.8 \times V_{CC}$	$V_{CC} + 0.25$	V

class A
terminals
until end
December
2013; see
Table 1

Symbol	Conditions	Minimum	Maximum	Unit
V_{OH}	$0 < I_{OH} < 20 \mu A$	$0.8 \times V_{CC}$	V_{CC}	V
V_{OL}	$-0.5 \text{ mA} < I_{OL} < 0$	0	$0.15 \times V_{CC}$	V
t_R and t_F	$C_{IN(ICC)} = 30 \text{ pF}$ max.	—	0.8	μs
Signal perturbations	Signal low	-0.25	$0.15 \times V_{CC}$	V
	Signal high	$0.8 \times V_{CC}$	$V_{CC} + 0.25$	V

new
terminal
values
from
January
2014; see
Table 1

Table 10: Electrical Characteristics of I/O for Terminal Transmission

Unless transmitting, the terminal shall set its I/O line driver to reception mode.

5.5.2.2 Reception Mode

When in reception mode, the terminal shall correctly interpret signals from the ICC having the characteristics shown in Table 11:

Symbol	Conditions	Minimum	Maximum	Unit
V_{IH}		$0.6 \times V_{CC}$	V_{CC}	V
V_{IL}		0	0.5	V
t_R and t_F		—	1.2	μs

class A
terminals
until end
December
2013; see
Table 1

Symbol	Conditions	Minimum	Maximum	Unit
V_{IH}		$0.6 \times V_{CC}$	V_{CC}	V
V_{IL}		0	$0.20 \times V_{CC}$	V
t_R and t_F		—	1.2	μs

new
terminal
values
from
January
2014; see
Table 1

Table 11: Electrical Characteristics of I/O for Terminal Reception

5.5.3 Programming Voltage (VPP)

C6 shall be electrically isolated. Electrically isolated means that the resistance measured between C6 and any other contact shall be $\geq 10M\Omega$ with an applied voltage of 5V DC. If connected in existing class A terminals, C6 shall be maintained at a potential between GND and $1.05 \times V_{CC}$ throughout the card session.

Note: Keeping C6 isolated in new class A terminals facilitates its use for other purposes if so defined in future versions of this specification.

5.5.4 Clock (CLK)

The terminal shall generate a CLK signal having the characteristics shown in Table 12:

Symbol	Conditions	Minimum	Maximum	Unit
V_{OH}	$0 < I_{OH} < 50 \mu A$, $V_{CC} = \text{min.}$	$V_{CC} - 0.5$	V_{CC}	V
V_{OL}	$-50 \mu A < I_{OL} < 0$, $V_{CC} = \text{min.}$	0	0.4	V
t_R and t_F	$C_{IN(ICC)} = 30 \text{ pF}$ max.	—	8% of clock period	
Signal perturba- tions	Signal low	- 0.25	0.4	V
	Signal high	$V_{CC} - 0.5$	$V_{CC} + 0.25$	V

class A
terminals
until end
December
2013; see
Table 1

Symbol	Conditions	Minimum	Maximum	Unit
V_{OH}	$0 < I_{OH} < 50 \mu A$	$0.8 \times V_{CC}$	V_{CC}	V
V_{OL}	$-50 \mu A < I_{OL} < 0$	0	$0.15 \times V_{CC}$	V
t_R and t_F	$C_{IN(ICC)} = 30 \text{ pF}$ max.	—	8% of clock period	
Signal perturba- tions	Signal low	- 0.25	$0.15 \times V_{CC}$	V
	Signal high	$0.8 \times V_{CC}$	$V_{CC} + 0.25$	V

new
terminal
values
from
January
2014; see
Table 1

Table 12: Electrical Characteristics of CLK from Terminal

Duty cycle shall be between 45% and 55% of the period during stable operation.

Frequency shall be in the range 1 MHz to 5 MHz and shall not change by more than $\pm 1\%$ throughout answer to reset and the following stages of a card session (see section 6) unless changed following the answer to reset by means of a proprietary negotiation technique.

5.5.5 Reset (RST)

The terminal shall generate a RST signal having the characteristics shown in Table 13:

Symbol	Conditions	Minimum	Maximum	Unit
V_{OH}	$0 < I_{OH} < 50 \mu A$, $V_{CC} = \text{min.}$	$V_{CC} - 0.5$	V_{CC}	V
V_{OL}	$-50 \mu A < I_{OL} < 0$, $V_{CC} = \text{min.}$	0	0.4	V
t_R and t_F	$C_{IN(ICC)} = 30 \text{ pF}$ max.	—	0.8	μs
Signal perturbations	Signal low	-0.25	0.4	V
	Signal high	$V_{CC} - 0.5$	$V_{CC} + 0.25$	V

class A
terminals
until end
December
2013; see
Table 1

Symbol	Conditions	Minimum	Maximum	Unit
V_{OH}	$0 < I_{OH} < 50 \mu A$	$0.8 \times V_{CC}$	V_{CC}	V
V_{OL}	$-50 \mu A < I_{OL} < 0$	0	$0.15 \times V_{CC}$	V
t_R and t_F	$C_{IN(ICC)} = 30 \text{ pF}$ max.	—	0.8	μs
Signal perturbations	Signal low	-0.25	$0.15 \times V_{CC}$	V
	Signal high	$0.8 \times V_{CC}$	$V_{CC} + 0.25$	V

new
terminal
values
from
January
2014; see
Table 1

Table 13: Electrical Characteristics of RST from Terminal

5.5.6 Supply Voltage (VCC)

The terminal shall generate a V_{CC} of $5\text{ V} \pm 0.4\text{ V}$ DC and shall be capable of delivering steady state output current in the range 0 to 55 mA whilst maintaining V_{CC} within these tolerances. The supply shall be protected from transients and surges caused by internal operation of the terminal and from external interference introduced via power leads, communications links, etc. V_{CC} shall never be less than -0.25V with respect to ground.

During normal operation of an ICC, current pulses cause voltage transients on VCC as measured at the ICC contacts. The power supply shall be able to counteract transients in the current consumption of the ICC having a charge $\leq 30\text{ nAs}$, a duration $\leq 400\text{ ns}$, an amplitude $\leq 100\text{ mA}$, and a rate of change of current $\leq 1\text{ mA/ns}$, ensuring that VCC remains within the range specified. See Figure 4 for the maximum envelope of the pulse.

class A
terminals
until end
December
2013; see
Table 1

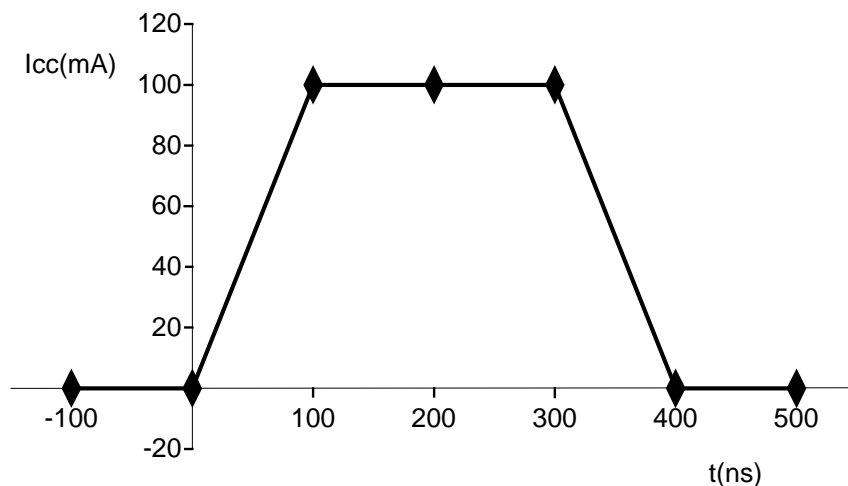


Figure 4: Maximum Current Pulse Envelope

The terminal shall generate a V_{CC} within one of the range(s) specified in Table 14 below for the class(es) supported, and shall be capable of delivering the corresponding steady state output current whilst maintaining V_{CC} within that range. If the terminal supports more than one class, it shall always generate a V_{CC} from the class containing the highest voltage range available.

For proprietary reasons terminals may support the capability to negotiate with the ICC the voltage class to be used, but this is outside the scope of EMV, and is not supported by ICCs conforming to this specification. Attempting class negotiation with such an ICC may result in the ICC being rejected.

The supply shall be protected from transients and surges caused by internal operation of the terminal and from external interference introduced via power leads, communications links, etc. V_{CC} shall never be less than $-0.25V$ with respect to ground.

new
terminal
values
from
January
2014; see
Table 1

Symbol	Conditions	Minimum	Maximum	Unit
V_{CC}	Class A	4.60	5.40	V
	Class B	2.76	3.24	
	Class C	1.66	1.94	
I_{CC}	Class A	55		mA
	Class B	55		
	Class C	35		

Table 14: Terminal Supply Voltage and Current

During normal operation of an ICC, current pulses cause voltage transients on VCC as measured at the ICC contacts. The power supply shall be able to counteract transients in the current consumption of the ICC having characteristics within the maximum charge envelope applicable to the class of operation as shown in Figure 5, ensuring that VCC remains within the range specified.

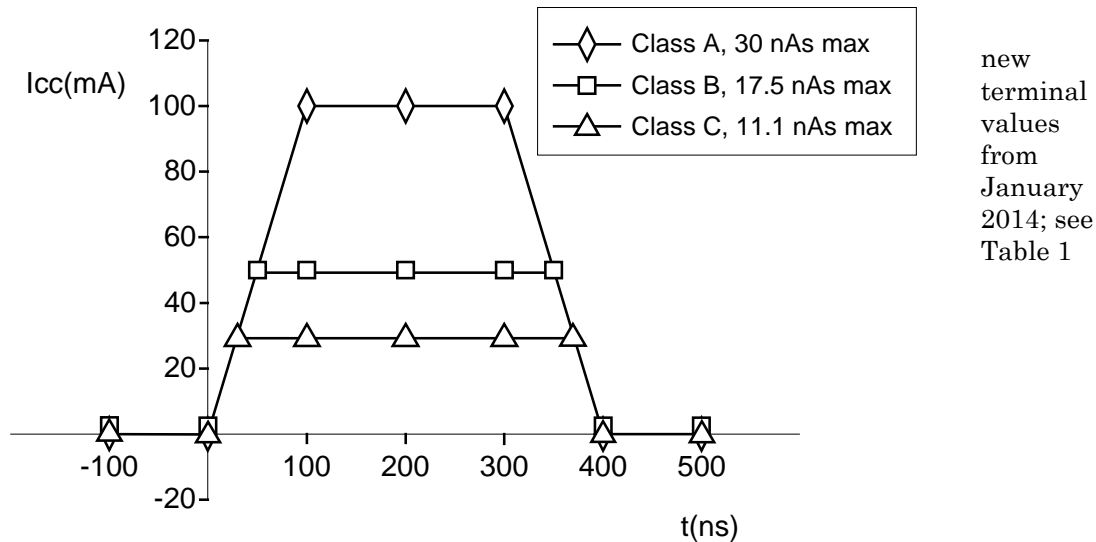


Figure 5: Maximum Current Pulse Envelopes

Note: Terminals may be designed to be capable of delivering more than required current, but it is recommended that terminals limit the steady state current that can be delivered to a maximum of 200 mA.

5.5.7 Contact Resistance

The contact resistance as measured across a pair of clean IFD and clean nominal ICC contacts shall be less than 500 mΩ throughout the design life of a terminal (see ISO/IEC 7816-1 for test method).

Note: A nominal ICC contact may be taken as 1.25 μm of gold over 5.00 μm of nickel.

5.5.8 Short Circuit Resilience

The terminal shall not be damaged in the event of fault conditions such as a short circuit between any combinations of contacts. The terminal shall be capable of sustaining a short circuit of any duration between any or all contacts without suffering damage or malfunction, for example, if a metal plate is inserted.

5.5.9 Powering and Depowering of Terminal with ICC in Place

If the terminal is powered on or off with an ICC in place, all signal voltages shall remain within the limits specified in section 5.5, and contact activation and deactivation sequences and timings, as described in sections 6.1.2 and 6.1.5 respectively, shall be respected.

6 Card Session

This section describes all stages involved in a card session from insertion of the ICC into the IFD through the execution of the transaction to the removal of the ICC from the IFD.

6.1 Normal Card Session

This section describes the processes involved in the execution of a normal transaction.

6.1.1 Stages of a Card Session

A card session is comprised of the following stages:

1. Insertion of the ICC into the IFD and connection and activation of the contacts.
2. Reset of the ICC and establishment of communication between the terminal and the ICC.
3. Execution of the transaction(s).
4. Deactivation of the contacts and removal of the ICC.

6.1.2 ICC Insertion and Contact Activation Sequence

On insertion of the ICC into the IFD, the terminal shall ensure that all signal contacts are in state L with values of V_{OL} as defined in section 5.5 and that V_{CC} is 0.4 V or less at the instant galvanic contact is made. When the ICC is correctly seated within the IFD, the contacts shall be activated as follows (see Figure 6):

- RST shall be maintained by the terminal in state L throughout the activation sequence.
- Following establishment of galvanic contact but prior to activation of I/O or CLK, VCC shall be powered.
- Following verification by the terminal that V_{CC} is stable and within the limits defined in section 5.5.6, the terminal shall set its I/O line driver to reception mode and shall provide CLK with a suitable and stable clock as defined in section 5.5.4. The I/O line driver in the terminal may be set to reception mode prior to application of the clock but shall be set to reception mode no later than 200 clock cycles after application of the clock.

Note: The terminal may verify the state of V_{CC} by measurement, by waiting sufficient time for it to stabilise according to the design of the terminal, or otherwise. The state of the I/O line after the terminal has set its I/O line driver to reception mode is dependent upon the state of the I/O line driver in the ICC (see section 6.1.3.1).

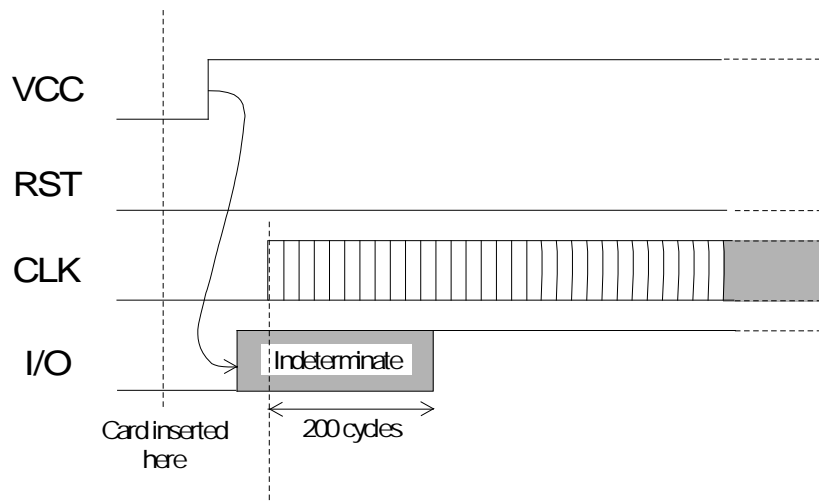


Figure 6: Contact Activation Sequence

6.1.3 ICC Reset

The ICC shall answer to reset asynchronously using active low reset.

The means of transportation of the answer to reset (ATR) are described in section 7 and its contents are described in sections 8.2 and 8.3.

6.1.3.1 Cold Reset

Following activation of the contacts according to section 6.1.2, the terminal shall initiate a cold reset and obtain an ATR from the ICC as follows (see Figure 7):

- The terminal shall apply CLK at a notional time T0.
- Within a maximum of 200 clock cycles following T0, the ICC shall set its I/O line driver to reception mode. Since the terminal shall also have set its I/O line driver to reception mode within this period, the I/O line is guaranteed to be in state H no later than 200 clock cycles following time T0.
- The terminal shall maintain RST in state L through time T0 and for a period of between 40,000 and 45,000 clock cycles following time T0 to time T1, when it shall set RST to state H.
- The answer to reset on I/O from the ICC shall begin between 400 and 40,000 clock cycles after time T1 (time $t1$ in Figure 7).
- The terminal shall have a reception window which is opened no later than 380 clock cycles after time T1 and closed no earlier than 42,000 clock cycles after time T1 (time $t1$ in Figure 7). If no answer to reset is received from the ICC, the terminal shall initiate the deactivation sequence no earlier than 42,001 clock cycles after time T1, and no later than 42,000 clock cycles plus 50ms after time T1.

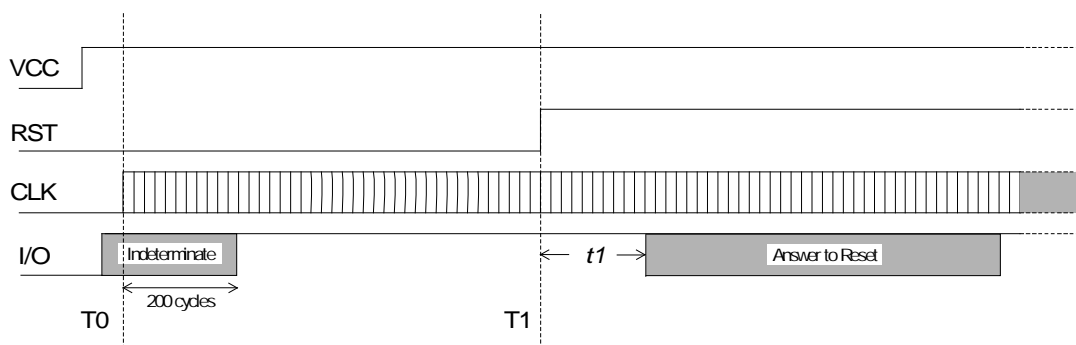


Figure 7: Cold Reset Sequence

6.1.3.2 Warm Reset

If the ATR received following a cold reset as described in section 6.1.3.1 does not conform to the specification in section 8, the terminal shall initiate a warm reset and obtain an ATR from the ICC as follows (see Figure 8):

- A warm reset shall start at a notional time T_0' , at which time the terminal shall set RST to state L.
- The terminal shall maintain VCC and CLK stable and within the limits defined in sections 5.5.4 and 5.5.6 throughout the warm reset sequence.
- Within a maximum of 200 clock cycles following T_0' , the ICC and terminal shall set their I/O line drivers to reception mode. The I/O line therefore is guaranteed to be in state H no later than 200 clock cycles following time T_0' .
- The terminal shall maintain RST in state L from time T_0' for a period of between 40,000 and 45,000 clock cycles following time T_0' to time T_1' , when it shall set RST to state H.
- The answer to reset on I/O from the ICC shall begin between 400 and 40,000 clock cycles after time T_1' (time t_1' in Figure 8).
- The terminal shall have a reception window which is opened no later than 380 clock cycles after time T_1' and closed no earlier than 42,000 clock cycles after time T_1' (time t_1' in Figure 8). If no answer to reset is received from the ICC, the terminal shall initiate the deactivation sequence no earlier than 42,001 clock cycles after time T_1' , and no later than 42,000 clock cycles plus 50ms after time T_1' .

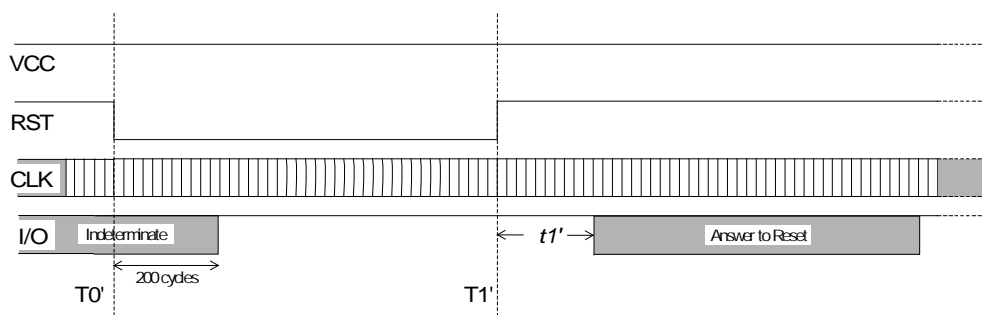


Figure 8: Warm Reset Sequence

Note: Figure 8 indicates that the terminal may initiate the warm reset sequence during the time that the card is still transmitting the cold ATR, and in the event that it does, the card shall be able to respond correctly with the warm ATR.

6.1.4 Execution of a Transaction

Selection of the application in the ICC and the subsequent exchange of information between the ICC and the terminal necessary to perform a transaction are described in section 12 and in Book 3.

6.1.5 Contact Deactivation Sequence

As the final step in the card session, upon normal or abnormal termination of the transaction (including withdrawal of the ICC from the IFD during a card session), the terminal shall deactivate the IFD contacts as follows (see Figure 9):

- The terminal shall initiate the deactivation sequence by setting RST to state L.
- Following the setting of RST to state L but prior to depowering VCC, the terminal shall set CLK and I/O to state L.
- Following the setting of RST, CLK, and I/O to state L but prior to galvanic disconnection of the IFD contacts, the terminal shall depower VCC. V_{CC} shall be 0.4 V or less prior to galvanic disconnection of the IFD contacts.
- The deactivation sequence shall be completed within 100 ms. This period is measured from the time that RST is set to state L to the time that V_{CC} reaches 0.4 V or less.

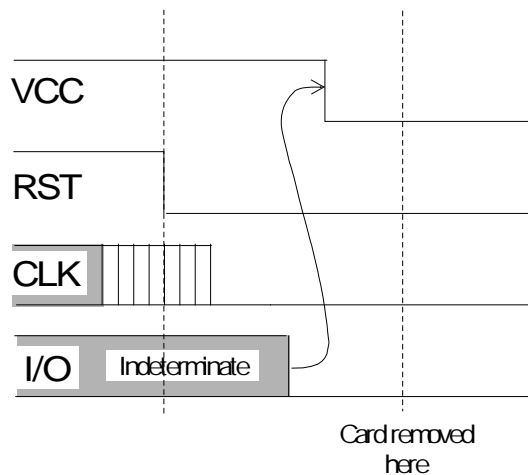


Figure 9: Contact Deactivation Sequence

6.2 Abnormal Termination of Transaction Process

If an ICC is prematurely removed from a terminal during execution of a transaction at speeds of up to 1 m/s, the terminal shall be capable of sensing the movement of the ICC relative to the IFD contacts, and of deactivating all IFD contacts in the manner described in section 6.1.5 before the relative movement exceeds 1 mm. No electrical or mechanical damage shall be caused to the ICC under these conditions.

Note: For 'sliding carriage' type IFDs, it may be possible for the terminal to sense the movement of the ICC/IFD contact sub-assembly relative to the main body of the IFD. In this event, it is not mandatory to be able to sense the movement of the ICC relative to the IFD contacts, but deactivation of the contacts shall be complete before any electrical contact is broken between the ICC and IFD.

7 Physical Transportation of Characters

During the transaction process, data is passed bi-directionally between the terminal and the ICC over the I/O line in an asynchronous half duplex manner. A clock signal is provided to the ICC by the terminal, and this shall be used to control the timing of this exchange. The mechanism of exchanging bits and characters is described below. It applies during the answer to reset and is also used by both transmission protocols as described in section 9.

7.1 Bit Duration

The bit duration used on the I/O line is defined as an elementary time unit (etu). A linear relationship exists between the etu on the I/O line and CLK frequency (f).

During the answer to reset, the bit duration is known as the initial etu, and is given by the following equation:

$$\text{initial etu} = \frac{372}{f} \text{ seconds, where } f \text{ is in Hertz}$$

Following the answer to reset (and establishment of the global parameters F and D , as described in section 8), the bit duration is known as the current etu, and is given by the following equation:

$$\text{current etu} = \frac{F}{Df} \text{ seconds, where } f \text{ is in Hertz}$$

Note: For the basic answer(s) to reset described in this specification, only values of $F = 372$ and $D = 1$ are supported. In the following sections, “etu” indicates current etu unless otherwise specified.

7.2 Character Frame

Data is passed over the I/O line in a character frame as described below. The convention used is specified in the initial character (TS) transmitted by the ICC in the ATR (see section 8.3.1).

Prior to transmission of a character, the I/O line shall be in state H.

A character consists of 10 consecutive bits (see Figure 10):

- 1 start bit in state L
- 8 bits, which comprise the data byte
- 1 even parity checking bit

The start bit is detected by the receiving end by periodically sampling the I/O line. The sampling time should be less than or equal to 0.2 etu.

The number of logic ones in a character shall be even. The 8 bits of data and the parity bit itself are included in this check but the start bit is not.

The time origin is fixed as midway between the last observation of state H and the first observation of state L. The existence of a start bit should be verified within 0.7 etu. Subsequent bits should be received at intervals of $(n + 0.5 \pm 0.2)$ etu (n being the rank of the bit). The start bit is bit 1.

Within a character, the time from the leading edge of the start bit to the trailing edge of the n th bit is $(n \pm 0.2)$ etu.

The interval between the leading edges of the start bits of two consecutive characters is comprised of the character duration (10 ± 0.2) etu, plus a guardtime. Under error free transmission, during the guardtime both the ICC and the terminal shall be in reception mode (I/O line in state H). For $T=0$ only, if the ICC or terminal as receiver detects a parity error in a character just received, it shall set I/O to state L to indicate the error to the sender (see section 9.2.3).

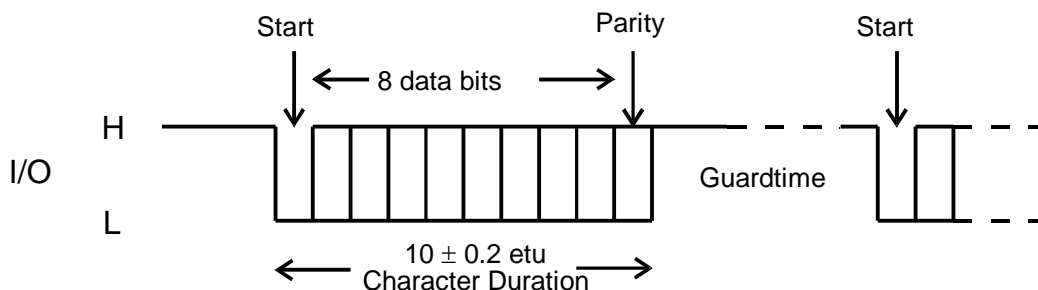


Figure 10: Character Frame

At the terminal transport layer (TTL), data shall always be passed over the I/O line most significant (m.s.) byte first. The order of bits within a byte (that is, whether the least significant (l.s.) or m.s. bit is transferred first) is specified in character TS returned in the answer to reset (see section 8.3).

8 Answer to Reset

After being reset by the terminal as described in section 6.1.3, the ICC answers with a string of bytes known as the ATR. These bytes convey information to the terminal that defines certain characteristics of the communication to be established between the ICC and the terminal. The method of transporting these bytes, and their meaning, is described below.

Note: In sections 8 and 9, the m.s. bit of a character refers to bit b8 and the l.s. bit refers to bit b1. A value in straight single quotes is coded in hexadecimal notation; for example, 'A' or '3F'.

8.1 Physical Transportation of Characters Returned at Answer to Reset

This section describes the structure and timing of the characters returned at the answer to reset.

The bit duration is defined in section 7.1, and the character frame is defined in section 7.2.

During the answer to reset, the minimum interval between the leading edges of the start bits of two consecutive characters shall be 12 initial etus, and the maximum interval between the leading edges of the start bits of two consecutive characters shall be 9600 initial etus.

The ICC shall transmit all the characters to be returned during an answer to reset (warm or cold) within 19,200 initial etus.⁴ This time is measured between the leading edge of the start bit of the first character (TS) and 12 initial etus after the leading edge of the start bit of the last character.

⁴ The maximum time allowed for the answer to reset varies according to clock frequency, since the period represented by an etu is frequency dependent (see section 7.1).

8.2 Characters Returned by ICC at Answer to Reset

The number and coding of the characters returned by the ICC at the answer to reset varies depending upon the transmission protocol(s) and the values of the transmission control parameters supported. This section describes two basic answers to reset, one for ICCs supporting T=0 only and the other for ICCs supporting T=1 only. It defines the characters to be returned and the allowable ranges of values for the transmission control parameters. ICCs returning one of the two answers to reset described here are assured correct operation and interoperability in terminals conforming to this specification.

For proprietary reasons ICCs may optionally support more than one transmission protocol, but one of the supported protocols shall be T=0 or T=1. The first offered protocol shall be T=0 or T=1, and the terminal shall continue the card session using the first offered protocol unless for proprietary reasons it supports a mechanism for selecting an alternative protocol offered by the ICC. Support for such a mechanism is not required by, and is beyond the scope of these specifications.

Note: This specification does not support ICCs having both T=0 and T=1 protocols present at the same time. This can only be achieved by proprietary means beyond the scope of this specification.

Also for proprietary reasons ICCs may optionally support other values of the transmission control parameters at the issuer's discretion. However, such support is considered outside the scope of this specification and such ICCs may be rejected at terminals conforming to this specification, which need not have the corresponding additional proprietary functionality required to support the ICC.

The characters returned by the ICC at the answer to reset for the two basic answers to reset are shown in Table 15 and Table 16. The characters are shown in the order in which they are sent by the ICC, that is, TS first.

If protocol type T=0 only is supported (character-oriented asynchronous transmission protocol), the characters returned shall be as shown in Table 15:

Character	Value	Remarks
TS	'3B' or '3F'	Indicates direct or inverse convention
T0	'6x'	TB1 and TC1 present; x indicates the number of historical bytes present
TB1	'00'	VPP not required
TC1	'00' to 'FF'	Indicates the amount of extra guardtime required. Value 'FF' has a special meaning (see section 8.3.3.3)

Table 15: Basic ATR for T=0 Only

If protocol type T=1 only is supported (block-oriented asynchronous transmission protocol), the characters returned shall be as shown in Table 16:

Character	Value	Remarks
TS	'3B' or '3F'	Indicates direct or inverse convention
T0	'Ex'	TB1 to TD1 present; x indicates the number of historical bytes present
TB1	'00'	VPP not required
TC1	'00' to 'FF'	Indicates amount of extra guardtime required. Value 'FF' has special meaning (see section 8.3.3.3)
TD1	'81'	TA2, TB2, and TC2 absent; TD2 present; T=1 to be used
TD2	'31'	TA3 and TB3 present; TC3 and TD3 absent; T=1 to be used
TA3	'10' to 'FE'	Returns IFSI, which indicates initial value for information field size for the ICC and IFSC of 16–254 bytes
TB3	m.s. nibble '0' to '4' l.s. nibble '0' to '5'	BWI = 0 to 4 CWI = 0 to 5
TCK	See section 8.3.4	Check character

Table 16: Basic ATR for T=1 Only

8.3 Character Definitions

This section provides detailed descriptions of the characters that may be returned at the answer to reset.

Each character description includes the following information:

- title
- explanation of usage as described in ISO/IEC 7816-3
- basic response (This response should always be used in a warm ATR to ensure interoperability.)
- required terminal behaviour in the event that a terminal receives characters outside the range allowed by EMV

The 'basic response' indicates the presence or absence of the character, and the allowable range of values it may take (if present) if it is to conform to one of the basic ATRs. The description of a basic response (even though indicated by 'shall') is not intended to preclude the use of other values of the characters, nor the omission/inclusion of a character at the issuer's discretion. For example, the ICC may return additional characters if it supports more than one transmission protocol (see section 9). However, only ICCs returning a basic ATR, or an ATR supported by the minimum required terminal functionality described below, are guaranteed to be supported correctly in interchange.

Terminals conforming to this specification are only required (as a minimum) to support the basic ATRs described here together with any additional requirements specified in 'terminal behaviour'. Terminals may thus reject an ATR containing interface bytes not described in, or having values not specified in, this specification. However, terminals may correctly interpret such an ATR if it is returned by an ICC for proprietary (for example, national) use. Such terminal functionality is not mandatory and is beyond the scope of this specification. As a general principle, a terminal should accept a non-basic ATR if it is able to function correctly with it.

Terminals shall be capable of checking the parity of characters returned in the answer to reset, but not necessarily as they are received. If the terminal detects a parity error, it shall reject the ICC.

Table 17 describes the action indicated by several terms in the following character descriptions:

If it is indicated that a terminal shall:	then:
reject an ATR	<ul style="list-style-type: none">If the terminal is rejecting a cold ATR, the terminal shall issue a warm reset.If the terminal is rejecting a warm ATR, the terminal shall terminate the card session by deactivating the ICC contacts.
reject an ICC	The terminal shall terminate the card session by deactivating the ICC contacts.
accept an ATR	The terminal shall accept the ATR, but <i>only</i> if the requirements specified in this section for all other characters are also met.

Table 17: Terminal Behaviour

8.3.1 TS - Initial Character

TS performs two functions. It provides a known bit pattern to the terminal to facilitate bit synchronisation, and it indicates the logic convention to be used for the interpretation of the subsequent characters.

Using inverse logic convention, a low state L on the I/O line is equivalent to a logic one, and the m.s. bit of the data byte is the first bit sent after the start bit. Using direct logic convention, a high state H on the I/O line is equivalent to a logic one, and the l.s. bit of the data byte is the first bit sent after the start bit. The first four bits LHHL are used for bit synchronisation.

Basic responses: The ICC shall return an ATR containing TS having one of two values:

- (H) LHHLLLLLLH inverse convention value '3F'
- (H) LHHLHHHLLH direct convention value '3B'

The convention used may differ between cold and warm resets.

Terminal behaviour: The terminal shall be capable of supporting both inverse and direct convention and shall accept an ATR containing TS having a value of either '3B' or '3F'. An ICC returning an ATR containing TS having any other value shall be rejected.

Note: It is strongly recommended that a value of '3B' is returned by the ICC since a value of '3F' may not be supported in future versions of this specification.

8.3.2 T0 - Format Character

T0 is comprised of two parts. The m.s. nibble (b5–b8) is used to indicate whether the subsequent characters TA1 to TD1 are present. Bits b5–b8 are set to the logic one state to indicate the presence of TA1 to TD1, respectively. The l.s. nibble (b1–b4) indicates the number of optional historical bytes present (0 to 15). (See Table 18 for the basic response coding of character T0.)

Basic responses: If T=0 only is to be used, the ATR shall contain T0 = '6x', indicating that characters TB1 and TC1 are present. If T=1 only is to be used, the ATR shall contain T0 = 'Ex', indicating that characters TB1 to TD1 are present. The value of 'x' represents the number of optional historical bytes to be returned.⁵

Terminal behaviour: The terminal shall accept an ATR containing T0 of any value provided that the value returned correctly indicates and is consistent with the interface characters TA1 to TD1 and historical bytes actually returned.

	b8	b7	b6	b5	b4	b3	b2	b1
T=0 only	0	1	1	0	x	x	x	x
T=1 only	1	1	1	0	x	x	x	x

Table 18: Basic Response Coding of Character T0

8.3.3 TA1 to TC3 - Interface Characters

TA1 to TC3 convey information that shall be used during exchanges between the terminal and the ICC subsequent to the answer to reset. They indicate the values of the transmission control parameters F, D, I, P, and N, and the IFSC, block waiting time integer (BWI), and character waiting time integer (CWI) applicable to T=1 as defined in ISO/IEC 7816-3. The information contained in TA1, TB1, TC1, TA2, and TB2 shall apply to all subsequent exchanges irrespective of the protocol type to be used.

⁵ Although their use is not forbidden, the EMV Specifications do not explicitly support the use of historical bytes, and their usage, structure and meaning are outside the scope of EMV. However, if used, it is strongly recommended that they are encoded to have a structure and meaning according to ISO/IEC 7816-4. EMV-compliant terminals should ignore any historical bytes present in the ATR. However, if an EMV-compliant terminal does support historical bytes, it should never be designed in such a way that non-recognition or misinterpretation of any historical bytes present in the ATR causes termination of the transaction. Since Issuers are free to encode the historical bytes in any way they choose, they should recognise that unintentional conflict of coding between cards may exist, leading to misinterpretation at terminals. Great care should be exercised by the terminal that it is able to unambiguously identify a card before interpreting any historical bytes returned in the ATR.

8.3.3.1 TA1

TA1 conveys the values of FI and DI where:

- the m.s. nibble FI is used to determine the value of F, the clock rate conversion factor, which may be used to modify the frequency of the clock provided by the terminal subsequent to the answer to reset
- the l.s. nibble DI is used to determine the value of D, the bit rate adjustment factor, which may be used to adjust the bit duration used subsequent to the answer to reset

See section 7.1 for calculation of the bit duration subsequent to the answer to reset (current etu).

Default values of FI = 1 and DI = 1 indicating values of F = 372 and D = 1, respectively, shall be used during the answer to reset.

Basic response: The ATR shall not contain TA1 and thus the default values of F = 372 and D = 1 shall continue be used during all subsequent exchanges.

Terminal behaviour: If TA1 is present in the ATR (indicated by b5 of T0 set to 1) and TA2 is returned with b5 = 0 (specific mode, parameters defined by the interface bytes), the terminal shall:

- Accept the ATR if the value of TA1 is in the range '11' to '13',⁶ and immediately implement the values of F and D indicated (F=372 and D = 1, 2, or 4).
- Reject the ATR if the value of TA1 is not in the range '11' to '13', unless it is able to support and immediately implement the conditions indicated.

If TA1 is present in the ATR (indicated by b5 of T0 set to 1) and TA2 is not returned (negotiable mode), the terminal shall accept the ATR and shall continue using the default values of D = 1 and F = 372 during all subsequent exchanges, unless it supports a proprietary technique for negotiating the parameters to be used.

If TA1 is absent from the ATR, the default values of D = 1 and F = 372 shall be used during all subsequent exchanges.

⁶ Terminals compliant to version 3.1.1 of the EMV Specifications may reject an ATR (not an ICC) if TA1 is present and coded other than '11'. ATRs indicating the higher allowable values of D will include TA1 coded '12' or '13', and thus may be rejected in 3.1.1 compliant terminals. Therefore, to ensure that an ICC supporting higher data transfer rates is always accepted in 3.1.1 compliant terminals (albeit operating at basic data transfer rates), it is essential that any TA1 indicating higher data rates is present in the cold ATR only, and that a warm ATR is always present which either does not contain TA1, or includes a TA1 having the value '11'.

8.3.3.2 TB1

TB1 conveys the values of PI1 and II where:

- PI1 is specified in bits b1 to b5 and is used to determine the value of the programming voltage P required by the ICC. PI1 = 0 indicates that VPP is not connected in the ICC.
- II is specified in bits b6 and b7 and is used to determine the maximum programming current, I_{pp} , required by the ICC. This parameter is not used if PI1 = 0.
- Bit 8 is not used and shall be set to logic zero.

Basic response: The ATR shall contain TB1 = '00', indicating that VPP is not connected in the ICC.

Terminal behaviour: In response to a cold reset, the terminal shall accept only an ATR containing TB1 = '00'. In response to a warm reset the terminal shall accept an ATR containing TB1 of any value (provided that b6 of T0 is set to 1) or not containing TB1 (provided that b6 of T0 is set to 0) and shall continue the card session as though TB1 = '00' had been returned. V_{pp} shall never be generated.

Note: Existing terminals may maintain V_{pp} in the idle state (see section 5.4.3).

The basic response coding of character TB1 is shown in Table 19:

b8	b7	b6	b5	b4	b3	b2	b1
0	0	0	0	0	0	0	0

Table 19: Basic Response Coding of Character TB1

8.3.3.3 TC1

TC1 conveys the value of N, where N is used to indicate the extra guardtime that shall be added to the minimum duration between the leading edges of the start bits of two consecutive characters for subsequent exchanges from the terminal to the ICC. N is binary coded over bits b1–b8 of TC1, and its value represents the number of etus to be added as extra guardtime. TC1='FF' has a special meaning and indicates that the minimum delay between the leading edges of the start bits of two consecutive characters shall be reduced to 12 etus if T=0 is to be used, or 11 etus if T=1 is to be used.

Note: TC1 applies only to the timing between two consecutive characters sent from the terminal to the ICC. It does not apply to the timing between consecutive characters sent from the ICC to the terminal, nor does it apply to the timing between two characters sent in opposite directions (see sections 9.2.2.1 and 9.2.4.2.2).

N may take any value between 0 and 255.

If the value of TC1 is in the range '00' to 'FE', between 0 and 254 etus of extra guardtime shall be added to the minimum character to character duration, which for subsequent transmissions shall be between 12 and 266 etus.

If the value of TC1 = 'FF', then the minimum character to character duration for subsequent transmissions shall be 12 etus if T=0 is to be used, or 11 etus if T=1 is to be used.

Basic response: The ATR shall contain TC1 having a value in the range '00' to 'FF'.

Terminal behaviour: The terminal shall accept an ATR not containing TC1 (provided that b7 of T0 is set to 0), and shall continue the card session as though TC1 = '00' had been returned.

The basic response coding of character TC1 is shown in Table 20:

b8	b7	b6	b5	b4	b3	b2	b1
x	x	x	x	x	x	x	x

Table 20: Basic Response Coding of Character TC1

Note: It is strongly recommended that the value of TC1 be set to the minimum acceptable for the ICC. Large values of TC1 lead to very slow communication between the terminal and the ICC, and thus lengthy transaction times.

8.3.3.4 TD1

TD1 indicates whether any further interface bytes are to be transmitted and information concerning the protocol type(s) where:

- The m.s. nibble is used to indicate whether the characters TA2 to TD2 are present. These bits (b5–b8) are set to the logic one state to indicate the presence of TA2 to TD2 respectively.
- The l.s. nibble provides information concerning the protocol type(s) to be used for subsequent exchanges.

Basic responses: The ATR shall not contain TD1 if T=0 only is to be used, and protocol type T=0 shall be used as a default for all subsequent transmissions. The ATR shall contain TD1 = '81' if T=1 only is to be used, indicating that TD2 is present and that protocol type T=1 shall be used for all subsequent transmissions.

Terminal behaviour: The terminal shall accept an ATR containing TD1 with the m.s. nibble having any value (provided that the value returned correctly indicates and is consistent with the interface characters TA2 to TD2 actually returned), and the l.s. nibble having a value of '0' or '1'. The terminal shall reject an ATR containing other values of TD1.

The basic response coding of character TD1 is shown in Table 21:

	b8	b7	b6	b5	b4	b3	b2	b1
T=1	1	0	0	0	0	0	0	1

Table 21: Basic Response Coding of Character TD1

8.3.3.5 TA2

The presence or absence of TA2 indicates whether the ICC will operate in specific mode or negotiable mode respectively following the answer to reset. When present, TA2 conveys information regarding the specific mode of operation where:

- b8 indicates whether the ICC is capable of changing its mode of operation. It is capable of changing if b8 is set to 0, and unable to change if b8 is set to 1.
- b7–b6 are RFU (set to 00).
- b5 indicates whether the transmission parameters to be used following Answer to Reset are defined in the interface characters or are implicitly known by the terminal. The transmission parameters are defined by the interface characters if b5 is set to 0, or are implicitly known by the terminal if b5 is set to 1.
- l.s. nibble b4-b1 indicates the protocol to be used in specific mode.

Basic response: The ATR shall not contain TA2; the absence of TA2 indicates the negotiable mode of operation.

Terminal behaviour: The terminal shall accept an ATR containing TA2 provided that all the following conditions are met:

- The protocol indicated in the l.s. nibble is also the first indicated protocol in the ATR.
- b5 = 0
- The terminal is able to support the exact conditions indicated in the applicable interface characters and immediately uses those conditions.

Otherwise, the terminal shall reject an ATR containing TA2.

8.3.3.6 TB2

TB2 conveys PI2, which is used to determine the value of programming voltage P required by the ICC. When present it overrides the value indicated by PI1 returned in TB1.

Basic response: The ATR shall not contain TB2.

Terminal behaviour: The terminal shall reject an ATR containing TB2.

Note: Existing terminals may maintain V_{PP} in the idle state (see section 5.4.3).

8.3.3.7 TC2

TC2 is specific to protocol type T=0 and conveys the work waiting time integer (WI) that is used to determine the maximum interval between the leading edge of the start bit of any character sent by the ICC and the leading edge of the start bit of the previous character sent either by the ICC or the terminal (the work waiting time). The work waiting time is given by $960 \times D \times WI$.

Basic response: The ATR shall not contain TC2 and a default value of WI = 10 shall be used during subsequent communication.

Terminal behaviour: The terminal shall:

- reject an ATR containing TC2 = '00'
- accept an ATR containing TC2 = '0A'
- reject an ATR containing TC2 having any other value unless it is able to support it.

8.3.3.8 TD2

TD2 indicates whether any further interface bytes are to be transmitted and the protocol type to be used for subsequent transmissions, where:

- The m.s. nibble is used to indicate whether the characters TA3 to TD3 are present. These bits (b5–b8) are set to the logic one state to indicate the presence of TA3 to TD3, respectively.
- The l.s. nibble indicates the protocol type to be used for subsequent exchanges. It shall take the value '1' as T=1 is to be used.

Basic responses: The ATR shall not contain TD2 if T=0 is to be used, and the protocol type T=0 shall be used as a default for all subsequent transmissions. The ATR shall contain TD2 = '31' if T=1 is to be used, indicating that TA3 and TB3 are present and that protocol type T=1 shall be used for all subsequent transmissions.

Terminal behaviour: The terminal shall accept an ATR containing TD2 with the m.s. nibble having any value (provided that the value returned correctly indicates and is consistent with the interface characters TA3 to TD3 actually returned), and the l.s. nibble having a value of '1' (or 'E' if the l.s. nibble of TD1 is '0'). The terminal shall reject an ATR containing other values of TD2.

The basic response coding of character TD2 is shown in Table 22:

	b8	b7	b6	b5	b4	b3	b2	b1
T=1	0	0	1	1	0	0	0	1

Table 22: Basic Response Coding of Character TD2

8.3.3.9 TA3

TA3 (if T=1 is indicated in TD2) returns the information field size integer for the ICC (IFSI), which determines the IFSC, and specifies the maximum length of the information field (INF) of blocks that can be received by the card. It represents the length of IFSC in bytes and may take any value between '01' and 'FE'. Values of '00' and 'FF' are reserved for future use.

Basic response: If T=1 is to be used, the ATR shall contain TA3 having a value in the range '10' to 'FE' indicating an initial IFSC in the range 16 to 254 bytes.

Terminal behaviour: The terminal shall accept an ATR not containing TA3 (provided that b5 of TD2 is set to 0), and shall continue the card session using a value of '20' for TA3. The terminal shall reject an ATR containing TA3 having a value in the range '00' to '0F' or a value of 'FF'.

The basic response coding of character TA3 is shown in Table 23:

T=1	b8	b7	b6	b5	b4	b3	b2	b1
	x	x	x	x	x	x	x	x
'00' to '0F' and 'FF' not allowed								

Table 23: Basic Response Coding of Character TA3

8.3.3.10 TB3

TB3 (if T=1 is indicated in TD2) indicates the values of the CWI and the BWI used to compute the CWT and BWT respectively. The l.s. nibble (b1–b4) is used to indicate the value of CWI, whilst the m.s. nibble (b5–b8) is used to indicate the value of BWI.

Basic response: If T=1 is to be used, the ATR shall contain TB3 having the l.s. nibble in the range '0' to '5', and the m.s. nibble in the range '0' to '4', indicating values of 0 to 5 for CWI and 0 to 4 for BWI.

The basic response coding of character TB3 is shown in Table 24:

	b8	b7	b6	b5	b4	b3	b2	b1
T=1	0	x	x	x	0	y	y	y
	xxx is in the range 000 to 100 yyy is in the range 000 to 101							

Table 24: Basic Response Coding of Character TB3

Terminal behaviour: The terminal shall reject an ATR not containing TB3, or containing a TB3 indicating BWI greater than 4 and/or CWI greater than 5, or having a value such that $2^{CWI} \leq (N + 1)$. It shall accept an ATR containing a TB3 having any other value.

Note: N is the extra guardtime indicated in TC1. When using T=1, if TC1='FF', the value of N shall be taken as –1. Since the maximum value for CWI allowed by these specifications is 5, note that when T=1 is used, TC1 shall have a value in the range '00' to '1E' or a value of 'FF' in order to avoid a conflict between TC1 and TB3.

8.3.3.11 TC3

TC3 (if T=1 is indicated in TD2) indicates the type of block error detection code to be used. The type of code to be used is indicated in b1, and b2 to b8 are not used.

Basic response: The ATR shall not contain TC3, thus indicating longitudinal redundancy check (LRC) as the error code to be used.

Terminal behaviour: The terminal shall accept an ATR containing TC3 = '00'. It shall reject an ATR containing TC3 having any other value.

8.3.4 TCK - Check Character

TCK has a value that allows the integrity of the data sent in the ATR to be checked. The value of TCK is such that the exclusive-OR'ing of all bytes from T0 to TCK inclusive is null.

Basic responses: The ATR shall not contain TCK if T=0 only is to be used. In all other cases TCK shall be returned in the ATR.

Terminal behaviour: The terminal shall be able to evaluate TCK when appropriately returned. It shall accept an ICC returning an ATR not containing TCK if T=0 only is indicated. In all other cases, the terminal shall reject an ICC returning an ATR not containing TCK, or containing an incorrect TCK.

8.4 Terminal Behaviour during Answer to Reset

Following activation of the ICC contacts as described in section 6.1.2 the terminal shall initiate a cold reset as described in section 6.1.3.1. Subsequently the following shall apply:

- If the terminal rejects the ICC as described in section 8.3, it shall initiate the deactivation sequence within 24,000 initial etus (19,200 + 4,800 initial etus) measured from the leading edge of the start bit of the TS character of the ATR.
- If the terminal rejects a cold ATR as described in section 8.3, it shall not immediately abort the card session but shall initiate a warm reset within 24,000 initial etus (19,200 + 4,800 initial etus) measured from the leading edge of the start bit of the TS character of the cold ATR to the time that RST is set low. The terminal shall not initiate the warm reset until the T0 character has been received.
- If the terminal rejects a warm ATR as described in section 8.3, it shall initiate the deactivation sequence within 24,000 initial etus (19,200 + 4,800 initial etus) measured from the leading edge of the start bit of the TS character of the warm ATR.
- The terminal shall be able to receive an ATR having a minimum interval between the leading edges of the start bits of two consecutive characters of 11.8 initial etus.
- The terminal shall be able to receive an ATR having maximum interval between two consecutive characters of 10,080 initial etus (9,600 + 480 initial etus). If a character is not received, the terminal shall abort the card session by initiating the deactivation sequence within 14,400 initial etus (9,600 + 4,800 initial etus) following the leading edge of the start bit of the last received character (the character from which timeout occurred).

- The terminal shall be able to receive an ATR having a duration of less than or equal to 20,160 initial etus. If the ATR (warm or cold) is not completed the terminal shall abort the card session by initiating the deactivation sequence within 24,000 initial etus (19,200 + 4,800 initial etus) following the leading edge of the start bit of the TS character.
- If the terminal detects a parity error in a character returned in the ATR, it shall initiate the deactivation sequence within 24,000 initial etus (19,200 + 4,800 initial etus) measured from the leading edge of the start bit of the TS character of the ATR.
- Upon receipt of a valid cold or warm reset complying with the timings described above, the terminal shall proceed with the card session using the returned parameters. It may continue the card session as soon as the last character of the valid ATR (as indicated by the bit map characters T0 and/or TDi) and TCK, if present, has been received. Before transmitting, it shall wait at least the guardtime applicable to the protocol to be used (16 etus for T=0, BGT for T=1) measured from the leading edge of the start bit of the last character of the valid ATR.

8.5 Answer to Reset - Flow at the Terminal

Figure 11 illustrates an example of the process of an ICC returning an ATR to the terminal and the checks performed by the terminal to ensure conformance to section 8.

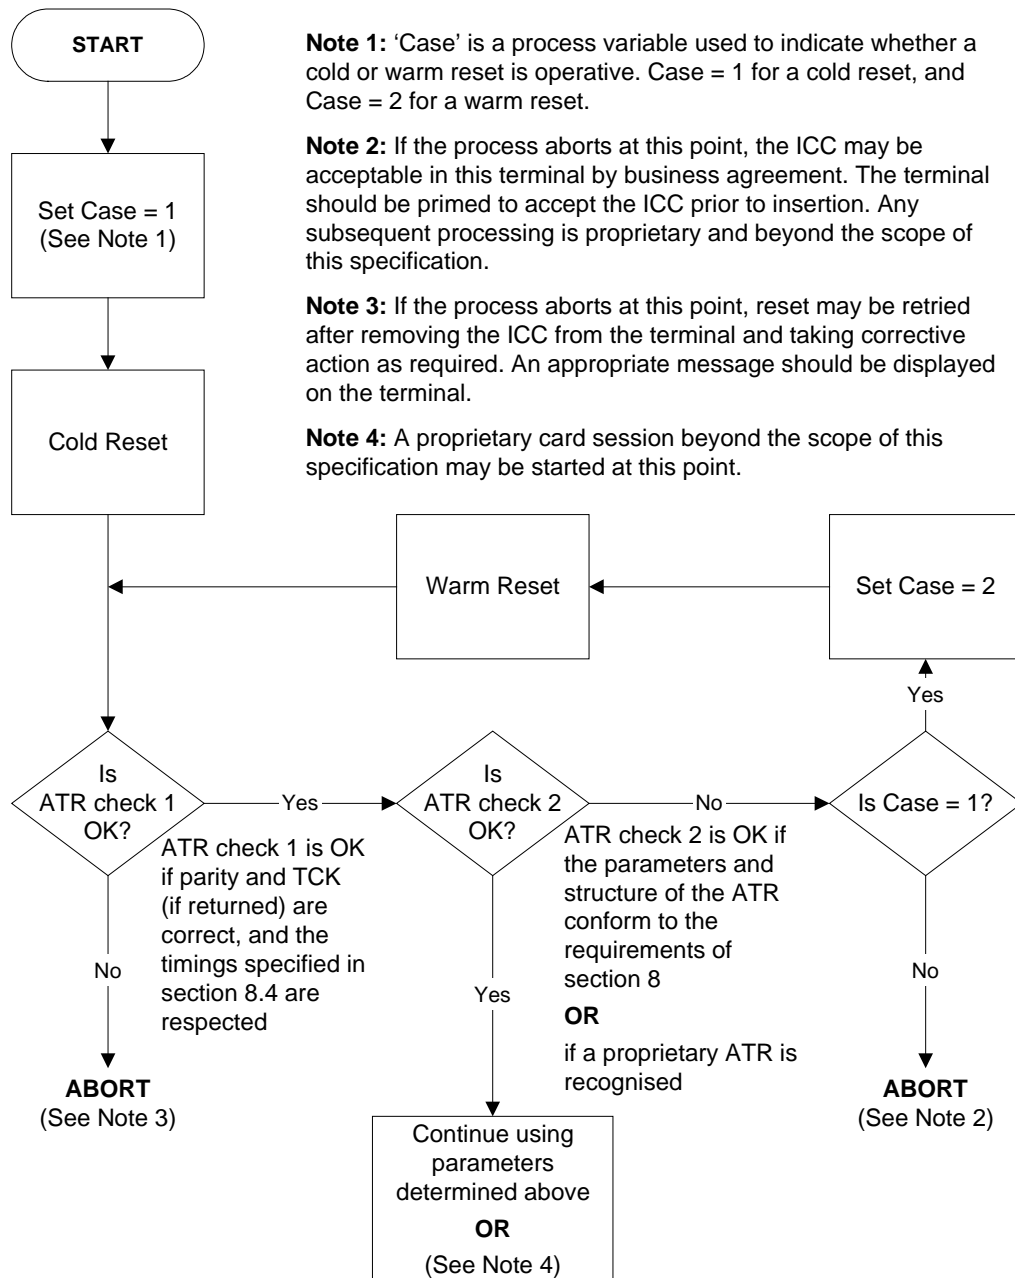


Figure 11: ATR - Example Flow at the Terminal

9 Transmission Protocols

This section defines the structure and processing of commands initiated by the terminal for transmission control and for specific control in asynchronous half duplex transmission protocols.

Two types of protocol are defined, character protocol (T=0) and block protocol (T=1). ICCs shall support either protocol T=0 or protocol T=1. Terminals shall support both protocol T=0 and T=1. The protocol to be used for subsequent communication between the ICC and terminal is indicated in TD1, and shall be T=0 or T=1. If TD1 is absent in the ATR, T=0 is assumed. The protocol indicated by the ICC applies immediately after the answer to reset, as there is no PTS procedure. Other parameters returned in the ATR and relevant to a specific protocol are defined in sections 9.2 through 9.4.

The protocols are defined according to the following layering model:

- Physical layer, which describes the exchanges of bits and is common to both protocols.
- Data link layer, which includes the following sub-definitions:
 - Character frame, defining the exchanges of characters common to both protocols.
 - Character protocol T=0, defining the exchange of characters specific to T=0.
 - Error detection and correction specific to T=0.
 - Block protocol T=1, defining the exchanges of blocks specific to T=1.
 - Error detection and correction specific to T=1.
- Transport layer, which defines the transmission of application-oriented messages specific to each protocol.
- Application layer, which defines the exchange of messages according to an application protocol that is common to both transmission protocols.

9.1 Physical Layer

Both protocols T=0 and T=1 use the physical layer and character frame as defined in section 7.

9.2 Data Link Layer

This section describes the timing, specific options, and error handling for protocols T=0 and T=1.

9.2.1 Character Frame

The character frame as defined in section 7.2 applies to all messages exchanged between the ICC and the terminal.

9.2.2 Character Protocol T=0

9.2.2.1 Specific Options - Character Timing for T=0

The minimum interval between the leading edges of the start bits of two consecutive characters sent by the terminal to the ICC shall be between 12 and 266 etus as determined by the value of TC1 returned at the answer to reset (see sections 8.2 and 8.3). This interval may be less than the minimum interval of 16 etus allowed between two characters sent in opposite directions. If the value returned in TC1 is N, the ICC shall be able to correctly interpret characters sent by the terminal with a minimum interval between the leading edges of the start bits of two consecutive characters of $11.8 + N$ etus.

The minimum interval between the leading edges of the start bits of two consecutive characters sent by the ICC to the terminal shall be 12 etus. The terminal shall be able to correctly interpret characters sent by the ICC with a minimum interval between the leading edges of the start bits of two consecutive characters of 11.8 etus.

The maximum interval between the leading edge of the start bit of any character sent by the ICC and the leading edge of the start bit of the previous character sent either by the ICC or the terminal (the Work Waiting Time, or WWT) shall not exceed $960 \times D \times WI$ etus (D and WI are returned in TA1 and TC2, respectively).

The terminal shall be able to correctly interpret a character sent by the ICC with a maximum interval between the leading edge of the start bit of the character and the leading edge of the start bit of the previous character sent either by the ICC or the terminal of $\{WWT + (D \times 480)\}$ etus. If no character is received, the terminal shall initiate the deactivation sequence within $\{WWT + (D \times 9600)\}$ etus following the leading edge of the start bit of the character from which the timeout occurred.

For the ICC or terminal, the minimum interval between the leading edges of the start bits of the last character received and the first character sent in the opposite direction shall be 16 etus. The ICC or terminal shall be able to correctly interpret a character received within 15 etus timed from the leading edge of the start bit of the last character sent to the leading edge of the start bit of the received character. These timings do not apply during character repetition.

9.2.2.2 Command Header

A command is always initiated by the terminal application layer (TAL) which sends an instruction via the TTL to the ICC in the form of a five byte header called the command header. The command header is comprised of five consecutive bytes, CLA, INS, P1, P2, and P3, where:

- CLA is the command class.
- INS is the instruction code.
- P1 and P2 contain additional instruction-specific parameters.
- P3 indicates either the length of data to be sent with the command to the ICC, or the maximum length of data expected in the response from the ICC, depending on the coding of INS.

These bytes together with any data to be sent with the command constitute the command transport protocol data unit (C-TPDU) for T=0. The mapping of the command application protocol data unit (C-APDU) onto the C-TPDU is described in section 9.3.

The TTL transmits the five-byte header to the ICC and waits for a procedure byte.

9.2.2.3 Command Processing

Following reception of a command header by the ICC, the ICC shall return a procedure byte or status bytes SW1 SW2 (hereafter referred to as 'status') to the TTL. Both the TTL and ICC shall know implicitly at any point during exchange of commands and data between the TTL and the ICC what the direction of data flow is and whether it is the TTL or the ICC that is driving the I/O line.

9.2.2.3.1 Procedure Byte

The procedure byte indicates to the TTL what action it shall take next. The coding of the byte and the action that shall be taken by the TTL is shown in Table 25.

Procedure Byte Value	Action
Equal to INS byte	All remaining data bytes shall be transferred by the TTL, or the TTL shall be ready to receive all remaining data bytes from the ICC
Equal to complement of INS byte ($\overline{\text{INS}}$)	The next data byte shall be transferred by the TTL, or the TTL shall be ready to receive the next data byte from the ICC
'60'	The TTL shall provide additional work waiting time as defined in this section
'61'	The TTL shall wait for a second procedure byte then send a GET RESPONSE command header to the ICC with a maximum length of 'xx', where 'xx' is the value of the second procedure byte
'6C'	The TTL shall wait for a second procedure byte then immediately resend the previous command header to the ICC using a length of 'xx', where 'xx' is the value of the second procedure byte

Table 25: Terminal Response to Procedure Byte

In all cases, after the action has taken place the TTL shall wait for a further procedure byte or status.

9.2.2.3.2 Status Bytes

The status bytes indicate to the TTL that command processing by the ICC is complete. The meaning of the status bytes is related to the command being processed and is defined in section 11 and in Book 3. The coding of the first status byte and the action that shall be taken by the TTL are shown in Table 26.

First Status Byte Value	Action
'6x' or '9x' (except '60', '61' and '6C') - status byte SW1	TTL shall wait for a further status byte (status byte SW2)

Table 26: Status Byte Coding

Following receipt of the second status byte, the TTL shall return the status bytes (together with any appropriate data - see section 9.3.1) to the TAL in the response APDU (R-APDU) and await a further C-APDU.

9.2.2.4 Transportation of C-APDUs

A C-APDU containing only command data to be sent to the ICC, or only expecting data in response from the ICC (cases 2 and 3 in section 9.4), is mapped without change onto a T=0 C-TPDU. A C-APDU that contains and expects no data, or a C-APDU that requires data transmission to and from the ICC (cases 1 and 4 in section 9.4) is translated according to the rules defined in section 9.3 for transportation by a C-TPDU for T=0.

9.2.3 Error Detection and Correction for T=0

This procedure is mandatory for T=0 but does not apply during the answer to reset.

If a character is received with a parity error, the receiver shall indicate an error by setting the I/O line to state L at time (10.5 ± 0.2) etus following the leading edge of the start bit of the character for a minimum of 1 etu and a maximum of 2 etus.

The transmitter shall test the I/O line (11 ± 0.2) etus after the leading edge of the start bit of a character was sent, and assumes that the character was correctly received if the I/O line is in state H.

If the transmitter detects an error, it shall repeat the disputed character after a delay of at least 2 etus following detection of the error. The transmitter shall repeat the same disputed character a maximum of three more times, and shall therefore send a character up to a maximum of five times in total (the original transmission followed by the first repeat and then three further repeats) in an attempt to achieve error free transmission.

If the last repetition is unsuccessful, the terminal shall initiate the deactivation sequence within $(D \times 960)$ etus following reception of the leading edge of the start bit of the invalid character (if it is the receiver), or within $(D \times 960)$ etus following detection of the signalling of the parity error by the ICC (if it is the transmitter).

Character repetition timing is illustrated in Figure 12.

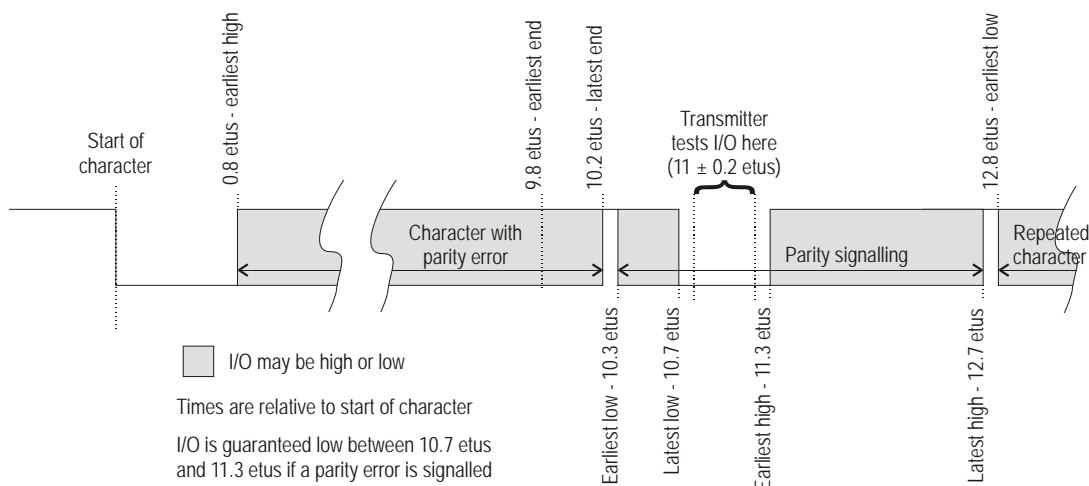


Figure 12: Character Repetition Timing

When awaiting a procedure byte or status byte, if the byte returned by the ICC has a value other than specified in sections 9.2.2.3.1 and 9.2.2.3.2, the terminal shall initiate the deactivation sequence within 9,600 etus following the leading edge of the start bit of the (invalid) byte received.

9.2.4 Block Protocol T=1

The protocol consists of blocks transmitted between the TAL and the ICC to convey command and R-APDUs and transmission control information (for example, acknowledgment).

The data link layer block frame structure, specific options of the protocol, and protocol operations (including error handling) are defined below.

9.2.4.1 Block Frame Structure

The character frame as defined in section 7.2 applies.

The block is structured as illustrated in Table 27:

Prologue Field - Mandatory -			Information Field - Optional -	Epilogue Field - Mandatory -
Node Address (NAD)	Protocol Control Byte (PCB)	Length (LEN)	APDU or Control Information (INF)	Error Detection Code (EDC)
1 byte	1 byte	1 byte	0–254 bytes	1 byte

Table 27: Structure of a Block

9.2.4.1.1 Prologue Field

The Prologue Field is mandatory and consists of three mandatory bytes:

- Node address (NAD) to identify source and intended destination of the block and to provide VPP state control
- Protocol control byte (PCB) to control data transmission
- Length (LEN) of the optional information field

Node Address

NAD is mandatory. Bits b1–b3 of NAD indicate the source node address (SAD) of the block, whilst bits b5–b7 indicate the intended destination node address (DAD) of the block. Bits b4 and b8⁷ are unused and shall be set to 0.

These specifications do not support node addressing. The first block sent by the terminal following the ATR and all following blocks transmitted by either the terminal or ICC shall have the NAD = '00'.

If during the card session the terminal or ICC receives a block with a NAD ≠ '00', it may treat the block as invalid. In this event, it shall apply the error detection and correction techniques described in section 9.2.5.

⁷ Defined in ISO/IEC 7816-3:1997 as VPP control for class A. A value of 0 indicates that VPP shall be maintained in the idle state.

Protocol Control Byte

The PCB is mandatory, and indicates the type of block. There are three types of blocks, as defined in Table 28:

Type of Block	Short Name	Purpose
Information block	I-block	to convey APDUs
Receive-ready block	R-block	to convey acknowledgments (ACK or NAK)
Supervisory block	S-block	to exchange control information

Table 28: Types of Blocks

The coding of the PCB depends on its type and is defined in Table 29, Table 30, and Table 31.

b8	0
b7	Sequence number
b6	Chaining (more data)
b5–b1	Reserved for future use (RFU)

Table 29: Coding of the PCB of an I-block

b8	1
b7	0
b6	0
b5	Sequence number
b4–b1	0 = Error free 1 = EDC and/or parity error 2 = Other error(s) Other values RFU

Table 30: Coding of the PCB of a R-block

b8	1
b7	1
b6	0 = Request 1 = Response
b5–b1	0 = Resynchronisation request 1 = Information field size request 2 = Abort request 3 = Extension of BWT request 4 = VPP error ⁸ Other values RFU

Table 31: Coding of the PCB of a S-block

⁸ Not used by ICCs and terminals conforming to this specification.

Length

The Length (LEN) is mandatory, and indicates the length of the INF part of the block; it may range from 0 to 254 depending on the type of block.

Note: This specification does not support I-blocks with LEN = 0.

9.2.4.1.2 Information Field

The Information Field (INF) is conditional.

- When present in an I-block, it conveys application data.
- When present in a S-block, it conveys control information.
- A R-block shall not contain an INF.

9.2.4.1.3 Epilogue Field

The Epilogue Field is mandatory, and contains the EDC of the transmitted block. A block is invalid when a parity error and/or an EDC error occurs. This specification supports only the LRC as EDC. The LRC is one byte in length and is calculated as the exclusive-OR of all the bytes starting with the NAD and including the last byte of INF, if present.

Note: TCi ($i > 2$), which indicates the type of error detection code to be used, is not returned by the ICC in the ATR. The normal default of the LRC is thus used for the EDC.

9.2.4.1.4 Block Numbering

I-blocks are numbered using a modulo-2 number coded on one bit. The numbering system is maintained independently at the ICC and the terminal as senders. The value of the number starts with zero for the first I-block sent after the answer to reset by a sender and is incremented by one after sending each I-block. The number is reset to zero by the sender after resynchronisation.

R-blocks are numbered using a modulo-2 number coded on one bit. A R-block is used to acknowledge a chained I-block or to request retransmission of an invalid block. In either case, b5 of the PCB of the R-block carries the sequence number of the next I-block its sender expects to receive.

A S-block carries no number.

9.2.4.2 Specific Options

This section defines the information field sizes and timings to be used with protocol type T=1.

9.2.4.2.1 Information Field Sizes

The IFSC is the maximum length of the information field of blocks that can be received by the ICC, and is defined as follows. At the answer to reset the IFSI is returned by the ICC in TA3 indicating the size of the IFSC that can be accommodated by the ICC. IFSI may take values in the range '10' to 'FE' that indicate values for IFSC in the range 16 to 254 bytes. The maximum block size that can be received by the ICC is therefore (IFSC + 3 + 1) bytes including the prologue and epilogue fields. The size established during the answer to reset shall be used throughout the rest of the card session or until a new value is negotiated by the ICC by sending a S(IFS request) block to the terminal.

The information field size for the terminal (IFSD) is the maximum length of the information field of blocks that can be received by the terminal. The initial size immediately following the answer to reset shall be 254 bytes, and this size shall be used throughout the rest of the card session.

9.2.4.2.2 Timing for T=1

The minimum interval between the leading edges of the start bits of two consecutive characters sent by the terminal to the ICC shall be between 11 and 42 etus as indicated by the value of TC1 returned at the answer to reset (see sections 8.2 and 8.3). If the value returned in TC1 is N, the ICC shall be able to correctly interpret characters sent by the terminal with a minimum interval between the leading edges of the start bits of two consecutive characters of $11.8 + N$ etus.

The minimum interval between the leading edges of the start bits of two consecutive characters sent by the ICC to the terminal shall be 11 etus. The terminal shall be able to correctly interpret characters sent by the ICC with a minimum interval between the leading edges of the start bits of two consecutive characters of 10.8 etus.

The maximum interval between the leading edges of the start bits of two consecutive characters sent in the same block (the character waiting time, CWT) shall not exceed $(2^{CWI} + 11)$ etus. The character waiting time integer, CWI shall have a value of 0 to 5 as described in section 8.3.3.10, and thus CWT lies in the range 12 to 43 etus. The receiver shall be able to correctly interpret a character having a maximum interval between the leading edge of the start bit of the character and the leading edge of the start bit of the previous character of $(CWT + 4)$ etus.

The maximum interval between the leading edge of the start bit of the last character that gave the right to send to the ICC and the leading edge of the start bit of the first character sent by the ICC (the block waiting time, BWT) shall not exceed $\{(2^{BWI} \times 960) + 11\}$ etus. The block waiting time integer, BWI shall have a value in the range 0 to 4 as described in section 8.3.3.10, and thus BWT lies in the range 971 to 15,371 etus for a D of 1.

The terminal shall be able to correctly interpret the first character of a block sent by the ICC following a time $BWT + (D \times 960)$ etus.

For the ICC or terminal, the minimum interval between the leading edges of the start bits of the last received character and the first character sent in the opposite direction (the block guard time, BGT) shall be 22 etus. The ICC or terminal shall be able to correctly interpret a character received within 21 etus timed from the leading edge of the start bit of the last character that it sent to the leading edge of the start bit of the received character.

Note: In general, for values of FI and DI other than 1, BWT is calculated using the formula:

$$BWT = \left(\left(2^{BWI} \times 960 \times \frac{372D}{F} \right) + 11 \right) \text{ etu}$$

9.2.4.3 Error Free Operation

The protocol rules for error free operation are as follows:

1. The first block transmitted after the answer to reset shall be sent by the terminal to the ICC and shall be a S(IFS request) block with PCB = 'C1' and with IFSD = 254 (value indicated in the single byte INF field). No further S(IFS request) blocks shall be sent by the terminal during the card session.
2. The ICC shall return a S(IFS response) block to the terminal acknowledging the change to the size of the IFSD. The PCB of the S(IFS response) block sent in response shall have the value 'E1', and the INF field shall have the same value as the INF field of the block requesting the change.
3. If the ICC wishes to change the size of the IFSC from the initial value indicated at the answer to reset, it shall send a S(IFS request) block to the terminal. The PCB of the S(IFS request) block shall have the value 'C1' indicating a request to change the IFSC. The INF field shall contain a byte the value of which indicates the size in bytes of the requested new IFSC. This byte shall have a value in the range '10' to 'FE'. The terminal shall return a S(IFS response) block to the ICC acknowledging the change to the size of the IFSC. The PCB of the S(IFS response) block sent in response shall have the value 'E1', and the INF field shall have the same value as the INF field of the block requesting the change.
4. During the card session, only blocks as defined in this section shall be exchanged. The half duplex block protocol consists of blocks transmitted alternately by the terminal and the ICC. When the sender has transmitted a complete block, the sender switches to the receiving state.
5. When the receiver has received the number of characters in accordance with the value of LEN and the EDC, the receiver gains the right to send.
6. The ICC shall acknowledge an I-block transmitted by the terminal. The acknowledgment is indicated in the sequence number of the I-block, or the R-block if chaining is in use (except the last block of the chain), that the ICC returns to the terminal.
7. A non-chained I-block or the last I-block of a chain is considered by the sender to be acknowledged when the sequence number of the I-block received in response differs from the sequence number of the previously received I-block. If no I-block was previously received, the sequence number of the I-block sent in response shall be 0.
8. When a R-block is received, b5 shall be evaluated. The receiver is not required to evaluate bits b4–b1 of the PCB. Optional evaluation of bits b4–b1 shall not result in any action which contradicts the protocol rules defined in this specification
9. During chaining, a chained I-block (except the last I-block of a chain) is considered by the sender to be acknowledged when the sequence number of the R-block sent in response differs from the sequence number of the I-block being acknowledged.

10. If the ICC requires more than the BWT to process the previously received I-block, it shall send a waiting time extension request S(WTX request) block, where the INF contains the one-byte binary integer multiplier of the BWT value requested. The terminal shall acknowledge by sending a waiting time extension response S(WTX response) block with the same value in the INF. The time allocated (which is the time requested in the S(WTX request) block, and which replaces BWT for this instance only) starts at the leading edge of the last character of the S(WTX response) block. After the ICC responds, BWT is again used as the time allowed for the ICC to process the I-block.
11. S-blocks are used only in pairs. A S(request) block is always followed by a S(response) block.

When synchronisation as outlined above is lost, the procedure described in section 9.2.5 shall apply.

9.2.4.4 Chaining

When the sender has to transmit data of length greater than IFSC or IFSD bytes, it shall divide it into several consecutive I-blocks. The transmission of these multiple I-blocks is achieved using the chaining function described below.

The chaining of I-blocks is controlled by b6 of the PCB. The coding of b6 is as follows:

- b6 = 0 Last block of the chain
- b6 = 1 Subsequent block follows

Any I-block with b6 = 1 shall be acknowledged by a R-block according to section 9.2.4.1.

The last block of a chain sent by the terminal shall be acknowledged by either an I-block if correctly received, or a R-block if incorrectly received. The last block of a chain sent by the ICC shall be acknowledged by a R-block if incorrectly received; if correctly received, the terminal will only transmit further I-blocks if another command is to be processed.

9.2.4.4.1 Rules for Chaining

The TTL shall support chaining for both transmitted and received blocks. The ICC may optionally chain blocks sent to the terminal. Chaining is only possible in one direction at a time. The following rules for chaining apply:

- When the terminal is the receiver, the terminal shall accept a sequence of chained I-blocks sent from the ICC of length \leq IFSD bytes per block.
- When the ICC is the receiver, the ICC shall accept a sequence of chained I-blocks sent from the terminal all having length $LEN = IFSC$ except the last block, whose length may be in the range 1 to IFSC bytes inclusive.
- When the ICC is the receiver, if an I-block sent by the terminal has length $> IFSC$, the ICC shall reject it using a R-block.
- If the ICC as sender chains blocks sent to the terminal it shall send I-blocks of length $\leq IFSD$ bytes per block.
- When the terminal is the sender, all I-blocks of a chain sent to the ICC shall have $LEN = IFSC$ bytes except the last, which shall have a length in the range 1 to IFSC bytes inclusive.
- During chaining, the ICC shall not attempt to negotiate a new IFSC by sending a S(IFSC request) block to the terminal.

9.2.4.4.2 Construction of Chained Blocks

C-APDUs are transported from the TTL to the ICC in the INF field of I-blocks (see section 9.3.2). If a C-APDU is too large to fit in one block, it is chained over several as illustrated in Figure 13.

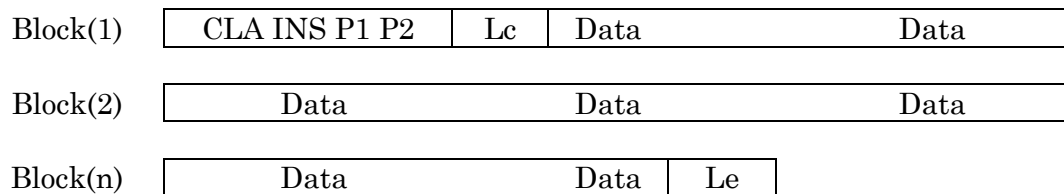


Figure 13: Chaining C-APDU

The data and status returned by the ICC may optionally be chained over several I-blocks as illustrated in Figure 14.

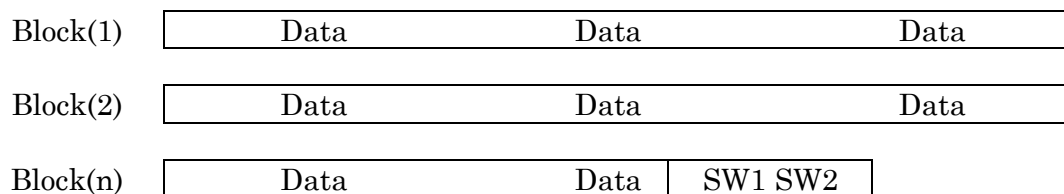


Figure 14: Chaining I-Blocks

Note: The above examples are for a case 4 command and show only the INF fields of the chained blocks. Each block also has a prologue and epilogue field. All chained blocks shall contain an INF field having a length in the range 1 to IFSD bytes if the ICC is the sender, or IFSC bytes during chaining and 1 to IFSC bytes in the last block of the chain if the terminal is the sender.

9.2.5 Error Detection and Correction for T=1

The following errors shall be detected by the TTL:

- Transmission error including parity error, EDC error, and BWT time-out.
- Loss of synchronisation assumed when the actual block size is inconsistent with the size indicated by the value in LEN.
- Protocol error (infringement of the rules of the protocol).
- Abort request for a chain of blocks.

If a parity error is detected, character repetition shall not be implemented when using T=1.

Error recovery is attempted in the following manner.

The TTL shall attempt error recovery by trying the following techniques in the order shown.

1. Retransmission of blocks

Deactivation of the ICC contacts

The ICC shall attempt error recovery by trying retransmission of blocks.

If a block is retransmitted, the retransmitted block shall be identical to the originally transmitted block.

Note: In some terminals the TTL may not be solely responsible for error handling. Where 'TTL' is used it includes any functionality present in the terminal as applicable.

The following types of block are considered invalid:

- Blocks containing transmission errors, i.e. parity/EDC incorrect
- Blocks that have formatting errors, i.e. blocks constructed incorrectly by the sender (syntax error)
- Blocks that are unexpected according to the rules of the protocol at any particular point in an exchange, for example, a S(Response) block received in response to an I-block.

A R-block received indicating an error condition is not an invalid block.

9.2.5.1 Protocol Rules for Error Handling

The following rules apply for error handling and correction. In each case where a R-block is sent, the error coding bits b4–b1 may optionally be evaluated, but shall not result in any action which contradicts the protocol rules defined in this specification.

1. If the first block received by the ICC after the answer to reset is invalid, it shall return a R-block to the TTL with b5 = 0 and NAD = 0.
2. If there is no response from the ICC to a block sent by the TTL, the terminal shall:

(a) initiate the deactivation sequence

OR

(b) if the block not responded to was an I-block, R-block, or S(Response) block, transmit a R-block with its sequence number coded as specified in section 9.2.4.1.4

OR

(c) if the block not responded to was a S(Request) block, retransmit the S(Request) block

between $\{BWT + (D \times 960)\}$ and $\{BWT + (D \times 4,800)\}$ etus (or between $\{WTX + (n \times D \times 960)\}$ and $\{WTX + (n \times D \times 4,800)\}$ etus if a waiting time extension has been negotiated) from the leading edge of the start bit of the last character of the block to which there was no response.

3. If during reception of a block by the terminal an expected character is not received, the terminal shall:

(a) initiate the deactivation sequence

OR

(b) if the block not responded to was an I-block, R-block, or S(Response) block, transmit a R-block with its sequence number coded as specified in section 9.2.4.1.4

OR

(c) if the block not responded to was a S(Request) block, retransmit the S(Request) block

within $(CWT + 4)$ and $(CWT + 4,800)$ etus from the leading edge of the start bit of the last character received.

4. If an invalid block is received in response to an I-block, the sender shall transmit a R-block with its sequence number coded as specified in section 9.2.4.1.4.
5. If an invalid block is received in response to a R-block, the sender shall retransmit the R-block.
6. If a correct S(... response) block is not received in response to a S(... request) block, the sender shall retransmit the S(... request) block.
7. If an invalid block is received in response to a S(... response) block, the sender shall transmit a R-block with its sequence number coded as specified in section 9.2.4.1.4.

8. If the TTL has sent three consecutive blocks of any type without obtaining a valid response, it shall initiate the deactivation sequence within $\{BWT + (D \times 14,400)\}$ etus following the leading edge of the start bit of the last character of the block requesting retransmission.

Note: Resynchronisation is not required by this specification. If for proprietary reasons the terminal supports resynchronisation, it may attempt this by sending a S(RESYNCH request) block, then behave as specified in ISO/IEC 7816-3.

If the ICC has sent a block a maximum of twice in succession (the original transmission followed by one repeat) without obtaining a valid response, it shall remain in reception mode.

9. A S(ABORT request) shall not be sent by the terminal. If the terminal receives a S(ABORT request) from the ICC, it shall terminate the card session by initiating the deactivation sequence within $(D \times 9,600)$ etus following reception of the leading edge of the start bit of the last character of the S(ABORT request) block.

Note: Transaction abortion is not required by this specification. If an ICC or terminal supports abortion for proprietary reasons, it may issue a S(ABORT request), but note that it will receive an invalid response if the receiver does not support abortion. In this event, the card session will be terminated according to the rules above. If a terminal optionally supporting abortion receives a S(ABORT request) from an ICC, it may return a S(ABORT response) rather than terminating the card session.

9.3 Terminal Transport Layer (TTL)

This section describes the mechanism by which command and response APDUs are transported between the terminal and the ICC. APDUs are command or response messages, and since both command and response messages may contain data, the TTL shall be capable of managing the four cases defined in section 9.4. The construction of C-APDUs and R-APDUs are described in sections 9.4.1 and 9.4.2, respectively.

The C-APDU is passed from the TAL to the TTL where it is mapped in a manner appropriate to the transmission protocol to be used before being sent to the ICC. Following processing of the command by the ICC, data (if present) and status are returned by the ICC to the TTL, which maps it onto the R-APDU.

9.3.1 Transport of APDUs by T=0

This section describes the mapping of C-APDUs and R-APDUs, the mechanism for exchange of data between the TTL and the ICC, and the use of the GET RESPONSE command for retrieval of data from the ICC when case 2 or 4 commands are used.

9.3.1.1 Mapping of C-APDUs and R-APDUs and Data Exchange

The mapping of the C-APDU onto the T=0 command header is dependent upon the case of the command. The mapping of the data (if present) and status returned by the ICC onto the R-APDU is dependent upon the length of the data returned and the meaning of the status bytes.

Procedure bytes '61xx' and '6Cxx' are returned by the ICC to control exchanges between the TTL and the ICC, and should never be returned to the TAL. Command processing in the ICC is not complete if it has returned procedure bytes '61xx' or '6Cxx'.

Note: For proprietary reasons, the TTL may in addition be capable of accepting data from the ICC without using the '61' and '6C' procedure bytes. Such functionality is not required and is beyond the scope of these specifications.

Normal status on completion of processing a command is indicated if the ICC returns status bytes SW1 SW2 = '9000' to the TTL. The TTL shall discontinue processing of a command (i.e. pass the R-APDU to the TAL and wait for a further C-APDU from the TAL) on receipt of any other status (but not on receipt of procedure bytes '61xx' and '6Cxx') from the ICC. (For case 4 commands only, immediately following successful transmission of command data to the ICC, the TTL shall continue processing the command if warning status bytes ('62xx' or '63xx') or application related status bytes ('9xxx' except '9000') are received.)

The following descriptions of the mapping of data and status returned by the ICC onto the R-APDU are for information, and apply only after the ICC has completed processing of the command, successfully or otherwise, and all data (if present) has been returned by the ICC under the control of '61xx' and '6Cxx' procedure bytes. Detailed use of the INS, $\overline{\text{INS}}$, and '60' procedure bytes is not described.

The status returned by the ICC shall relate to the most recently received command; where a GET RESPONSE command is used to complete the processing of a case 2 or case 4 command, any status returned by the ICC after receipt of the GET RESPONSE command shall relate to the GET RESPONSE command, not to the case 2 or case 4 command which it completes.

9.3.1.1.1 Case 1

The C-APDU header is mapped onto the first four bytes of the T=0 command header, and P3 of the T=0 command header is set to '00'.

The flow of the exchange is as follows:

1. The TTL shall send the T=0 command header to the ICC.
2. On receipt of the command header the ICC, under normal or abnormal processing, shall return status to the TTL.
(The ICC shall analyse the T=0 command header to determine whether it is processing a case 1 command or a case 2 command requesting all data up to the maximum length available.)
3. On receipt of status from the ICC, the TTL shall discontinue processing of the command.

See Annex A1 for details of the exchanges between the TTL and the ICC.

The status returned to the TTL from the ICC after completion of processing of the command is mapped onto the mandatory trailer of the R-APDU without change.

9.3.1.1.2 Case 2

The C-APDU header is mapped onto the first four bytes of the T=0 command header, and length byte 'Le' from the conditional body of the C-APDU is mapped onto P3 of the T=0 command header. READ RECORD commands issued during application selection and all case 2 commands issued according to Book 3 shall have Le = '00'.

The flow of the exchange is as follows:

1. The TTL shall send the T=0 command header to the ICC.
2. On receipt of the command header:
 - (a) under normal processing, the ICC shall return data and status to the TTL, using procedure bytes '6Cxx' (and if required, procedure bytes '61xx') to control the return of data
 - OR
 - (b) under abnormal processing, the ICC shall return status only to the TTL.
3. On receipt of the data (if present) and status from the ICC, the TTL shall discontinue processing the command.

See Annex A2 and Annex A5, for details of the exchanges between the TTL and the ICC, including use of the '61xx' and '6Cxx' procedure bytes.

The data (if present) and status returned to the TTL from the ICC after completion of processing of the command, or the status returned by the ICC that caused the TTL to discontinue processing of the command, are mapped onto the R-APDU as follows:

- The data returned (if present) is mapped onto the conditional body of the R-APDU. If no data is returned, the conditional body of the R-APDU is left empty.
- The status returned is mapped onto the mandatory trailer of the R-APDU without change.

9.3.1.1.3 Case 3

The C-APDU header is mapped onto the first four bytes of the T=0 command header, and length byte 'Lc' from the conditional body of the C-APDU is mapped onto P3 of the T=0 command header.

The flow of the exchange is as follows:

1. The TTL shall send the T=0 command header to the ICC.
2. On receipt of the command header:
 - (a) If the ICC returns a procedure byte, the TTL shall send the data portion of the conditional body of the C-APDU to the ICC under the control of procedure bytes returned by the ICC.
- OR
- (b) If the ICC returns status, the TTL shall discontinue processing of the command.
3. If processing was not discontinued in step 2(b), the ICC shall return status following receipt of the conditional body of the C-APDU and completion of processing the command.
4. On receipt of status from the ICC, the TTL shall discontinue processing the command.

See Annex A3, for details of the exchanges between the TTL and the ICC.

The status returned to the TTL from the ICC after completion of processing of the command, or the status returned by the ICC that caused the TTL to discontinue processing of the command, is mapped onto the R-APDU without change.

9.3.1.1.4 Case 4

The C-APDU header is mapped onto the first four bytes of the T=0 command header, and length byte 'Lc' from the conditional body of the C-APDU is mapped onto P3 of the T=0 command header. SELECT commands issued during application selection and all case 4 commands issued according to Book 3 shall have Le = '00'.

The flow of the exchange is as follows:

1. The TTL shall send the T=0 command header to the ICC.
2. On receipt of the command header:
 - (a) If the ICC returns a procedure byte, the TTL shall send the data portion of the conditional body of the C-APDU to the ICC under the control of procedure bytes returned by the ICC.
OR
 - (b) If the ICC returns status, the TTL shall discontinue processing of the command.
3. If processing was not discontinued in step 2(b), following receipt of the conditional body of the C-APDU:
 - (a) under normal processing, the ICC shall return procedure bytes '61xx' to the TTL requesting the TTL to issue a GET RESPONSE command to retrieve the data from the ICC.
OR
 - (b) under abnormal processing, the ICC shall return status only to the TTL.
4. On receipt of the procedure bytes or status returned in step 3:
 - (a) If the ICC returned '61xx' procedure bytes as in step 3(a), the TTL shall send a GET RESPONSE command header to the ICC with P3 set to a value less than or equal to the value contained in the 'xx' byte of '61xx' procedure bytes.
OR
 - (b) If the ICC returned status as in step 3(b) that indicates a warning ('62xx' or '63xx'), or which is application related ('9xxx' but not '9000'), the TTL shall send a GET RESPONSE command with Le='00'.
OR
 - (c) If the ICC returned status as in step 3(b) other than that described in step 4(b), the TTL shall discontinue processing of the command.
5. If processing was not discontinued in step 4(c), the GET RESPONSE command shall be processed according to the rules for case 2 commands in section 9.3.1.1.2.

See Annex A4 and Annex A6, for details of the exchanges between the TTL and the ICC, including use of the '61xx' and '6Cxx' procedure bytes.

The data (if present) and status returned to the TTL from the ICC after completion of processing of the command, or the status returned by the ICC that caused the TTL to discontinue processing of the command, are mapped onto the R-APDU as follows:

- The data returned (if present) is mapped onto the conditional body of the R-APDU. If no data is returned, the conditional body of the R-APDU is left empty.
- The first status returned during processing of the entire case 4 command, including the GET RESPONSE command if used, is mapped onto the mandatory trailer of the R-APDU without change.

9.3.1.2 Use of Procedure Bytes '61xx' and '6Cxx'

The ICC returns procedure bytes '61xx' and '6Cxx' to the TTL to indicate to it the manner in which it should retrieve the data requested by the command currently being processed. These procedure bytes are only used when processing case 2 and 4 commands.

Procedure bytes '61xx' instruct the TTL to issue a GET RESPONSE command to the ICC. P3 of the GET RESPONSE command header is set to ≤ 'xx'.

Procedure bytes '6Cxx' instruct the TTL to immediately resend the previous command header setting P3 = 'xx'.

Usage of these procedure bytes during error free processing with case 2 and 4 commands is as follows. In the case of an error, the ICC may return status indicating error or warning conditions instead of the '61xx' or '6Cxx' response.

9.3.1.2.1 Case 2 Commands

1. If the ICC receives a case 2 command header and $Le = '00'$ or $Le > Licc$, it shall return:
 - (a) procedure bytes '6C Licc' instructing the TTL to immediately resend the command header with $P3 = Licc$OR
 - (b) status indicating a warning or error condition (but not $SW1 SW2 = '90 00'$).

Note: If $Le = '00'$ and the ICC has 256 bytes of data to return, it should proceed as defined in the following rule for $Le = Licc$.

2. If the ICC receives a case 2 command header and $Le = Licc$, it shall return:
 - (a) data of length $Le (= Licc)$ under the control of the INS , \overline{INS} , or '60' procedure bytes followed by the associated statusOR
 - (b) procedure bytes '61xx' instructing the TTL to issue a GET RESPONSE command with a maximum length of 'xx'OR
 - (c) status indicating a warning or error condition (but not $SW1 SW2 = '90 00'$).
3. If the ICC receives a case 2 command header and $Le < Licc$, it shall return:
 - (a) data of length Le under the control of the INS , \overline{INS} , or '60' procedure bytes followed by procedure bytes '61xx' instructing the TTL to issue a GET RESPONSE command with a maximum length of 'xx'OR
 - (b) procedure bytes '6C Licc' instructing the TTL to immediately resend the command header with $P3 = Licc$OR
 - (c) status indicating a warning or error condition (but not $SW1 SW2 = '90 00'$).

3(b) above is not a valid response by the ICC to a GET RESPONSE command.

9.3.1.2.2 Case 4 Commands

1. If the ICC receives a case 4 command, after processing the data sent with the C-APDU, it shall return:
 - (a) procedure bytes '61 xx' instructing the TTL to issue a GET RESPONSE command with a maximum length of 'xx'
 - OR
 - (b) status indicating a warning or error condition (but not SW1 SW2 = '90 00').

The GET RESPONSE command so issued is then treated as described in section 9.3.1.2.1 for case 2 commands.

9.3.1.3 GET RESPONSE Command

The GET RESPONSE command is issued by the TTL to obtain available data from the ICC when processing case 2 and 4 commands. It is employed only when the T=0 protocol type is in use.

The structure of the command message is shown in Table 32:

CLA	'00'
INS	'C0'
P1	'00'
P2	'00'
Le	Maximum length of data expected

Table 32: Structure of Command Message

Following normal processing, the ICC returns status bytes SW1 SW2 = '9000' and Licc bytes of data.

In the event that an error condition occurs, the coding of the error status bytes (SW1 SW2) is shown in Table 33:

SW1	SW2	Meaning
'62'	'81'	Part of returned data may be corrupted
'67'	'00'	Length field incorrect
'6A'	'86'	P1 P2 ≠ '00'
'6F'	'00'	No precise diagnosis

Table 33: GET RESPONSE Error Conditions

9.3.2 Transportation of APDUs by T=1

The C-APDU is sent from the TAL to the TTL. The TTL maps the C-APDU onto the INF field of an I-block without change, and sends the I-block to the ICC.

Response data (if present) and status are returned from the ICC to the TTL in the INF field of an I-block. If The ICC returns status indicating normal processing ('9000'), a warning ('62xx' or '63xx'), or which is application related ('9xxx'), it shall also return data (if available) associated with processing of the command.

No data shall be returned with any other status. The contents of the INF field of the I-block are mapped onto the R-APDU without change and returned to the TAL.

Note: C-APDUs and response data/status may be chained over the INF fields of multiple blocks if required.

9.4 Application Layer

The application protocol consists of an ordered set of exchanges between the TAL and the TTL. Each step in an application layer exchange consists of a command-response pair, where the TAL sends a command to the ICC via the TTL, and the ICC processes it and sends a response via the TTL to the TAL. Each specific command has a specific response. An APDU is defined as a command message or a response message.

Both command and response messages may contain data. Thus, four cases shall be managed by the transmission protocols via the TTL, as shown in Table 34:

Case	Command Data	Response Data
1	Absent	Absent
2	Absent	Present
3	Present	Absent
4	Present	Present

Table 34: Definition of Cases for Data in APDUs

Note: When secure messaging is used only case 3 and case 4 commands exist since data (as a minimum, the MAC) is always sent to the ICC. When using secure messaging, case 1 commands will become case 3, and case 2 commands will become case 4.

9.4.1 C-APDU

The C-APDU consists of a mandatory header of four consecutive bytes denoted CLA, INS, P1, and P2, followed by a conditional body of variable length.

These mandatory header bytes are defined as follows:

- CLA: Instruction class; may take any value except 'FF'.
- INS: Instruction code within the instruction class. The INS is only valid if the l.s. bit is 0, and the m.s. nibble is neither '6' nor '9'.
- P1, P2: Reference bytes completing the INS.

Note: The full coding of the headers for each command is covered in section 11.

The conditional body consists of a string of bytes defined as follows:

- 1 byte, denoted by Lc, defining the number of data bytes to be sent in the C-APDU. The value of Lc may range from 1 to 255.
- String of bytes sent as the data field of the C-APDU, the number of bytes sent being as defined by Lc.
- 1 byte, denoted by Le, indicating the maximum number of data bytes expected in the R-APDU. The value of Le may range from 0 to 255; if Le = 0, the maximum number of bytes expected in the response is 256.

Note: The full coding of the data field of the conditional body for each command is covered in section 11.

The four possible C-APDU structures are defined in Table 35:

Case	Structure
1	CLA INS P1 P2
2	CLA INS P1 P2 Le
3	CLA INS P1 P2 Lc Data
4	CLA INS P1 P2 Lc Data Le

Table 35: C-APDU Structures

9.4.2 R-APDU

The R-APDU is a string of bytes consisting of a conditional body followed by a mandatory trailer of two bytes denoted SW1 SW2.

The conditional body is a string of data bytes with a maximum length as defined by Le in the C-APDU.

The mandatory trailer indicates the status of the ICC after processing the command.

The coding of SW1 SW2 is defined in section 11.

Part III

Files, Commands, and Application Selection

10 Files

An application in the ICC includes a set of items of information, often contained within files. These items of information may be accessible to the terminal after a successful application selection.

An item of information is called a data element. A data element is the smallest piece of information that may be identified by a name, a description of logical content, a format, and a coding.

It is up to the issuer to ensure that data in the card is of the correct format.

The data element directory defined in Annex B includes those data elements that may be used for application selection. Data elements used during application selection that are not specified in Annex B are outside the scope of these specifications.

10.1 File Structure

The file organisation applying to this specification is deduced from and complies with the basic organisations as defined in ISO/IEC 7816-4.

This section describes the file structure of applications conforming to this specification.

The files within the ICC are seen from the terminal as a tree structure. Every branch of the tree is an Application Definition File (ADF) or a Directory Definition File (DDF). An ADF is the entry point to one or more Application Elementary Files (AEFs). An ADF and its related data files are seen as being on the same branch of the tree. A DDF is an entry point to AEFs, ADFs or other DDFs.

10.1.1 Application Definition Files

The tree structure of ADFs:

- Enables the attachment of data files to an application.
- Ensures the separation between applications.
- Allows access to the logical structure of an application by its selection.

An ADF is seen from the terminal as a file containing only data objects encapsulated in its file control information (FCI) as shown in Table 45.

10.1.2 Application Elementary Files

The structure and use of AEFs is application dependent. For the EMV Debit/Credit application, the files are described in Book 3.

10.1.3 Mapping of Files onto ISO/IEC 7816-4 File Structure

The following mapping onto ISO/IEC 7816-4 applies:

- A dedicated file (DF) as defined in ISO/IEC 7816-4 and containing a FCI is mapped onto an ADF or a DDF. It may give access to elementary files and DFs. The DF at the highest level of the card is the master file (MF).
- An elementary file (EF) as defined in ISO/IEC 7816-4 is mapped onto the AEF. An EF is never used as an entry point to another file.

If DFs are embedded, retrieval of the attached EF is transparent to this specification.

10.1.4 Directory Structure

When the Payment System Environment (PSE) as described in section 12.2.2 is present, the ICC shall maintain a directory structure for the list of applications within the PSE that the issuer wants to be selected by a directory. In that case, the applications are listed in a Payment System Directory file (DIR file), the location of which is indicated in the FCI of the PSE DDF.

The directory structure allows for retrieval of an application using its ADF Name.

The location of the DIR file shall be coded in the response message to the selection of the PSE (see the SELECT command).

The DIR file is an AEF (in other words, an EF) with a record structure according to this specification including the following data objects according to ISO/IEC 7816-4:

- One or more records that each contains one or more Application Templates (tag '61') containing an ADF directory entry, that is, DF Name (see Table 46).
- Optionally, other data objects present within a Directory Discretionary Template (tag '73'). The data objects contained in this template are outside the scope of this specification.

Directories are optional within an ICC, and when present there is no defined limit to the number of such directories that may exist. Each such directory is located by a directory SFI data object contained in the FCI of each DDF.

10.2 File Referencing

A file may be referred to by a name or a SFI depending on its type.

10.2.1 Referencing by Name

Any ADF or DDF in the card is referenced by its DF Name. A DF Name for an ADF corresponds to the AID or contains the AID as the beginning of the DF Name. Each DF Name shall be unique within a given card. A DF Name shall not be a substring of another DF Name on the card.

10.2.2 Referencing by SFI

SFIs are used for the selection of AEFs. Any AEF within a given application is referenced by a SFI coded on 5 bits in the range 1 to 30. The coding of the SFI is described in every command that uses it. A SFI shall be unique within an application.

11 Commands

11.1 Message Structure

Messages are transported between the terminal and the card according to the transmission protocol selected at the ATR (see Part II). The terminal and the card shall also implement the physical, data link, and transport layers as defined in Part II.

To run an application, an additional layer called application protocol is implemented in the terminal. It includes steps consisting of sending a command to the card, processing it in the card, and sending back the response to the terminal. All commands and responses referred to in the remainder of this Book are defined at the application layer.

The command message sent from the application layer and the response message returned by the card to the application layer are called Application Protocol Data Units (APDU). A specific response corresponds to a specific command. These are referred to as APDU command-response pairs. In an APDU command-response pair, the command message and the response message may contain data.

This section describes the structure of the APDU command-response pairs necessary to the application protocols defined in this specification. This Book describes only those commands necessary to the functioning of application selection. All other commands shall be implemented as required by specific applications, but shall conform to the APDU structures (formats) defined in Book 3, Part II.

11.1.1 Command APDU Format

The command APDU consists of a mandatory header of four bytes followed by a conditional body of variable length, as shown in Figure 15:




Figure 15: Command APDU Structure

The number of data bytes sent in the command APDU is denoted by Lc (length of command data field).

The maximum number of data bytes expected in the response APDU is denoted by Le (length of expected data). When Le is present and contains the value zero, the maximum number of data bytes available (≤ 256) is requested. READ RECORD and SELECT commands issued during application selection and all case 2 and case 4 commands issued according to Book 3 shall have Le = '00'.

The content of a command APDU message is as shown in Table 36:

Code	Description	Length
CLA	Class of instruction	1
INS	Instruction code	1
P1	Instruction parameter 1	1
P2	Instruction parameter 2	1
Lc	Number of bytes present in command data field	0 or 1
Data	String of data bytes sent in command (= Lc)	var.
Le	Maximum number of data bytes expected in data field of response	0 or 1

Table 36: Command APDU Content

The different cases of command APDU structure are described in Table 35.

11.1.2 Response APDU Format

The response APDU format consists of a conditional body of variable length followed by a mandatory trailer of two bytes, as shown in Figure 16:




Figure 16: Response APDU Structure

The number of data bytes received in the response APDU is denoted by Lr (length of response data field). Lr is not returned by the transport layer. The application layer may rely on the object oriented structure of the response message data field to calculate Lr if needed.

The trailer indicates in two bytes the processing state of the command as returned by the transport layer.

The content of a response APDU message is as shown in Table 37:

Code	Description	Length
Data	String of data bytes received in response	var(= Lr)
SW1	Command processing status	1
SW2	Command processing qualifier	1

Table 37: Response APDU Content

11.2 READ RECORD Command-Response APDUs

11.2.1 Definition and Scope

The READ RECORD command reads a file record in a linear file.

The response from the ICC consists of returning the record.

11.2.2 Command Message

The READ RECORD command message is coded according to Table 38:

Code	Value
CLA	'00'
INS	'B2'
P1	Record number
P2	Reference control parameter (see Table 39)
Lc	Not present
Data	Not present
Le	'00'

Table 38: READ RECORD Command Message

Table 39 defines the reference control parameter of the command message:

b8	b7	b6	b5	b4	b3	b2	b1	Meaning
x	x	x	x	x				SFI
					1	0	0	P1 is a record number

Table 39: READ RECORD Command Reference Control Parameter

11.2.3 Data Field Sent in the Command Message

The data field of the command message is not present.

11.2.4 Data Field Returned in the Response Message

The data field of the response message of any successful READ RECORD command contains the record read. Records read during application selection are directory records which are formatted as in section 12.2.3. The format of records read during application processing is application dependent.

11.2.5 Processing State Returned in the Response Message

'9000' indicates a successful execution of the command.

11.3 SELECT Command-Response APDUs

11.3.1 Definition and Scope

The SELECT command is used to select the PSE, a DDF, or an ADF corresponding to the submitted file name or AID. The selection of an application is described in section 12.

A successful execution of the command sets the path to the PSE, DDF, or ADF.

Subsequent commands apply to AEFs associated with the selected PSE, DDF, or ADF using SFIs.

The response from the ICC consists of returning the FCI.

11.3.2 Command Message

The SELECT command message is coded according to Table 40:

Code	Value
CLA	'00'
INS	'A4'
P1	Reference control parameter (see Table 41)
P2	Selection options (see Table 42)
Lc	'05'-'10'
Data	File name
Le	'00'

Table 40: SELECT Command Message

Table 41 defines the reference control parameter of the SELECT command message:

b8	b7	b6	b5	b4	b3	b2	b1	Meaning
0	0	0	0	0				
								1
					0	0		

Table 41: SELECT Command Reference Control Parameter

Table 42 defines the selection options P2 of the SELECT command message:

b8	b7	b6	b5	b4	b3	b2	b1	Meaning
						0	0	First or only occurrence
						1	0	Next occurrence

Table 42: SELECT Command Options Parameter

11.3.3 Data Field Sent in the Command Message

The data field of the command message contains the PSE name or the AID to be selected. During final selection of the application to be used, the data field shall be the DF Name if List of AIDs selection has been used, or ADF Name if PSE selection has been used.

11.3.4 Data Field Returned in the Response Message

The data field of the response message contains the FCI specific to the selected PSE, DDF, or ADF. The tags defined in Table 43, Table 44, and Table 45 apply to this specification. No additional data elements shall be present in the FCI template (tag '6F') returned in the response to the SELECT command other than those contained in template 'BF0C'. Padding is not allowed within the FCI returned by the card. Terminals shall accept and correctly parse an FCI containing padding unless the FCI would be rejected due to other errors.

Data elements present in templates '6F' and/or 'BF0C' that are not expected or understood by the terminal because the terminal does not support any issuer-specific processing shall be ignored.

Table 43 defines the FCI returned by a successful selection of the PSE:

Tag	Value		Presence
'6F'	FCI Template		M
	'84'	DF Name	M
	'A5'	FCI Proprietary Template	M
	'88'	SFI of the Directory Elementary File	M
	'5F2D'	Language Preference	O
	'9F11'	Issuer Code Table Index	O
	'BF0C'	FCI Issuer Discretionary Data	O
	'XXXX' (Tag constructed according to Book 3, Annex B)	1 or more additional proprietary data elements from an application provider, issuer, or IC card supplier, or EMV-defined tags that are specifically allocated to 'BF0C'	O

Table 43: SELECT Response Message Data Field (FCI) of the PSE

Table 44 defines the FCI returned by a successful selection of a DDF:

Tag	Value		Presence
'6F'	FCI Template		M
	'84'	DF Name	M
	'A5'	FCI Proprietary Template	M
	'88'	SFI of the Directory Elementary File	M
	'BF0C'	FCI Issuer Discretionary Data	O
	'XXXX'	1 or more additional proprietary data elements from an application provider, issuer, or IC card supplier, or EMV-defined tags that are specifically allocated to 'BF0C'	O

Table 44: SELECT Response Message Data Field (FCI) of a DDF

Table 45 defines the FCI returned by a successful selection of an ADF:

Tag	Value		Presence
'6F'	FCI Template		M
	'84'	DF Name	M
	'A5'	FCI Proprietary Template	M
	'50'	Application Label	M
	'87'	Application Priority Indicator	O
	'9F38'	PDOL	O
	'5F2D'	Language Preference	O
	'9F11'	Issuer Code Table Index	O
	'9F12'	Application Preferred Name	O
	'BF0C'	FCI Issuer Discretionary Data	O
	'9F4D'	Log Entry	O
	'XXXX' (Tag constructed according to Book 3, Annex B)	1 or more additional proprietary data elements from an application provider, issuer, or IC card supplier, or EMV-defined tags that are specifically allocated to 'BF0C'	O

Table 45: SELECT Response Message Data Field (FCI) of an ADF

11.3.5 Processing State Returned in the Response Message

'9000' indicates a successful execution of the command.

ICC support for the selection of a DF using only a partial DF Name is not mandatory. However, if the ICC does support partial name selection, it shall comply with the following:

- If, after a DF has been successfully selected, the terminal repeats the SELECT command having P2 set to the Next Occurrence option (see Table 42) and with the same partial DF Name, the card shall select a different DF matching the partial name, if another such DF exists.
- Repeated issuing of the same command with no intervening application level commands shall retrieve all such files, but shall retrieve no file twice.

- After all matching DFs have been selected, repeating the same command again shall result in no file being selected, and the card shall respond with SW1 SW2 = '6A82' (file not found).

12 Application Selection

12.1 Overview of Application Selection

During an EMV card session as defined in section 6.1.1, application selection using the commands and techniques described in sections 11 and 12 shall be the first process performed immediately after contact activation/reset of the card and prior to the first application function. If a proprietary processing session (including any proprietary application selection method) is performed immediately before or after an EMV card session, there is no requirement to remove/reinsert the card between the sessions. However, if proprietary processing occurs before the EMV card session, the card contacts shall be deactivated before starting the EMV card session.

This section describes the application selection process from the standpoint of both the card and the terminal. It specifies the logical structure of data and files within the card that are required for the process, and then describes the terminal logic using the card structure.

It is not recommended that the ICC and the terminal use implicit selection as defined in ISO 7816, as it is not useful in an interchange environment. If used, it shall be performed outside the EMV card session as defined in section 6.1.1.

The application selection process described in this section is the process by which the terminal uses data in the ICC according to protocols defined herein to determine the terminal program and the ICC application to be used in processing a transaction. The process is described in two steps:

1. Create a list of ICC applications that are supported by the terminal. (This list is referred to below using the name ‘candidate list.’) This process is described in section 12.3.
2. Select the application to be run from the list generated above. This process is described in section 12.4.

This section of the specification describes the necessary information in the card and two terminal selection algorithms that yield the correct results. Other terminal selection algorithms that yield the same results are permitted in place of the selection algorithms described here.

A payment system application is comprised of the following:

- A set of files in the ICC providing data customised by the issuer
- Data in the terminal provided by the acquirer or the merchant
- An application protocol agreed upon by both the ICC and the terminal

Applications supported by the terminal are identified by AIDs conforming to ISO/IEC 7816-4. Applications supported by the ICC are identified by DF Names conforming to ISO/IEC 7816-4. For further details see section 12.2.1 below).

The techniques chosen by the payment systems and described herein are designed to meet the following key objectives:

- Ability to work with ICCs with a wide range of capabilities.
- Ability for terminals with a wide range of capabilities to work with all ICCs supporting payment system applications according to this specification.
- Conformance with ISO standards.
- Ability of ICCs to support multiple applications, not all of which need to be payment system applications.
- Ability for ICCs to provide multiple sets of applications to be supported by a single terminal program. (For example, a card may contain multiple credit/debit applications, each representing a different type or level of service or a different account).
- As far as possible, provide the capability for applications conforming with this specification to co-reside on cards with presently existing applications.
- Minimum overhead in storage and processing.
- Ability for the issuer to optimise the selection process.

The set of data that the ICC contains in support of a given application is defined by an ADF selected by the terminal using a SELECT command and an Application File Locator (AFL) returned by the ICC in response to a GET PROCESSING OPTIONS command.

12.2 Data in the ICC Used for Application Selection

12.2.1 Coding of Payment System Application Identifier

The structure of AIDs, ADF Names and DF Names is according to ISO/IEC 7816-4 and consists of two parts:

1. A Registered Application Provider Identifier (RID) of 5 bytes, unique to an application provider and assigned according to ISO/IEC 7816-4.
2. An optional field assigned by the application provider of up to 11 bytes. This field is known as a Proprietary Application Identifier Extension (PIX) and may contain any 0–11 byte value specified by the provider. The meaning of this field is defined only for the specific RID and need not be unique across different RIDs.

Additional ADFs defined under the control of other application providers may be present in the ICC but shall avoid duplicating the range of RIDs assigned to payment systems. Compliance with ISO/IEC 7816-4 will assure this avoidance.

12.2.2 Structure of the PSE

The PSE is accessed via a DDF with the name '1PAY.SYS.DDF01'. The presence of this DDF in the ICC is optional but, if present, it shall comply with this specification. If it is present, this DDF is mapped onto a DF within the card, which may or may not be the MF, and shall contain a Payment System Directory. The FCI of this DDF shall contain at least the information defined for all DDFs in section 11 and, optionally, the Language Preference (tag '5F2D') and the Issuer Code Table Index (tag '9F11').

The Language Preference and Issuer Code Table Index are optional data objects that may occur in two places: the FCI of the PSE and the FCI of ADF files. If either of these data elements is present in one location but not the other, the terminal shall use the data element that is present. If either data element is present in both locations but has different values in the two locations, the terminal may use either value.⁹

The directory attached to the PSE DDF contains entries for ADFs that are formatted according to this specification, although the applications defined by those ADFs may or may not conform to this specification.

The directory is not required to have entries for all ADFs in the card. However, if the PSE exists, only applications that are revealed by reading the directory can be assured of international interoperability.

See Annex C for examples of the internal logic structure of an ICC containing the PSE.

⁹ A terminal building a candidate list using the process described in section 12.3.2 will encounter the values specified in the FCI of the PSE and will not see the values specified in the FCI of the ADF until the application to be run has been chosen. A terminal building the candidate list using the process described in section 12.3.3 will encounter the values specified in the FCI of the ADFs. To ensure consistent interface to the cardholder, the values must be the same.

12.2.3 Coding of a Payment System Directory

A Payment System Directory is a linear EF file identified by a SFI in the range 1 to 10. The SFI for the Payment System Directory AEF is contained in the FCI of the DDF to which the directory is attached. The Payment System Directory is read using the READ RECORD command as defined in section 11.

A record may have several directory entries, but a directory entry shall always be encapsulated in its entirety in a single record. Each record in the Payment System Directory is a constructed data object, and the value field is comprised of one or more directory entries as described below in Table 46:

Tag '70'	Data Length (L)	Tag '61'	Length of directory entry 1	Directory entry 1 (ADF)	...	Tag '61'	Length of directory entry n	Directory entry n (ADF)
-------------	-----------------------	-------------	--------------------------------------	-------------------------------	-----	-------------	--------------------------------------	-------------------------------

Table 46: Payment System Directory Record Format

Payment Systems Directory records shall not contain any entries for DDFs. If the terminal encounters a directory entry for a DDF in one of these records, it may ignore it or may optionally process the DDF, but any such processing is outside the scope of EMV.

Each entry in a Payment System Directory is the value field of an Application Template (tag '61') and contains the information according to Table 47. No additional data elements shall be present in the Payment System Directory Record (tag '70') other than those contained in template '73'.

Data elements present in the Payment System Directory Record, template '61', or template '73' that are not expected or understood by the terminal because the terminal does not support any issuer-specific processing, shall be ignored.

Tag	Length	Value		Presence
'4F'	5–16	ADF Name		M
'50'	1–16	Application Label		M
'9F12'	1–16	Application Preferred Name		O
'87'	1	Application Priority Indicator (see Table 48)		O
'73'	var.	Directory Discretionary Template		O ¹¹
	'XXXX' (Tag constructed according to Book 3, Annex B)	var.	1 or more additional proprietary data elements from an application provider, issuer, or IC card supplier, or EMV-defined tags that are specifically allocated to template '73'	O

Table 47: ADF Directory Entry Format

b8	b7–b5	b4–b1	Definition
1			Application cannot be selected without confirmation by the cardholder
0			Application may be selected without confirmation by the cardholder
	xxx		RFU
		0000	No priority assigned
		xxxx (except 0000)	Order in which the application is to be listed or selected, ranging from 1–15, with 1 being highest priority

Table 48: Format of Application Priority Indicator

¹¹ Other data objects not relevant to this specification may appear in this constructed data object.

12.2.4 Error Handling for FCI Response Data

The data elements Application Label, Application Preferred Name, Issuer Code Table Index, and Language Preference are present for the convenience of the cardholder and are not critical to the successful processing of application selection. If these data elements are present in the FCI, the issuer is responsible for their correct encoding.

If the Application Label data element is not present in the FCI of an ADF, the terminal shall not terminate the card session but shall proceed with application selection.

Terminals shall not enforce the correct formatting of these data elements. If Application Preferred Name or Application Label contains a character that is not valid for the defined format, the terminal shall display the character if it is able to, or if the terminal is unable to display the invalid character, it should omit the character or substitute a space character or any other appropriate character. Otherwise, if the terminal detects format errors in any of these data elements, the terminal shall disregard these errors and act as if the response provided by the card did not contain these data elements. More specifically, the terminal shall not terminate the card session but shall proceed with application selection.

If the terminal does not understand the value in Issuer Code Table Index or Language Preference, it shall treat the data element as not present.

12.3 Building the Candidate List

A terminal shall always support application selection using the List of AIDs method as described in section 12.3.3. A terminal may additionally support application selection using the PSE method as described in section 12.3.2. If the card contains no PSE, the procedure described in section 12.3.3 must be followed.

The terminal may know other ways that are not described in this section to locate proprietary applications or to eliminate specific applications in the ICC from consideration. This is permitted as long as all interoperable applications can be located in the ICC using the techniques described here.

12.3.1 Matching Terminal Applications to ICC Applications

The terminal shall maintain a list of applications supported by the terminal identified by their AIDs. The terminal determines which applications in the ICC are supported by comparing the AIDs for applications supported by the terminal with the DF Names¹² of applications supported by the ICC.

For each of the AIDs within the list of applications supported by the terminal, the terminal shall use the Application Selection Indicator (ASI) as an indicator of the matching criterion to use.

- If the ASI indicates that the terminal supports the ICC application only when the AID in the terminal has the same length and value as the DF Name then this limits the ICC to at most one matching ADF.
- If the ASI indicates that the terminal supports the ICC application when the DF Name begins with the entire AID kept within the terminal then this allows the ICC to have multiple ADFs matching the terminal AID by adding unique information to the DF Name used by each of the ADFs.

¹² Depending upon the method used to build the candidate list, the names in the list will be ADF Names found in directory entries if the PSE selection method is used or DF Names found in the FCIs returned to SELECT commands if the List of AIDs method is used. For readability in this section, the term DF Name is used in place of either.

If the ICC does not support partial name selection as described in section 11.3.5, the DF Name of the ADF must be an exact match with the terminal AID.

If the ICC supports partial name selection as described in section 11.3.5 and has multiple ADFs supported by a single terminal AID, all of the matching DF Names must be distinguished by adding unique data to the PIX. All of the matching DF Names shall be longer than the corresponding terminal AID.

12.3.2 Using the PSE

If a terminal chooses to support application selection using the PSE method, it shall follow the procedure described in this section to determine the applications supported by the card. Figure 17 is a flow diagram of the logic described here.

The terminal performs the following steps:

1. The terminal begins by selecting the PSE using a SELECT command as described in section 11 using a file name of '1PAY.SYS.DDF01'. This establishes the PSE and makes the Payment System Directory accessible.

If the card is blocked or the SELECT command is not supported (both conditions represented by SW1 SW2 = '6A81'), the terminal terminates the session.

If there is no PSE in the ICC, the ICC shall return '6A82' ('File not found') in response to the SELECT command for the PSE. In this case, the terminal shall use the List of AIDs method described in section 12.3.3.

If the PSE is blocked, the ICC shall return '6283'. In this case, the terminal shall use the List of AIDs method described in section 12.3.3.

If the ICC returns SW1 SW2 = '9000', the terminal proceeds to step 2.

If the card returns any other value in SW1 SW2, the terminal shall use the List of AIDs method described in section 12.3.3.

If any error, including a SW1 SW2 different from '90 00' or '6A 83', occurs in steps 2 through 4, the terminal shall clear the candidate list and restart the application selection process using the List of AIDs method described in section 12.3.3 to find the matching applications.

2. The terminal uses the Directory SFI from the FCI returned and reads all the records in the Payment System Directory beginning with record number 1 and continuing with successive records until the card returns SW1 SW2 = '6A83', which indicates that the record number requested does not exist. (The card shall return '6A83' if the record number in the READ RECORD command is greater than the number of the last record in the file). If the card returns SW1 SW2 = '6A83' in response to a READ RECORD for record number 1 for the Payment System Directory, no directory entries exist, and step 5 (below) applies.

For each record in the Payment System Directory, the terminal begins with the first directory entry and processes each directory entry in turn as described in steps 3 and 4. If there are no directory entries in the record, the terminal proceeds to the next directory record.

3. If the ADF Name in the directory entry matches one of the applications supported by the terminal as defined in section 12.3.1, the application joins the candidate list for final application selection under control of the ASI maintained in the terminal for that AID.

The ASI indicates whether the AID in the terminal shall match exactly (both in length and name) or need only partially match the associated ADF Name in the directory entry (tag '4F').

The application is added to the candidate list in either of the following cases:

- the ADF Name in the directory entry retrieved is an exact match, or
- the ASI for the AID in the terminal indicates that a partial match is allowed.

The application is not added to the candidate list if the ADF Name in the directory entry retrieved is not an exact match and the ASI for the AID in the terminal indicates that an exact match is required.

4. When the terminal finishes processing all entries in the last record of the Payment System Directory, all ADFs that can be found by this procedure have been determined. The search and the candidate list are complete. If at least one matching ADF Name was found, the terminal continues processing as described in section 12.4.
5. If steps 1 through 4 yield no directory entries that match applications supported by the terminal, the terminal shall use the list of AIDs method described in section 12.3.3 to find a match.

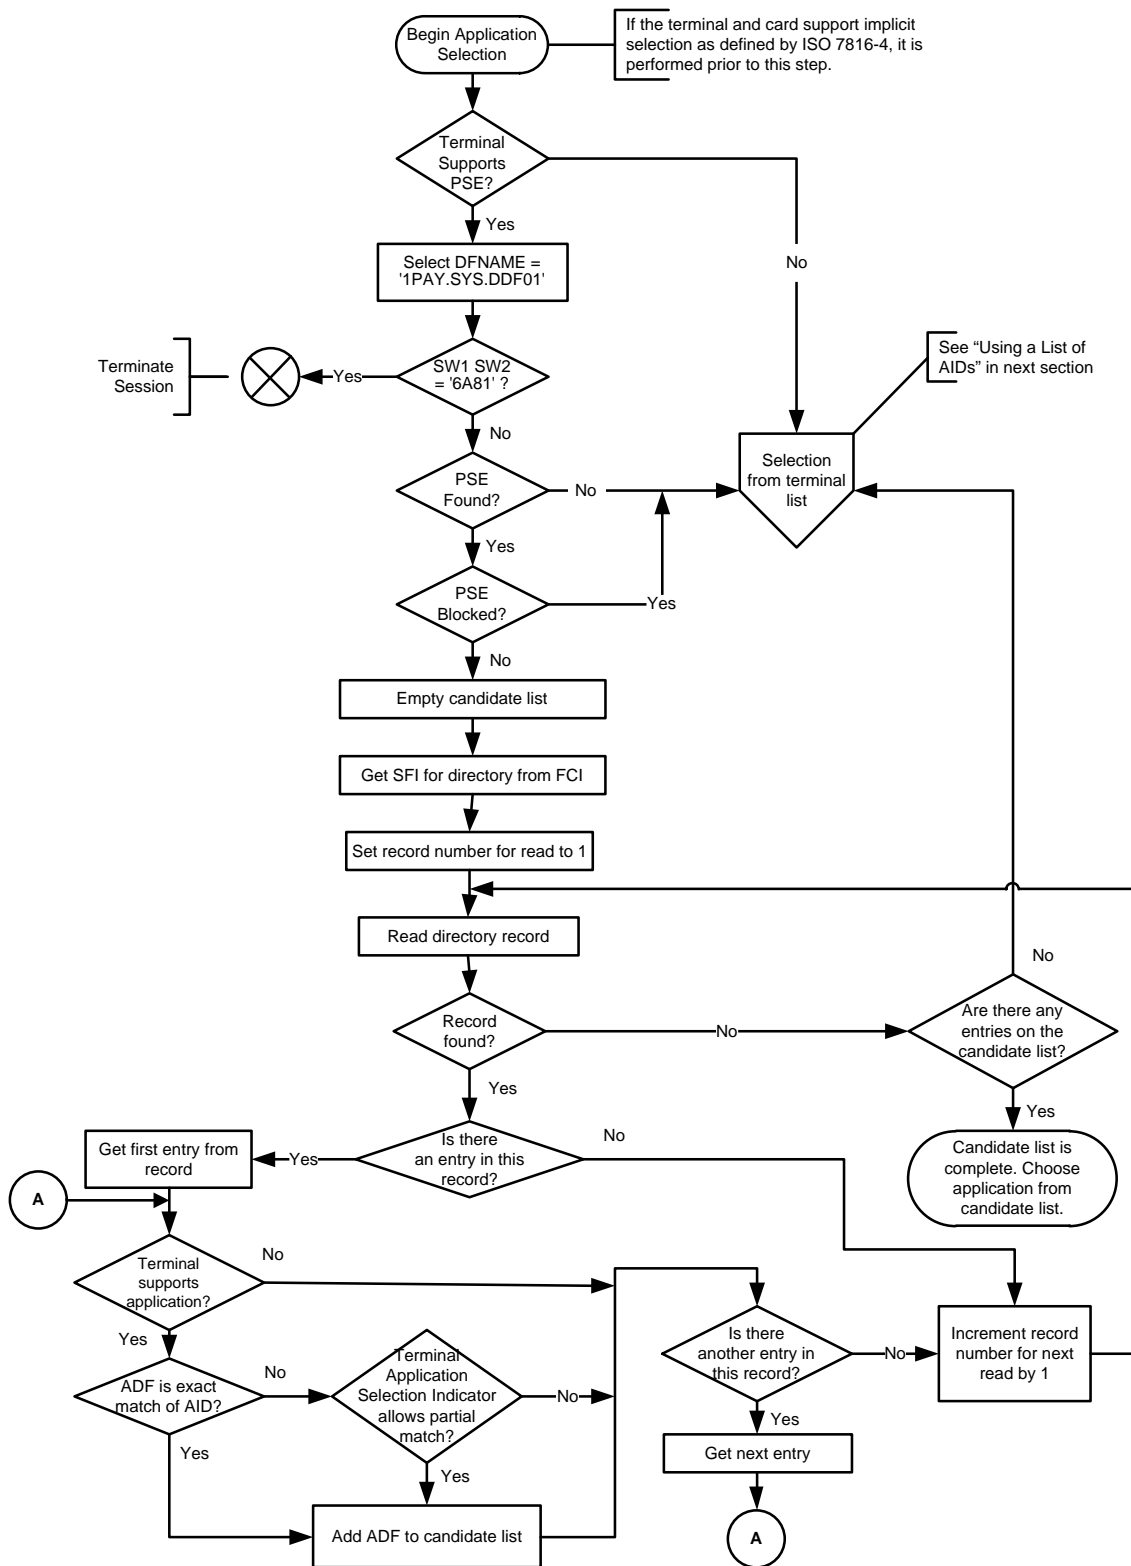


Figure 17: Terminal Logic Using Directories

12.3.3 Using a List of AIDs

If either the card or the terminal does not support the PSE method or if the terminal is unable to find a matching application using the Payment System Directory selection method, the terminal shall use a list of AIDs that it supports to build the candidate list. Figure 18 is a flow diagram of the logic described here.

The terminal performs the following steps:

1. The terminal issues a SELECT command using the first AID¹³ in the terminal list as the file name.
2. If the SELECT command fails because the card is blocked or the command is not supported by the ICC (SW1 SW2 = '6A81'), the terminal terminates the card session.
3. If the SELECT command is successful (SW1 SW2 = '9000' or '6283'), the terminal compares the AID with the DF Name field returned in the FCI. The DF Name will either be identical to the AID (including the length), or the DF Name will start with the AID but will be longer. If the names are identical, the terminal proceeds with step 4. If the DF Name is longer, the card processed the command as a partial name selection, and the terminal proceeds to step 6.

If the card returns any other status or if mandatory data is missing from the SELECT response or if the FCI contains formatting errors not described in Section 12.2.4, the terminal proceeds to Step 5 without adding the DF Name to the candidate list.

4. If the SELECT command is successful (SW1 SW2 = '9000'), the terminal adds the DF Name and other information¹⁴ from the FCI to the candidate list and proceeds to step 5. If the application is blocked (SW1 SW2 = '6283'), the terminal proceeds to step 5 without adding the DF Name to the candidate list.
5. The terminal issues another SELECT command using the next AID in its list and returns to step 3. If there are no more AIDs in the list, the candidate list is complete, and the terminal proceeds as specified in section 12.4.

¹³ To assist in a clear understanding of the process described in this section, it is necessary to distinguish between the application identifier kept in the terminal and the application identifier kept in the ICC. As can be seen in section 12.3.1, these might not be identical even for matching applications. In this procedure, the term AID is used for the application identifier kept in the terminal, and DF Name is used for the application identifier in the card.

¹⁴ The Application Label and Application Preferred Name must also be saved if the cardholder will be provided a list during final selection. The DF Name and the Application Priority Indicator will be required in any case.

6. Along with the AID list, the terminal keeps an Application Selection Indicator that indicates whether the card may have multiple occurrences of the application within the card. The terminal checks this indicator. If the indicator says that an exact match (in both length and name) is required, the terminal does not add the DF Name and other information from the FCI to the candidate list, but proceeds to step 5.

If multiple occurrences are permitted, the partial name match is sufficient. If the application is not blocked (SW1 SW2 = '9000'), the terminal adds the DF Name and other information from the FCI to the candidate list and proceeds to step 7.

If multiple occurrences are permitted but the application is blocked (SW1 SW2 ≠ '9000'), the terminal proceeds to step 7 without adding the DF Name or other information from the FCI to the candidate list.

7. The terminal repeats the SELECT command using the same command data as before, but changes P2 in the command to '02' (Select Next). If the ICC returns SW1 SW2 = '9000', '62xx', or '63xx', the terminal returns to step 3. If it returns a different SW1 SW2, the terminal goes to step 5.

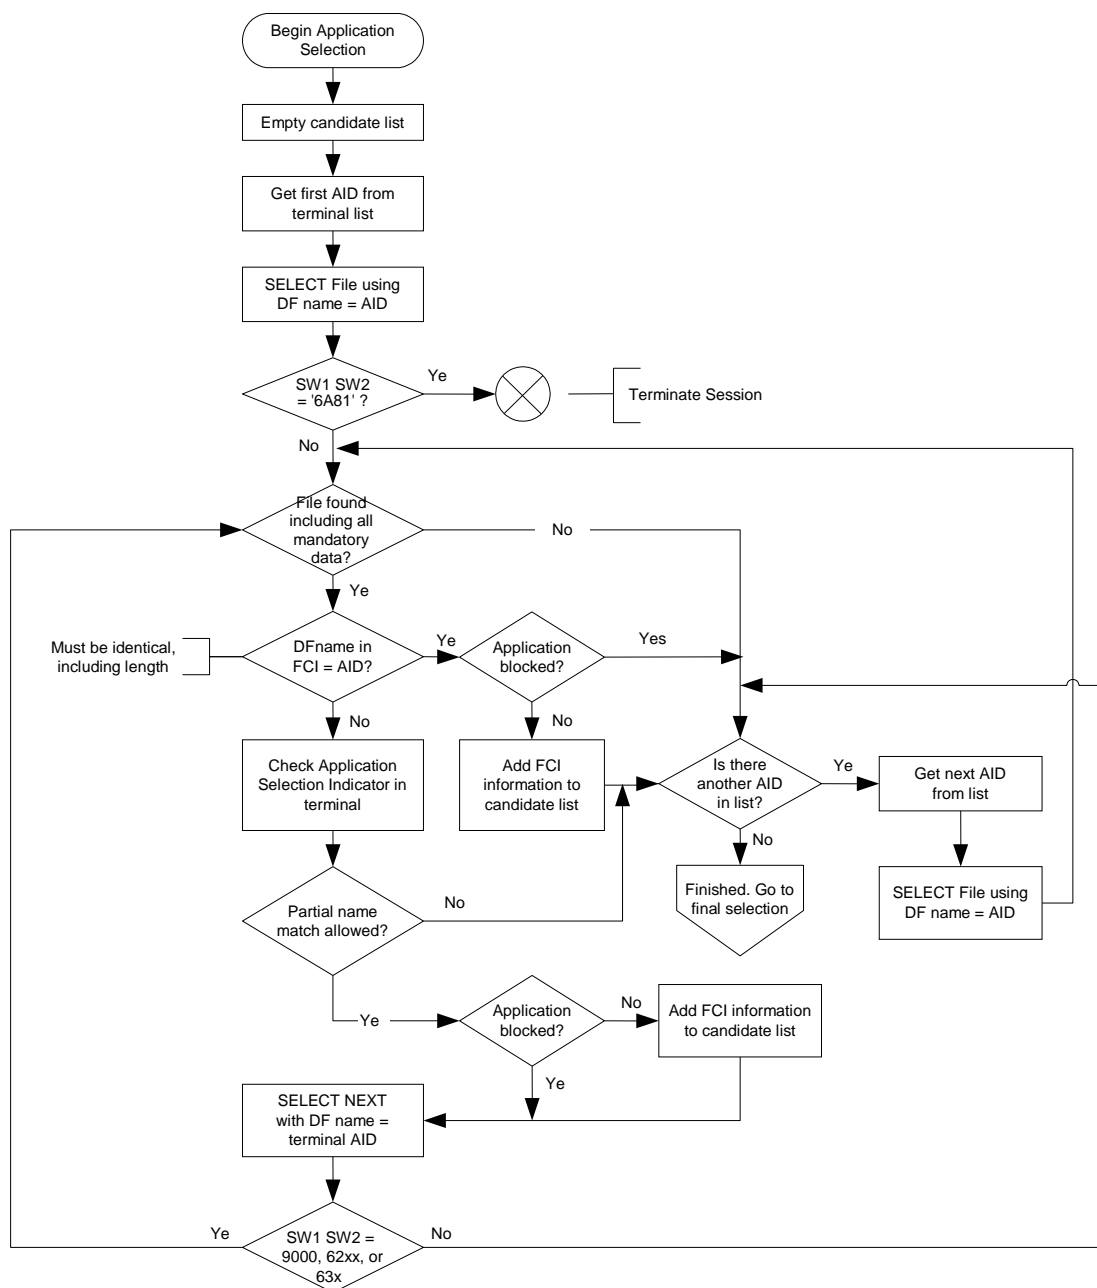


Figure 18: Using the List of AIDs in the Terminal

12.4 Final Selection

The terminal should support the ability to allow the cardholder to select an application or to confirm the application proposed by the terminal.

When the terminal displays an application to the cardholder, it shall display:

- the Application Preferred Name, if present and if the Issuer Code Table Index indicating the part of ISO/IEC 8859 to use is present and supported by the terminal (as indicated in Additional Terminal Capabilities)
- otherwise the Application Label, if present, by using the common character set of ISO/IEC 8859 (see Book 4 Annex B)

Once the terminal determines the list of mutually supported applications, it proceeds as follows:

1. If there are no mutually supported applications, the transaction is terminated.
2. If there is only one mutually supported application, the terminal checks b8 of the card's Application Priority Indicator for that application if present.
 - If b8 = '0', the terminal selects the application.
 - If b8 = '1' and the terminal provides for confirmation by the cardholder, the terminal requests confirmation and selects the application if the cardholder approves. If the terminal does not provide for confirmation by the cardholder, or if the terminal requests confirmation and the cardholder does not approve, the terminal terminates the session.
3. If there is more than one mutually supported application, then:
 - if the terminal supports the ability to allow the cardholder to select an application the terminal shall offer a selection to the cardholder as described in step 4
 - if the terminal does not support the ability to allow the cardholder to select an application, the terminal makes the selection itself as described in step 5.

Step 4 is the preferred method.

4. When the terminal offers a selection to the cardholder, then:
 - Applications where the card's Application Priority Indicator is present shall be presented in priority sequence as indicated by the Application Priority Indicator with the highest priority application offered first. Where the same priority is assigned to multiple applications, the terminal may present these applications in its own preferred order or in the order encountered in the card.

- For applications where the card's Application Priority Indicator is not present, the terminal may present these applications in its own preferred order or in the order encountered in the card.
5. When the terminal does not offer a selection to the cardholder, then the terminal shall select the highest priority application that does not require cardholder confirmation (that is, the card's Application Priority Indicator b8 = '0') from the list of mutually supported applications. The application's priority is determined using the same rules as described in step 4.

Once the application to be run is determined by the terminal or by the cardholder, the application shall be selected. A SELECT command coded according to section 11 shall be issued by the terminal for the application using the ADF Name field (if a directory was read) or the DF Name field from the FCI (if the List of AIDs method was used) found during the building of the candidate list.

On successful selection of the application to be used (SW1 SW2 = '9000' returned in response to the final SELECT command, the response contains no format errors other than those described in section 12.2.4, and the AID used in the final SELECT command exactly matches the DF Name (tag '84') returned by the ICC in the FCI), the terminal shall set the value of the terminal data element Application Identifier (AID) – terminal (tag '9F06') to the same value as the DF Name (tag '84') returned in the FCI. If transaction processing is to be continued according to Book 3, this shall be done prior to issuance of the GET PROCESSING OPTIONS command.

If the command returns other than '9000' in SW1 SW2 or the SELECT response contains format errors other than those described in section 12.2.4, the application shall be removed from the candidate list, and processing shall resume at step 1.

If the cardholder selects or confirms the selection of an application that is subsequently removed from the candidate list due to its being blocked or for any other reason, no application is to be selected without cardholder confirmation.

If no application can be selected, the terminal shall terminate the transaction.

In any case, the terminal shall inform the cardholder of the action taken (that is, by using the messages defined in Book 4 section 11.2), if appropriate.

Part IV

Annexes

Annex A Examples of Exchanges Using T=0

The following examples illustrate exchanges of data and procedure bytes between the TTL and ICC.

Note the following:

- The use of procedure bytes '60' and $\overline{\text{INS}}$ is not illustrated.
- [Data(x)] means x bytes of data.
- Case 2 and 4 commands have Le = '00' requesting the return of all data from the ICC up to the maximum available. Le = '00' is used in these examples to illustrate typical exchanges that may be observed when executing the application specified in Book 3. Le may take other values when executing a proprietary application.

Sections A1 to A4 illustrate typical exchanges using case 1 to 4 commands. Sections A5 and A6 illustrate the more extensive use of procedure bytes '61 xx' when used with case 2 and 4 commands. Section A7 illustrates a warning condition with a case 4 command.

A1 Case 1 Command

A C-APDU of {CLA INS P1 P2} is passed from the TAL to the TTL (note that P3 of the C-TPDU is set to '00').

TTL	ICC
[CLA INS P1 P2 00] ⇒	
	⇐ 90 00

A R-APDU of {90 00} is returned from the TTL to the TAL.

A2 Case 2 Command

A C-APDU of {CLA INS P1 P2 00} is passed from the TAL to the TTL.

TTL	ICC
[CLA INS P1 P2 00] ⇒	
	⇐ 6C Licc
[CLA INS P1 P2 Licc] ⇒	
	⇐ INS [Data(Licc)] 90 00

A R-APDU of {[Data(Licc)] 90 00} is returned from the TTL to the TAL.

A3 Case 3 Command

A C-APDU of {CLA INS P1 P2 Lc [Data(Lc)]} is passed from the TAL to the TTL.

TTL	ICC
[CLA INS P1 P2 Lc] ⇒	
	⇐ INS
[Data(Lc)] ⇒	
	⇐ 90 00

A R-APDU of {90 00} is returned from the TTL to the TAL.

A4 Case 4 Command

A C-APDU of {CLA INS P1 P2 Lc [Data (Lc)] 00} is passed from the TAL to the TTL.

TTL	ICC
[CLA INS P1 P2 Lc] ⇒	
	⇐ [INS]
[Data(Lc)] ⇒	
	⇐ 61 Licc
[00 C0 00 00 Licc] ⇒	
	⇐ C0 [Data(Licc)] 90 00

A R-APDU of {[Data(Licc)] 90 00} is returned from the TTL to the TAL.

A5 Case 2 Command Using the '61' and '6C' Procedure Bytes

A C-APDU of {CLA INS P1 P2 00} is passed from the TAL to the TTL.

TTL	ICC
[CLA INS P1 P2 00] ⇒	
	⇐ 6C L _{icc}
[CLA INS P1 P2 L _{icc}] ⇒	
	⇐ 61 xx
[00 C0 00 00 yy] ⇒	
	⇐ C0 [Data(yy)] 61 zz
[00 C0 00 00 zz] ⇒	
	⇐ C0 [Data(zz)] 90 00

Where $yy \leq xx$

A R-APDU of {[Data(yy + zz)] 90 00} is returned from the TTL to the TAL.

A6 Case 4 Command Using the '61' Procedure Byte

A C-APDU of {CLA INS P1 P2 L_c [Data L_c] 00} is passed from the TAL to the TTL.

TTL	ICC
[CLA INS P1 P2 L _c] ⇒	
	⇐ [INS]
[Data(L _c)] ⇒	
	⇐ 61 xx
[00 C0 00 00 xx] ⇒	
	⇐ C0 [Data(xx)] 61 yy
[00 C0 00 00 yy] ⇒	
	⇐ C0 [Data(yy)] 90 00

A R-APDU of {[Data(xx + yy)] 90 00} is returned from the TTL to the TAL.

A7 Case 4 Command with Warning Condition

A C-APDU of {CLA INS P1 P2 Lc [Data Lc] 00} is passed from the TAL to the TTL.

TTL	ICC
[CLA INS P1 P2 Lc] ⇒	
	⇐ [INS]
[Data(Lc)] ⇒	
	⇐ 62 xx
[00 C0 00 00 00] ⇒	
	⇐ 6C Licc
[00 C0 00 00 Licc] ⇒	
	⇐ C0 [Data(Licc)] 90 00

A R-APDU of {[Data(Licc)] 62 xx} is returned from the TTL to the TAL containing the data returned together with the warning status bytes.

Annex B Data Elements Table

Table 49 defines those data elements that may be used for application selection and their mapping onto data objects and files.¹⁵ Table 50 lists the data elements in tag sequence.

The characters used in the “Format” column are described in section 4.3, Data Element Format Convention.

B1 Data Elements by Name

Name	Description	Source	Format	Template	Tag	Length
Application Dedicated File (ADF) Name	Identifies the application as described in ISO/IEC 7816-4	ICC	b	'61'	'4F'	5–16
Application Identifier (AID) - terminal	Identifies the application as described in ISO/IEC 7816-4	Terminal	b	—	'9F06'	5–16

Table 49: Data Elements Table

¹⁵ Annex A of Book 3 provides a complete data elements table, defining all data elements that may be used for financial transaction interchange and their mapping onto data objects and files.

Name	Description	Source	Format	Template	Tag	Length
Application Label	Mnemonic associated with the AID according to ISO/IEC 7816-4	ICC	ans with the special character limited to space	'61' or 'A5'	'50'	1–16
Application Preferred Name	Preferred mnemonic associated with the AID	ICC	ans (see section 4.3)	'61' or 'A5'	'9F12'	1–16
Application Priority Indicator	Indicates the priority of a given application or group of applications in a directory	ICC	b	'61' or 'A5'	'87'	1
Application Selection Indicator	For an application in the ICC to be supported by an application in the terminal, the Application Selection Indicator indicates whether the associated AID in the terminal must match the AID in the card exactly, including the length of the AID, or only up to the length of the AID in the terminal There is only one Application Selection Indicator per AID supported by the terminal	Terminal	At the discretion of the terminal. The data is not sent across the interface	—	—	See Format
Application Template	Contains one or more data objects relevant to an application directory entry according to ISO/IEC 7816-4	ICC	b	'70'	'61'	var. up to 252

Table 49: Data Elements Table, continued

Name	Description	Source	Format	Template	Tag	Length
Bank Identifier Code (BIC)	Uniquely identifies a bank as defined in ISO 9362.	ICC	var.	'BF0C' or '73'	'5F54'	8 or 11
Dedicated File (DF) Name	Identifies the name of the DF as described in ISO/IEC 7816-4	ICC	b	'6F'	'84'	5–16
Directory Definition File (DDF) Name	Identifies the name of a DF associated with a directory	ICC	b	'61'	'9D'	5–16
Directory Discretionary Template	Issuer discretionary part of the directory according to ISO/IEC 7816-4	ICC	var.	'61'	'73'	var. up to 252
File Control Information (FCI) Issuer Discretionary Data	Issuer discretionary part of the FCI	ICC	var.	'A5'	'BF0C'	var. up to 222
File Control Information (FCI) Proprietary Template	Identifies the data object proprietary to this specification in the FCI template according to ISO/IEC 7816-4	ICC	var.	'6F'	'A5'	var.
File Control Information (FCI) Template	Identifies the FCI template according to ISO/IEC 7816-4	ICC	var.	—	'6F'	var. up to 252

Table 49: Data Elements Table, continued

Name	Description	Source	Format	Template	Tag	Length
International Bank Account Number (IBAN)	Uniquely identifies the account of a customer at a financial institution as defined in ISO 13616.	ICC	var.	'BF0C' or '73'	'5F53'	Var. up to 34
Issuer Code Table Index	Indicates the code table according to ISO/IEC 8859 for displaying the Application Preferred Name	ICC	n 2	'A5'	'9F11'	1
Issuer Country Code (alpha2 format)	Indicates the country of the issuer as defined in ISO 3166 (using a 2 character alphabetic code)	ICC	a 2	'BF0C' or '73'	'5F55'	2
Issuer Country Code (alpha3 format)	Indicates the country of the issuer as defined in ISO 3166 (using a 3 character alphabetic code)	ICC	a 3	'BF0C' or '73'	'5F56'	3
Issuer Identification Number (IIN)	The number that identifies the major industry and the card issuer and that forms the first part of the Primary Account Number (PAN)	ICC	n 6	'BF0C' or '73'	'42'	3
Issuer URL	The URL provides the location of the issuer's Library Server on the Internet	ICC	ans	'BF0C' or '73'	'5F50'	var.

Table 49: Data Elements Table, continued

Name	Description	Source	Format	Template	Tag	Length
Language Preference	1–4 languages stored in order of preference, each represented by 2 alphabetical characters according to ISO 639 Note: EMVCo strongly recommends that cards be personalised with data element '5F2D' coded in lowercase, but that terminals accept the data element whether it is coded in upper or lower case.	ICC	an 2	'A5'	'5F2D'	2–8
Log Entry	Provides the SFI of the Transaction Log file and its number of records	ICC	b	'BF0C' or '73'	'9F4D'	2
Processing Options Data Object List (PDOL)	Contains a list of terminal resident data objects (tags and lengths) needed by the ICC in processing the GET PROCESSING OPTIONS command	ICC	b	'A5'	'9F38'	var.
READ RECORD Response Message Template	Contains the contents of the record read. (Mandatory for SFIs 1-10. Response messages for SFIs 11-30 are outside the scope of EMV, but may use template '70'.)	ICC	var.	—	'70'	var. up to 252
Short File Identifier (SFI)	Identifies the AEF referenced in commands related to a given ADF or DDF. It is a binary data object having a value in the range 1 – 30 and with the three high order bits set to zero.	ICC	b	'A5'	'88'	1

Table 49: Data Elements Table, continued

When the length defined for the data object is greater than the length of the actual data, the following rules apply:

- A data element in format n is right justified and padded with leading hexadecimal zeroes.
- A data element in format a, an, or ans is left justified and padded with trailing hexadecimal zeroes.

When data is moved from one entity to another (for example, card to terminal), it shall always be passed in order from high order to low order, regardless of how it is internally stored. The same rule applies when concatenating data.

B2 Data Elements by Tag

Name	Template	Tag
Issuer Identification Number (IIN)	'BF0C' or '73'	'42'
Application Dedicated File (ADF) Name	'61'	'4F'
Application Label	'61' or 'A5'	'50'
Language Preference	'A5'	'5F2D'
Issuer URL	'BF0C' or '73'	'5F50'
International Bank Account Number (IBAN)	'BF0C' or '73'	'5F53'
Bank Identifier Code (BIC)	'BF0C' or '73'	'5F54'
Issuer Country Code (alpha2 format)	'BF0C' or '73'	'5F55'
Issuer Country Code (alpha3 format)	'BF0C' or '73'	'5F56'
Application Template	'70'	'61'
File Control Information (FCI) Template	—	'6F'
READ RECORD Response Message Template	—	'70'
Directory Discretionary Template	'61'	'73'
Dedicated File (DF) Name	'6F'	'84'
Application Priority Indicator	'61' or 'A5'	'87'
Short File Identifier (SFI)	'A5'	'88'
Directory Definition File (DDF) Name	'61'	'9D'
Application Identifier (AID) - terminal	—	'9F06'
Issuer Code Table Index	'A5'	'9F11'
Application Preferred Name	'61' or 'A5'	'9F12'
Processing Options Data Object List (PDOL)	'A5'	'9F38'
Log Entry	'BF0C' or '73'	'9F4D'
File Control Information (FCI) Proprietary Template	'6F'	'A5'
File Control Information (FCI) Issuer Discretionary Data	'A5'	'BF0C'

Table 50: Data Elements Tags

Annex C Examples of Directory Structures

This annex illustrates some possible logical ICC file structures.

C1 Single Application Card

Figure 19 illustrates a single application card with only a single level directory. In this example, the MF (with file identification of '3F00', as defined by ISO/IEC 7816-4) acts as the only DDF in the card. The MF shall be given the unique payment system's name assigned to the first level DDF as defined in section 12.2, and the FCI of the MF shall contain the SFI data object.

'DIR A' in this example may or may not be the ISO DIR file, but it shall conform to this specification, including the requirement that it has a SFI in the range 1 to 10.

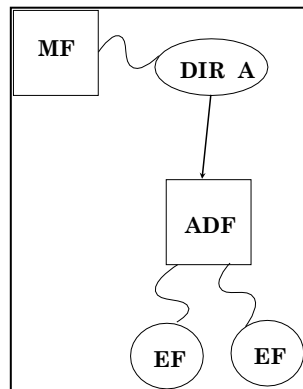


Figure 19: Simplest Card Structure Single Application

C2 Single Level Directory

Figure 20 gives an example of a multi-application card with a single directory. In this example, the root file (MF) does not support an application complying with this specification, and no restrictions are placed on the function of the MF. According to ISO/IEC 7816-4, a DIR file may be present but is not used by the application selection algorithm defined in section 12. Also note that the directory does not have entries for all ADFs (ADF2 to ADF5), as ADF5 is omitted. ADF5 can be selected only by a terminal that 'knows' ADF5 may exist in the card. The manner in which the terminal finds ADF5 is outside the scope of this specification.

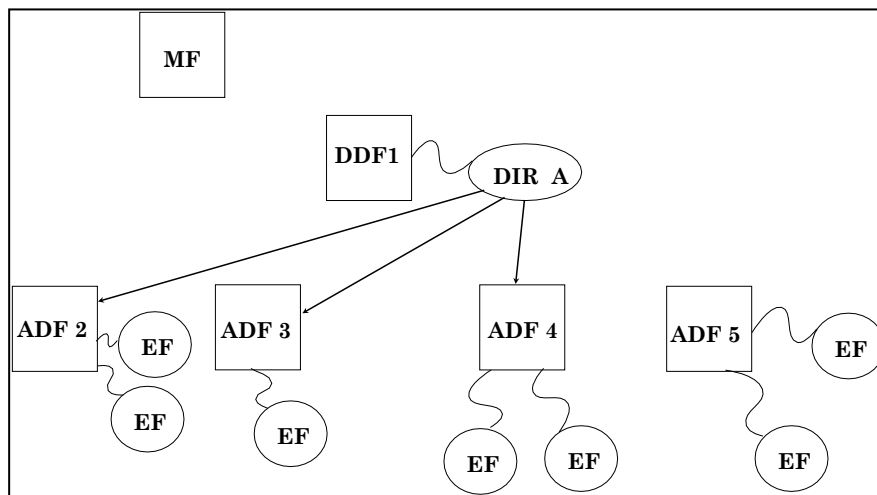


Figure 20: Single Level Directory

C3 Multi-Level Directory

Figure 21 is an example of a multi-application card with an n level directory structure. The first level directory ('DIR A') has entries for 2 ADFs – ADF3 and ADF4 – and a single DDF – DDF2. The directory attached to DDF2 ('DIR B') has entries for two ADFs – ADF21 and ADF22 – and a single DDF – DDF6. DDF5 has no entry in the root directory and can be found only by a terminal that 'knows' of the existence of DDF5. The manner in which the terminal finds and selects DDF5 is outside the scope of this specification, but the directory attached to DF5 ('DIR C') may conform to this specification, and, if found by the terminal, may lead the terminal to ADFs such as DF51, DF52, and DF53. DIR D, attached to DDF6, is a third level directory and points to four files (not shown), which may be either ADFs or more DDFs.

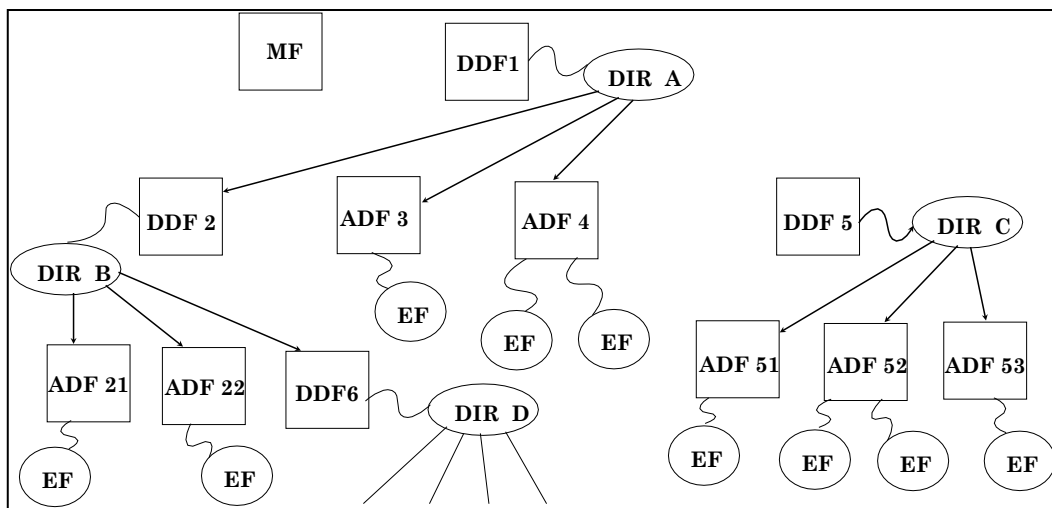


Figure 21: Third Level Directory

C4 Coding of Proprietary Directories

EMV does not mandate the formats for proprietary directories that may be present on the card in addition to the Payment System Directory. Directories following the structure defined in section 12.2 can be accessed using the methods described in this section.

These directories can have the same format as shown in Table 46 for the Payment System Directory Record Format, and can in addition to the one or more ADF Directory Entries also contain one or more DDF Directory Entries. If present, these DDF Directory entries can have the format as shown in Table 51 below.

Tag	Length	Value		Presence
'9D'	5–16	DDF Name		M
'73'	var.	Directory Discretionary Template		O ¹⁶
	'XXXX' (Tag constructed according to Book 3, Annex B)	var.	1 or more additional proprietary data elements from an application provider, issuer, or IC card supplier, or EMV-defined tags that are specifically allocated to template '73'	O

Table 51: Example of a DDF Directory Entry Format

¹⁶ Other data objects not relevant to this specification may appear in this constructed data object.

Part V

Common Core Definitions

Common Core Definitions

This Part describes an optional extension to this Book, to be used when implementing the Common Core Definitions (CCD). It is to be used in conjunction with Books 2, 3, and 4, including the Common Core Definitions part of Books 2 and 3.

These Common Core Definitions specify a minimum common set of card application implementation options, card application behaviours, and data element definitions sufficient to accomplish an EMV transaction. Terminals certified to be compliant with the existing EMV specifications will, without change, accept cards implemented according to the Common Core Definitions, since the Common Core Definitions are supported within the existing EMV requirements. To be compliant with the Common Core Definitions, an implementation shall implement all the additional requirements in the Common Core Definitions sections of all affected Books.

Changed Sections

Each section heading below refers to the section in this Book to which the additional requirements apply. The text defines requirements for a common core implementation, in addition to the requirements already specified in the referenced section of EMV.

Part III - Files, Commands, and Application Selection

11 Commands

11.3 SELECT Command-Response APDUs

11.3.5 Processing State Returned in the Response Message

The ICC shall support partial name selection and shall accept SELECT command messages containing at least the 5 high-order bytes of the DF name (that is, the RID). Select Next functionality shall be supported.

Index

I

IPAY.SYS.DDF01 136, 141

,

'60' 90
'61' 90
'6C' 90

A

Abbreviations 19
Abnormal Termination of Transaction Process 64
Abort Request 103
Accept an ATR 73
ACK 94
Acknowledged 99
Additional Work Waiting Time 90
ADF 119
 Directory Entry Format 138
AEF *See* Application Elementary File
AFL 134
AID 120, 134
Answer to Reset 69
 Basic 70
 Character Definitions 72
 Characters Returned by ICC 70
 Flow at the Terminal 85
 Physical Transportation of Characters Ret'd 69
 Terminal Behaviour 83
Application Definition File *See* ADF
Application Elementary File 119, 120
Application Identifier *See* AID
Application Layer 87, 114
 C-APDU 115
 R-APDU 116
Application Priority Indicator 147
 Format 138
Application Selection 133, 140
 Final Selection 147
 List of AIDs Method 144
 PSE Method 141
 Using Data in ICC 135
Application Selection Indicator *See* ASI
Application Template 120, 137, 156
ASI 142, 145
Assignment of Contacts 39, 48
Asynchronous Half Duplex 65
ATR *See* Answer to Reset

B

Basic ATR 70, 72
Basic ATR for T=0 Only 70
Basic ATR for T=1 Only 71
Basic Response 72
Basic Response Coding
 Character T0 74
 Character TA3 81
 Character TB1 76
 Character TB3 82
 Character TC1 77
 Character TD1 78
 Character TD2 80
Bit Duration 65
Bit Rate Adjustment Factor 75
Bit Synchronisation 73
Block Protocol T=1 87, 93
 Block Frame Structure 93
 Chaining 100
 Error Detection and Correction 103
 Error Free Operation 99
 Information Field Sizes and Timings 97
Blocks, Types 94
Body 125
BWL 74, 82
BWT 82, 98, 100
BWT Time-out 103

C

C-APDU 89, 115
 Chaining 102
 Content 124
 Format 124
 Structure 124
 Structures 115
Card Session Stages 59
Cardholder and Attendant Interface
 Application Selection 140
Cases for Data in APDUs 114
CCD *See* Common Core Definitions
Chaining 99
 C-APDU 102
 I-blocks 100, 102
Character 92
Character Definitions 72
Character Frame 66, 87, 88
Character Protocol T=0 87, 88
 Character Timing 88
 Command Header 89
 Command Processing 89
 Example Exchanges 151
 Transportation of C-APDUs 91
Character Repetition 92

Characters Returned by ICC at Answer to Reset ..	70
Check Character TCK	83
CLA	89, 115
Classes of Operation	45
Clock	
ICC Electrical Characteristics	43
Terminal Electrical Characteristics	52
Clock Rate Conversion Factor	75
Coding PCB of	
I-block	95
R-block	95
S-block	95
Cold Reset	61
Command	
READ RECORD	125
SELECT	127
Command Application Protocol Data Unit	<i>See</i> C-APDU
Command Class	89
Command Data	114
Command Header	89
Command Message Structure	113, 123
Command Processing Qualifier (SW2)	125
Command Processing Status (SW1)	125
Command Transport Protocol Data Unit	<i>See</i> C-TPDU
Command-Response Pair	114
Common Core Definitions	169
SELECT Command-Response APDUs	170
Conditional Body	124
Contact	
Activation Sequence	60
Assignment	39, 48
Deactivation Sequence	63
Force	48
Layout	39
Location	38, 47
Resistance	46, 56
C-TPDU	89
Current etu	65
Current Requirement	
ICC Electrical Characteristics	45
Terminal Electrical Characteristics	54
CWI	74, 82
CWT	82

D

D	74, 75
DAD	93
Data Byte	66
Data Element	119
Data Element Format Conventions	29
Data Elements Table	155
Data in ICC Used for Application Selection	135
Data Link Layer	87, 88
Character Frame	88
Data Transfer Rates	75
DDF	119, 163

Directory Entry Format	138
Definitions	9
Destination Node Address	<i>See</i> DAD
DF Name	121, 144
DI	75
DIR	120
Direct Logic Convention	73
Directory Definition File	<i>See</i> DDF
Directory Discretionary Template	120
Directory Structure	120
Examples	163
Disputed Character	92

E

EDC	96, 99
EDC Error	96, 103
Electrical Characteristics, ICC	40
Clock	43
Contact Resistance	46
Current Requirement	45
I/O Reception	41
I/O Transmission	42
Reset	44
Temperature Range	40
VCC	45
VPP	42
Electrical Characteristics, Terminal	48
Clock	52
Contact Resistance	56
Current Requirement	54
I/O Current Limit	49
I/O Reception	51
I/O Transmission	50
Powering and Depowering	57
Reset	53
Short Circuit Resilience	56
Temperature Range	48
VCC	54
VPP	51
Electromechanical Interface	35
Elementary Time Unit	<i>See</i> etu
Error Detection and Correction for T=0	92
Error Recovery	103
etu65	
Even Parity Checking Bit	66
Exact Match	145
Examples of Directory Structures	163
Examples of Exchanges Using T=0	151
Extra Guardtime	77

F

F	74, 75
FCI	120
FCI Template	129
FI	75

File Referencing	121
File Structure	119
Application Definition Files	119
Application Elementary Files	120
Directory Structure	120
Mapping onto ISO/IEC 7816-4	120
First Block Transmitted	99
Format Character T0	74

G

GET PROCESSING OPTIONS	134
GET RESPONSE	90, 107, 111
Error Conditions	113
Guardtime	66

H

Historical Bytes	74
------------------------	----

I

I	74
I/O Current Limit	49
I/O Reception	41, 51
I/O Transmission	42, 50
I-block	94, 96, 99, 100, 103, 104, 114
Chaining	100, 102
Coding PCB	95
IC Module Height	37
ICC Clock	43
ICC Contact	
Assignment	39
Layout	39
Location	38
Resistance	46
ICC Current Requirement	45
ICC Electrical Characteristics	40
ICC I/O Reception	41
ICC I/O Transmission	42
ICC Insertion and Contact Activation Sequence	60
ICC Mechanical Characteristics	37
ICC Reset	44, 61
ICC Temperature Range	40
ICC VCC	45
IFD Contact Assignment	48
IFSC	74, 81, 97, 99, 101
IFSD	97, 101
IFSI	81, 97
II	76
Implicit Selection	133
INF	96
Information block	<i>See</i> I-block
Initial Character	<i>See</i> TS
Initial etu	65
INS	89, 90, 115

INS bar *****	90
Instruction Code	89
Integrity	83
Interface Characters, TA1 to TC3	74
Invalid Block	103
Inverse Logic Convention	73
Issuer Code Table Index	136

L

Language Preference	136
Layout of Contacts	39
Le	124
LEN	93, 96, 99
Length	<i>See</i> LEN
Length of Expected Data	<i>See</i> Le
List of AIDs Method	141, 144
Location of Contacts	38
Logic Convention	
Direct	73
Inverse	73
Longitudinal Redundancy Check	<i>See</i> LRC
Loss of Synchronisation	103
Lower Voltage ICC Migration	36
LRC	82, 96

M

Mandatory Header	124
Matching Applications	140
Maximum Block Size	97
Maximum Current Pulse Envelope	54, 56
Maximum Interval	98
Mechanical Characteristics, ICC	37
Contact Assignment	39
Contact Layout	39
Contact Location	38
Module Height	37
Mechanical Characteristics, Terminal	47
Contact Assignment	48
Contact Force	48
Contact Location	47
Message Structure	123
MF	163
Migration to Lower Voltage Cards	36
Minimum Interval	98
Module Height	37
Modulo-2	96
Multiple Applications	147
Mutually Supported Applications	147

N

N	74, 77
NAD	93
NAK	94

Negotiable Mode	79
Node Address	<i>See</i> NAD
Normal Status	107
Normative References	5
Notations	27

O

Operating Voltage Ranges	46
--------------------------------	----

P

P	74
P1	89, 115
P2	89, 115
P3	89
Padding	
Format a, an, ans	160
Format n	160
Parity	72
Parity Bit	66
Parity Error	92, 96, 103
Payment System Application	134
Payment System Directory File	120
Payment System Directory Record Format	137
Payment System Environment	120
PCB	93, 94
Physical Layer	87
Physical Transportation of Characters	65
Physical Transportation of Characters Returned at Answer to Reset	69
PI1	76
PI2	79
PIX	135
Powering and Depowering	57
Procedure Byte	89, 90, 106, 111
Programming Voltage	<i>See</i> VPP
Proprietary Application Identifier Extension	<i>See</i> PIX
Proprietary Data Elements	129
Protocol	<i>See</i> Transmission Protocols
Protocol Control Byte	<i>See</i> PCB
Protocol Error	103
PSE	120
PSE Method	141
PTS	87

R

R-APDU	91
Content	125
Format	125
Structure	125
R-block	94, 96, 99, 100, 103, 104
Coding PCB	95
READ RECORD	124, 125
Command Message	126

Command Reference Control Parameter	126
Command-Response APDUs	125
Receive-ready block	<i>See</i> R-block
References	
Normative	5
Registered Application Provider Identifier ..	<i>See</i> RID
Reject an ATR	73
Reject an ICC	73
Reset	44, 61
Terminal Electrical Characteristics	53
Response APDU	<i>See</i> R-APDU
Response Data	114
Resynchronisation	105
Revision Log	iii
RID	135

S

S(ABORT Request) Block	105
S(IFS Request) Block	99
S(IFS Response) Block	99
S(Response) block	104
S(RESYNCH Request) Block	105
S(WTX Request) Block	100
S(WTX Response) Block	100
SAD	93
S-block	94, 96, 100
Coding PCB	95
Scope	3
SELECT	110, 124
Command Message	128
Command Options Parameter	128
Command Reference Control Parameter	128
Command-Response APDUs	127
Response Message Data Field (FCI) of ADF ..	131
Response Message Data Field (FCI) of DDF ..	130
Response Message Data Field (FCI) of PSE ..	129
SFI	120, 121
Short Circuit Resilience	56
Sliding Carriage	64
Source Node Address	<i>See</i> SAD
Specific Mode	79
Stages of a Card Session	59
Start Bit	66
Status Byte Coding	91
Structure of a Block	
Block Protocol T=1	93
Structure of Command Message	113
Supervisory block	<i>See</i> S-block
Supply Voltage	<i>See</i> VCC
Supply Voltage (VCC)	54
Synchronisation	73, 100
Syntax Error	103

T

T=0	<i>See</i> Character Protocol T=0
-----------	-----------------------------------

T=1	See Block Protocol T=1	Transaction Abortion	105
T0 - Format Character	74	Transmission Control Parameters	74
TA1 - Interface Character	75	Transmission Error.....	103
TA2 - Interface Character	79	Transmission Protocols	70, 87,
TA3 - Interface Character	81	<i>See</i> Character Protocol T=0,	
TAL.....	89, 114	<i>See</i> Block Protocol T=1	
TB1 - Interface Character.....	76	Transport Layer.....	87
TB2 - Interface Character.....	79	Transport of APDUs by T=0.....	106
TB3 - Interface Character.....	82	Transportation of APDUs by T=1	114
TC1 - Interface Character.....	77	Tree Structure.....	119
TC2 - Interface Character.....	80	TS - Initial Character.....	66, 73
TC3 - Interface Character.....	82	TTL	89, 106, 114
TCK - Check Character.....	83	Transport of APDUs by T=0	106
TD1 - Interface Character	78	Transportation of APDUs by T=1	114
TD2 - Interface Character	80	Types of Blocks	94
Temperature Range	40, 48		
Template	156		
Template 'BFOC'.....	129		
Terminal Application Layer	89		
Terminal Behaviour during Answer to Reset	83		
Terminal Electrical Characteristics	48		
Clock	52		
Contact Resistance	56		
Current Requirement	54		
I/O Current Limit	49		
I/O Reception	51		
I/O Transmission	50		
Powering and Depowering	57		
Reset.....	53		
Short Circuit Resilience.....	56		
Temperature Range	48		
VCC	54		
VPP	51		
Terminal Logic Using Directories.....	143		
Terminal Mechanical Characteristics	47		
Contact Assignment	48		
Contact Force	48		
Contact Location	47		
Terminal Response to Procedure Byte	90		
Terminal Supply Voltage and Current	55		
Terminal Transport Layer	<i>See</i> TTL		
Terminology.....	31		
Trailer.....	125		

U	
Using the List of AIDs in the Terminal.....	146

V	
VCC	
ICC Electrical Characteristics	45
Terminal Electrical Characteristics	54
Voltage Ranges	46
VPP	76, 79
ICC Electrical Characteristics	42
Terminal Electrical Characteristics	51

W	
Waiting Time Integer	<i>See</i> WI
Warm Reset.....	62
Warning Status	107
WI	80
Work Waiting Time	80, 88

$$\overline{U}$$
Using the List of AIDs in the Terminal..... 146
$$\overline{V}$$

VCC	
ICC Electrical Characteristics	45
Terminal Electrical Characteristics	54
Voltage Ranges	46
VPP	76, 79
ICC Electrical Characteristics	42
Terminal Electrical Characteristics	51

W

Waiting Time Integer	See WI
Warm Reset.....	62
Warning Status	107
WI	80
Work Waiting Time	80, 88