

축경 145~180 mm




축경 (mm) d_1	호칭 베어링 내경 (mm) d	호칭번호 (적용베어링)	나사의 호칭 G	치수 (mm) B_3	G_1	B_4	질량 (kg) (참고)
145	150	23030CDKE4 + **AHX 3030**	M 160 × 3	72	15	77	1.15
	150	24030CK30E4 + **AH 24030**	M 155 × 3	90	15	101	1.11
	150	23130CKE4 + **AHX 3130**	M 165 × 3	96	15	101	1.79
	150	22230CDKE4 + **AHX 3130**	M 165 × 3	96	15	101	1.79
	150	24130CK30E4 + **AH 24130**	M 160 × 3	115	15	126	1.63
	150	23230CKE4 + **AHX 3230**	M 165 × 3	114	17	119	2.22
	150	22330CAKE4 + **AHX 2330**	M 165 × 3	135	24	140	2.82
150	160	23032CDKE4 + **AH 3032**	M 170 × 3	77	16	82	2.05
	160	24032CK30E4 + **AH 24032**	M 170 × 3	95	15	106	2.28
	160	23132CKE4 + **AH 3132**	M 180 × 3	103	16	108	3.2
	160	22232CDKE4 + **AH 3132**	M 180 × 3	103	16	108	3.2
	160	24132CK30E4 + **AH 24132**	M 170 × 3	124	15	135	3.03
	160	23232CKE4 + **AH 3232**	M 180 × 3	124	20	130	4.1
	160	22332CAKE4 + **AH 2332**	M 180 × 3	140	24	146	4.7
160	170	23034CDKE4 + **AH 3034**	M 180 × 3	85	17	90	2.45
	170	24034CK30E4 + **AH 24034**	M 180 × 3	106	16	117	2.74
	170	23134CKE4 + **AH 3134**	M 190 × 3	104	16	109	3.4
	170	22234CDKE4 + **AH 3134**	M 190 × 3	104	16	109	3.4
	170	24134CK30E4 + **AH 24134**	M 180 × 3	125	16	136	3.26
	170	23234CKE4 + **AH 3234**	M 190 × 3	134	24	140	4.8
	170	22334CAKE4 + **AH 2334**	M 190 × 3	146	24	152	5.25
170	180	23036CDKE4 + **AH 3036**	M 190 × 3	92	17	98	2.8
	180	24036CK30E4 + **AH 24036**	M 190 × 3	116	16	127	3.19
	180	23136CKE4 + **AH 3136**	M 200 × 3	116	19	122	4.2
	180	24136CK30E4 + **AH 24136**	M 190 × 3	134	16	145	3.74
	180	22236CDKE4 + **AH 2236**	M 200 × 3	105	17	110	3.75
	180	23236CKE4 + **AH 3236**	M 200 × 3	140	24	146	5.3
	180	22336CAKE4 + **AH 2336**	M 200 × 3	154	26	160	5.85
180	190	23038CAKE4 + **AH 3038**	Tr 205 × 4	96	18	102	3.35
	190	24038CK30E4 + **AH 24038**	M 200 × 3	118	18	131	3.47
	190	23138CKE4 + **AH 3138**	Tr 210 × 4	125	20	131	4.9
	190	24138CK30E4 + **AH 24138**	M 200 × 3	146	18	159	4.38
	190	22238CAKE4 + **AH 2238**	Tr 210 × 4	112	18	117	4.25
	190	23238CKE4 + **AH 3238**	Tr 210 × 4	145	25	152	5.9
	190	22338CAKE4 + **AH 2338**	Tr 210 × 4	160	26	167	6.65




축경 (mm) d_1	호칭 베어링 내경 (mm) d	호칭번호 (적용베어링)	나사의 호칭 G	치수 (mm) B_3	G_1	B_4	질량 (kg) (참고)
190	200	23040CAKE4 + **AH 3040**	Tr 215 × 4	102	19	108	3.8
	200	24040CK30E4 + **AH 24040**	Tr 210 × 4	127	18	140	3.92
	200	23140CKE4 + **AH 3140**	Tr 220 × 4	134	21	140	5.5
	200	24140CK30E4 + **AH 24140**	Tr 210 × 4	158	18	171	5.0
	200	22240CAKE4 + **AH 2240**	Tr 220 × 4	118	19	123	4.7
	200	23240CKE4 + **AH 3240**	Tr 220 × 4	153	25	160	6.7
	200	22340CAKE4 + **AH 2340**	Tr 220 × 4	170	30	177	7.55
200	220	23044CAKE4 + **AH 3044**	Tr 235 × 4	111	20	117	7.4
	220	24044CK30E4 + **AH 24044**	Tr 230 × 4	138	20	152	8.23
	220	23144CKE4 + **AH 3144**	Tr 240 × 4	145	23	151	10.5
	220	24144CK30E4 + **AH 24144**	Tr 230 × 4	170	20	184	10.3
	220	22244CAKE4 + **AH 2244**	Tr 240 × 4	130	20	136	9.1
	220	23244CKE4 + **AH 2344**	Tr 240 × 4	181	30	189	13.5
	220	22344CAKE4 + **AH 2344**	Tr 240 × 4	181	30	189	13.5
220	240	23048CAKE4 + **AH 3048**	Tr 260 × 4	116	21	123	8.75
	240	24048CK30E4 + **AH 24048**	Tr 250 × 4	138	20	153	9.0
	240	23148CKE4 + **AH 3148**	Tr 260 × 4	154	25	161	12
	240	24148CK30E4 + **AH 24148**	Tr 260 × 4	180	20	195	12.6
	240	22248CAKE4 + **AH 2248**	Tr 260 × 4	144	21	150	11
	240	23248CAKE4 + **AH 2348**	Tr 260 × 4	189	30	197	15.5
	240	22348CAKE4 + **AH 2348**	Tr 260 × 4	189	30	197	15.5
240	260	23052CAKE4 + **AH 3052**	Tr 280 × 4	128	23	135	10.5
	260	24052CAK30E4 + **AH 24052**	Tr 270 × 4	162	22	178	11.7
	260	23152CAKE4 + **AH 3152**	Tr 290 × 4	172	26	179	16
	260	24152CAK30E4 + **AH 24152**	Tr 280 × 4	202	22	218	15.5
	260	22252CAKE4 + **AH 2252**	Tr 290 × 4	155	23	161	14
	260	23252CAKE4 + **AH 2352**	Tr 290 × 4	205	30	213	19.5
	260	22352CAKE4 + **AH 2352**	Tr 290 × 4	205	30	213	19.5
260	280	23056CAKE4 + **AH 3056**	Tr 300 × 4	131	24	139	12
	280	24056CAK30E4 + **AH 24056**	Tr 290 × 4	162	22	179	12.6
	280	23156CAKE4 + **AH 3156**	Tr 310 × 5	175	28	183	17.5
	280	24156CAK30E4 + **AH 24156**	Tr 300 × 4	202	22	219	16.8
	280	22256CAKE4 + **AH 2256**	Tr 310 × 5	155	24	163	15
	280	23256CAKE4 + **AH 2356**	Tr 310 × 5	212	30	220	21.5
	280	22356CAKE4 + **AH 2356**	Tr 310 × 5	212	30	220	21.5

축경 280~380 mm




축경 (mm) d_1	호칭 베어링 내경 (mm) d	호칭번호 (적용베어링)	나사의 호칭 G	치수 (mm) B_3	G_1	B_4	질량 (kg) (참고)
280	300	23060CAKE4 + **AH 3060**	Tr 320 × 5	145	26	153	14.5
	300	24060CAK30E4 + **AH 24060**	Tr 310 × 5	184	24	202	15.5
	300	23160CAKE4 + **AH 3160**	Tr 330 × 5	192	30	200	21
	300	24160CAK30E4 + **AH 24160**	Tr 320 × 5	224	24	242	20.3
	300	22260CAKE4 + **AH 2260**	Tr 330 × 5	170	26	178	18
	300	23260CAKE4 + **AH 3260**	Tr 330 × 5	228	34	236	20
300	320	23064CAKE4 + **AH 3064**	Tr 345 × 5	149	27	157	16
	320	24064CAK30E4 + **AH 24064**	Tr 330 × 5	184	24	202	16.4
	320	23164CAKE4 + **AH 3164**	Tr 350 × 5	209	31	217	24.5
	320	24164CAK30E4 + **AH 24164**	Tr 340 × 5	242	24	260	23.5
	320	23264CAKE4 + **AH 3264**	Tr 350 × 5	246	36	254	25
320	340	23068CAKE4 + **AH 3068**	Tr 365 × 5	162	28	171	19.5
	340	24068CAK30E4 + **AH 24068**	Tr 360 × 5	206	26	225	21.2
	340	23168CAKE4 + **AH 3168**	Tr 370 × 5	225	33	234	29
	340	24168CAK30E4 + **AH 24168**	Tr 360 × 5	269	26	288	28.3
	340	23268CAKE4 + **AH 3268**	Tr 370 × 5	264	38	273	35.5
340	360	23072CAKE4 + **AH 3072**	Tr 385 × 5	167	30	176	21
	360	24072CAK30E4 + **AH 24072**	Tr 380 × 5	206	26	226	22.5
	360	23172CAKE4 + **AH 3172**	Tr 400 × 5	229	35	238	33
	360	24172CAK30E4 + **AH 24172**	Tr 380 × 5	269	26	289	30
	360	23272CAKE4 + **AH 3272**	Tr 400 × 5	274	40	283	41.5
360	380	23076CAKE4 + **AH 3076**	Tr 410 × 5	170	31	180	23.5
	380	24076CAK30E4 + **AH 24076**	Tr 400 × 5	208	28	228	24.1
	380	23176CAKE4 + **AH 3176**	Tr 420 × 5	232	36	242	35.5
	380	24176CAK30E4 + **AH 24176**	Tr 400 × 5	271	28	291	32.1
	380	23276CAKE4 + **AH 3276**	Tr 420 × 5	284	42	294	45.5
380	400	23080CAKE4 + **AH 3080**	Tr 430 × 5	183	33	193	27.5
	400	24080CAK30E4 + **AH 24080**	Tr 420 × 5	228	28	248	28
	400	23180CAKE4 + **AH 3180**	Tr 440 × 5	240	38	250	39.5
	400	24180CAK30E4 + **AH 24180**	Tr 420 × 5	278	28	298	34.8
	400	23280CAKE4 + **AH 3280**	Tr 440 × 5	302	44	312	51.5



축경 (mm) d_1	호칭 베어링 내경 (mm) d	호칭번호 (적용베어링)	나사의 호칭 G	치수 (mm) B_3	G_1	B_4	질량 (kg) (참고)
400	420	23084CAKE4 + **AH 3084**	Tr 450 × 5	186	34	196	29
	420	24084CAK30E4 + **AH 24084**	Tr 440 × 5	230	30	252	29.8
	420	23184CAKE4 + **AH 3184**	Tr 460 × 5	266	40	276	46.5
	420	24184CAK30E4 + **AH 24184**	Tr 440 × 5	310	30	332	41.4
	420	23284CAKE4 + **AH 3284**	Tr 460 × 5	321	46	331	59
420	440	23088CAKE4 + **AHX 3088**	Tr 470 × 5	194	35	205	42
	440	24088CAK30E4 + **AH 24088**	Tr 460 × 5	242	30	264	33
	440	23188CAKE4 + **AHX 3188**	Tr 480 × 5	270	42	281	50
	440	24188CAK30E4 + **AH 24188**	Tr 460 × 5	310	30	332	43.5
	440	23288CAKE4 + **AHX 3288**	Tr 480 × 5	330	48	341	64
440	460	23092CAKE4 + **AHX 3092**	Tr 490 × 5	202	37	213	46
	460	24092CAK30E4 + **AH 24092**	Tr 480 × 5	250	32	273	35.9
	460	23192CAKE4 + **AHX 3192**	Tr 510 × 6	285	43	296	58
	460	24192CAK30E4 + **AH 24192**	Tr 480 × 5	332	32	355	49.7
	460	23292CAKE4 + **AHX 3292**	Tr 510 × 6	349	50	360	74.5
460	480	23096CAKE4 + **AHX 3096**	Tr 520 × 6	205	38	217	51
	480	24096CAK30E4 + **AH 24096**	Tr 500 × 5	250	32	273	37.5
	480	23196CAKE4 + **AHX 3196**	Tr 530 × 6	295	45	307	63
	480	24196CAK30E4 + **AH 24196**	Tr 500 × 5	340	32	363	53
	480	23296CAKE4 + **AHX 3296**	Tr 530 × 6	364	52	376	82
480	500	230/500CAKE4 + **AHX 30/500**	Tr 540 × 6	209	40	221	54.5
	500	240/500CAK30E4 + **AH 240/500**	Tr 530 × 6	253	35	276	41.9
	500	231/500CAKE4 + **AHX 31/500**	Tr 550 × 6	313	47	325	71
	500	241/500CAK30E4 + **AH 241/500**	Tr 530 × 6	360	35	383	61.2
	500	232/500CAKE4 + **AHX 32/500**	Tr 550 × 6	393	54	405	94.5

구름베어링용 너트

(어댑터 및 축용)

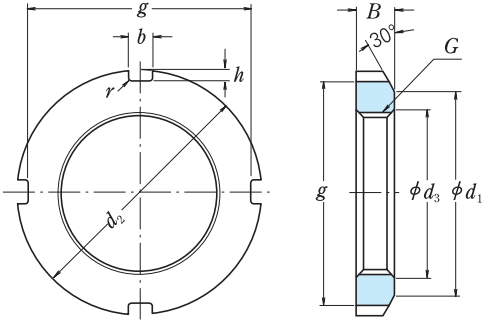


와셔를 사용하는 너트

단위 mm

호칭번호	너트계열 AN										참고		
	나사의 호칭 G	기준치수 d_2	d_1	g	b	h	d_3	B	r (최대)	질량 (kg) (참고)	어댑터[1] 슬리이브 내경번호	와셔의 호칭번호	축경 (축용)
AN 02	M 15×1	25	21	21	4	2	15.5	5	0.4	0.010	—	**AW 02 X**	15
AN 03	M 17×1	28	24	24	4	2	17.5	5	0.4	0.013	—	**AW 03 X**	17
AN 04	M 20×1	32	26	28	4	2	20.5	6	0.4	0.019	04	**AW 04 X**	20
AN 05	M 25×1.5	38	32	34	5	2	25.8	7	0.4	0.025	05	**AW 05 X**	25
AN 06	M 30×1.5	45	38	41	5	2	30.8	7	0.4	0.043	06	**AW 06 X**	30
AN 07	M 35×1.5	52	44	48	5	2	35.8	8	0.4	0.053	07	**AW 07 X**	35
AN 08	M 40×1.5	58	50	53	6	2.5	40.8	9	0.5	0.085	08	**AW 08 X**	40
AN 09	M 45×1.5	65	56	60	6	2.5	45.8	10	0.5	0.119	09	**AW 09 X**	45
AN 10	M 50×1.5	70	61	65	6	2.5	50.8	11	0.5	0.148	10	**AW 10 X**	50
AN 11	M 55×2	75	67	69	7	3	56	11	0.5	0.158	11	**AW 11 X**	55
AN 12	M 60×2	80	73	74	7	3	61	11	0.5	0.174	12	**AW 12 X**	60
AN 13	M 65×2	85	79	79	7	3	66	12	0.5	0.203	13	**AW 13 X**	65
AN 14	M 70×2	92	85	85	8	3.5	71	12	0.5	0.242	14	**AW 14 X**	70
AN 15	M 75×2	98	90	91	8	3.5	76	13	0.5	0.287	15	**AW 15 X**	75
AN 16	M 80×2	105	95	98	8	3.5	81	15	0.6	0.395	16	**AW 16 X**	80
AN 17	M 85×2	110	102	103	8	3.5	86	16	0.6	0.45	17	**AW 17 X**	85
AN 18	M 90×2	120	108	112	10	4	91	16	0.6	0.555	18	**AW 18 X**	90
AN 19	M 95×2	125	113	117	10	4	96	17	0.6	0.66	19	**AW 19 X**	95
AN 20	M 100×2	130	120	122	10	4	101	18	0.6	0.70	20	**AW 20 X**	100
AN 21	M 105×2	140	126	130	12	5	106	18	0.7	0.845	21	**AW 21 X**	105
AN 22	M 110×2	145	133	135	12	5	111	19	0.7	0.965	22	**AW 22 X**	110
AN 23	M 115×2	150	137	140	12	5	116	19	0.7	1.01	—	**AW 23**	115
AN 24	M 120×2	155	138	145	12	5	121	20	0.7	1.08	24	**AW 24**	120
AN 25	M 125×2	160	148	150	12	5	126	21	0.7	1.19	—	**AW 25**	125

주 (1) 어댑터 슬리이브 계열 A31, A2, A3 및 A23에 적용한다.
비 고 나사의 기준산형 및 기준치수는 JIS B 0205에 의한다.

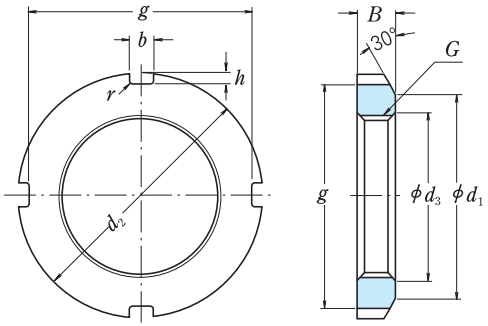

와셔를 사용하는 너트

단위 mm


호칭번호	나사의 호칭 G	기준치수 d_2	d_1	g	b	h	d_3	B	r (최대)	질량 (kg) (참고)	어댑터[1] 슬리이브 내경번호 (참고)	와셔의 호칭번호 (참고)	축경 (축용) (참고)
너트계열 AN													
AN 26	M 130×2	165	149	155	12	5	131	21	0.7	1.25	26	**AW 26**	130
AN 27	M 135×2	175	160	163	14	6	136	22	0.7	1.55	—	**AW 27**	135
AN 28	M 140×2	180	160	168	14	6	141	22	0.7	1.56	28	**AW 28**	140
AN 29	M 145×2	190	172	178	14	6	146	24	0.7	2.0	—	**AW 29**	145
AN 30	M 150×2	195	171	183	14	6	151	24	0.7	2.03	30	**AW 30**	150
AN 31	M 155×3	200	182	186	16	7	156.5	25	0.7	2.21	—	—	—
AN 32	M 160×3	210	182	196	16	7	161.5	25	0.7	2.59	32	**AW 32**	160
AN 33	M 165×3	210	193	196	16	7	166.5	26	0.7	2.43	—	—	—
AN 34	M 170×3	220	193	206	16	7	171.5	26	0.7	2.8	34	**AW 34**	170
AN 36	M 180×3	230	203	214	18	8	181.5	27	0.7	3.05	36	**AW 36**	180
AN 38	M 190×3	240	214	224	18	8	191.5	28	0.7	3.4	38	**AW 38**	190
AN 40	M 200×3	250	226	234	18	8	201.5	29	0.7	3.7	40	**AW 40**	200
너트계열 ANL													
ANL 24	M 120×2	145	133	135	12	5	121	20	0.7	0.78	24	**AWL 24**	120
ANL 26	M 130×2	155	143	145	12	5	131	21	0.7	0.88	26	**AWL 26**	130
ANL 28	M 140×2	165	151	153	14	6	141	22	0.7	0.99	28	**AWL 28**	140
ANL 30	M 150×2	180	164	168	14	6	151	24	0.7	1.38	30	**AWL 30**	150
ANL 32	M 160×3	190	174	176	16	7	161.5	25	0.7	1.56	32	**AWL 32**	160
ANL 34	M 170×3	200	184	186	16	7	171.5	26	0.7	1.72	34	**AWL 34**	170
ANL 36	M 180×3	210	192	194	18	8	181.5	27	0.7	1.95	36	**AWL 36**	180
ANL 38	M 190×3	220	202	204	18	8	191.5	28	0.7	2.08	38	**AWL 38**	190
ANL 40	M 200×3	240	218	224	18	8	201.5	29	0.7	2.98	40	**AWL 40**	200


주 (1) AN계열은, 어댑터슬리이브계열 A31 및 A23에 적용한다.
ANL계열은, 어댑터 슬리이브계열 A30에 사용한다.

비 고 나사의 기준산형 및 기준치수는 JIS B 0205에 의한다.

구름베어링용 너트

(어댑터 및 축용)





STOPPER을 사용하는 너트

단위 mm


호칭번호	너트계열 AN														참고		
	나사의 호칭	기준치수												질량 (kg)	어댑터[1] 슬리이브 내경번호	Stopper의 호칭번호	축 경 (축용)
	G	d_2	d_1	g	b	h	d_3	B	r (최대)	l	나사구멍 나사의 호칭(S)	d_4					
AN 44	Tr 220×4	280	250	260	20	10	222	32	0.8	15	M 8×1.25	238		5.2	44	**AL 44**	220
AN 48	Tr 240×4	300	270	280	20	10	242	34	0.8	15	M 8×1.25	258		5.95	48	**AL 44**	240
AN 52	Tr 260×4	330	300	306	24	12	262	36	0.8	18	M 10×1.5	281		8.05	52	**AL 52**	260
AN 56	Tr 280×4	350	320	326	24	12	282	38	0.8	18	M 10×1.5	301		9.05	56	**AL 52**	280
AN 60	Tr 300×4	380	340	356	24	12	302	40	0.8	18	M 10×1.5	326		11.8	60	**AL 60**	300
AN 64	Tr 320×5	400	360	376	24	12	322.5	42	0.8	18	M 10×1.5	345		13.1	64	**AL 64**	320
AN 68	Tr 340×5	440	400	410	28	15	342.5	55	1	21	M 12×1.75	372		23.1	68	**AL 68**	340
AN 72	Tr 360×5	460	420	430	28	15	362.5	58	1	21	M 12×1.75	392		25.1	72	**AL 68**	360
AN 76	Tr 380×5	490	450	454	32	18	382.5	60	1	21	M 12×1.75	414		31	76	**AL 76**	380
AN 80	Tr 400×5	520	470	484	32	18	402.5	62	1	27	M 16×2	439		37	80	**AL 80**	400
AN 84	Tr 420×5	540	490	504	32	18	422.5	70	1	27	M 16×2	459		43.5	84	**AL 80**	420
AN 88	Tr 440×5	560	510	520	36	20	442.5	70	1	27	M 16×2	477		45	88	**AL 88**	440
AN 92	Tr 460×5	580	540	540	36	20	462.5	75	1	27	M 16×2	497		50.5	92	**AL 88**	460
AN 96	Tr 480×5	620	560	580	36	20	482.5	75	1	27	M 16×2	527		62	96	**AL 96**	480
AN 100	Tr 500×5	630	580	584	40	23	502.5	80	1	27	M 16×2	539		63.5	/500	**AL 100**	500
	너트계열 ANL																
ANL 44	Tr 220×4	260	242	242	20	9	222	30	0.8	12	M 6×1	229		3.1	44	**ALL 44**	220
ANL 48	Tr 240×4	290	270	270	20	10	242	34	0.8	15	M 8×1.25	253		5.15	48	**ALL 48**	240
ANL 52	Tr 260×4	310	290	290	20	10	262	34	0.8	15	M 8×1.25	273		5.65	52	**ALL 48**	260
ANL 56	Tr 280×4	330	310	310	24	10	282	38	0.8	15	M 8×1.25	293		6.8	56	**ALL 56**	280
ANL 60	Tr 300×4	360	336	336	24	12	302	42	0.8	15	M 8×1.25	316		9.6	60	**ALL 60**	300
ANL 64	Tr 320×5	380	356	356	24	12	322.5	42	0.8	15	M 8×1.25	335		9.95	64	**ALL 64**	320
ANL 68	Tr 340×5	400	376	376	24	12	342.5	45	1	15	M 8×1.25	355		11.7	68	**ALL 64**	340
ANL 72	Tr 360×5	420	394	394	28	13	362.5	45	1	15	M 8×1.25	374		12	72	**ALL 72**	360
ANL 76	Tr 380×5	450	422	422	28	14	382.5	48	1	18	M 10×1.5	398		14.9	76	**ALL 76**	380
ANL 80	Tr 400×5	470	442	442	28	14	402.5	52	1	18	M 10×1.5	418		16.9	80	**ALL 76**	400
ANL 84	Tr 420×5	490	462	462	32	14	422.5	52	1	18	M 10×1.5	438		17.4	84	**ALL 84**	420
ANL 88	Tr 440×5	520	490	490	32	15	442.5	60	1	21	M 12×1.75	462		26.2	88	**ALL 88**	440
ANL 92	Tr 460×5	540	510	510	32	15	462.5	60	1	21	M 12×1.75	482		28	92	**ALL 88**	460
ANL 96	Tr 480×5	560	530	530	36	15	482.5	60	1	21	M 12×1.75	502		29.5	96	**ALL 96**	480
ANL 100	Tr 500×5	580	550	550	36	15	502.5	68	1	21	M 12×1.75	522		33.5	/500	**ALL 96**	500

주 [1] AN계열은 어댑터 슬리이브계열 A31, A32 및 A23에 적용한다. ANL계열은 어댑터 슬리이브계열 A30에 사용한다.

비 고 1. 나사의 기준산형 및 기준치수는, JIS B 0216에 의한다.

2. 나사구멍의 나사의 기준산형 및 기준치수는, JIS B 0205에 의한다.

(해체 슬리이브용)

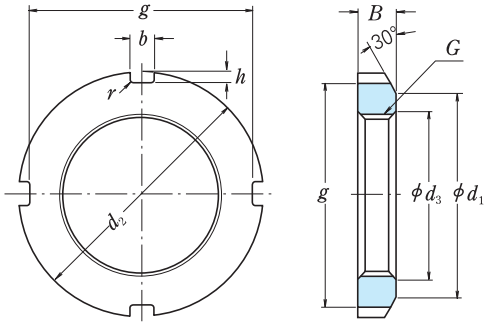


단위 mm

호칭번호	나사의 호칭 G	기준치수 d_2	d_1	g	b	h	d_3	B	r (최대)	질량 (kg) (참고)	참고 해체슬리이브의 호칭번호 AH 31	AH 22	AH 32	AH 23
너트계열 HN														
HN 42	Tr 210×4	270	238	250	20	10	212	30	0.8	4.75	**AH 3138**	**AH 2238**	**AH 3238**	**AH 2338**
HN 44	Tr 220×4	280	250	260	20	10	222	32	0.8	5.35	**AH 3140**	**AH 2240**	**AH 3240**	**AH 2340**
HN 48	Tr 240×4	300	270	280	20	10	242	34	0.8	6.2	**AH 3144**	**AH 2244**	—	**AH 2344**
HN 52	Tr 260×4	330	300	306	24	12	262	36	0.8	8.55	**AH 3148**	**AH 2248**	—	**AH 2348**
HN 58	Tr 290×4	370	330	346	24	12	292	40	0.8	11.8	**AH 3152**	**AH 2252**	—	**AH 2352**
HN 62	Tr 310×5	390	350	366	24	12	312.5	42	0.8	13.4	**AH 3156**	**AH 2256**	—	**AH 2356**
HN 66	Tr 330×5	420	380	390	28	15	332.5	52	1	20.4	**AH 3160**	**AH 2260**	**AH 3260**	—
HN 70	Tr 350×5	450	410	420	28	15	352.5	55	1	25.2	**AH 3164**	**AH 2264**	**AH 3264**	—
HN 74	Tr 370×5	470	430	440	28	15	372.5	58	1	28.2	**AH 3168**	—	**AH 3268**	—
HN 80	Tr 400×5	520	470	484	32	18	402.5	62	1	40	**AH 3172**	—	**AH 3272**	—
HN 84	Tr 420×5	540	490	504	32	18	422.5	70	1	46.9	**AH 3176**	—	**AH 3276**	—
HN 88	Tr 440×5	560	510	520	36	20	442.5	70	1	48.5	**AH 3180**	—	**AH 3280**	—
HN 92	Tr 460×5	580	540	540	36	20	462.5	75	1	55	**AH 3184**	—	**AH 3284**	—
HN 96	Tr 480×5	620	560	580	36	20	482.5	75	1	67	**AHX 3188**	—	**AHX 3288**	—
HN 102	Tr 510×6	650	590	604	40	23	513	80	1	75	**AHX 3192**	—	**AHX 3292**	—
HN 106	Tr 530×6	670	610	624	40	23	533	80	1	78	**AHX 3196**	—	**AHX 3296**	—
HN 110	Tr 550×6	700	640	654	40	23	553	80	1	92.5	**AHX 31/500**	—	**AHX 32/500**	—
너트계열 HNL											AH 30	AH 2		
HNL41	Tr 205×4	250	232	234	18	8	207	30	0.8	3.45	**AH 3038**	**AH 238**		
HNL43	Tr 215×4	260	242	242	20	9	217	30	0.8	3.7	**AH 3040**	**AH 240**		
HNL47	Tr 235×4	280	262	262	20	9	237	34	0.8	4.6	**AH 3044**	**AH 244**		
HNL52	Tr 260×4	310	290	290	20	10	262	34	0.8	5.8	**AH 3048**	**AH 248**		
HNL56	Tr 280×4	330	310	310	24	10	282	38	0.8	6.7	**AH 3052**	**AH 252**		
HNL60	Tr 300×4	360	336	336	24	12	302	42	0.8	9.6	**AH 3056**	**AH 256**		
HNL64	Tr 320×5	380	356	356	24	12	322.5	42	1	10.3	**AH 3060**	—		
HNL69	Tr 345×5	410	384	384	28	13	347.5	45	1	11.5	**AH 3064**	—		
HNL73	Tr 365×5	430	404	404	28	13	367.5	48	1	14.2	**AH 3068**	—		
HNL77	Tr 385×5	450	422	422	28	14	387.5	48	1	15	**AH 3072**	—		
HNL82	Tr 410×5	480	452	452	32	14	412.5	52	1	19	**AH 3076**	—		
HNL86	Tr 430×5	500	472	472	32	14	432.5	52	1	19.8	**AH 3080**	—		
HNL90	Tr 450×5	520	490	490	32	15	452.5	60	1	23.8	**AH 3084**	—		
HNL94	Tr 470×5	540	510	510	32	15	472.5	60	1	25	**AHX 3088**	—		
HNL98	Tr 490×5	580	550	550	36	15	492.5	60	1	34	**AHX 3092**	—		
HNL 104	Tr 520×6	600	570	570	36	15	523	68	1	37	**AHX 3096**	—		
HNL 108	Tr 540×6	630	590	590	40	20	543	68	1	43.5	**AHX 30/500**			

비 고 1. 나사의 기준산형 및 기준치수는, JIS B 0216에 의한다.
2. 너트의 Notch수는, 그림에 표시하는 것보다 많아도 좋다.


(해체슬리이브와 너트의 조합)

호칭번호	참고 해체슬리이브의 호칭번호						
	AH 30	AH 31	AH 2	AH 22	AH 32	AH 3	AH 23
AN 09	—	—	AH 208	—	—	AH 308	AH 2308
AN 10	—	—	AH 209	—	—	AH 309	AH 2309
AN 11	—	—	AH 210	—	—	AHX 310	AHX 2310
AN 12	—	—	AH 211	—	—	AHX 311	AHX 2311
AN 13	—	—	AH 212	—	—	AHX 312	AHX 2312
AN 14	—	—	—	—	—	—	—
AN 15	—	—	AH 213	—	—	AH 313	AH 2313
AN 16	—	—	AH 214	—	—	AH 314	AHX 2314
AN 17	—	—	AH 215	—	—	AH 315	AHX 2315
AN 18	—	—	AH 216	—	—	AH 316	AHX 2316
AN 19	—	—	AH 217	—	—	AHX 317	AHX 2317
AN 20	—	—	AH 218	—	AHX 3218	AHX 318	AHX 2318
AN 21	—	—	AH 219	—	—	AHX 319	AHX 2319
AN 22	—	—	AH 220	—	AHX 3220	AHX 320	AHX 2320
AN 23	—	—	AH 221	—	—	AHX 321	—
AN 24	—	AHX 3122	AH 222	—	—	AHX 322	—
AN 25	—	—	—	—	AHX 3222	—	AHX 2322
AN 26	AHX 3024	AHX 3124	AH 224	—	—	AHX 324	—
AN 27	—	—	—	—	AHX 3224	—	AHX 2324
AN 28	AHX 3026	AHX 3126	AH 226	—	—	AHX 326	—
AN 29	—	—	—	—	AHX 3226	—	AHX 2326
AN 30	AHX 3028	AHX 3128	AH 228	—	—	AHX 328	—
AN 31	—	—	—	—	AHX 3228	—	AHX 2328
AN 32	AHX 3030	—	AH 230	—	—	—	—
AN 33	—	AHX 3130	—	—	AHX 3230	AHX 330	AHX 2330
AN 34	AH 3032	—	AH 232	—	—	—	—
AN 36	AH 3034	AH 3132	AH 234	—	AH 3232	AH 332	AH 2332
AN 38	AH 3036	AH 3134	AH 236	—	AH 3234	AH 334	AH 2334
AN 40	—	AH 3136	—	AH 2236	AH 3236	—	AH 2336

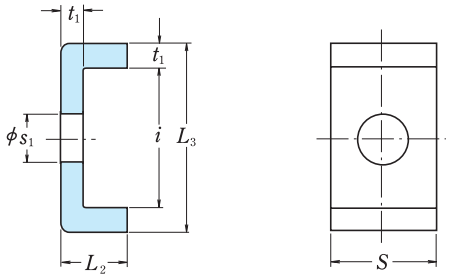


단위 mm

호칭번호	기준치수 t_1	S	L_2	s_1	i	L_3	질량(kg) (참고) 100개당	참고 너트의 호칭번호
	STOPPER 계열 AL							
AL 44	4	20	12	9	22.5	30.5	2.6	**AN 44, AN 48**
AL 52	4	24	12	12	25.5	33.5	3.4	**AN 52, AN 56**
AL 60	4	24	12	12	30.5	38.5	3.8	**AN 60**
AL 64	5	24	15	12	31	41	5.35	**AN 64**
AL 68	5	28	15	14	38	48	6.65	**AN 68, AN 72**
AL 76	5	32	15	14	40	50	7.95	**AN 76**
AL 80	5	32	15	18	45	55	8.2	**AN 80, AN 84**
AL 88	5	36	15	18	43	53	9.0	**AN 88, AN 92**
AL 96	5	36	15	18	53	63	10.4	**AN 96**
AL 100	5	40	15	18	45	55	10.5	**AN 100**
	STOPPER 계열 ALL							
ALL 44	4	20	12	7	13.5	21.5	2.12	**ANL 44**
ALL 48	4	20	12	9	17.5	25.5	2.29	**ANL 48, ANL 52**
ALL 56	4	24	12	9	17.5	25.5	2.92	**ANL 56**
ALL 60	4	24	12	9	20.5	28.5	3.15	**ANL 60**
ALL 64	5	24	15	9	21	31	4.55	**ANL 64, ANL 68**
ALL 72	5	28	15	9	20	30	5.05	**ANL 72**
ALL 76	5	28	15	12	24	34	5.3	**ANL 76, ANL 80**
ALL 84	5	32	15	12	24	34	6.1	**ANL 84**
ALL 88	5	32	15	14	28	38	6.45	**ANL 88, ANL 92**
ALL 96	5	36	15	14	28	38	7.3	**ANL 96, ANL 100**

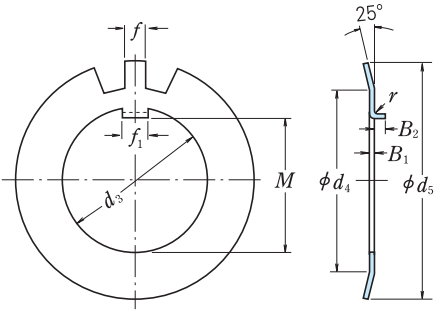

끝부분을 구부린형식

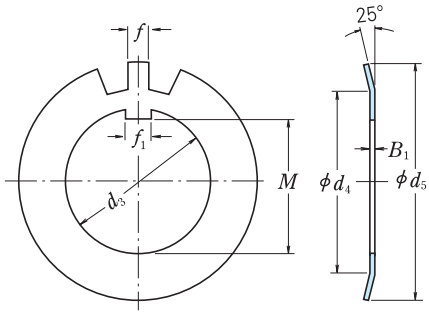


끝부분을 구부리지 않은 형식

단위 mm


호칭번호		와셔계열 AW 기준치수									齒數	질량(kg) (참고) 100개당	참고		
끝부분을 구부린형식	끝부분을 구부리지않은 형식	d_3	M	f_1	B_1	f	d_4	d_5	끝부분을 구부린 형식 r	끝부분을 구부린 형식 B_2			어댑터[1] 슬리이브 내경번호	너트의 호칭번호	축경 (축용)
AW 02	**AW 02 X**	15	13.5	4	1	4	21	28	1	2.5	13	0.253	—	**AN 02**	15
AW 03	**AW 03 X**	17	15.5	4	1	4	24	32	1	2.5	13	0.315	—	**AN 03**	17
AW 04	**AW 04 X**	20	18.5	4	1	4	26	36	1	2.5	13	0.35	04	**AN 04**	20
AW 05	**AW 05 X**	25	23	5	1.2	5	32	42	1	2.5	13	0.64	05	**AN 05**	25
AW 06	**AW 06 X**	30	27.5	5	1.2	5	38	49	1	2.5	13	0.78	06	**AN 06**	30
AW 07	**AW 07 X**	35	32.5	6	1.2	5	44	57	1	2.5	15	1.04	07	**AN 07**	35
AW 08	**AW 08 X**	40	37.5	6	1.2	6	50	62	1	2.5	15	1.23	08	**AN 08**	40
AW 09	**AW 09 X**	45	42.5	6	1.2	6	56	69	1	2.5	17	1.52	09	**AN 09**	45
AW 10	**AW 10 X**	50	47.5	6	1.2	6	61	74	1	2.5	17	1.6	10	**AN 10**	50
AW 11	**AW 11 X**	55	52.5	8	1.2	7	67	81	1	4	17	1.96	11	**AN 11**	55
AW 12	**AW 12 X**	60	57.5	8	1.5	7	73	86	1.2	4	17	2.53	12	**AN 12**	60
AW 13	**AW 13 X**	65	62.5	8	1.5	7	79	92	1.2	4	19	2.9	13	**AN 13**	65
AW 14	**AW 14 X**	70	66.5	8	1.5	8	85	98	1.2	4	19	3.35	14	**AN 14**	70
AW 15	**AW 15 X**	75	71.5	8	1.5	8	90	104	1.2	4	19	3.55	15	**AN 15**	75
AW 16	**AW 16 X**	80	76.5	10	1.8	8	95	112	1.2	4	19	4.65	16	**AN 16**	80
AW 17	**AW 17 X**	85	81.5	10	1.8	8	102	119	1.2	4	19	5.25	17	**AN 17**	85
AW 18	**AW 18 X**	90	86.5	10	1.8	10	108	126	1.2	4	19	6.25	18	**AN 18**	90
AW 19	**AW 19 X**	95	91.5	10	1.8	10	113	133	1.2	4	19	6.7	19	**AN 19**	95
AW 20	**AW 20 X**	100	96.5	12	1.8	10	120	142	1.2	6	19	7.65	20	**AN 20**	100
AW 21	**AW 21 X**	105	100.5	12	1.8	12	126	145	1.2	6	19	8.25	21	**AN 21**	105
AW 22	**AW 22 X**	110	105.5	12	1.8	12	133	154	1.2	6	19	9.4	22	**AN 22**	110
AW 23	**AW 23 X**	115	110.5	12	2	12	137	159	1.5	6	19	10.8	—	**AN 23**	115
AW 24	**AW 24 X**	120	115	14	2	12	138	164	1.5	6	19	10.5	24	**AN 24**	120
AW 25	**AW 25 X**	125	120	14	2	12	148	170	1.5	6	19	11.8	—	**AN 25**	125

주 (1) 어댑터 슬리이브 계열 A31, A2, A3 및 A23에 적용한다.

비 고 갈라진폭이 좁은 형식의 어댑터슬리이브에는, 끝부분을 구부리지 않는 와셔를 쓰고, 갈라진폭이 넓은 형식의 어댑터 슬리이브에는, 어느형식의 와셔를 써도 좋다.

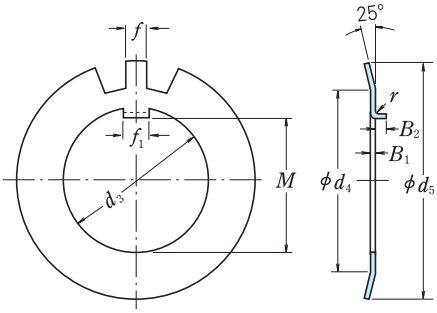

끝부분을 구부린형식

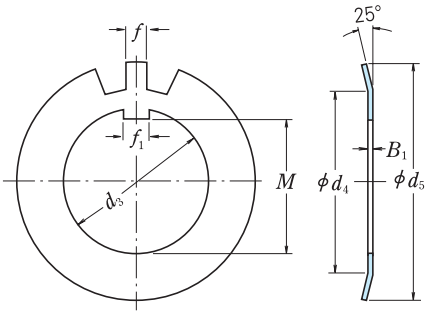

끝부분을 구부리지 않은 형식

단위 mm

호칭번호		와셔계열 AW											참고		
		기준치수							끝부분을 구부린 형식		齒數	질량(kg) (참고) 100개당	어댑터[1] 슬리이브 내경번호	너트의 호칭번호	축경 (축용)
끝부분을 구부린형식	끝부분을 구부리지않은 형식	d_3	M	f_1	B_1	f	d_4	d_5	r	B_2					
AW 26	**AW 26 X**	130	125	14	2	12	149	175	1.5	6	19	11.3	26	**AN 26**	130
AW 27	**AW 27 X**	135	130	14	2	14	160	185	1.5	6	19	14.4	—	**AN 27**	135
AW 28	**AW 28 X**	140	135	16	2	14	160	192	1.5	8	19	14.2	28	**AN 28**	140
AW 29	**AW 29 X**	145	140	16	2	14	172	202	1.5	8	19	16.8	—	**AN 29**	145
AW 30	**AW 30 X**	150	145	16	2	14	171	205	1.5	8	19	15.9	30	**AN 30**	150
AW 31	**AW 31 X**	155	147.5	16	2.5	16	182	212	1.5	8	19	20.9	—	**AN 31**	155
AW 32	**AW 32 X**	160	154	18	2.5	16	182	217	1.5	8	19	22.2	32	**AN 32**	160
AW 33	**AW 33 X**	165	157.5	18	2.5	16	193	222	1.5	8	19	24.1	—	**AN 33**	165
AW 34	**AW 34 X**	170	164	18	2.5	16	193	232	1.5	8	19	24.7	34	**AN 34**	170
AW 36	**AW 36 X**	180	174	20	2.5	18	203	242	1.5	8	19	26.8	36	**AN 36**	180
AW 38	**AW 38 X**	190	184	20	2.5	18	214	252	1.5	8	19	27.8	38	**AN 38**	190
AW 40	**AW 40 X**	200	194	20	2.5	18	226	262	1.5	8	19	29.3	40	**AN 40**	200
		와셔계열 AWL													
AWL 24	**AWL 24 X**	120	115	14	2	12	133	155	1.5	6	19	7.7	24	**ANL 24**	120
AWL 26	**AWL 26 X**	130	125	14	2	12	143	165	1.5	6	19	8.7	26	**ANL 26**	130
AWL 28	**AWL 28 X**	140	135	16	2	14	151	175	1.5	8	19	10.9	28	**ANL 28**	140
AWL 30	**AWL 30 X**	150	145	16	2	14	164	190	1.5	8	19	11.3	30	**ANL 30**	150
AWL 32	**AWL 32 X**	160	154	18	2.5	16	174	200	1.5	8	19	16.2	32	**ANL 32**	160
AWL 34	**AWL 34 X**	170	164	18	2.5	16	184	210	1.5	8	19	19	34	**ANL 34**	170
AWL 36	**AWL 36 X**	180	174	20	2.5	18	192	220	1.5	8	19	18	36	**ANL 36**	180
AWL 38	**AWL 38 X**	190	184	20	2.5	18	202	230	1.5	8	19	20.5	38	**ANL 38**	190
AWL 40	**AWL 40 X**	200	194	20	2.5	18	218	250	1.5	8	19	21.4	40	**ANL 40**	200

주 (1) AW계열은, 어댑터슬리이브계열 A31 및 A23에 적용한다.
AWL계열은, 어댑터 슬리이브계열 A30에 사용한다.

비 고 갈라진폭이 좁은 형식의 어댑터슬리이브에는, 끝부분을 구부리지 않는 와셔를 쓰고,
갈라진폭이 넓은 형식의 어댑터 슬리이브에는, 어느형식의 와셔를 써도 좋다.

NSK 제품소개 · 부표

제품소개

페이지
NSK각종제품의 사진 ····· C 2~C 7

부 표

부표 1 국제단위계(SI)로 부터의 환산 ····· C 8~C 9
부표 2 N—kgf 환산표 ····· C10
부표 3 kg—lb 환산표 ····· C11
부표 4 °C—°F 온도환산표 ····· C12
부표 5 점도환산표 ····· C13
부표 6 inch—mm 환산표 ····· C14~C15
부표 7 경도환산표 ····· C16
부표 8 금속재료의 물리적 기계적 성질 ····· C17
부표 9 축의 치수 허용차 ····· C18~C19
부표10 하우징구멍의 치수 허용차 ····· C20~C21
부표11 기본공차의 IT수치 ····· C22~C23
부표12 회전속도 n과 속도계수 f_n ····· C24
부표13 하중비 C/P · 피로수명계수 f_h와 피로수명 L · L_h ····· C25
부표14 inch계 테이퍼 로울러 베어링의 색인 ····· C26~C33


AUTOMOTIVE PRODUCTS




Column Type Electric Power Steering
(CAT. No. 4102)



Pinion Type Electric Power Steering
(CAT. No. 4102)

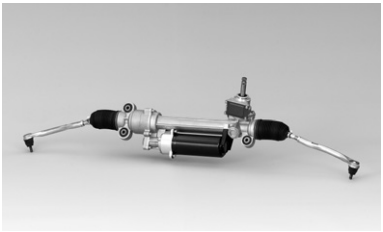

Offeet Ball Screw Type Electric Power Steering
(CAT. No. 4102)

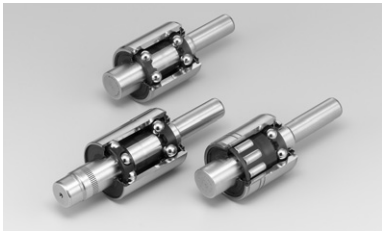

Long Life Water Pump Bearings
(CAT. No. 396, 4102)



Hub Unit Bearings
(CAT. No. 4201)



One-Way Clutch
(CAT. No. 4603)


PRECISION MACHINE COMPONENTS

BALL SCREWS






Precision Ball Screws
(CAT. No. 3161)




High-speed Low-noise
Ball Screws BSS Series
(CAT. No. 3229)




Ball Screw for standard
stock compact FA Series
(CAT. No. 3230)



Ball Screws for Standard
stock VFA Series
(CAT. No. 3161)




Ball Screws for High-Load
Drive HTF Series
(CAT. No. 3218)



Precision Miniature Ball Screws
(CAT. No. 3161)



Precision Hollow Shaft Ball Screws
(CAT. No. 3161)




NSK New Σ Series
ROBOTTE Ball Screws with Spline
(CAT. No. 3161)



Rolled Ball Screws
(CAT. No. 3161)


MONOCARRIERS




Monocarriers
(CAT. No. 3161)

PRECISION MACHINE COMPONENTS


LINEAR BEARINGS




NSK Linear Guides and Ball Screws
Equipped with "NSK K1™" Lubrication Unit
(CAT. No. 3161)




Translide™, New Type of Rolling
Element Linear Motion Bearing
(CAT. No. 3324)



NSK Linear Guides
Self-aligning LH Series
LS Series
(CAT. No. 3161)



NSK Linear Guides Miniature PU and PE Series
(CAT. No. 3327)




NSK Linear Guides HA Series
(CAT. No. 3326)



NSK S1 Series Precision Linear Guides
(CAT. No. 3320)

ASSORTED SPINDLES




High Speed Integrated Motor Spindles
(CAT. No. 2204)




Precision Grinding Spindles
(CAT. No. 1053)




Live Centers
(CAT. No. 1052)



Oil/Air Lubricating Unit,
Fine Lube
(CAT. No. 1254/1387)




Standard Type Precision Boring Heads
(CAT. No. 1053)




Spindles for Electrical and
Electric Equipment
(CAT. No. 1053)

MECHATRONIC ACTUATORS

Megatorque Motors
PS Series
(CAT. No. 3510)




Robot
Modules



Megatorque Motors
YSB Series




XY Tables




Megatorque Motors
RS Series




Megathrust Motors
Y Series



Megatorque Motors
PM Series



Air Bearing
Slides



AIR SPINDLES



AIR SPINDLES
(CAT. No. 1389)



Air Cleaner Unit
(CAT. No. 1389)




DD Air-spindle
(CAT. No. 1389)


Large Size Proximity Stepper RZ Series



RELATED PRODUCT WITH BEARING



Bearing Induction Heater
(CAT.No. E398)

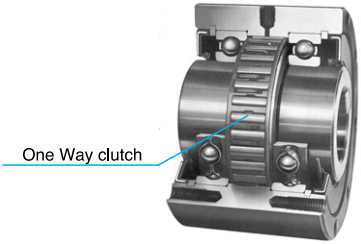

One Way clutch (Package Type)
(CAT. No. 4603)



Extra Small Bearing Monitor NB-4
(Bearing Abnormality Detector)
(CAT.No. E410)

부표 1 국제단위계 (SI)로부터 환산

SI, CGS계 및 공학단위계의 대조표

량 / 단위계	길이	질량	시간	온도	가속도	力	응력	압력	일	일율
SI	m	kg	s	K, °C	m/s^2	N	Pa	Pa	J	W
CGS계	cm	g	s	°C	Gal	dyn	dyn/cm^2	dyn/cm^2	erg	erg/s
공학단위계	m	$kgf \cdot s^2/m$	s	°C	m/s^2	kgf	kgf/m^2	kgf/m^2	$kgf \cdot m$	$kgf \cdot m/s$

SI 단위로부터 환산율

량	SI 단위		SI 이외의 단위		SI 단위에서의 환율
	단위의 명칭	기호	단위의 명칭	기호	
각 도	Radian	rad	Degree Minute Second	° ′ ″	$180/\pi$ $10\,800/\pi$ $648\,000/\pi$
길 이	Meter	m	Micron Angstrom	μ Å	10^6 10^{10}
면 적	Square meter	m^2	Are Hectare	a ha	10^{-2} 10^{-4}
체 적	Cubic meter	m^3	Liter Deciliter	l, L dl, dL	10^3 10^4
시 간	Second	s	Minute Hour Day	min h d	1/60 1/3 600 1/86 400
진동수, 주파수	Hertz	Hz	Cycle	s^{-1}	1
회 전 수	Revolution per second	s^{-1}	Revolution per minute	rpm	60
속 도	Meter per second	m/s	Kilometer per hour Knot	km/h kn	3 600/1 000 3 600/1 852
가 속 도	Meter per second per second	m/s^2	Gal g	Gal G	10^2 1/9.806 65
질 량	Kilogram	kg	Ton	t	10^{-3}
力	Newton	N	Kilogram-force Ton-force Dyne	kgf tf dyn	1/9.806 65 $1/(9.806\,65\times10^3)$ 10^5
토오크 및 힘의 모 멘 트	Newton-meter	$N \cdot m$	Kilogram-force meter	$kgf \cdot m$	1/9.806 65
응 력	Pascal (Newton per square meter)	Pa (N/m^2)	Kilogram-force per square centimeter Kilogram-force per square millimeter	kgf/cm^2 kgf/mm^2	$1/(9.806\,65\times10^4)$ $1/(9.806\,65\times10^6)$

SI단위의 접두어

단위에 곱하여 지는 배수	접두어의 명 칭	기 호	단위에 곱하여 지는 배수	접두어의 명 칭	기 호
10^{18}	Exa	E	10^{-1}	Deci	d
10^{15}	Peta	P	10^{-2}	Centi	c
10^{12}	Tera	T	10^{-3}	Milli	m
10^{9}	Giga	G	10^{-6}	Micro	μ
10^{6}	Mega	M	10^{-9}	Nano	n
10^{3}	Kilo	k	10^{-12}	Pico	p
10^{2}	Hecto	h	10^{-15}	Femto	f
10	Deca	da	10^{-18}	Ato	a

SI 단위로부터 환산율 (계속)

량	SI 단위		SI 이외의 단위		SI 단위에서의 환율
	단위의 명칭	기호	단위의 명칭	기호	
압 력	Pascal (Newton per square meter)	Pa (N/m^2)	Kilogram-force per square meter Water Column Mercury Column Torr Bar Atmosphere	kgf/m^2 mH_2O mmHg Torr bar atm	1/9.806 65 $1/(9.806\ 65\times10^3)$ $760/(1.013\ 25\times10^5)$ $760/(1.013\ 25\times10^5)$ 10^{-5} $1/(1.013\ 25\times10^5)$
일	Joule (Newton meter)	J (N · m)	Erg Calorie (International) Kilogram-force meter Kilowatt hour French hourse power hour	erg cal_{IT} kgf · m kW · h PS · h	10^7 1/4.186 8 1/9.806 65 $1/(3.6\times10^6)$ $\approx 3.776\ 72\times10^{-7}$
동력, 일율	Watt (Joule per second)	W (J/s)	Kilogram-force meter per second Kilocalorie per hour French horse power	kgf · m/s kcal/h PS	1/9.806 65 1/1.163 ≈ 1/735.498 8
점도, 점도지수	Hertz	Pa · S	Poise	P	10
동점도, 동점도지수	Square meter per second	m^2/s	Stokes Centistokes	St cSt	10^4 10^6
온도, 온도차	Kelvin	K, °C	Celsius Degree, degree	°C	(注(1) 참조)
전류, 기자력	ampere	A	Ampere	A	1
전압, 기전력	Volt	V	(Watts per ampere)	(W/A)	1
자계의 강도	Ampere per meter	A/m	Oersted	Oe	$4\pi/10^3$
자속밀도	Tesla	T	Gauss Gamma	Gs γ	10^4 10^9
전기저항	Ohm	Ω	(Volts per ampere)	(V/A)	1

주 (1) TK에서 θ℃로의 온도환산은 $\theta = T - 273.15$로 하지만 온도차인 경우는 $\Delta T = \Delta\theta$이다.
단, ΔT 및 $\Delta\theta$는 각각 캘빈 및 셀시우스度으로 측정한 온도차를 나타낸다.

비 고 괄호안에 쓴 단위명칭 및 기호는 그 위 또는 왼쪽에 쓴 단위의 정의를 나타낸다.

환산례 1 N=1/9.806 65kgf