
MACHINED RING NEEDLE ROLLER BEARINGS STAINLESS STEEL

WITH INNER RING


SUS/INOX




NA49..M ,NKI..M



NKI..M(d ≦ 8)



NA49..M,NKI..M



NA49..M ,NKI..M TYPE

Shaft Diameter (mm)	Designation		Dimensions (mm)					Standard mounting dimensions (mm)			Basic dynamic load rating	Basic static load rating	Limiting speed *	Mass	Usable bearing designation	
	NA49..M	NKI..M	d	D	C	r s min	F	da MIN	da MAX	Da MAX	Cr N	Cor N	rpm	g (approx)	OUTER RING	INNER RING
5	NA495M	—	5 0 -0.008	13	10	0.15	7	6.2	6.7	11.8	2 700	2 400	34 000	7.3	RNA495M	IR5710M
	—	NKI 5/12M	5	15	12	0.3	8	7	7.7	13	4 600	4 300	32 000	11.9	NK8/12M	IR5812M
	—	NKI 5/16M	5	15	16	0.3	8	7	7.7	13	6 500	6 700	32 000	16.7	NK8/16M	IR5816M
6	NA496M	—	6 0 -0.008	15	10	0.15	8	7.2	7.7	13.8	3 500	3 100	32 000	9.1	RNA496M	IR6810M
	—	NKI 6/12M	6	16	12	0.3	9	8	8.7	14	5 000	4 800	30 000	13	NK9/12M	IR6912M
	—	NKI 6/16M	6	16	16	0.3	9	8	8.7	14	6 900	7 500	30 000	17.5	NK9/16M	IR6916M
7	NA497M	—	7 0 -0.008	17	10	0.15	9	8.2	8.7	15.8	4 100	3 300	30 000	11.2	RNA497M	IR7910M
	—	NKI 7/12M	7	17	12	0.3	10	9	9.7	15	5 400	5 500	28 000	14.3	NK10/12M	IR71012M
	—	NKI 7/16M	7	17	16	0.3	10	9	9.7	15	7 500	8 400	28 000	19.2	NK10/16M	IR71016M
8	NA498M	—	8 0 -0.008	19	11	0.2	10	9.2	9.7	17.4	5 700	4 600	28 000	15	RNA498M	IR81011M
9	—	NKI 9/12M	9 0 -0.008	19	12	0.3	12	11	11.5	17	6 000	6 700	26 000	16.7	NK12/12M	IR91212M
	—	NKI 9/16M	9	19	16	0.3	12	11	11.5	17	8 400	10 300	26 000	22.5	NK12/16M	IR91216M
	NA499M	—	9	20	11	0.3	12	11	11.5	18	6 000	5 700	26 000	16.7	RNA499M	IR91211M
10	NA4900M	—	10 0 -0.008	22	13	0.3	14	12	13	20	8 400	9 200	24 000	24	RNA4900M	IR101413M
	—	NKI 10/16M	10	22	16	0.3	14	12	13	20	10 800	12 600	24 000	30	NK14/16M	IR101416M
	—	NKI 10/20M	10	22	20	0.3	14	12	13	20	13 600	17 000	24 000	38	NK14/20M	IR101420M
12	NA4901M	—	12 0 -0.008	24	13	0.3	16	14	15	22	8 900	10 200	23 000	26.5	RNA4901M	IR121613M
	—	NKI 12/16M	12	24	16	0.3	16	14	15	22	11 300	13 800	23 000	33.5	NK16/16M	IR121616M
	—	NKI 12/20M	12	24	20	0.3	16	14	15	22	14 300	18 700	23 000	42.5	NK16/20M	IR121620M
15	—	NKI 15/16M	15 0 -0.008	27	16	0.3	19	17	18	25	12 800	17 200	21 000	39.5	NK19/16M	IR151916M
	—	NKI 15/20M	15	27	20	0.3	19	17	18	25	16 200	23 200	21 000	50	NK19/20M	IR151920M
	NA4902M	—	15	28	13	0.3	20	17	19	26	10 000	12 600	20 000	35	RNA4902M	IR152013M
17	NA4903M	—	17 0 -0.008	30	13	0.3	22	19	21	28	10 800	14 300	18 000	39	RNA4903M	IR172213M
20	NA4904M	—	20 0 -0.010	37	17	0.3	25	22	24	35	19 300	23 000	16 000	78.5	RNA4904M	IR202517M
25	NA4905M	—	25 0 -0.010	42	17	0.3	30	27	29	40	21 800	28 200	13 000	92.5	RNA4905M	IR253017M


* Suitable for oil lubrication. In case of grease lubrication, down to 60% of this value.

INNER RINGS STAINLESS STEEL





IR..M

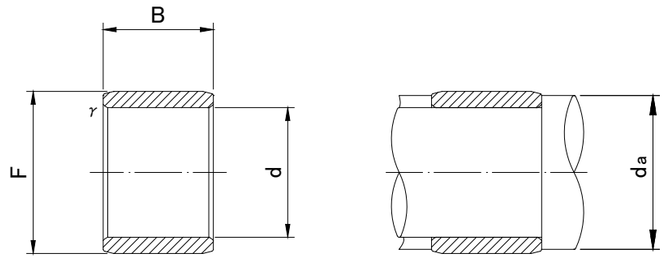

IR..M

IR..M TYPE


Shaft Diameter (mm)	Designation	Dimensions (mm)				Standard mounting dimensions (mm)		Mass	Usable bearing designation	
	IR..M	d	F	B	*r*s min	da MIN	da MAX	g (approx)	RNA49..M	NK..M
5	IR 5710M	5 0 -0.008	7	10	0.15	6.2	6.7	1.4	RNA495M	—
	IR 5812M	5	8	12	0.3	7	7.7	3	—	NK8/12M
	IR 5816M	5	8	16	0.3	7	7.7	4	—	NK8/16M
6	IR 6810M	6 0 -0.008	8	10	0.15	7.2	7.7	1.7	RNA496M	—
	IR 6912M	6	9	12	0.3	8	8.7	3.2	—	NK9/12M
	IR 6916M	6	9	16	0.3	8	8.7	4.3	—	NK9/16M
	IR 61010M	6	10	10	0.3	8	9.7	4	—	—
7	IR 7910M	7 0 -0.008	9	10	0.15	8.2	8.7	1.9	RNA497M	—
	IR 71012M	7	10	12	0.3	9	9.7	3.6	—	NK10/12M
	IR 71016M	7	10	16	0.3	9	9.7	5	—	NK10/16M
8	IR 81011M	8 0 -0.008	10	11	0.15	9.2	9.7	2.4	RNA498M	—
	IR 81210M	8	12	10	0.3	10	11	4.8	—	—
9	IR 91211M	9 0 -0.008	12	11	0.3	11	11.5	3.1	RNA499M	—
	IR 91212M	9	12	12	0.3	11	11.5	4.5	—	NK12/12M
	IR 91216M	9	12	16	0.3	11	11.5	6	—	NK12/16M
10	IR 101412M	10 0 -0.008	14	12	0.3	12	13	7	—	—
	IR 101413M	10	14	13	0.3	12	13	7.5	RNA4900M	—
	IR 101416M	10	14	16	0.3	12	13	9	—	NK14/16M
	IR 101420M	10	14	20	0.3	12	13	11.5	—	NK14/20M
12	IR 121612M	12 0 -0.008	16	12	0.3	14	15	8	—	—
	IR 121613M	12	16	13	0.3	14	15	8.5	RNA4901M	—
	IR 121616M	12	16	16	0.3	14	15	10.5	—	NK16/16M
	IR 121620M	12	16	20	0.3	14	15	13.5	—	NK16/20M
15	IR 151916M	15 0 -0.008	19	16	0.3	17	18	12.5	—	NK19/16M
	IR 151920M	15	19	20	0.3	17	18	16	—	NK19/20M
	IR 152012M	15	20	12	0.3	17	19	12	—	—
	IR 152013M	15	20	13	0.3	17	19	13.5	RNA4902M	—
17	IR 172213M	17 0 -0.008	22	13	0.3	19	21	15.5	RNA4903M	—
	IR 172216M	17	22	16	0.3	19	21	19	—	—

INNER RINGS STAINLESS STEEL





IR..M

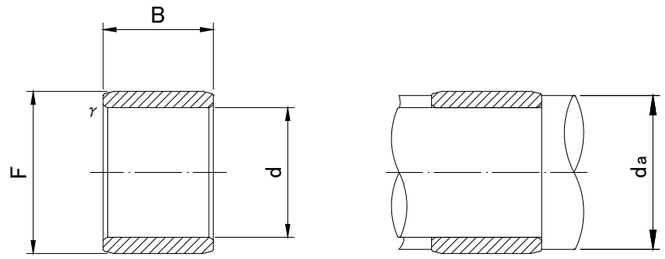

IR..M

IR..M TYPE

Shaft Diameter (mm)	Designation	Dimensions (mm)				Standard mounting dimensions (mm)		Mass	Usable bearing designation	
	IR..M	d	F	B	*r*s min	da MIN	da MAX	g (approx)	RNA49..M	NK..M
20	IR 202516M	20 0 -0.010	25	16	0.3	22	24	22	—	—
	IR 202517M	20	25	17	0.3	22	24	23	RNA4904M	—
25	IR 253016M	25 0 -0.010	30	16	0.3	27	29	28	—	—
	IR253017M	25	30	17	0.3	27	29	28.5	RNA4905M	—
30	IR 303820M	30 0 -0.010	38	20	0.6	34	37	65	—	—
35	IR 354220M	35 0 -0.012	42	20	0.6	39	41	65	—	—
50	IR 506020M	50 0 -0.012	60	20	1	55	59	135	—	—



IR..M




CAM FOLLOWERS

STAINLESS STEEL





CAM FOLLOWERS STAINLESS STEEL
MINIATURE TYPE
HEXAGON SOCKET ON STUD HEAD




CFS..MA


CFS..VMA

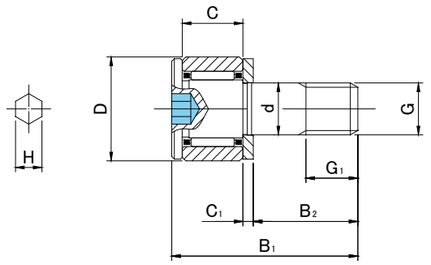



CFS..MA TYPE

Prepacked Grease

Stud diameter (mm)	h6 tolerance	Designation Cylindrical outer ring: With cage	Full roller	D	C	d	G	G1	B1	B2	C1	H	f min	Basic dynamic load rating Cr N	Basic static load rating Cor N	Largest permissible load N	Max tightening torque N·m	Mass g (approx)
2.5	0 -0.006	**CFS 2.5MA**	—	**5**	3	2.5	M2.5×0.45	2.5	9.5	5	0.7	0.9	4.8	370	300	260	0.2	1
		—	**CFS 2.5VMA**											920	990	260		
3	0 -0.006	**CFS 3MA**	—	**6**	4	3	M3×0.5	3	11.5	6	0.7	1.5	5.8	570	560	360	0.3	2
		—	**CFS 3VMA**											1 260	1 620	360		
4	0 -0.008	**CFS 4MA**	—	**8**	5	4	M4×0.7	4	15	8	1	2	7.7	990	990	780	0.6	4
		—	**CFS 4VMA**											2 160	2 790	780		
5	0 -0.008	**CFS 5MA**	—	**10**	6	5	M5×0.8	5	18	10	1	2.5	9.6	1 440	1 710	1 420	1.3	7
		—	**CFS 5VMA**											2 880	4 330	1 420		
6	0 -0.008	**CFS 6MA**	—	**12**	7	6	M6×1	6	21.5	12	1.2	3	11.6	1 890	1 980	2 110	2.3	13
		—	**CFS 6VMA**											4 240	5 760	2 110		

OUTER RINGS TOLERANCE (μm)

TYPE	Cylindrical outer ring
CFS2.5M,CFS3M,CFS4M,CFS5M,CFS6M	0/-8


ACCESSORIES

TYPE	 NUT
All types	Attached






CAM FOLLOWERS STAINLESS STEEL
HEXAGON SOCKET ON STUD HEAD





CF..MA



CF..VMA

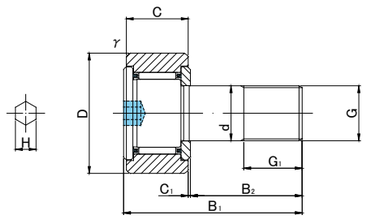

CF3(V)MA～CF10−1(V)MA

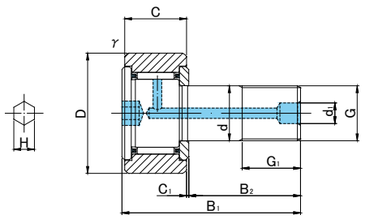

CF10(V)MAK～CF10−1(V)MAK



CF..MA TYPE

Prepacked Grease

Stud diameter (mm)	h7 tolerance	Designation: Cylindrical outer ring, Without seals	Cylindrical outer ring, With seals	Crowned outer ring R250(CF3 ～ CF5) R500(CF6 ～ CF10-1), Without seals	Crowned outer ring, With seals	D	C	d	G	G1	B1	B2	B3	C1	d1	d2	H	r s min	f min	Basic dynamic load rating Cr N	Basic static load rating Cor N	Largest permissible load N	Limiting speed * rpm	Track load capacity: Cylindrical outer ring N	Track load capacity: Crowned outer ring N	Max tightening torque N·m	Mass g (approx)
3	0 -0.010	CF 3MA	CF 3MUUA	CF 3MRA	CF 3MUURA	10	7	3	M3×0.5	5	17	9	—	0.5	—	—	1.5	0.2	6.8	1 350	1 080	360	47 000	1 370	540	0.4	4.5
		CF 3VMA	CF 3VMUUA	CF 3VMRA	CF 3VMUURA															2 570	2 300	360	18 800				
4	0 -0.012	CF 4MA	CF 4MUUA	CF 4MRA	CF 4MUURA	12	8	4	M4×0.7	6	20	11	—	0.5	—	—	2	0.3	8.6	1 890	1 880	780	37 000	1 760	690	1	7.5
		CF 4VMA	CF 4VMUUA	CF 4VMRA	CF 4VMUURA															3 680	3 950	780	14 800				
5	0 -0.012	CF 5MA	CF 5MUUA	CF 5MRA	CF 5MUURA	13	9	5	M5×0.8	7.5	23	13	—	0.5	—	—	2.5	0.3	9.7	2 880	2 540	1 420	29 000	2 250	780	2	10.5
		CF 5VMA	CF 5VMUUA	CF 5VMRA	CF 5VMUURA															4 690	5 060	1 420	11 600				
6	0 -0.012	CF 6MA	CF 6MUUA	CF 6MRA	CF 6MUURA	16	11	6	M6×1	8	28	16	—	0.6	—	—	3	0.3	11	3 330	3 330	2 110	25 000	3 430	1 080	3	18.5
		CF 6VMA	CF 6VMUUA	CF 6VMRA	CF 6VMUURA															6 400	7 840	2 110	12 000				
8	0 -0.015	CF 8MA	CF 8MUUA	CF 8MRA	CF 8MUURA	19	11	8	M8×1.25	10	32	20	—	0.6	—	—	4	0.3	13	3 960	4 330	4 710	20 000	4 020	1 370	8	28.5
		CF 8VMA	CF 8VMUUA	CF 8VMRA	CF 8VMUURA															7 470	10 270	4 710	9 000				
10	0 -0.015	CF10MA	CF10MUUA	CF10MRA	CF10MUURA	22	12	10	M10×1.25	12	36	23	—	0.6	—	—	5	0.3	15	4 950	6 310	6 860	17 000	4 700	1 670	15	45
		CF10VMA	CF10VMUUA	CF10VMRA	CF10VMUURA															8 740	13 340	7 450	7 500				
10	0 -0.015	CF10-1MA	CF10-1MUUA	CF10-1MRA	CF10-1MUURA	26	12	10	M10×1.25	12	36	23	—	0.6	—	—	5	0.3	15	4 950	6 310	6 860	17 000	5 490	2 060	15	60
		CF10-1VMA	CF10-1VMUUA	CF10-1VMRA	CF10-1VMUURA															8 740	13 340	7 450	7 500				
10	0 -0.015	CF10MAK	CF10MUUAK	CF10MRAK	CF10MUURAK	22	12	10	M10×1	12	36	23	—	0.6	4	—	5	0.3	15	4 950	6 310	6 860	17 000	4 700	1 670	15	45
		CF10VMAK	CF10VMUUAK	CF10VMRAK	CF10VMUURAK															8 740	13 340	7 450	7 500				
10	0 -0.015	CF10-1MAK	CF10-1MUUAK	CF10-1MRAK	CF10-1MUURAK	26	12	10	M10×1	12	36	23	—	0.6	4	—	5	0.3	15	4 950	6 310	6 860	17 000	5 490	2 060	15	60
		CF10-1VMAK	CF10-1VMUUAK	CF10-1VMRAK	CF10-1VMUURAK															8 740	13 340	7 450	7 500				

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.


OUTER RINGS TOLERANCE (μm)

TYPE	Cylindrical outer ring	Crowned outer ring
CF3M,CF4M,CF5M,CF6M	0/-8	0/-50
CF8M,CF10M,CF10-1M,CF12M	0/-9	0/-50
CF12-1M,CF16M,CF18M,CF20-1M	0/-11	0/-50
CF20M,CF24M,CF24-1M,CF30M	0/-13	0/-50
CF30-1M,CF30-2M	0/-15	0/-50

ACCESSORIES

TYPE	 STOP PLUG	 RESIN PLUG	 NUT
CF3M/CF4M/CF5M/CF6M/CF8M/CF10M/CF10-1M	—	—	Attached
CF10MK/CF10-1MK	ϕ 4 Attached	ϕ 4 Attached	Attached
CF12M/CF12-1M/CF16M/CF18M	ϕ 6 Attached	ϕ 6 Attached	Attached
CF20M/CF20-1M/CF24M/CF24-1M/CF30M/CF30-1M/CF30-2M	ϕ 8 Attached	ϕ 8 Attached	Attached

CAM FOLLOWERS STAINLESS STEEL
HEXAGON SOCKET ON STUD HEAD







CF..MA



CF..VMA

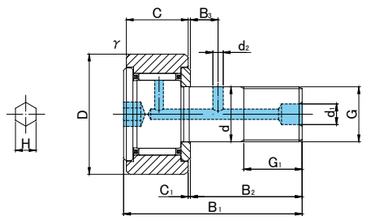



CF..MA TYPE

Prepacked Grease

Stud diameter (mm)	h7 tolerance	Designation: Cylindrical outer ring, Without seals	Cylindrical outer ring, With seals	Crowned outer ring R500(CF12 ～ CF18) R1000(CF20 ≦), Without seals	Crowned outer ring, With seals	D	C	d	G	G1	B1	B2	B3	C1	d1	d2	H	r s min	f min	Basic dynamic load rating Cr N	Basic static load rating Cor N	Largest permissible load N	Limiting speed * rpm	Track load capacity: Cylindrical outer ring N	Track load capacity: Crowned outer ring N	Max tightening torque N·m	Mass g (approx)
12	0 -0.018	CF12MA	CF12MUUA	CF12MRA	CF12MUURA	30	14	12	M12×1.5	13	40	25	6	0.6	6	3	6	0.6	20	7 300	9 010	9 800	14 000	7 060	2 450	22	95
		CF12VMA	CF12VMUUA	CF12VMRA	CF12VMUURA															12 350	18 120	11 270	6 000				
12	0 -0.018	CF12-1MA	CF12-1MUUA	CF12-1MRA	CF12-1MUURA	32	14	12	M12×1.5	13	40	25	6	0.6	6	3	6	0.6	20	7 300	9 010	9 800	14 000	7 450	2 740	22	105
		CF12-1VMA	CF12-1VMUUA	CF12-1VMRA	CF12-1VMUURA															12 350	18 120	11 270	6 000				
16	0 -0.018	CF16MA	CF16MUUA	CF16MRA	CF16MUURA	35	18	16	M16×1.5	17	52	32.5	8	0.8	6	3	6	0.6	24	11 080	16 860	18 330	10 000	11 200	3 140	58	170
		CF16VMA	CF16VMUUA	CF16VMRA	CF16VMUURA															19 020	34 610	19 800	4 500				
18	0 -0.018	CF18MA	CF18MUUA	CF18MRA	CF18MUURA	40	20	18	M18×1.5	19	58	36.5	8	0.8	6	3	6	1	26	13 520	23 180	25 200	8 500	14 400	3 720	87	250
		CF18VMA	CF18VMUUA	CF18VMRA	CF18VMUURA															23 250	47 240	26 560	3 500				
20	0 -0.021	CF20MA	CF20MUUA	CF20MRA	CF20MUURA	52	24	20	M20×1.5	21	66	40.5	9	0.8	8	4	8	1	36	19 020	31 830	32 140	7 000	23 200	8 230	120	460
		CF20VMA	CF20VMUUA	CF20VMRA	CF20VMUURA															30 470	59 320	32 140	3 500				
20	0 -0.021	CF20-1MA	CF20-1MUUA	CF20-1MRA	CF20-1MUURA	47	24	20	M20×1.5	21	66	40.5	9	0.8	8	4	8	1	36	19 020	31 830	32 140	7 000	21 000	7 150	120	385
		CF20-1VMA	CF20-1VMUUA	CF20-1VMRA	CF20-1VMUURA															30 470	59 320	32 140	3 500				
24	0 -0.021	CF24MA	CF24MUUA	CF24MRA	CF24MUURA	62	29	24	M24×1.5	25	80	49.5	11	0.8	8	4	8	1	40	28 040	48 410	49 500	6 500	34 200	10 500	220	815
		CF24VMA	CF24VMUUA	CF24VMRA	CF24VMUURA															42 820	84 650	49 500	3 000				
24	0 -0.021	CF24-1MA	CF24-1MUUA	CF24-1MRA	CF24-1MUURA	72	29	24	M24×1.5	25	80	49.5	11	0.8	8	4	8	1	40	28 040	48 410	49 500	6 500	39 800	12 900	220	1 140
		CF24-1VMA	CF24-1VMUUA	CF24-1VMRA	CF24-1VMUURA															42 820	84 650	49 500	3 000				
30	0 -0.021	CF30MA	CF30MUUA	CF30MRA	CF30MUURA	80	35	30	M30×1.5	32	100	63	15	1	8	4	8	1	46	41 740	78 250	73 700	5 000	52 600	14 900	450	1 870
		CF30VMA	CF30VMUUA	CF30VMRA	CF30VMUURA															62 210	132 530	73 700	2 200				
30	0 -0.021	CF30-1MA	CF30-1MUUA	CF30-1MRA	CF30-1MUURA	85	35	30	M30×1.5	32	100	63	15	1	8	4	8	1	46	41 740	78 250	73 700	5 000	56 000	56 000	450	2 030
		CF30-1VMA	CF30-1VMUUA	CF30-1VMRA	CF30-1VMUURA															62 210	132 530	73 700	2 200				
30	0 -0.021	CF30-2MA	CF30-2MUUA	CF30-2MRA	CF30-2MUURA	90	35	30	M30×1.5	32	100	63	15	1	8	4	8	1	46	41 740	78 250	73 700	5 000	59 300	59 300	450	2 220
		CF30-2VMA	CF30-2VMUUA	CF30-2VMRA	CF30-2VMUURA															62 210	132 530	73 700	2 200				

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.

OUTER RINGS TOLERANCE (μm)


TYPE	Cylindrical outer ring	Crowned outer ring
CF3M,CF4M,CF5M,CF6M	0/-8	0/-50
CF8M,CF10M,CF10-1M,CF12M	0/-9	0/-50
CF12-1M,CF16M,CF18M,CF20-1M	0/-11	0/-50
CF20M,CF24M,CF24-1M,CF30M	0/-13	0/-50
CF30-1M,CF30-2M	0/-15	0/-50

ACCESSORIES

TYPE	STOP PLUG	RESIN PLUG	NUT
CF3M/CF4M/CF5M/CF6M/CF8M/CF10M/CF10-1M	—	—	Attached
CF10MK/CF10-1MK	ϕ 4 Attached	ϕ 4 Attached	Attached
CF12M/CF12-1M/CF16M/CF18M	ϕ 6 Attached	ϕ 6 Attached	Attached
CF20M/CF20-1M/CF24M/CF24-1M/CF30M/CF30-1M/CF30-2M	ϕ 8 Attached	ϕ 8 Attached	Attached

CAM FOLLOWERS STAINLESS STEEL

HEXAGON SOCKET ON BOTH SIDES
GREASE NIPPLE INSTALLED

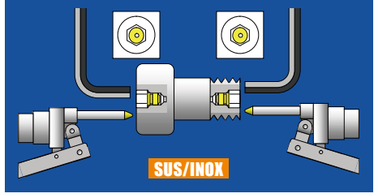





CF..MAB




CF..VMAB

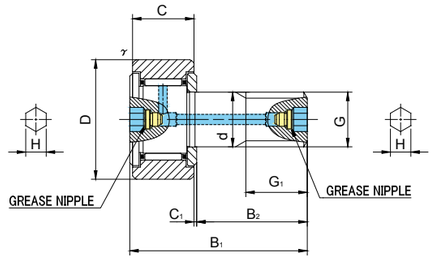

CF10(V)ABK～CF10-1(V)MABK

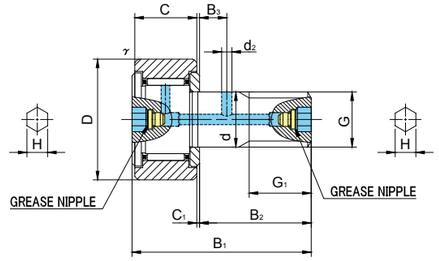

CF12(V)AB～CF18(V)MAB



CF..MAB TYPE

Prepacked Grease

Stud diameter (mm)	h7 tolerance	Designation: Cylindrical outer ring, Without seals	Cylindrical outer ring, With seals	Crowned outer ring R500(CF10 ～ CF18), Without seals	Crowned outer ring R500(CF10 ～ CF18), With seals	D	C	d	G	G1	B1	B2	B3	C1	d2	H	r s min	f min	Basic dynamic load rating Cr N	Basic static load rating Cor N	Largest permissible load N	Limiting speed * rpm	Track load capacity: Cylindrical outer ring N	Track load capacity: Crowned outer ring N	Max tightening torque N·m	Mass g (approx)
10	0 -0.015	**CF10MABK**	**CF10MUUABK**	**CF10MRABK**	**CF10MUURABK**	**22**	12	10	**M10×1**	12	36	23	—	0.6	—	5	0.3	15	4 950	6 310	6 860	17 000	4 700	1 670	15	45
		CF10VMABK	**CF10VMUUABK**	**CF10VMRABK**	**CF10VMUURABK**														8 740	13 340	7 450	7 500				
10	0 -0.015	**CF10-1MABK**	**CF10-1MUUABK**	**CF10-1MRABK**	**CF10-1MUURABK**	**26**	12	10	**M10×1**	12	36	23	—	0.6	—	5	0.3	15	4 950	6 310	6 860	17 000	5 490	2 060	15	60
		CF10-1VMABK	**CF10-1VMUUABK**	**CF10-1VMRABK**	**CF10-1VMUURABK**														8 740	13 340	7 450	7 500				
12	0 -0.018	**CF12MAB**	**CF12MUUAB**	**CF12MRAB**	**CF12MUURAB**	**30**	14	12	M12×1.5	13	40	25	6	0.6	3	6	0.6	20	7 300	9 010	9 800	14 000	7 060	2 450	22	95
		CF12VMAB	**CF12VMUUAB**	**CF12VMRAB**	**CF12VMUURAB**														12 350	18 120	11 270	6 000				
12	0 -0.018	**CF12-1MAB**	**CF12-1MUUAB**	**CF12-1MRAB**	**CF12-1MUURAB**	**32**	14	12	M12×1.5	13	40	25	6	0.6	3	6	0.6	20	7 300	9 010	9 800	14 000	7 450	2 740	22	105
		CF12-1VMAB	**CF12-1VMUUAB**	**CF12-1VMRAB**	**CF12-1VMUURAB**														12 350	18 120	11 270	6 000				
16	0 -0.018	**CF16MAB**	**CF16MUUAB**	**CF16MRAB**	**CF16MUURAB**	**35**	18	16	M16×1.5	17	52	32.5	8	0.8	3	6	0.6	24	11 080	16 860	18 330	10 000	11 200	3 140	58	170
		CF16VMAB	**CF16VMUUAB**	**CF16VMRAB**	**CF16VMUURAB**														19 020	34 610	19 800	4 500				
18	0 -0.018	**CF18MAB**	**CF18MUUAB**	**CF18MRAB**	**CF18MUURAB**	**40**	20	18	M18×1.5	19	58	36.5	8	0.8	3	6	1	26	13 520	23 180	25 200	8 500	14 400	3 720	87	250
		CF18VMAB	**CF18VMUUAB**	**CF18VMRAB**	**CF18VMUURAB**														23 250	47 240	26 560	3 500				

CF..MAB TYPE has oil holes (grease nipple) which are prepared in the stud head and thread side, also an oil hole is prepared outer surface of stud.

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.

OUTER RINGS TOLERANCE (μm)


TYPE	Cylindrical outer ring	Crowned outer ring
CF10,CF10-1,CF12	0/-9	0/-50
CF12-1,CF16,CF18,CF20-1	0/-11	0/-50
CF20,CF24,CF24-1,CF30	0/-13	0/-50
CF30-1,CF30-2	0/-15	0/-50

ACCESSORIES

TYPE	 Grease Nipple	 NUT
All types	Installed	Attached

CAM FOLLOWERS STAINLESS STEEL

HEXAGON SOCKET ON BOTH SIDES
GREASE NIPPLE INSTALLED

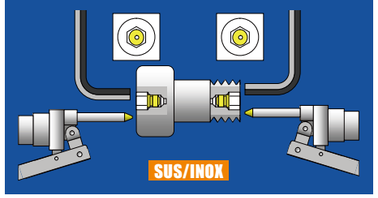





CF..MAB



CF..VMAB

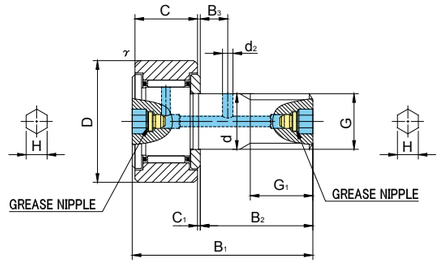



CF..MAB TYPE

Prepacked Grease

Stud diameter (mm)	h7 tolerance	Designation: Cylindrical outer ring, Without seals	Cylindrical outer ring, With seals	Crowned outer ring R1000(CF20 ≦), Without seals	Crowned outer ring R1000(CF20 ≦), With seals	D	C	d	G	G1	B1	B2	B3	C1	d2	H	rs min	f min	Basic dynamic load rating Cr N	Basic static load rating Cor N	Largest permissible load N	Limiting speed * rpm	Track load capacity: Cylindrical outer ring N	Track load capacity: Crowned outer ring N	Max tightening torque N·m	Mass g (approx)
20	0 -0.021	**CF20MAB**	**CF20MUUAB**	**CF20MRAB**	**CF20MUURAB**	**52**	24	20	M20×1.5	21	66	40.5	9	0.8	4	8	1	36	19 020	31 830	32 140	7 000	23 200	8 230	120	460
		CF20VMAB	**CF20VMUUAB**	**CF20VMRAB**	**CF20VMUURAB**														30 470	59 320	32 140	3 500				
20	0 -0.021	**CF20-1MAB**	**CF20-1MUUAB**	**CF20-1MRAB**	**CF20-1MUURAB**	**47**	24	20	M20×1.5	21	66	40.5	9	0.8	4	8	1	36	19 020	31 830	32 140	7 000	21 000	7 150	120	385
		CF20-1VMAB	**CF20-1VMUUAB**	**CF20-1VMRAB**	**CF20-1VMUURAB**														30 470	59 320	32 140	3 500				
24	0 -0.021	**CF24MAB**	**CF24MUUAB**	**CF24MRAB**	**CF24MUURAB**	**62**	29	24	M24×1.5	25	80	49.5	11	0.8	4	8	1	40	28 040	48 410	49 500	6 500	34 200	10 500	220	815
		CF24VMAB	**CF24VMUUAB**	**CF24VMRAB**	**CF24VMUURAB**														42 820	84 650	49 500	3 000				
24	0 -0.021	**CF24-1MAB**	**CF24-1MUUAB**	**CF24-1MRAB**	**CF24-1MUURAB**	**72**	29	24	M24×1.5	25	80	49.5	11	0.8	4	8	1	40	28 040	48 410	49 500	6 500	39 800	12 900	220	1 140
		CF24-1VMAB	**CF24-1VMUUAB**	**CF24-1VMRAB**	**CF24-1VMUURAB**														42 820	84 650	49 500	3 000				
30	0 -0.021	**CF30MAB**	**CF30MUUAB**	**CF30MRAB**	**CF30MUURAB**	**80**	35	30	M30×1.5	32	100	63	15	1	4	8	1	46	41 740	78 250	73 700	5 000	52 600	14 900	450	1 870
		CF30VMAB	**CF30VMUUAB**	**CF30VMRAB**	**CF30VMUURAB**														62 210	132 530	73 700	2 200				
30	0 -0.021	**CF30-1MAB**	**CF30-1MUUAB**	**CF30-1MRAB**	**CF30-1MUURAB**	**85**	35	30	M30×1.5	32	100	63	15	1	4	8	1	46	41 740	78 250	73 700	5 000	56 000	16 100	450	2 030
		CF30-1VMAB	**CF30-1VMUUAB**	**CF30-1VMRAB**	**CF30-1VMUURAB**														62 210	132 530	73 700	2 200				
30	0 -0.021	**CF30-2MAB**	**CF30-2MUUAB**	**CF30-2MRAB**	**CF30-2MUURAB**	**90**	35	30	M30×1.5	32	100	63	15	1	4	8	1	46	41 740	78 250	73 700	5 000	59 300	17 300	450	2 220
		CF30-2VMAB	**CF30-2VMUUAB**	**CF30-2VMRAB**	**CF30-2VMUURAB**														62 210	132 530	73 700	2 200				

CF..MAB TYPE has oil holes (grease nipple) which are prepared in the stud head and thread side, also an oil hole is prepared outer surface of stud.

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.

OUTER RINGS TOLERANCE (μm)

TYPE	Cylindrical outer ring	Crowned outer ring
CF10,CF10-1,CF12	0/-9	0/-50
CF12-1,CF16,CF18,CF20-1	0/-11	0/-50
CF20,CF24,CF24-1,CF30	0/-13	0/-50
CF30-1,CF30-2	0/-15	0/-50


ACCESSORIES

TYPE	 Grease Nipple	 NUT
All types	Installed	Attached





CAM FOLLOWERS STAINLESS STEEL
SCREWDRIVER SLOT HEAD




SUS/INOX




CF..M




CF..VM



CF5(V)M～CF10−1(V)M



CF10(V)MK～CF10−1(V)MK



CF..M TYPE

Prepacked Grease

Stud diameter (mm)	h7 tolerance	Designation: Cylindrical outer ring, Without seals	Cylindrical outer ring, With seals	Crowned outer ring R250(CF5) R500(CF6 ～ CF10-1), Without seals	Crowned outer ring, With seals	Dimensions (mm): D	C	d	G	G1	B1	B2	B3	C1	d1	d2	r's min	f min	Basic dynamic load rating: Cr N	Basic static load rating: Cor N	Largest permissible load: N	Limiting speed *: rpm	Track load capacity: Cylindrical outer ring N	Crowned outer ring N	Max tightening torque: N·m	Mass: g (approx)
5	0 -0.012	CF 5M	CF 5MUU	CF 5MR	CF 5MUUR	13	9	5	M5×0.8	7.5	23	13	—	0.5	3.1	—	0.3	9.7	2 880	2 540	1 420	29 000	2 250	780	2	10.5
		CF 5VM	CF 5VMUU	CF 5VMR	CF 5VMUUR														4 690	5 060	1 420	11 600				
6	0 -0.012	CF 6M	CF 6MUU	CF 6MR	CF 6MUUR	16	11	6	M6×1	8	28	16	—	0.6	4	—	0.3	11	3 330	3 330	2 110	25 000	3 430	1 080	3	18.5
		CF 6VM	CF 6VMUU	CF 6VMR	CF 6VMUUR														6 400	7 840	2 110	12 000				
8	0 -0.015	CF 8M	CF 8MUU	CF 8MR	CF 8MUUR	19	11	8	M8×1.25	10	32	20	—	0.6	4	—	0.3	13	3 960	4 330	4 710	20 000	4 020	1 370	8	28.5
		CF 8VM	CF 8VMUU	CF 8VMR	CF 8VMUUR														7 470	10 270	4 710	9 000				
10	0 -0.015	CF10M	CF10MUU	CF10MR	CF10MUUR	22	12	10	M10×1.25	12	36	23	—	0.6	4	—	0.3	15	4 950	6 310	6 860	17 000	4 700	1 670	15	45
		CF10VM	CF10VMUU	CF10VMR	CF10VMUUR														8 740	13 340	7 450	7 500				
10	0 -0.015	CF10-1M	CF10-1MUU	CF10-1MR	CF10-1MUUR	26	12	10	M10×1.25	12	36	23	—	0.6	4	—	0.3	15	4 950	6 310	6 860	17 000	5 490	2 060	15	60
		CF10-1VM	CF10-1VMUU	CF10-1VMR	CF10-1VMUUR														8 740	13 340	7 450	7 500				
10	0 -0.015	CF10MK	CF10MUUK	CF10MRK	CF10MUURK	22	12	10	M10×1	12	36	23	—	0.6	4	—	0.3	15	4 950	6 310	6 860	17 000	4 700	1 670	15	45
		CF10VMK	CF10VMUUK	CF10VMRK	CF10VMUURK														8 740	13 340	7 450	7 500				
10	0 -0.015	CF10-1MK	CF10-1MUUK	CF10-1MRK	CF10-1MUURK	26	12	10	M10×1	12	36	23	—	0.6	4	—	0.3	15	4 950	6 310	6 860	17 000	5 490	2 060	15	60
		CF10-1VMK	CF10-1VMUUK	CF10-1VMRK	CF10-1VMUURK														8 740	13 340	7 450	7 500				

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.


OUTER RINGS TOLERANCE (μm)

TYPE	Cylindrical outer ring	Crowned outer ring
CF5M,CF6M	0/-8	0/-50
CF8M,CF10M,CF10-1M,CF12M	0/-9	0/-50
CF12-1M,CF16M,CF18M,CF20-1M	0/-11	0/-50
CF20M,CF24M,CF24-1M,CF30M	0/-13	0/-50
CF30-1M,CF30-2M	0/-15	0/-50

ACCESSORIES

TYPE	STOP PLUG	RESIN PLUG	NUT
CF5M	—	—	Attached
CF6M/CF8M/CF10M/CF10-1M	—	ϕ 4 Attached	Attached
CF10MK/CF10-1MK	ϕ 4 Attached	ϕ 4 Attached	Attached
CF12M/CF12-1M/CF16M/CF18M	ϕ 6 Attached	ϕ 6 Attached	Attached
CF20M/CF20-1M/CF24M/CF24-1M/CF30M/CF30-1M/CF30-2M	ϕ 8 Attached	ϕ 8 Attached	Attached

CAM FOLLOWERS STAINLESS STEEL
SCREWDRIVER SLOT HEAD







CF..M



CF..VM





CF..M TYPE

Prepacked Grease

Stud diameter (mm)		Designation				Dimensions (mm)												Basic dynamic load rating	Basic static load rating	Largest permissible load	Limiting speed *	Track load capacity		Max tightening torque	Mass
		Cylindrical outer ring		Crowned outer ring R500(CF12 ～ CF18) R1000(CF20 ≦)																					
	h7 tolerance	Without seals	With seals	Without seals	With seals	D	C	d	G	G1	B1	B2	B3	C1	d1	d2	r s min	f min	Cr N	Cor N	N	rpm	Cylindrical outer ring N	Crowned outer ring N	N·m	g (approx)
12	0 -0.018	**CF12M**	**CF12MUU**	**CF12MR**	**CF12MUUR**	**30**	14	12	M12×1.5	13	40	25	6	0.6	6	3	0.6	20	7 300	9 010	9 800	14 000	7 060	2 450	22	95
		CF12VM	**CF12VMUU**	**CF12VMR**	**CF12VMUUR**														12 350	18 120	11 270	6 000				
12	0 -0.018	**CF12-1M**	**CF12-1MUU**	**CF12-1MR**	**CF12-1MUUR**	**32**	14	12	M12×1.5	13	40	25	6	0.6	6	3	0.6	20	7 300	9 010	9 800	14 000	7 450	2 740	22	105
		CF12-1VM	**CF12-1VMUU**	**CF12-1VMR**	**CF12-1VMUUR**														12 350	18 120	11 270	6 000				
16	0 -0.018	**CF16M**	**CF16MUU**	**CF16MR**	**CF16MUUR**	**35**	18	16	M16×1.5	17	52	32.5	8	0.8	6	3	0.6	24	11 080	16 860	18 330	10 000	11 200	3 140	58	170
		CF16VM	**CF16VMUU**	**CF16VMR**	**CF16VMUUR**														19 020	34 610	19 800	4 500				
18	0 -0.018	**CF18M**	**CF18MUU**	**CF18MR**	**CF18MUUR**	**40**	20	18	M18×1.5	19	58	36.5	8	0.8	6	3	1	26	13 520	23 180	25 200	8 500	14 400	3 720	87	250
		CF18VM	**CF18VMUU**	**CF18VMR**	**CF18VMUUR**														23 250	47 240	26 560	3 500				
20	0 -0.021	**CF20M**	**CF20MUU**	**CF20MR**	**CF20MUUR**	**52**	24	20	M20×1.5	21	66	40.5	9	0.8	8	4	1	36	19 020	31 830	32 140	7 000	23 200	8 230	120	460
		CF20VM	**CF20VMUU**	**CF20VMR**	**CF20VMUUR**														30 470	59 320	32 140	3 500				
20	0 -0.021	**CF20-1M**	**CF20-1MUU**	**CF20-1MR**	**CF20-1MUUR**	**47**	24	20	M20×1.5	21	66	40.5	9	0.8	8	4	1	36	19 020	31 830	32 140	7 000	21 000	7 150	120	385
		CF20-1VM	**CF20-1VMUU**	**CF20-1VMR**	**CF20-1VMUUR**														30 470	59 320	32 140	3 500				
24	0 -0.021	**CF24M**	**CF24MUU**	**CF24MR**	**CF24MUUR**	**62**	29	24	M24×1.5	25	80	49.5	11	0.8	8	4	1	40	28 040	48 410	49 500	6 500	34 200	10 500	220	815
		CF24VM	**CF24VMUU**	**CF24VMR**	**CF24VMUUR**														42 820	84 650	49 500	3 000				
24	0 -0.021	**CF24-1M**	**CF24-1MUU**	**CF24-1MR**	**CF24-1MUUR**	**72**	29	24	M24×1.5	25	80	49.5	11	0.8	8	4	1	40	28 040	48 410	49 500	6 500	39 800	12 900	220	1 140
		CF24-1VM	**CF24-1VMUU**	**CF24-1VMR**	**CF24-1VMUUR**														42 820	84 650	49 500	3 000				
30	0 -0.021	**CF30M**	**CF30MUU**	**CF30MR**	**CF30MUUR**	**80**	35	30	M30×1.5	32	100	63	15	1	8	4	1	46	41 740	78 250	73 700	5 000	52 600	14 900	450	1 870
		CF30VM	**CF30VMUU**	**CF30VMR**	**CF30VMUUR**														62 210	132 530	73 700	2 200				
30	0 -0.021	**CF30-1M**	**CF30-1MUU**	**CF30-1MR**	**CF30-1MUUR**	**85**	35	30	M30×1.5	32	100	63	15	1	8	4	1	46	41 740	78 250	73 700	5 000	56 000	16 100	450	2 030
		CF30-1VM	**CF30-1VMUU**	**CF30-1VMR**	**CF30-1VMUUR**														62 210	132 530	73 700	2 200				
30	0 -0.021	**CF30-2M**	**CF30-2MUU**	**CF30-2MR**	**CF30-2MUUR**	**90**	35	30	M30×1.5	32	100	63	15	1	8	4	1	46	41 740	78 250	73 700	5 000	59 300	17 300	450	2 220
		CF30-2VM	**CF30-2VMUU**	**CF30-2VMR**	**CF30-2VMUUR**														62 210	132 530	73 700	2 200				

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.

OUTER RINGS TOLERANCE (μm)


TYPE	Cylindrical outer ring	Crowned outer ring
CF5M,CF6M	0/-8	0/-50
CF8M,CF10M,CF10-1M,CF12M	0/-9	0/-50
CF12-1M,CF16M,CF18M,CF20-1M	0/-11	0/-50
CF20M,CF24M,CF24-1M,CF30M	0/-13	0/-50
CF30-1M,CF30-2M	0/-15	0/-50

ACCESSORIES

TYPE	STOP PLUG	RESIN PLUG	NUT
CF5M	—	—	Attached
CF6M/CF8M/CF10M/CF10-1M	—	ϕ 4 Attached	Attached
CF10MK/CF10-1MK	ϕ 4 Attached	ϕ 4 Attached	Attached
CF12M/CF12-1M/CF16M/CF18M	ϕ 6 Attached	ϕ 6 Attached	Attached
CF20M/CF20-1M/CF24M/CF24-1M/CF30M/CF30-1M/CF30-2M	ϕ 8 Attached	ϕ 8 Attached	Attached

CAM FOLLOWERS STAINLESS STEEL

HEXAGON SOCKET ON THREAD SIDE SCREWDRIVER SLOT HEAD






CF..MB



CF..VMB

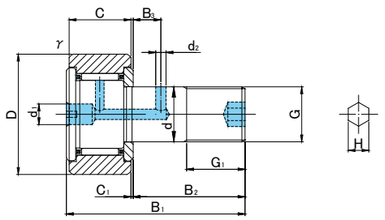

CF..MB TYPE

Prepacked Grease

Stud diameter (mm) d	h7 tolerance	Designation: Cylindrical outer ring, Without seals	Cylindrical outer ring, With seals	Crowned outer ring R500 (CF12 ～ CF18) R1000 (CF20 ≦), Without seals	Crowned outer ring, With seals	D	C	G	G1	B1	B2	B3	C1	d1	d2	H	r s min	f min	Basic dynamic load rating Cr N	Basic static load rating Cor N	Largest permissible load N	Limiting speed * rpm	Track load capacity: Cylindrical outer ring N	Track load capacity: Crowned outer ring N	Max tightening torque N·m	Mass g (approx)
12	0 -0.018	CF12MB	CF12MUUB	CF12MRB	CF12MUURB	30	14	M12×1.5	13	40	25	6	0.6	6	3	6	0.6	20	7 300	9 010	9 800	14 000	7 060	2 450	22	95
		CF12VMB	CF12VMUUB	CF12VMRB	CF12VMUURB														12 350	18 120	11 270	6 000				
12	0 -0.018	CF12-1MB	CF12-1MUUB	CF12-1MRB	CF12-1MUURB	32	14	M12×1.5	13	40	25	6	0.6	6	3	6	0.6	20	7 300	9 010	9 800	14 000	7 450	2 740	22	105
		CF12-1VMB	CF12-1VMUUB	CF12-1VMRB	CF12-1VMUURB														12 350	18 120	11 270	6 000				
16	0 -0.018	CF16MB	CF16MUUB	CF16MRB	CF16MUURB	35	18	M16×1.5	17	52	32.5	8	0.8	6	3	6	0.6	24	11 080	16 860	18 330	10 000	11 200	3 140	58	170
		CF16VMB	CF16VMUUB	CF16VMRB	CF16VMUURB														19 020	34 610	19 800	4 500				
18	0 -0.018	CF18MB	CF18MUUB	CF18MRB	CF18MUURB	40	20	M18×1.5	19	58	36.5	8	0.8	6	3	6	1	26	13 520	23 180	25 200	8 500	14 400	3 720	87	250
		CF18VMB	CF18VMUUB	CF18VMRB	CF18VMUURB														23 250	47 240	26 560	3 500				
20	0 -0.021	CF20MB	CF20MUUB	CF20MRB	CF20MUURB	52	24	M20×1.5	21	66	40.5	9	0.8	8	4	8	1	36	19 020	31 830	32 140	7 000	23 200	8 230	120	460
		CF20VMB	CF20VMUUB	CF20VMRB	CF20VMUURB														30 470	59 320	32 140	3 500				
20	0 -0.021	CF20-1MB	CF20-1MUUB	CF20-1MRB	CF20-1MUURB	47	24	M20×1.5	21	66	40.5	9	0.8	8	4	8	1	36	19 020	31 830	32 140	7 000	21 000	7 150	120	385
		CF20-1VMB	CF20-1VMUUB	CF20-1VMRB	CF20-1VMUURB														30 470	59 320	32 140	3 500				
24	0 -0.021	CF24MB	CF24MUUB	CF24MRB	CF24MUURB	62	29	M24×1.5	25	80	49.5	11	0.8	8	4	8	1	40	28 040	48 410	49 500	6 500	34 200	10 500	220	815
		CF24VMB	CF24VMUUB	CF24VMRB	CF24VMUURB														42 820	84 650	49 500	3 000				
24	0 -0.021	CF24-1MB	CF24-1MUUB	CF24-1MRB	CF24-1MUURB	72	29	M24×1.5	25	80	49.5	11	0.8	8	4	8	1	40	28 040	48 410	49 500	6 500	39 800	12 900	220	1 140
		CF24-1VMB	CF24-1VMUUB	CF24-1VMRB	CF24-1VMUURB														42 820	84 650	49 500	3 000				
30	0 -0.021	CF30MB	CF30MUUB	CF30MRB	CF30MUURB	80	35	M30×1.5	32	100	63	15	1	8	4	8	1	46	41 740	78 250	73 700	5 000	52 600	14 900	450	1 870
		CF30VMB	CF30VMUUB	CF30VMRB	CF30VMUURB														62 210	132 530	73 700	2 200				
30	0 -0.021	CF30-1MB	CF30-1MUUB	CF30-1MRB	CF30-1MUURB	85	35	M30×1.5	32	100	63	15	1	8	4	8	1	46	41 740	78 250	73 700	5 000	56 000	16 100	450	2 030
		CF30-1VMB	CF30-1VMUUB	CF30-1VMRB	CF30-1VMUURB														62 210	132 530	73 700	2 200				
30	0 -0.021	CF30-2MB	CF30-2MUUB	CF30-2MRB	CF30-2MUURB	90	35	M30×1.5	32	100	63	15	1	8	4	8	1	46	41 740	78 250	73 700	5 000	59 300	17 300	450	2 220
		CF30-2VMB	CF30-2VMUUB	CF30-2VMRB	CF30-2VMUURB														62 210	132 530	73 700	2 200				

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.

OUTER RINGS TOLERANCE (μm)


TYPE	Cylindrical outer ring	Crowned outer ring
CF12M	0/-9	0/-50
CF12-1M,CF16M,CF18M,CF20-1M	0/-11	0/-50
CF20M,CF24M,CF24-1M,CF30M	0/-13	0/-50
CF30-1M,CF30-2M	0/-15	0/-50

ACCESSORIES

TYPE	 STOP PLUG	 RESIN PLUG	 NUT
CF3M/CF4M/CF5M	—	—	Attached
CF6M/CF8M/CF10M/CF10-1M	—	—	Attached
CF12M/CF12-1M/CF16M/CF18M	ϕ 6 Attached	ϕ 6 Attached	Attached
CF20M/CF20-1M/CF24M/CF24-1M/CF30M/CF30-1M/CF30-2M	ϕ 8 Attached	ϕ 8 Attached	Attached

CAM FOLLOWERS STAINLESS STEEL

SOLID ECCENTRIC TYPE HEXAGON SOCKET ON STUD HEAD







CFH..MA



CFH..VMA



CFH5(V)MA～CFH10-1(V)MA

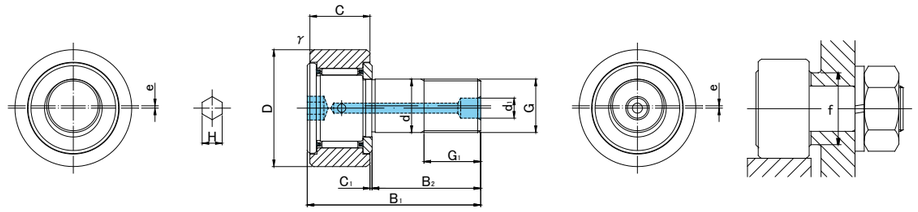

CFH12(V)MA～CFH12-1(V)MA

CFH..MA TYPE

Prepacked Grease

Stud diameter (mm)		Designation				Dimensions (mm)													Basic dynamic load rating	Basic static load rating	Largest permissible load	Limiting speed *	Track load capacity		Max tightening torque	Mass
		Cylindrical outer ring		Crowned outer ring R500(CF5 ～ CF12)																						
	h7 tolerance	Without seals	With seals	Without seals	With seals	D	C	d	G	G1	B1	B2	C1	d1	H	r s min	e	f min	Cr N	Cor N	N	rpm	Cylindrical outer ring N	Crowned outer ring N	N·m	g (approx)
5	0 -0.012	**CFH 5MA**	**CFH 5MUUA**	**CFH 5MRA**	**CFH 5MUURA**	**13**	9	5	M5×0.8	7.5	23	13	0.5	—	2.5	0.3	0.2	9.7	2 880	2 540	1 420	29 000	2 250	780	2	10.5
		CFH 5VMA	**CFH 5VMUUA**	**CFH 5VMRA**	**CFH 5VMUURA**														4 690	5 060	1 420	11 600				
6	0 -0.012	**CFH 6MA**	**CFH 6MUUA**	**CFH 6MRA**	**CFH 6MUURA**	**16**	11	6	M6×1	8	28	16	0.6	—	3	0.3	0.25	11	3 330	3 330	2 110	25 000	3 430	1 080	3	18.5
		CFH 6VMA	**CFH 6VMUUA**	**CFH 6VMRA**	**CFH 6VMUURA**														6 400	7 840	2 110	12 000				
8	0 -0.015	**CFH 8MA**	**CFH 8MUUA**	**CFH 8MRA**	**CFH 8MUURA**	**19**	11	8	M8×1.25	10	32	20	0.6	—	4	0.3	0.25	13	3 960	4 330	4 710	20 000	4 020	1 370	8	28.5
		CFH 8VMA	**CFH 8VMUUA**	**CFH 8VMRA**	**CFH 8VMUURA**														7 470	10 270	4 710	9 000				
10	0 -0.015	**CFH10MA**	**CFH10MUUA**	**CFH10MRA**	**CFH10MUURA**	**22**	12	10	M10×1.25	12	36	23	0.6	—	5	0.3	0.3	15	4 950	6 310	6 860	17 000	4 700	1 670	15	45
		CFH10VMA	**CFH10VMUUA**	**CFH10VMRA**	**CFH10VMUURA**														8 740	13 340	7 450	7 500				
10	0 -0.015	**CFH10-1MA**	**CFH10-1MUUA**	**CFH10-1MRA**	**CFH10-1MUURA**	**26**	12	10	M10×1.25	12	36	23	0.6	—	5	0.3	0.3	15	4 950	6 310	6 860	17 000	5 490	2 060	15	60
		CFH10-1VMA	**CFH10-1VMUUA**	**CFH10-1VMRA**	**CFH10-1VMUURA**														8 740	13 340	7 450	7 500				
12	0 -0.018	**CFH12MA**	**CFH12MUUA**	**CFH12MRA**	**CFH12MUURA**	**30**	14	12	M12×1.5	13	40	25	0.6	6	6	0.6	0.4	20	7 300	9 010	9 800	14 000	7 060	2 450	22	95
		CFH12VMA	**CFH12VMUUA**	**CFH12VMRA**	**CFH12VMUURA**														12 350	18 120	11 270	6 000				
12	0 -0.018	**CFH12-1MA**	**CFH12-1MUUA**	**CFH12-1MRA**	**CFH12-1MUURA**	**32**	14	12	M12×1.5	13	40	25	0.6	6	6	0.6	0.4	20	7 300	9 010	9 800	14 000	7 450	2 740	22	105
		CFH12-1VMA	**CFH12-1VMUUA**	**CFH12-1VMRA**	**CFH12-1VMUURA**														12 350	18 120	11 270	6 000				

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.

OUTER RINGS TOLERANCE (μm)

TYPE	Cylindrical outer ring	Crowned outer ring
CF5M,CF6M	0/-8	0/-50
CF8M,CF10M,CF10-1M,CF12M	0/-9	0/-50
CF12-1M,CF16M,CF18M,CF20-1M	0/-11	0/-50
CF20M,CF24M,CF24-1M,CF30M	0/-13	0/-50
CF30-1M,CF30-2M	0/-15	0/-50

ACCESSORIES


TYPE	 STOP PLUG	 RESIN PLUG	 NUT
CF3M/CF4M/CF5M	—	—	Attached
CF6M/CF8M/CF10M/CF10-1M	—	—	Attached
CF12M/CF12-1M/CF16M/CF18M	ϕ 6 Attached	ϕ 6 Attached	Attached
CF20M/CF20-1M/CF24M/CF24-1M/CF30M/CF30-1M/CF30-2M	ϕ 8 Attached	ϕ 8 Attached	Attached





CAM FOLLOWERS STAINLESS STEEL

SOLID ECCENTRIC TYPE HEXAGON SOCKET ON STUD HEAD






CFH..MA



CFH..VMA

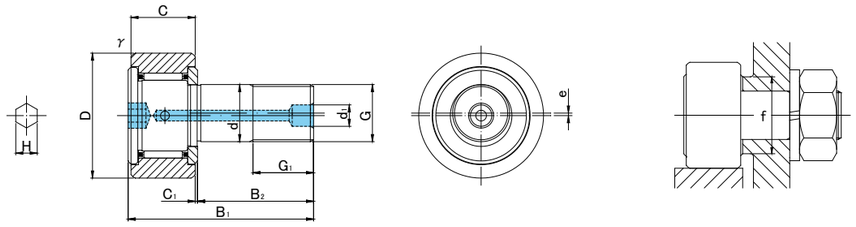

CFH..MA TYPE

Prepacked Grease

Stud diameter (mm)	h7 tolerance	Designation: Cylindrical outer ring, Without seals	Designation: Cylindrical outer ring, With seals	Designation: Crowned outer ring R500(CF16 ～ CF18) R1000(CF20 ≦), Without seals	Designation: Crowned outer ring R500(CF16 ～ CF18) R1000(CF20 ≦), With seals	D	C	d	G	G1	B1	B2	C1	d1	H	rs min	e	f min	Basic dynamic load rating Cr N	Basic static load rating Cor N	Largest permissible load N	Limiting speed * rpm	Track load capacity: Cylindrical outer ring N	Track load capacity: Crowned outer ring N	Max tightening torque N·m	Mass g (approx)
16	0 -0.018	**CFH16MA**	**CFH16MUUA**	**CFH16MRA**	**CFH16MUURA**	**35**	18	16	M16×1.5	17	52	32.5	0.8	6	6	0.6	0.5	24	11 080	16 860	18 330	10 000	11 200	3 140	58	170
		CFH16VMA	**CFH16VMUUA**	**CFH16VMRA**	**CFH16VMUURA**														19 020	34 610	19 800	4 500				
18	0 -0.018	**CFH18MA**	**CFH18MUUA**	**CFH18MRA**	**CFH18MUURA**	**40**	20	18	M18×1.5	19	58	36.5	0.8	6	6	1	0.6	26	13 520	23 180	25 200	8 500	14 400	3 720	87	250
		CFH18VMA	**CFH18VMUUA**	**CFH18VMRA**	**CFH18VMUURA**														23 250	47 240	26 560	3 500				
20	0 -0.021	**CFH20MA**	**CFH20MUUA**	**CFH20MRA**	**CFH20MUURA**	**52**	24	20	M20×1.5	21	66	40.5	0.8	8	8	1	0.7	36	19 020	31 830	32 140	7 000	23 200	8 230	120	460
		CFH20VMA	**CFH20VMUUA**	**CFH20VMRA**	**CFH20VMUURA**														30 470	59 320	32 140	3 500				
20	0 -0.021	**CFH20-1MA**	**CFH20-1MUUA**	**CFH20-1MRA**	**CFH20-1MUURA**	**47**	24	20	M20×1.5	21	66	40.5	0.8	8	8	1	0.7	36	19 020	31 830	32 140	7 000	21 000	7 150	120	385
		CFH20-1VMA	**CFH20-1VMUUA**	**CFH20-1VMRA**	**CFH20-1VMUURA**														30 470	59 320	32 140	3 500				
24	0 -0.021	**CFH24MA**	**CFH24MUUA**	**CFH24MRA**	**CFH24MUURA**	**62**	29	24	M24×1.5	25	80	49.5	0.8	8	8	1	0.8	40	28 040	48 410	49 500	6 500	34 200	10 500	220	815
		CFH24VMA	**CFH24VMUUA**	**CFH24VMRA**	**CFH24VMUURA**														42 820	84 650	49 500	3 000				
24	0 -0.021	**CFH24-1MA**	**CFH24-1MUUA**	**CFH24-1MRA**	**CFH24-1MUURA**	**72**	29	24	M24×1.5	25	80	49.5	0.8	8	8	1	0.8	40	28 040	48 410	49 500	6 500	39 800	12 900	220	1 140
		CFH24-1VMA	**CFH24-1VMUUA**	**CFH24-1VMRA**	**CFH24-1VMUURA**														42 820	84 650	49 500	3 000				
30	0 -0.021	**CFH30MA**	**CFH30MUUA**	**CFH30MRA**	**CFH30MUURA**	**80**	35	30	M30×1.5	32	100	63	1	8	8	1	1	46	41 740	78 250	73 700	5 000	52 600	14 900	450	1 870
		CFH30VMA	**CFH30VMUUA**	**CFH30VMRA**	**CFH30VMUURA**														62 210	132 530	73 700	2 200				
30	0 -0.021	**CFH30-1MA**	**CFH30-1MUUA**	**CFH30-1MRA**	**CFH30-1MUURA**	**85**	35	30	M30×1.5	32	100	63	1	8	8	1	1	46	41 740	78 250	73 700	5 000	56 000	16 100	450	2 030
		CFH30-1VMA	**CFH30-1VMUUA**	**CFH30-1VMRA**	**CFH30-1VMUURA**														62 210	132 530	73 700	2 200				
30	0 -0.021	**CFH30-2MA**	**CFH30-2MUUA**	**CFH30-2MRA**	**CFH30-2MUURA**	**90**	35	30	M30×1.5	32	100	63	1	8	8	1	1	46	41 740	78 250	73 700	5 000	59 300	17 300	450	2 220
		CFH30-2VMA	**CFH30-2VMUUA**	**CFH30-2VMRA**	**CFH30-2VMUURA**														62 210	132 530	73 700	2 200				

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.

OUTER RINGS TOLERANCE (μm)


TYPE	Cylindrical outer ring	Crowned outer ring
CF5M,CF6M	0/-8	0/-50
CF8M,CF10M,CF10-1M,CF12M	0/-9	0/-50
CF12-1M,CF16M,CF18M,CF20-1M	0/-11	0/-50
CF20M,CF24M,CF24-1M,CF30M	0/-13	0/-50
CF30-1M,CF30-2M	0/-15	0/-50

ACCESSORIES

TYPE	 STOP PLUG	 RESIN PLUG	 NUT
CF3M/CF4M/CF5M	—	—	Attached
CF6M/CF8M/CF10M/CF10-1M	—	—	Attached
CF12M/CF12-1M/CF16M/CF18M	ϕ 6 Attached	ϕ 6 Attached	Attached
CF20M/CF20-1M/CF24M/CF24-1M/CF30M/CF30-1M/CF30-2M	ϕ 8 Attached	ϕ 8 Attached	Attached

CAM FOLLOWERS STAINLESS STEEL

SOLID ECCENTRIC TYPE
HEXAGON SOCKET ON BOTH SIDES
GREASE NIPPLE INSTALLED

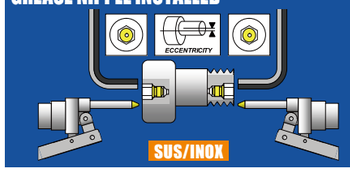




CFH..MAB



CFH..VMAB

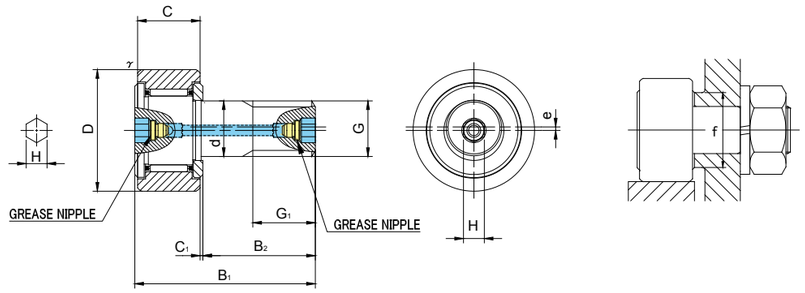

CFH..MAB TYPE

Prepacked Grease

Stud diameter (mm)		Designation				Dimensions (mm)											Basic dynamic load rating	Basic static load rating	Largest permissible load	Limiting speed *	Track load capacity		Max tightening torque	Mass
		Cylindrical outer ring		Crowned outer ring R500(CF12 ～ CF18) R1000(CF20 ≦)																				
	h7 tolerance	Without seals	With seals	Without seals	With seals	D	C	d	G	G1	B1	B2	C1	H	r s min	e	f min	Cr N	Cor N	N	rpm	Cylindrical outer ring N	Crowned outer ring N	N·m	g (approx)
12	0 -0.018	**CFH12MAB**	**CFH12MUUAB**	**CFH12MRAB**	**CFH12MUURAB**	**30**	14	12	M12×1.5	13	40	25	0.6	6	0.6	0.4	20	7 300	9 010	9 800	14 000	7 060	2 450	22	95
		CFH12VMAB	**CFH12VMUUAB**	**CFH12VMRAB**	**CFH12VMUURAB**													12 350	18 120	11 270	6 000				
12	0 -0.018	**CFH12-1MAB**	**CFH12-1MUUAB**	**CFH12-1MRAB**	**CFH12-1MUURAB**	**32**	14	12	M12×1.5	13	40	25	0.6	6	0.6	0.4	20	7 300	9 010	9 800	14 000	7 450	2 740	22	105
		CFH12-1VMAB	**CFH12-1VMUUAB**	**CFH12-1VMRAB**	**CFH12-1VMUURAB**													12 350	18 120	11 270	6 000				
16	0 -0.018	**CFH16MAB**	**CFH16MUUAB**	**CFH16MRAB**	**CFH16MUURAB**	**35**	18	16	M16×1.5	17	52	32.5	0.8	6	0.6	0.5	24	11 080	16 860	18 330	10 000	11 200	3 140	58	170
		CFH16VMAB	**CFH16VMUUAB**	**CFH16VMRAB**	**CFH16VMUURAB**													19 020	34 610	19 800	4 500				
18	0 -0.018	**CFH18MAB**	**CFH18MUUAB**	**CFH18MRAB**	**CFH18MUURAB**	**40**	20	18	M18×1.5	19	58	36.5	0.8	6	1	0.6	26	13 520	23 180	25 200	8 500	14 400	3 720	87	250
		CFH18VMAB	**CFH18VMUUAB**	**CFH18VMRAB**	**CFH18VMUURAB**													23 250	47 240	26 560	3 500				
20	0 -0.021	**CFH20MAB**	**CFH20MUUAB**	**CFH20MRAB**	**CFH20MUURAB**	**52**	24	20	M20×1.5	21	66	40.5	0.8	8	1	0.7	36	19 020	31 830	32 140	7 000	23 200	8 230	120	460
		CFH20VMAB	**CFH20VMUUAB**	**CFH20VMRAB**	**CFH20VMUURAB**													30 470	59 320	32 140	3 500				
20	0 -0.021	**CFH20-1MAB**	**CFH20-1MUUAB**	**CFH20-1MRAB**	**CFH20-1MUURAB**	**47**	24	20	M20×1.5	21	66	40.5	0.8	8	1	0.7	36	19 020	31 830	32 140	7 000	21 000	7 150	120	385
		CFH20-1VMAB	**CFH20-1VMUUAB**	**CFH20-1VMRAB**	**CFH20-1VMUURAB**													30 470	59 320	32 140	3 500				

CFH..MAB TYPE has oil holes (grease nipple) which are prepared in the stud head and thread side, also an oil hole is prepared outer surface of stud.

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.

OUTER RINGS TOLERANCE (μm)


TYPE	Cylindrical outer ring	Crowned outer ring
CF12	0/-9	0/-50
CF12-1,CF16,CF18,CF20-1	0/-11	0/-50
CF20,CF24,CF24-1,CF30	0/-13	0/-50
CF30-1,CF30-2	0/-15	0/-50

ACCESSORIES

TYPE	 Grease Nipple	 NUT
All types	Installed	Attached

CAM FOLLOWERS STAINLESS STEEL

SOLID ECCENTRIC TYPE
HEXAGON SOCKET ON BOTH SIDES
GREASE NIPPLE INSTALLED

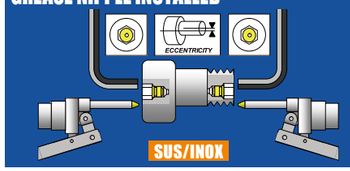




CFH..MAB



CFH..VMAB

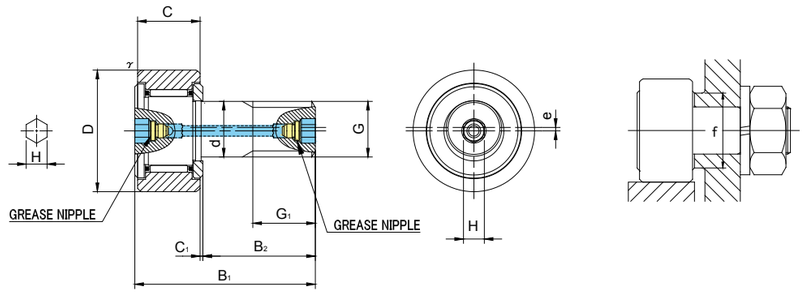

CFH..MAB TYPE

Prepacked Grease

Stud diameter (mm)		Designation				Dimensions (mm)											Basic dynamic load rating	Basic static load rating	Largest permissible load	Limiting speed *	Track load capacity		Max tightening torque	Mass
		Cylindrical outer ring		Crowned outer ring R1000(CF24 ≦)																				
	h7 tolerance	Without seals	With seals	Without seals	With seals	D	C	d	G	G1	B1	B2	C1	H	r s min	e	f min	Cr N	Cor N	N	rpm	Cylindrical outer ring N	Crowned outer ring N	N·m	g (approx)
24	0 -0.021	CFH24MAB	CFH24MUUAB	CFH24MRAB	CFH24MUURAB	62	29	24	M24×1.5	25	80	49.5	0.8	8	1	0.8	40	28 040	48 410	49 500	6 500	34 200	10 500	220	815
		CFH24VMAB	CFH24VMUUAB	CFH24VMRAB	CFH24VMUURAB													42 820	84 650	49 500	3 000				
24	0 -0.021	CFH24-1MAB	CFH24-1MUUAB	CFH24-1MRAB	CFH24-1MUURAB	72	29	24	M24×1.5	25	80	49.5	0.8	8	1	0.8	40	28 040	48 410	49 500	6 500	39 800	12 900	220	1 140
		CFH24-1VMAB	CFH24-1VMUUAB	CFH24-1VMRAB	CFH24-1VMUURAB													42 820	84 650	49 500	3 000				
30	0 -0.021	CFH30MAB	CFH30MUUAB	CFH30MRAB	CFH30MUURAB	80	35	30	M30×1.5	32	100	63	1	8	1	1	46	41 740	78 250	73 700	5 000	52 600	14 900	450	1 870
		CFH30VMAB	CFH30VMUUAB	CFH30VMRAB	CFH30VMUURAB													62 210	132 530	73 700	2 200				
30	0 -0.021	CFH30-1MAB	CFH30-1MUUAB	CFH30-1MRAB	CFH30-1MUURAB	85	35	30	M30×1.5	32	100	63	1	8	1	1	46	41 740	78 250	73 700	5 000	56 000	16 100	450	2 030
		CFH30-1VMAB	CFH30-1VMUUAB	CFH30-1VMRAB	CFH30-1VMUURAB													62 210	132 530	73 700	2 200				
30	0 -0.021	CFH30-2MAB	CFH30-2MUUAB	CFH30-2MRAB	CFH30-2MUURAB	90	35	30	M30×1.5	32	100	63	1	8	1	1	46	41 740	78 250	73 700	5 000	59 300	17 300	450	2 220
		CFH30-2VMAB	CFH30-2VMUUAB	CFH30-2VMRAB	CFH30-2VMUURAB													62 210	132 530	73 700	2 200				

CFH..MAB TYPE has oil holes (grease nipple) which are prepared in the stud head and thread side, also an oil hole is prepared outer surface of stud.

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.

OUTER RINGS TOLERANCE (μm)


TYPE	Cylindrical outer ring	Crowned outer ring
CF12	0/-9	0/-50
CF12-1,CF16,CF18,CF20-1	0/-11	0/-50
CF20,CF24,CF24-1,CF30	0/-13	0/-50
CF30-1,CF30-2	0/-15	0/-50

ACCESSORIES

TYPE	 Grease Nipple	 NUT
All types	Installed	Attached

CAM FOLLOWERS STAINLESS STEEL

SOLID ECCENTRIC TYPE SCREWDRIVER SLOT HEAD







CFH..M



CFH..VM



CFH5(V)M～CFH10-1(V)M

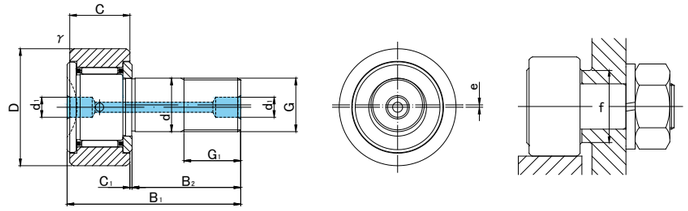

CFH12(V)M～CFH18(V)M

CFH..M TYPE

Prepacked Grease

Stud diameter (mm)		Designation				Dimensions (mm)											Basic dynamic load rating	Basic static load rating	Largest permissible load	Limiting speed *	Track load capacity		Max tightening torque	Mass
		Cylindrical outer ring		Crowned outer ring R250(CF5) R500(CF6 ～ CF18)																				
	h7 tolerance	Without seals	With seals	Without seals	With seals	D	C	d	G	G1	B1	B2	C1	d1	r's min	e	f min	Cr N	Cor N	N	rpm	Cylindrical outer ring N	Crowned outer ring N	N·m	g (approx)
5	0 -0.012	CFH 5M	CFH 5MUU	CFH 5MR	CFH 5MUUR	13	9	5	M5×0.8	7.5	23	13	0.5	3.1	0.3	0.2	9.7	2 880	2 540	1 420	29 000	2 250	780	2	10.5
		CFH 5VM	CFH 5VMUU	CFH 5VMR	CFH 5VMUUR													4 690	5 060	1 420	11 600				
6	0 -0.012	CFH 6M	CFH 6MUU	CFH 6MR	CFH 6MUUR	16	11	6	M6×1	8	28	16	0.6	4	0.3	0.25	11	3 330	3 330	2 110	25 000	3 430	1 080	3	18.5
		CFH 6VM	CFH 6VMUU	CFH 6VMR	CFH 6VMUUR													6 400	7 840	2 110	12 000				
8	0 -0.015	CFH 8M	CFH 8MUU	CFH 8MR	CFH 8MUUR	19	11	8	M8×1.25	10	32	20	0.6	4	0.3	0.25	13	3 960	4 330	4 710	20 000	4 020	1 370	8	28.5
		CFH 8VM	CFH 8VMUU	CFH 8VMR	CFH 8VMUUR													7 470	10 270	4 710	9 000				
10	0 -0.015	CFH10M	CFH10MUU	CFH10MR	CFH10MUUR	22	12	10	M10×1.25	12	36	23	0.6	4	0.3	0.3	15	4 950	6 310	6 860	17 000	4 700	1 670	15	45
		CFH10VM	CFH10VMUU	CFH10VMR	CFH10VMUUR													8 740	13 340	7 450	7 500				
10	0 -0.015	CFH10-1M	CFH10-1MUU	CFH10-1MR	CFH10-1MUUR	26	12	10	M10×1.25	12	36	23	0.6	4	0.3	0.3	15	4 950	6 310	6 860	17 000	5 490	2 060	15	60
		CFH10-1VM	CFH10-1VMUU	CFH10-1VMR	CFH10-1VMUUR													8 740	13 340	7 450	7 500				
12	0 -0.018	CFH12M	CFH12MUU	CFH12MR	CFH12MUUR	30	14	12	M12×1.5	13	40	25	0.6	6	0.6	0.4	20	7 300	9 010	9 800	14 000	7 060	2 450	22	95
		CFH12VM	CFH12VMUU	CFH12VMR	CFH12VMUUR													12 350	18 120	11 270	6 000				
12	0 -0.018	CFH12-1M	CFH12-1MUU	CFH12-1MR	CFH12-1MUUR	32	14	12	M12×1.5	13	40	25	0.6	6	0.6	0.4	20	7 300	9 010	9 800	14 000	7 450	2 740	22	105
		CFH12-1VM	CFH12-1VMUU	CFH12-1VMR	CFH12-1VMUUR													12 350	18 120	11 270	6 000				
16	0 -0.018	CFH16M	CFH16MUU	CFH16MR	CFH16MUUR	35	18	16	M16×1.5	17	52	32.5	0.8	6	0.6	0.5	24	11 080	16 860	18 330	10 000	11 200	3 140	58	170
		CFH16VM	CFH16VMUU	CFH16VMR	CFH16VMUUR													19 020	34 610	19 800	4 500				
18	0 -0.018	CFH18M	CFH18MUU	CFH18MR	CFH18MUUR	40	20	18	M18×1.5	19	58	36.5	0.8	6	1	0.6	26	13 520	23 180	25 200	8 500	14 400	3 720	87	250
		CFH18VM	CFH18VMUU	CFH18VMR	CFH18VMUUR													23 250	47 240	26 560	3 500				

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.


OUTER RINGS TOLERANCE (μm)

TYPE	Cylindrical outer ring	Crowned outer ring
CF5M,CF6M	0/-8	0/-50
CF8M,CF10M,CF10-1M,CF12M	0/-9	0/-50
CF12-1M,CF16M,CF18M,CF20-1M	0/-11	0/-50
CF20M,CF24M,CF24-1M,CF30M	0/-13	0/-50
CF30-1M,CF30-2M	0/-15	0/-50

ACCESSORIES

TYPE	 STOP PLUG	 RESIN PLUG	 NUT
CF5M	—	—	Attached
CF6M/CF8M/CF10M/CF10-1M	—	ϕ 4 Attached	Attached
CF12M/CF12-1M/CF16M/CF18M	ϕ 6 Attached	ϕ 6 Attached	Attached
CF20M/CF20-1M/CF24M/CF24-1M/CF30M/CF30-1M/CF30-2M	ϕ 8 Attached	ϕ 8 Attached	Attached

CAM FOLLOWERS STAINLESS STEEL
SOLID ECCENTRIC TYPE SCREWDRIVER SLOT HEAD






CFH..M



CFH..VM

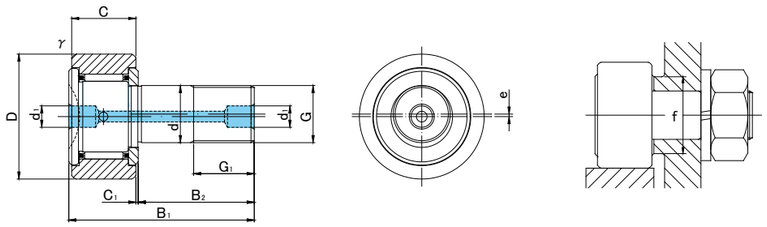

CFH..M TYPE

Prepacked Grease

Stud diameter (mm)		Designation				Dimensions (mm)											Basic dynamic load rating	Basic static load rating	Largest permissible load	Limiting speed *	Track load capacity		Max tightening torque	Mass
		Cylindrical outer ring		Crowned outer ring R1000(CF20 ≦)																				
	h7 tolerance	Without seals	With seals	Without seals	With seals	D	C	d	G	G1	B1	B2	C1	d1	r's min	e	f min	Cr N	Cor N	N	rpm	Cylindrical outer ring N	Crowned outer ring N	N·m	g (approx)
20	0 -0.021	CFH20M	CFH20MUU	CFH20MR	CFH20MUUR	52	24	20	M20×1.5	21	66	40.5	0.8	8	1	0.7	36	19 020	31 830	32 140	7 000	23 200	8 230	120	460
		CFH20VM	CFH20VMUU	CFH20VMR	CFH20VMUUR													30 470	59 320	32 140	3 500				
20	0 -0.021	CFH20-1M	CFH20-1MUU	CFH20-1MR	CFH20-1MUUR	47	24	20	M20×1.5	21	66	40.5	0.8	8	1	0.7	36	19 020	31 830	32 140	7 000	21 000	7 150	120	385
		CFH20-1VM	CFH20-1VMUU	CFH20-1VMR	CFH20-1VMUUR													30 470	59 320	32 140	3 500				
24	0 -0.021	CFH24M	CFH24MUU	CFH24MR	CFH24MUUR	62	29	24	M24×1.5	25	80	49.5	0.8	8	1	0.8	40	28 040	48 410	49 500	6 500	34 200	10 500	220	815
		CFH24VM	CFH24VMUU	CFH24VMR	CFH24VMUUR													42 820	84 650	49 500	3 000				
24	0 -0.021	CFH24-1M	CFH24-1MUU	CFH24-1MR	CFH24-1MUUR	72	29	24	M24×1.5	25	80	49.5	0.8	8	1	0.8	40	28 040	48 410	49 500	6 500	39 800	12 900	220	1 140
		CFH24-1VM	CFH24-1VMUU	CFH24-1VMR	CFH24-1VMUUR													42 820	84 650	49 500	3 000				
30	0 -0.021	CFH30M	CFH30MUU	CFH30MR	CFH30MUUR	80	35	30	M30×1.5	32	100	63	1	8	1	1	46	41 740	78 250	73 700	5 000	52 600	14 900	450	1 870
		CFH30VM	CFH30VMUU	CFH30VMR	CFH30VMUUR													62 210	132 530	73 700	2 200				
30	0 -0.021	CFH30-1M	CFH30-1MUU	CFH30-1MR	CFH30-1MUUR	85	35	30	M30×1.5	32	100	63	1	8	1	1	46	41 740	78 250	73 700	5 000	56 000	16 100	450	2 030
		CFH30-1VM	CFH30-1VMUU	CFH30-1VMR	CFH30-1VMUUR													62 210	132 530	73 700	2 200				
30	0 -0.021	CFH30-2M	CFH30-2MUU	CFH30-2MR	CFH30-2MUUR	90	35	30	M30×1.5	32	100	63	1	8	1	1	46	41 740	78 250	73 700	5 000	59 300	17 300	450	2 220
		CFH30-2VM	CFH30-2VMUU	CFH30-2VMR	CFH30-2VMUUR													62 210	132 530	73 700	2 200				

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.

OUTER RINGS TOLERANCE (μm)


TYPE	Cylindrical outer ring	Crowned outer ring
CF5M,CF6M	0/-8	0/-50
CF8M,CF10M,CF10-1M,CF12M	0/-9	0/-50
CF12-1M,CF16M,CF18M,CF20-1M	0/-11	0/-50
CF20M,CF24M,CF24-1M,CF30M	0/-13	0/-50
CF30-1M,CF30-2M	0/-15	0/-50

ACCESSORIES

TYPE	 STOP PLUG	 RESIN PLUG	 NUT
CF5M	—	—	Attached
CF6M/CF8M/CF10M/CF10-1M	—	ϕ 4 Attached	Attached
CF12M/CF12-1M/CF16M/CF18M	ϕ 6 Attached	ϕ 6 Attached	Attached
CF20M/CF20-1M/CF24M/CF24-1M/CF30M/CF30-1M/CF30-2M	ϕ 8 Attached	ϕ 8 Attached	Attached

CAM FOLLOWERS STAINLESS STEEL

SOLID ECCENTRIC TYPE
HEXAGON SOCKET ON THREAD SIDE
SCREWDRIVER SLOT HEAD






CFH..MB



CFH..VMB

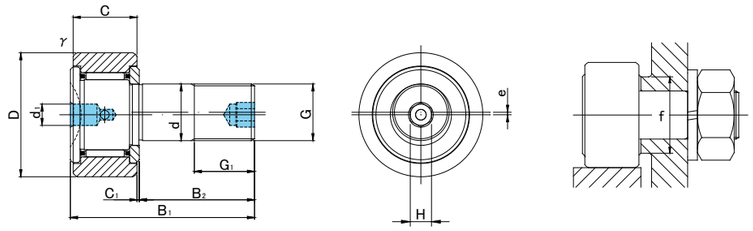

CFH..MB TYPE

Prepacked Grease

Stud diameter (mm)	h7 tolerance	Designation: Cylindrical outer ring, Without seals	Cylindrical outer ring, With seals	Crowned outer ring R500(CF12 ～ CF18) R1000(CF20 ≦), Without seals	Crowned outer ring, With seals	D	C	d	G	G1	B1	B2	C1	d1	H	rs min	e	f min	Basic dynamic load rating Cr N	Basic static load rating Cor N	Largest permissible load N	Limiting speed * rpm	Track load capacity: Cylindrical outer ring N	Track load capacity: Crowned outer ring N	Max tightening torque N·m	Mass g (approx)
12	0 -0.018	**CFH12MB**	**CFH12MUUB**	**CFH12MRB**	**CFH12MUURB**	**30**	14	12	M12×1.5	13	40	25	0.6	6	6	0.6	0.4	20	7 300	9 010	9 800	14 000	7 060	2 450	22	95
		CFH12VMB	**CFH12VMUUB**	**CFH12VMRB**	**CFH12VMUURB**														12 350	18 120	11 270	6 000				
12	0 -0.018	**CFH12-1MB**	**CFH12-1MUUB**	**CFH12-1MRB**	**CFH12-1MUURB**	**32**	14	12	M12×1.5	13	40	25	0.6	6	6	0.6	0.4	20	7 300	9 010	9 800	14 000	7 450	2 740	22	105
		CFH12-1VMB	**CFH12-1VMUUB**	**CFH12-1VMRB**	**CFH12-1VMUURB**														12 350	18 120	11 270	6 000				
16	0 -0.018	**CFH16MB**	**CFH16MUUB**	**CFH16MRB**	**CFH16MUURB**	**35**	18	16	M16×1.5	17	52	32.5	0.8	6	6	0.6	0.5	24	11 080	16 860	18 330	10 000	11 200	3 140	58	170
		CFH16VMB	**CFH16VMUUB**	**CFH16VMRB**	**CFH16VMUURB**														19 020	34 610	19 800	4 500				
18	0 -0.018	**CFH18MB**	**CFH18MUUB**	**CFH18MRB**	**CFH18MUURB**	**40**	20	18	M18×1.5	19	58	36.5	0.8	6	6	1	0.6	26	13 520	23 180	25 200	8 500	14 400	3 720	87	250
		CFH18VMB	**CFH18VMUUB**	**CFH18VMRB**	**CFH18VMUURB**														23 250	47 240	26 560	3 500				
20	0 -0.021	**CFH20MB**	**CFH20MUUB**	**CFH20MRB**	**CFH20MUURB**	**52**	24	20	M20×1.5	21	66	40.5	0.8	8	8	1	0.7	36	19 020	31 830	32 140	7 000	23 200	8 230	120	460
		CFH20VMB	**CFH20VMUUB**	**CFH20VMRB**	**CFH20VMUURB**														30 470	59 320	32 140	3 500				
20	0 -0.021	**CFH20-1MB**	**CFH20-1MUUB**	**CFH20-1MRB**	**CFH20-1MUURB**	**47**	24	20	M20×1.5	21	66	40.5	0.8	8	8	1	0.7	36	19 020	31 830	32 140	7 000	21 000	7 150	120	385
		CFH20-1VMB	**CFH20-1VMUUB**	**CFH20-1VMRB**	**CFH20-1VMUURB**														30 470	59 320	32 140	3 500				
24	0 -0.021	**CFH24MB**	**CFH24MUUB**	**CFH24MRB**	**CFH24MUURB**	**62**	29	24	M24×1.5	25	80	49.5	0.8	8	8	1	0.8	40	28 040	48 410	49 500	6 500	34 200	10 500	220	815
		CFH24VMB	**CFH24VMUUB**	**CFH24VMRB**	**CFH24VMUURB**														42 820	84 650	49 500	3 000				
24	0 -0.021	**CFH24-1MB**	**CFH24-1MUUB**	**CFH24-1MRB**	**CFH24-1MUURB**	**72**	29	24	M24×1.5	25	80	49.5	0.8	8	8	1	0.8	40	28 040	48 410	49 500	6 500	39 800	12 900	220	1 140
		CFH24-1VMB	**CFH24-1VMUUB**	**CFH24-1VMRB**	**CFH24-1VMUURB**														42 820	84 650	49 500	3 000				
30	0 -0.021	**CFH30MB**	**CFH30MUUB**	**CFH30MRB**	**CFH30MUURB**	**80**	35	30	M30×1.5	32	100	63	1	8	8	1	1	46	41 740	78 250	73 700	5 000	52 600	14 900	450	1 870
		CFH30VMB	**CFH30VMUUB**	**CFH30VMRB**	**CFH30VMUURB**														62 210	132 530	73 700	2 200				
30	0 -0.021	**CFH30-1MB**	**CFH30-1MUUB**	**CFH30-1MRB**	**CFH30-1MUURB**	**85**	35	30	M30×1.5	32	100	63	1	8	8	1	1	46	41 740	78 250	73 700	5 000	56 000	16 100	450	2 030
		CFH30-1VMB	**CFH30-1VMUUB**	**CFH30-1VMRB**	**CFH30-1VMUURB**														62 210	132 530	73 700	2 200				
30	0 -0.021	**CFH30-2MB**	**CFH30-2MUUB**	**CFH30-2MRB**	**CFH30-2MUURB**	**90**	35	30	M30×1.5	32	100	63	1	8	8	1	1	46	41 740	78 250	73 700	5 000	59 300	17 300	450	2 220
		CFH30-2VMB	**CFH30-2VMUUB**	**CFH30-2VMRB**	**CFH30-2VMUURB**														62 210	132 530	73 700	2 200				

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.

OUTER RINGS TOLERANCE (μm)


TYPE	Cylindrical outer ring	Crowned outer ring
CF12M	0/-9	0/-50
CF12-1M,CF16M,CF18M,CF20-1M	0/-11	0/-50
CF20M,CF24M,CF24-1M,CF30M	0/-13	0/-50
CF30-1M,CF30-2M	0/-15	0/-50

ACCESSORIES

TYPE	 STOP PLUG	 RESIN PLUG	 NUT
CF12M/CF12-1M/CF16M/CF18M	ϕ 6 Attached	ϕ 6 Attached	Attached
CF20M/CF20-1M/CF24M/CF24-1M/CF30M/CF30-1M/CF30-2M	ϕ 8 Attached	ϕ 8 Attached	Attached

CAM FOLLOWERS STAINLESS STEEL

TAP HOLE FOR PIPING SCREWDRIVER SLOT HEAD

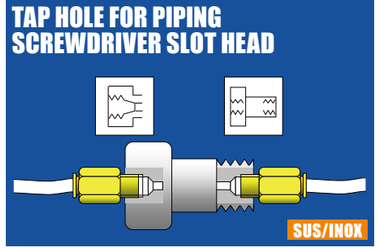





CFT..M




CFT..VM



CFT6(V)M～CFT10-1(V)M



CFT12(V)M～CFT18(V)M



CFT..M TYPE

Prepacked Grease

Stud diameter (mm)	h7 tolerance	Designation: Cylindrical outer ring, Without seals	Cylindrical outer ring, With seals	Crowned outer ring R500(CF6 ～ CF18), Without seals	Crowned outer ring R500(CF6 ～ CF18), With seals	D	C	d	G	G1	B1	B2	B3	C1	S1	d2	r's min	f min	Basic dynamic load rating Cr N	Basic static load rating Cor N	Largest permissible load N	Limiting speed * rpm	Track load capacity: Cylindrical outer ring N	Track load capacity: Crowned outer ring N	Max tightening torque N·m	Mass g (approx)
6	0 -0.012	CFT 6M	CFT 6MUU	CFT 6MR	CFT 6MUUR	16	11	6	M6×1	8	28	16	—	0.6	M6×0.75	—	0.3	11	3 330	3 330	2 110	25 000	3 430	1 080	3	18.5
		CFT 6VM	CFT 6VMUU	CFT 6VMR	CFT 6VMUUR														6 400	7 840	2 110	12 000				
8	0 -0.015	CFT 8M	CFT 8MUU	CFT 8MR	CFT 8MUUR	19	11	8	M8×1.25	10	32	20	—	0.6	M6×0.75	—	0.3	13	3 960	4 330	4 710	20 000	4 020	1 370	8	28.5
		CFT 8VM	CFT 8VMUU	CFT 8VMR	CFT 8VMUUR														7 470	10 270	4 710	9 000				
10	0 -0.015	CFT10M	CFT10MUU	CFT10MR	CFT10MUUR	22	12	10	M10×1.25	12	36	23	—	0.6	M6×0.75	—	0.3	15	4 950	6 310	6 860	17 000	4 700	1 670	15	45
		CFT10VM	CFT10VMUU	CFT10VMR	CFT10VMUUR														8 740	13 340	7 450	7 500				
10	0 -0.015	CFT10-1M	CFT10-1MUU	CFT10-1MR	CFT10-1MUUR	26	12	10	M10×1.25	12	36	23	—	0.6	M6×0.75	—	0.3	15	4 950	6 310	6 860	17 000	5 490	2 060	15	60
		CFT10-1VM	CFT10-1VMUU	CFT10-1VMR	CFT10-1VMUUR														8 740	13 340	7 450	7 500				
12	0 -0.018	CFT12M	CFT12MUU	CFT12MR	CFT12MUUR	30	14	12	M12×1.5	13	40	25	6	0.6	M6×0.75	3	0.6	20	7 300	9 010	7 840	14 000	7 060	2 450	22	95
		CFT12VM	CFT12VMUU	CFT12VMR	CFT12VMUUR														12 350	18 120	9 010	6 000				
12	0 -0.018	CFT12-1M	CFT12-1MUU	CFT12-1MR	CFT12-1MUUR	32	14	12	M12×1.5	13	40	25	6	0.6	M6×0.75	3	0.6	20	7 300	9 010	7 840	14 000	7 450	2 740	22	105
		CFT12-1VM	CFT12-1VMUU	CFT12-1VMR	CFT12-1VMUUR														12 350	18 120	9 010	6 000				
16	0 -0.018	CFT16M	CFT16MUU	CFT16MR	CFT16MUUR	35	18	16	M16×1.5	17	52	32.5	8	0.8	Rc1/8	3	0.6	24	11 080	16 860	14 660	10 000	11 200	3 140	58	170
		CFT16VM	CFT16VMUU	CFT16VMR	CFT16VMUUR														19 020	34 610	15 840	4 500				
18	0 -0.018	CFT18M	CFT18MUU	CFT18MR	CFT18MUUR	40	20	18	M18×1.5	19	58	36.5	8	0.8	Rc1/8	3	1	26	13 520	23 180	20 160	8 500	14 400	3 720	87	250
		CFT18VM	CFT18VMUU	CFT18VMR	CFT18VMUUR														23 250	47 240	21 240	3 500				

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.

OUTER RINGS TOLERANCE (μm)


TYPE	Cylindrical outer ring	Crowned outer ring
CF6M	0/-8	0/-50
CF8M,CF10M,CF10-1M,CF12M	0/-9	0/-50
CF12-1M,CF16M,CF18M,CF20-1M	0/-11	0/-50
CF20M,CF24M,CF24-1M,CF30M	0/-13	0/-50
CF30-1M,CF30-2M	0/-15	0/-50

ACCESSORIES

TYPE	 NUT
All types	Attached

CAM FOLLOWERS STAINLESS STEEL

TAP HOLE FOR PIPING SCREWDRIVER SLOT HEAD

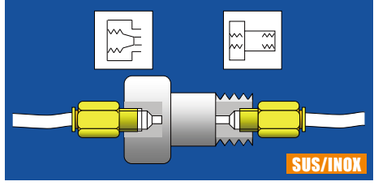





CFT..M



CFT..VM





CFT..M TYPE

Prepacked Grease

Stud diameter (mm)		Designation				Dimensions (mm)												Basic dynamic load rating	Basic static load rating	Largest permissible load	Limiting speed *	Track load capacity		Max tightening torque	Mass
		Cylindrical outer ring		Crowned outer ring R1000(CF20 ≦)																					
	h7 tolerance	Without seals	With seals	Without seals	With seals	D	C	d	G	G1	B1	B2	B3	C1	S1	d2	r s min	f min	Cr N	Cor N	N	rpm	Cylindrical outer ring N	Crowned outer ring N	N·m	g (approx)
20	0 -0.021	**CFT20M**	**CFT20MUU**	**CFT20MR**	**CFT20MUUR**	**52**	24	20	M20×1.5	21	66	40.5	9	0.8	Rc1/8	4	1	36	19 020	31 830	25 710	7 000	23 200	8 230	120	460
		CFT20VM	**CFT20VMUU**	**CFT20VMR**	**CFT20VMUUR**														30 470	59 320	25 710	3 500				
20	0 -0.021	**CFT20-1M**	**CFT20-1MUU**	**CFT20-1MR**	**CFT20-1MUUR**	**47**	24	20	M20×1.5	21	66	40.5	9	0.8	Rc1/8	4	1	36	19 020	31 830	25 710	7 000	21 000	7 150	120	385
		CFT20-1VM	**CFT20-1VMUU**	**CFT20-1VMR**	**CFT20-1VMUUR**														30 470	59 320	25 710	3 500				
24	0 -0.021	**CFT24M**	**CFT24MUU**	**CFT24MR**	**CFT24MUUR**	**62**	29	24	M24×1.5	25	80	49.5	11	0.8	Rc1/8	4	1	40	28 040	48 410	39 600	6 500	34 200	10 500	220	815
		CFT24VM	**CFT24VMUU**	**CFT24VMR**	**CFT24VMUUR**														42 820	84 650	39 600	3 000				
24	0 -0.021	**CFT24-1M**	**CFT24-1MUU**	**CFT24-1MR**	**CFT24-1MUUR**	**72**	29	24	M24×1.5	25	80	49.5	11	0.8	Rc1/8	4	1	40	28 040	48 410	39 600	6 500	39 800	12 900	220	1 140
		CFT24-1VM	**CFT24-1VMUU**	**CFT24-1VMR**	**CFT24-1VMUUR**														42 820	84 650	39 600	3 000				
30	0 -0.021	**CFT30M**	**CFT30MUU**	**CFT30MR**	**CFT30MUUR**	**80**	35	30	M30×1.5	32	100	63	15	1	Rc1/8	4	1	46	41 740	78 250	58 960	5 000	52 600	14 900	450	1 870
		CFT30VM	**CFT30VMUU**	**CFT30VMR**	**CFT30VMUUR**														62 210	132 530	58 960	2 200				
30	0 -0.021	**CFT30-1M**	**CFT30-1MUU**	**CFT30-1MR**	**CFT30-1MUUR**	**85**	35	30	M30×1.5	32	100	63	15	1	Rc1/8	4	1	46	41 740	78 250	58 960	5 000	56 000	56 000	450	2 030
		CFT30-1VM	**CFT30-1VMUU**	**CFT30-1VMR**	**CFT30-1VMUUR**														62 210	132 530	58 960	2 200				
30	0 -0.021	**CFT30-2M**	**CFT30-2MUU**	**CFT30-2MR**	**CFT30-2MUUR**	**90**	35	30	M30×1.5	32	100	63	15	1	Rc1/8	4	1	46	41 740	78 250	58 960	5 000	59 300	59 300	450	2 220
		CFT30-2VM	**CFT30-2VMUU**	**CFT30-2VMR**	**CFT30-2VMUUR**														62 210	132 530	58 960	2 200				

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.

OUTER RINGS TOLERANCE (μm)


TYPE	Cylindrical outer ring	Crowned outer ring
CF6M	0/-8	0/-50
CF8M,CF10M,CF10-1M,CF12M	0/-9	0/-50
CF12-1M,CF16M,CF18M,CF20-1M	0/-11	0/-50
CF20M,CF24M,CF24-1M,CF30M	0/-13	0/-50
CF30-1M,CF30-2M	0/-15	0/-50

ACCESSORIES

TYPE	 NUT
All types	Attached

CAM FOLLOWERS STAINLESS STEEL

TAP HOLE FOR PIPING
HEXAGON SOCKET ON STUD HEAD

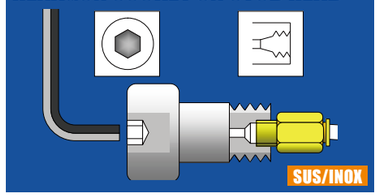





CFT..MA



CFT..VMA

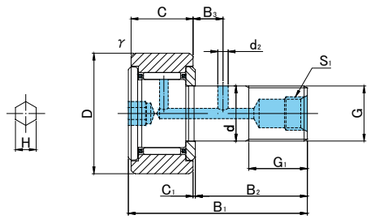



CFT..MA TYPE

Prepacked Grease

Stud diameter (mm)		Designation				Dimensions (mm)														Basic dynamic load rating	Basic static load rating	Largest permissible load	Limiting speed *	Track load capacity		Max tightening torque	Mass
		Cylindrical outer ring		Crowned outer ring R500(CF12 ～ CF18) R1000(CF20 ≦)																							
	h7 tolerance	Without seals	With seals	Without seals	With seals	D	C	d	G	G1	B1	B2	B3	C1	S1	d2	H	r s min	f min	Cr N	Cor N	N	rpm	Cylindrical outer ring N	Crowned outer ring N	N·m	g (approx)
12	0 -0.018	**CFT12MA**	**CFT12MUUA**	**CFT12MRA**	**CFT12MUURA**	**30**	14	12	M12×1.5	13	40	25	6	0.6	M6×0.75	3	6	0.6	20	7 300	9 010	7 840	14 000	7 060	2 450	22	95
		CFT12VMA	**CFT12VMUUA**	**CFT12VMRA**	**CFT12VMUURA**															12 350	18 120	9 010	6 000				
12	0 -0.018	**CFT12-1MA**	**CFT12-1MUUA**	**CFT12-1MRA**	**CFT12-1MUURA**	**32**	14	12	M12×1.5	13	40	25	6	0.6	M6×0.75	3	6	0.6	20	7 300	9 010	7 840	14 000	7 450	2 740	22	105
		CFT12-1VMA	**CFT12-1VMUUA**	**CFT12-1VMRA**	**CFT12-1VMUURA**															12 350	18 120	9 010	6 000				
16	0 -0.018	**CFT16MA**	**CFT16MUUA**	**CFT16MRA**	**CFT16MUURA**	**35**	18	16	M16×1.5	17	52	32.5	8	0.8	Rc1/8	3	6	0.6	24	11 080	16 860	14 660	10 000	11 200	3 140	58	170
		CFT16VMA	**CFT16VMUUA**	**CFT16VMRA**	**CFT16VMUURA**															19 020	34 610	15 840	4 500				
18	0 -0.018	**CFT18MA**	**CFT18MUUA**	**CFT18MRA**	**CFT18MUURA**	**40**	20	18	M18×1.5	19	58	36.5	8	0.8	Rc1/8	3	6	1	26	13 520	23 180	20 160	8 500	14 400	3 720	87	250
		CFT18VMA	**CFT18VMUUA**	**CFT18VMRA**	**CFT18VMUURA**															23 250	47 240	21 240	3 500				
20	0 -0.021	**CFT20MA**	**CFT20MUUA**	**CFT20MRA**	**CFT20MUURA**	**52**	24	20	M20×1.5	21	66	40.5	9	0.8	Rc1/8	4	8	1	36	19 020	31 830	25 710	7 000	23 200	8 230	120	460
		CFT20VMA	**CFT20VMUUA**	**CFT20VMRA**	**CFT20VMUURA**															30 470	59 320	25 710	3 500				
20	0 -0.021	**CFT20-1MA**	**CFT20-1MUUA**	**CFT20-1MRA**	**CFT20-1MUURA**	**47**	24	20	M20×1.5	21	66	40.5	9	0.8	Rc1/8	4	8	1	36	19 020	31 830	25 710	7 000	21 000	7 150	120	385
		CFT20-1VMA	**CFT20-1VMUUA**	**CFT20-1VMRA**	**CFT20-1VMUURA**															30 470	59 320	25 710	3 500				
24	0 -0.021	**CFT24MA**	**CFT24MUUA**	**CFT24MRA**	**CFT24MUURA**	**62**	29	24	M24×1.5	25	80	49.5	11	0.8	Rc1/8	4	8	1	40	28 040	48 410	39 600	6 500	34 200	10 500	220	815
		CFT24VMA	**CFT24VMUUA**	**CFT24VMRA**	**CFT24VMUURA**															42 820	84 650	39 600	3 000				
24	0 -0.021	**CFT24-1MA**	**CFT24-1MUUA**	**CFT24-1MRA**	**CFT24-1MUURA**	**72**	29	24	M24×1.5	25	80	49.5	11	0.8	Rc1/8	4	8	1	40	28 040	48 410	39 600	6 500	39 800	12 900	220	1 140
		CFT24-1VMA	**CFT24-1VMUUA**	**CFT24-1VMRA**	**CFT24-1VMUURA**															42 820	84 650	39 600	3 000				
30	0 -0.021	**CFT30MA**	**CFT30MUUA**	**CFT30MRA**	**CFT30MUURA**	**80**	35	30	M30×1.5	32	100	63	15	1	Rc1/8	4	8	1	46	41 740	78 250	58 960	5 000	52 600	14 900	450	1 870
		CFT30VMA	**CFT30VMUUA**	**CFT30VMRA**	**CFT30VMUURA**															62 210	132 530	58 960	2 200				
30	0 -0.021	**CFT30-1MA**	**CFT30-1MUUA**	**CFT30-1MRA**	**CFT30-1MUURA**	**85**	35	30	M30×1.5	32	100	63	15	1	Rc1/8	4	8	1	46	41 740	78 250	58 960	5 000	56 000	56 000	450	2 030
		CFT30-1VMA	**CFT30-1VMUUA**	**CFT30-1VMRA**	**CFT30-1VMUURA**															62 210	132 530	58 960	2 200				
30	0 -0.021	**CFT30-2MA**	**CFT30-2MUUA**	**CFT30-2MRA**	**CFT30-2MUURA**	**90**	35	30	M30×1.5	32	100	63	15	1	Rc1/8	4	8	1	46	41 740	78 250	58 960	5 000	59 300	59 300	450	2 220
		CFT30-2VMA	**CFT30-2VMUUA**	**CFT30-2VMRA**	**CFT30-2VMUURA**															62 210	132 530	58 960	2 200				

* Without seals, suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible, and 70% of this value shall apply for types with seals.

OUTER RINGS TOLERANCE (μm)

TYPE	Cylindrical outer ring	Crowned outer ring
CF12M	0/-9	0/-50
CF12-1M,CF16M,CF18M,CF20-1M	0/-11	0/-50
CF20M,CF24M,CF24-1M,CF30M	0/-13	0/-50
CF30-1M,CF30-2M	0/-15	0/-50

ACCESSORIES

TYPE	 NUT
All types	Attached





ROLLER FOLLOWERS

STAINLESS STEEL




ROLLER FOLLOWERS STAINLESS STEEL
SEPARABLE WITHOUT INNER RING




SUS/INOX



RNAST..M



RNAST..M



RNAST..MR

RNAST..M TYPE

Prepacked Grease

Shaft Diameter (mm)	Designation		Dimensions (mm)				Basic dynamic load rating	Basic static load rating	Track load capacity		Limiting speed *	Mass
	Cylindrical outer ring	Crowned outer ring (R500)	Fw	D	C	r s min	Cr N	Cor N	Cylindrical outer ring N	Crowned outer ring N	rpm	g (approx)
7	RNAST 5M	RNAST 5MR	7 +0.022 +0.013	16	7.8	0.3	2 520	2 190	2 350	1 080	30 000	8.9
10	RNAST 6M	RNAST 6MR	10 +0.027 +0.016	19	9.8	0.3	3 790	4 180	3 530	1 370	20 000	13.9
12	RNAST 8M	RNAST 8MR	12 +0.027 +0.016	24	9.8	0.6	5 220	5 410	4 020	1 860	17 000	23.5
14	RNAST10M	RNAST10MR	14 +0.027 +0.016	30	11.8	1	8 920	8 890	5 590	2 450	15 000	42.5
16	RNAST12M	RNAST12MR	16 +0.027 +0.016	32	11.8	1	9 560	10 020	5 980	2 740	13 000	49.5
20	RNAST15M	RNAST15MR	20 +0.033 +0.020	35	11.8	1	11 310	13 150	6 570	3 140	10 000	50
22	RNAST17M	RNAST17MR	22 +0.033 +0.020	40	15.8	1	16 000	19 220	10 900	3 720	9 500	90
25	RNAST20M	RNAST20MR	25 +0.033 +0.020	47	15.8	1	17 660	22 540	12 700	4 610	8 500	135
30	RNAST25M	RNAST25MR	30 +0.033 +0.020	52	15.8	1	19 040	26 120	14 100	5 290	7 000	135
38	RNAST30M	RNAST30MR	38 +0.041 +0.025	62	19.8	1	27 870	41 760	22 100	6 660	5 500	255
42	RNAST35M	RNAST35MR	42 +0.041 +0.025	72	19.8	1	29 620	46 550	25 700	8 130	5 000	375
50	RNAST40M	RNAST40MR	50 +0.041 +0.025	80	19.8	1.5	32 840	56 210	26 900	9 310	4 000	420
55	RNAST45M	RNAST45MR	55 +0.049 +0.030	85	19.8	1.5	34 130	61 080	28 500	10 100	4 000	460
60	RNAST50M	RNAST50MR	60 +0.049 +0.030	90	19.8	1.5	35 600	66 050	30 200	11 000	3 500	500

* Suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible.

OUTER RINGS TOLERANCE

TYPE	Cylindrical outer ring	Crowned outer ring
RNAST5M	0/-8	0/-50
RNAST6M,RNAST8M,RNAST10M	0/-9	0/-50
RNAST12M,RNAST15M,RNAST17M,RNAST20M	0/-11	0/-50
RNAST25M,RNAST30M,RNAST35M,RNAST40M	0/-13	0/-50
RNAST45M,RNAST50M	0/-15	0/-50


ROLLER FOLLOWERS STAINLESS STEEL

SEPARABLE WITH INNER RING






NAST..M



NAST..M



NAST..MR

NAST..M TYPE

Prepacked Grease

Shaft Diameter (mm)	Designation		Dimensions (mm)							Basic dynamic load rating	Basic static load rating	Track load capacity		Limiting speed *	Mass
	Cylindrical outer ring	Crowned outer ring (R500)	d	D	B	C	r_s min	r_{1s} min	F	Cr N	Cor N	Cylindrical outer ring N	Crowned outer ring N	rpm	g (approx)
6	**NAST 6M**	**NAST 6MR**	6 0 -0.008	**19**	10	9.8	0.3	0.3	10	3 790	4 180	3 530	1 370	20 000	17.8
8	**NAST 8M**	**NAST 8MR**	8 0 -0.008	**24**	10	9.8	0.6	0.3	12	5 220	5 410	4 020	1 860	17 000	28
10	**NAST10M**	**NAST10MR**	10 0 -0.008	**30**	12	11.8	1	0.3	14	8 920	8 890	5 590	2 450	15 000	50
12	**NAST12M**	**NAST12MR**	12 0 -0.008	**32**	12	11.8	1	0.3	16	9 560	10 020	5 980	2 740	13 000	58
15	**NAST15M**	**NAST15MR**	15 0 -0.008	**35**	12	11.8	1	0.3	20	11 310	13 150	6 570	3 140	10 000	62
17	**NAST17M**	**NAST17MR**	17 0 -0.010	**40**	16	15.8	1	0.3	22	16 000	19 220	10 900	3 720	9 500	110
20	**NAST20M**	**NAST20MR**	20 0 -0.010	**47**	16	15.8	1	0.3	25	17 660	22 540	12 700	4 610	8 500	155
25	**NAST25M**	**NAST25MR**	25 0 -0.010	**52**	16	15.8	1	0.3	30	19 040	26 120	14 100	5 290	7 000	180
30	**NAST30M**	**NAST30MR**	30 0 -0.010	**62**	20	19.8	1	0.6	38	27 870	41 760	22 100	6 660	5 500	320
35	**NAST35M**	**NAST35MR**	35 0 -0.012	**72**	20	19.8	1	0.6	42	29 620	46 550	25 700	8 130	5 000	440
40	**NAST40M**	**NAST40MR**	40 0 -0.012	**80**	20	19.8	1.5	1	50	32 840	56 210	26 900	9 310	4 000	530
45	**NAST45M**	**NAST45MR**	45 0 -0.012	**85**	20	19.8	1.5	1	55	34 130	61 080	28 500	10 100	4 000	580
50	**NAST50M**	**NAST50MR**	50 0 -0.012	**90**	20	19.8	1.5	1	60	35 600	66 050	30 200	11 000	3 500	635

* Suitable for grease lubrication. In case of oil lubrication, up to 130% of this value shall be permissible.

OUTER RINGS TOLERANCE (Outside diameter) (μm)

TYPE	Cylindrical outer ring	Crowned outer ring
NAST6M,NAST8M,NAST10M	0/-9	0/-50
NAST12M,NAST15M,NAST17M,NAST20M	0/-11	0/-50
NAST25M,NAST30M,NAST35M,NAST40M	0/-13	0/-50
NAST45M,NAST50M	0/-15	0/-50