INNER RINGS

Inner Rings for Shell Type Needle Roller Bearings





Shaft dia. 7 — 17mm

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm d	F	B	$r_{s\,min}$ (1)	Standard mounting dimension mm d_a Min.	Max.	Assembled bearings TA···Z (TAM)	TLA···Z (TLAM)	YT YTL
7	**IRT 710**	3.2	7	10	10.5	0.3	9	9.7	**TA 1010Z**	**TLA 1010Z**	—
	IRT 712	3.9	7	10	12.5	0.3	9	9.7	**TA 1012Z**	**TLA 1012Z**	—
	IRT 715	4.8	7	10	15.5	0.3	9	9.7	**TA 1015Z**	**TLA 1015Z**	—
8	**IRT 810**	5.1	8	12	10.5	0.3	10	11	—	**TLA 1210Z**	**YTL 1210**
	IRT 812	6	8	12	12.5	0.3	10	11	**TA 1212Z**	**TLA 1212Z**	**YT 1212**
	IRT 815	7.5	8	12	15.5	0.3	10	11	**TA 1215Z**	—	—
10	**IRT 1012**	5.2	10	13	12.5	0.3	12	12.7	—	**TLA 1312Z**	—
	IRT 1012-2	7.2	10	14	12.5	0.3	12	13	—	**TLA 1412Z**	—
	IRT 1016-2	9.6	10	14	16.5	0.3	12	13	**TA 1416Z**	**TLA 1416Z**	—
	IRT 1020-2	11.9	10	14	20.5	0.3	12	13	**TA 1420Z**	—	—
	IRT 1010-1	7.9	10	15	10.5	0.3	12	14	**TA 1510Z**	—	—
	IRT 1012-1	9.4	10	15	12.5	0.3	12	14	**TA 1512Z**	**TLA 1512Z**	—
	IRT 1015-1	11.7	10	15	15.5	0.3	12	14	**TA 1515Z**	—	—
	IRT 1020-1	15.5	10	15	20.5	0.3	12	14	**TA 1520Z**	—	—
	IRT 1025-1	19.3	10	15	25.5	0.3	12	14	**TA 1525Z**	—	—
12	**IRT 1212**	6.1	12	15	12.5	0.3	14	14.5	**TA 1512Z**	**TLA 1512Z**	—
	IRT 1216	8.1	12	15	16.5	0.3	14	14.5	—	**TLA 1516Z**	—
	IRT 1222	11	12	15	22.5	0.3	14	14.5	—	**TLA 1522Z**	—
	IRT 1212-1	8.5	12	16	12.5	0.3	14	15	—	**TLA 1612Z**	—
	IRT 1216-1	11.2	12	16	16.5	0.3	14	15	**TA 1616Z**	**TLA 1616Z**	—
	IRT 1220-1	13.9	12	16	20.5	0.3	14	15	**TA 1620Z**	—	—
	IRT 1222-1	15.2	12	16	22.5	0.3	14	15	—	**TLA 1622Z**	—
	IRT 1215-2	13.6	12	17	15.5	0.3	14	16	**TA 1715Z**	—	**YT 1715**
	IRT 1220-2	18	12	17	20.5	0.3	14	16	**TA 1720Z**	—	—
	IRT 1225-2	22.5	12	17	25.5	0.3	14	16	**TA 1725Z**	—	**YT 1725**
15	**IRT 1512**	7.5	15	18	12.5	0.3	17	17.5	—	**TLA 1812Z**	—
	IRT 1513	8.1	15	18	13.5	0.3	17	17.5	**TA 1813Z**	—	—

Note(1) Minimum allowable value of chamfer dimension r

Remark No oil hole is provided.





IRT

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm d	F	B	$r_{s\,min}$ (1)	Standard mounting dimension mm d_a Min.	Max.	Assembled bearings TA···Z (TAM)	TLA···Z (TLAM)	YT YTL
15	**IRT 1515**	9.3	15	18	15.5	0.3	17	17.5	**TA 1815Z**	—	—
	IRT 1516	9.9	15	18	16.5	0.3	17	17.5	—	**TLA 1816Z**	—
	IRT 1517	10.5	15	18	17.5	0.3	17	17.5	**TA 1817Z**	—	—
	IRT 1519	11.7	15	18	19.5	0.3	17	17.5	**TA 1819Z**	—	—
	IRT 1520	12.3	15	18	20.5	0.3	17	17.5	**TA 1820Z**	—	—
	IRT 1525	15.2	15	18	25.5	0.3	17	17.5	**TA 1825Z**	—	—
	IRT 1516-1	13.6	15	19	16.5	0.3	17	18	**TA 1916Z**	—	—
	IRT 1520-1	16.8	15	19	20.5	0.3	17	18	**TA 1920Z**	—	—
	IRT 1515-2	16.4	15	20	15.5	0.3	17	19	**TA 2015Z**	—	**YT 2015**
	IRT 1520-2	21.5	15	20	20.5	0.3	17	19	**TA 2020Z** **TA 202820Z**	**TLA 2020Z**	**YT 202820**
	IRT 1525-2	27	15	20	25.5	0.3	17	19	**TA 2025Z**	—	**YT 2025**
	IRT 1530-2	32	15	20	30.5	0.3	17	19	**TA 2030Z**	**TLA 2030Z**	—
17	**IRT 1716**	11.1	17	20	16.5	0.3	19	19.5	—	**TLA 2016Z**	—
	IRT 1720	13.7	17	20	20.5	0.3	19	19.5	**TA 2020Z** **TA 202820Z**	**TLA 2020Z**	**YT 202820**
	IRT 1730	20.5	17	20	30.5	0.3	19	19.5	**TA 2030Z**	**TLA 2030Z**	—
	IRT 1716-1	15.1	17	21	16.5	0.3	19	20	**TA 2116Z**	—	**YT 2116**
	IRT 1720-1	18.8	17	21	20.5	0.3	19	20	**TA 2120Z**	—	**YT 2120**
	IRT 1710-2	12.4	17	22	10.5	0.3	19	21	**TA 2210Z**	—	—
	IRT 1715-2	18.3	17	22	15.5	0.3	19	21	**TA 2215Z**	—	—
	IRT 1716-2	19.4	17	22	16.5	0.3	19	21	**TA 223016Z**	**TLA 2216Z**	**YT 223016**
	IRT 1720-2	24	17	22	20.5	0.3	19	21	**TA 2220Z** **TA 223020Z**	**TLA 2220Z**	**YT 223020**
	IRT 1725-2	30	17	22	25.5	0.3	19	21	**TA 2225Z**	—	—
	IRT 1730-2	36	17	22	30.5	0.3	19	21	**TA 2230Z**	—	—

Note(1) Minimum allowable value of chamfer dimension r

Remark No oil hole is provided.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

INNER RINGS


Inner Rings for Shell Type Needle Roller Bearings




Shaft dia. 20 — 45mm

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm d	F	B	$r_{s\,min}$ (1)	Standard mounting dimension mm d_a Min.	Max.	Assembled bearings TA···Z (TAM)	TLA···Z (TLAM)	YT YTL
20	**IRT 2016**	17.5	20	24	16.5	0.3	22	23	**TA 243216Z**	—	**YT 243216**
	IRT 2020	22	20	24	20.5	0.3	22	23	**TA 2420Z**	—	**YT 243220**
									TA 243220Z		
	IRT 2028	30.5	20	24	28.5	0.3	22	23	**TA 2428Z**	—	**YT 2428**
	IRT 2010-1	14.3	20	25	10.5	0.3	22	24	**TA 2510Z**	—	**YT 2510**
	IRT 2015-1	21	20	25	15.5	0.3	22	24	**TA 2515Z**	—	**YT 2515**
	IRT 2020-1	28	20	25	20.5	0.3	22	24	**TA 2520Z**	**TLA 2520Z**	**YT 2520**
	IRT 2025-1	34.5	20	25	25.5	0.3	22	24	**TA 2525Z**	—	**YT 2525**
	IRT 2026-1	36	20	25	26.5	0.3	22	24	—	**TLA 2526Z**	**YTL 2526**
	IRT 2030-1	41.5	20	25	30.5	0.3	22	24	**TA 2530Z**	—	—
	IRT 2038-1	52.5	20	25	38.5	0.3	22	24	—	**TLAW 2538Z**	—
22	**IRT 2216**	19.1	22	26	16.5	0.3	24	25	**TA 2616Z**	—	**YT 2616**
	IRT 2220	24	22	26	20.5	0.3	24	25	**TA 2620Z**	—	**YT 2620**
	IRT 2220-1	37	22	28	20.5	0.3	24	27	**TA 2820Z**	**TLA 2820Z**	**YT 2820**
	IRT 2230-1	55.5	22	28	30.5	0.3	24	27	**TA 2830Z**	—	—
25	**IRT 2520**	26.5	25	29	20.5	0.3	27	28	**TA 2920Z**	—	**YT 2920**
	IRT 2530	40	25	29	30.5	0.3	27	28	**TA 2930Z**	—	—
	IRT 2515-1	25.5	25	30	15.5	0.3	27	29	**TA 3015Z**	—	—
	IRT 2520-1	34	25	30	20.5	0.3	27	29	**TA 3020Z**	**TLA 3020Z**	—
	IRT 2525-1	42.5	25	30	25.5	0.3	27	29	**TA 3025Z**	—	—
	IRT 2526-1	44	25	30	26.5	0.3	27	29	—	**TLA 3026Z**	—
	IRT 2530-1	50.5	25	30	30.5	0.3	27	29	**TA 3030Z**	—	—
	IRT 2538-1	64	25	30	38.5	0.3	27	29	—	**TLAW 3038Z**	—
28	**IRT 2820**	29.5	28	32	20.5	0.3	30	31	**TA 3220Z**	—	**YT 3220**
	IRT 2830	44	28	32	30.5	0.3	30	31	**TA 3230Z**	—	—
30	**IRT 3012**	24.5	30	35	12.5	0.6	34	34.5	**TA 3512Z**	**TLA 3512Z**	—
	IRT 3015	30.5	30	35	15.5	0.6	34	34.5	**TA 3515Z**	—	—

Note(1) Minimum allowable value of chamfer dimension r
Remark No oil hole is provided.





IRT


Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm d	F	B	$r_{s\,min}$ (1)	Standard mounting dimension mm d_a Min.	Max.	Assembled bearings TA···Z (TAM)	TLA···Z (TLAM)	YT YTL
30	**IRT 3020**	40	30	35	20.5	0.6	34	34.5	**TA 3520Z**	**TLA 3520Z**	—
	IRT 3025	50	30	35	25.5	0.6	34	34.5	**TA 3525Z**	—	—
	IRT 3030	60	30	35	30.5	0.6	34	34.5	**TA 3530Z**	—	—
32	**IRT 3220**	42.5	32	37	20.5	0.6	36	36.5	**TA 3720Z**	—	**YT 3720**
	IRT 3230	63.5	32	37	30.5	0.6	36	36.5	**TA 3730Z**	—	—
	IRT 3215-1	39.5	32	38	15.5	0.6	36	37	**TA 3815Z**	—	—
	IRT 3220-1	52	32	38	20.5	0.6	36	37	**TA 3820Z**	—	—
	IRT 3225-1	64.5	32	38	25.5	0.6	36	37	**TA 3825Z**	—	—
	IRT 3230-1	77.5	32	38	30.5	0.6	36	37	**TA 3830Z**	—	—
	IRT 3245-1	115	32	38	45.5	0.6	36	37	**TAW 3845Z**	—	—
35	**IRT 3515**	35	35	40	15.5	0.6	39	39.5	**TA 4015Z**	—	**YT 4015**
	IRT 3520	46.5	35	40	20.5	0.6	39	39.5	**TA 4020Z**	**TLA 4020Z**	—
	IRT 3525	58	35	40	25.5	0.6	39	39.5	**TA 4025Z**	—	**YT 4025**
	IRT 3530	69	35	40	30.5	0.6	39	39.5	**TA 4030Z**	—	—
	IRT 3540	91.5	35	40	40.5	0.6	39	39.5	**TA 4040Z**	—	—
40	**IRT 4020**	52.5	40	45	20.5	0.6	44	45.5	**TA 4520Z**	**TLA 4520Z**	**YT 4520**
	IRT 4025	65.5	40	45	25.5	0.6	44	45.5	**TA 4525Z**	—	**YT 4525**
	IRT 4030	78.5	40	45	30.5	0.6	44	45.5	**TA 4530Z**	—	—
	IRT 4040	104	40	45	40.5	0.6	44	45.5	**TA 4540Z**	—	—
45	**IRT 4512**	36	45	50	12.5	0.6	49	49.5	**TA 5012Z**	—	—
	IRT 4515	44.5	45	50	15.5	0.6	49	49.5	**TA 5015Z**	—	—
	IRT 4520	59	45	50	20.5	0.6	49	49.5	**TA 5020Z**	**TLA 5020Z**	—
	IRT 4525	73	45	50	25.5	0.6	49	49.5	**TA 5025Z**	**TLA 5025Z**	—
	IRT 4530	87.5	45	50	30.5	0.6	49	49.5	**TA 5030Z**	—	—
	IRT 4540	116	45	50	40.5	0.6	49	49.5	**TA 5040Z**	—	—
	IRT 4545	131	45	50	45.5	0.6	49	49.5	**TAW 5045Z**	—	—

Note(1) Minimum allowable value of chamfer dimension r
Remark No oil hole is provided.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

INNER RINGS

Inner Rings for Shell Type Needle Roller Bearings

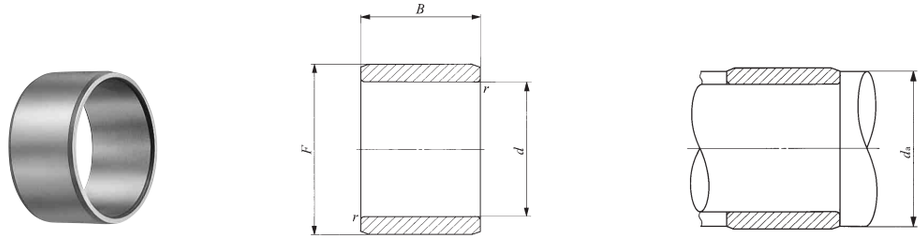


IRT

Shaft dia. 50 — 60mm

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm d	F	B	$r_{s\,min}$ (1)	Standard mounting dimension mm d_a Min.	Max.	Assembled bearings TA···Z (TAM)	TLA···Z (TLAM)	YT YTL
50	**IRT 5020-1**	65	50	55	20.5	0.6	54	54.5	**TA 5520Z**	**TLA 5520Z**	—
	IRT 5025-1	81	50	55	25.5	0.6	54	54.5	**TA 5525Z**	**TLA 5525Z**	—
	IRT 5030-1	96.5	50	55	30.5	0.6	54	54.5	**TA 5530Z**	—	—
	IRT 5040-1	128	50	55	40.5	0.6	54	54.5	**TA 5540Z**	—	—
	IRT 5045-1	144	50	55	45.5	0.6	54	54.5	**TAW 5545Z**	—	—
	IRT 5050-1	160	50	55	50.5	0.6	54	54.5	**TAW 5550Z**	—	—
	IRT 5025	169	50	60	25.5	1.5	58	59	**TA 6025Z**	—	—
	IRT 5030	205	50	60	30.5	1.5	58	59	**TA 6030Z**	—	—
	IRT 5040	270	50	60	40.5	1.5	58	59	**TA 6040Z**	—	—
	IRT 5045	300	50	60	45.5	1.5	58	59	**TAW 6045Z**	—	—
	IRT 5050	335	50	60	50.5	1.5	58	59	**TAW 6050Z**	—	—
52	**IRT 5212**	86	52	62	12.5	1.5	60	60.5	**TA 6212Z**	—	—
55	**IRT 5525**	185	55	65	25.5	1.5	63	63.5	**TA 6525Z**	—	—
	IRT 5530	220	55	65	30.5	1.5	63	63.5	**TA 6530Z**	—	—
	IRT 5545	330	55	65	45.5	1.5	63	63.5	**TAW 6545Z**	—	—
	IRT 5550	365	55	65	50.5	1.5	63	63.5	**TAW 6550Z**	—	—
60	**IRT 6025**	200	60	70	25.5	1.5	68	68.5	**TA 7025Z**	—	—
	IRT 6030	240	60	70	30.5	1.5	68	68.5	**TA 7030Z**	—	—
	IRT 6040	320	60	70	40.5	1.5	68	68.5	**TA 7040Z**	—	—
	IRT 6050	395	60	70	50.5	1.5	68	68.5	**TAW 7050Z**	—	—

Note(1) Minimum allowable value of chamfer dimension r
Remark No oil hole is provided.

Inner Rings for Shell Type Needle Roller Bearings Inch Series

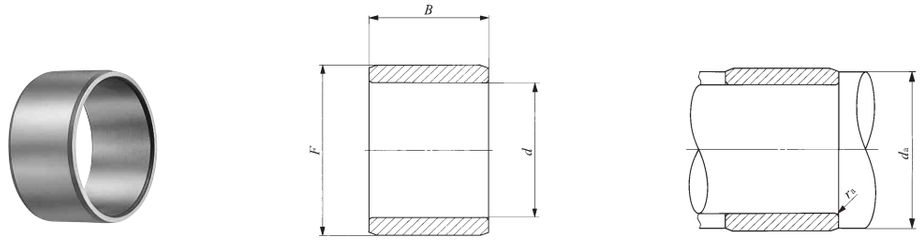

IRB

Shaft dia. 7.938 — 15.875mm

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch) d	F	B	Standard mounting dimensions mm d_a Min.	Max.	$r_{as\,max}$ (1) Max.	Assembled bearings BA···Z (BAM)	BHA···Z (BHAM)	YB YBH
7.938 (5/16)	**IRB 58**	8	7.938 (5/16)	12.700 (1/2)	13.08	11.3	11.7	0.3	**BA 88Z**	**BHA 88Z**	**YB 88**
9.525 (3/8)	**IRB 68**	8.9	9.525 (3/8)	14.288 (9/16)	13.08	12.8	13.2	0.3	**BA 98Z**	**BHA 98Z**	**YB 98**
	IRB 68-1	12.6	9.525 (3/8)	15.875 (5/8)	13.08	12.8	14	0.3	**BA 108Z**	**BHA 108Z**	**YB 108** **YBH 108**
	IRB 612	13.2	9.525 (3/8)	14.288 (9/16)	19.43	12.8	13.2	0.3	**BA 912Z**	—	**YB 912**
	IRB 612-1	18.8	9.525 (3/8)	15.875 (5/8)	19.43	12.8	14	0.3	**BA 1012Z**	**BHA 1012Z**	**YB 1012**
11.112 (7/16)	**IRB 78**	10.1	11.112 (7/16)	15.875 (5/8)	13.08	14.4	14.8	0.3	**BA 108Z**	**BHA 108Z**	**YB 108** **YBH 108**
	IRB 712	15	11.112 (7/16)	15.875 (5/8)	19.43	14.4	14.8	0.3	**BA 1012Z**	—	**YB 1012**
	IRB 714	17.4	11.112 (7/16)	15.875 (5/8)	22.60	14.4	14.8	0.3	**BA 1014Z**	—	—
	IRB 716	19.9	11.112 (7/16)	15.875 (5/8)	25.78	14.4	14.8	0.3	**BA 1016Z**	**BHA 1016Z**	—
12.700 (1/2)	**IRB 86**	8.5	12.700 (1/2)	17.462 (11/16)	9.90	16.9	16.9	0.3	**BA 116Z**	—	—
	IRB 88	11.2	12.700 (1/2)	17.462 (11/16)	13.08	16.9	16.9	0.3	**BA 118Z**	—	—
	IRB 812	16.7	12.700 (1/2)	17.462 (11/16)	19.43	16.9	16.9	0.3	**BA 1112Z**	—	**YB 1112**
	IRB 88-1	15.8	12.700 (1/2)	19.050 (3/4)	13.08	16.9	17.5	0.6	**BA 128Z**	—	**YB 128**
	IRB 810-1	19.6	12.700 (1/2)	19.050 (3/4)	16.25	16.9	17.5	0.6	**BA 1210Z**	—	**YB 1210**
	IRB 812-1	23.5	12.700 (1/2)	19.050 (3/4)	19.43	16.9	17.5	0.6	**BA 1212Z**	—	**YB 1212**
	IRB 814-1	27.5	12.700 (1/2)	19.050 (3/4)	22.60	16.9	17.5	0.6	**BA 1214Z**	—	—
	IRB 816-1	31	12.700 (1/2)	19.050 (3/4)	25.78	16.9	17.5	0.6	**BA 1216Z**	—	—
14.288 (9/16)	**IRB 98**	17.3	14.288 (9/16)	20.638 (13/16)	13.08	19	19.6	0.6	**BA 138Z**	—	**YB 138**
	IRB 910	21.5	14.288 (9/16)	20.638 (13/16)	16.25	19	19.6	0.6	**BA 1310Z**	—	**YBH 1310**
	IRB 912	26	14.288 (9/16)	20.638 (13/16)	19.43	19	19.6	0.6	**BA 1312Z**	**BHA 1312Z**	**YBH 1312**
	IRB 914	30	14.288 (9/16)	20.638 (13/16)	22.60	19	19.6	0.6	**BA 1314Z**	—	—
	IRB 916	34.5	14.288 (9/16)	20.638 (13/16)	25.78	19	19.6	0.6	**BA 1316Z**	—	—
	IRB 920	43	14.288 (9/16)	20.638 (13/16)	32.13	19	19.6	0.6	**BA 1320Z**	—	—
15.875 (5/8)	**IRB 106**	14.5	15.875 (5/8)	22.225 (7/8)	9.90	20.7	21.2	0.6	**BA 146Z**	—	—
	IRB 108	18.9	15.875 (5/8)	22.225 (7/8)	13.08	20.7	21.2	0.6	**BA 148Z**	—	**YB 148**
	IRB 1012	28	15.875 (5/8)	22.225 (7/8)	19.43	20.7	21.2	0.6	**BA 1412Z**	**BHA 1412Z**	**YB 1412**

Note(1) Maximum allowable fillet corner radius of shaft
Remark No oil hole is provided.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

INNER RINGS


Inner Rings for Shell Type Needle Roller Bearings Inch Series



Shaft dia. 15.875 — 63.500mm

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch) d	F	B	Standard mounting dimensions mm d_a Min.	d_a Max.	$r_{as\,max}$ (1) Max.	Assembled bearings BA···Z (BAM)	BHA···Z (BHAM)	YB YBH
15.875 (5/8)	IRB 1014	33	15.875 (5/8)	22.225 (7/8)	22.60	20.7	21.2	0.6	BA 1414Z	—	—
	IRB 1016	37.5	15.875 (5/8)	22.225 (7/8)	25.78	20.7	21.2	0.6	BA 1416Z	BHA 1416Z	YB 1416
	IRB 1022	51.5	15.875 (5/8)	22.225 (7/8)	35.30	20.7	21.2	0.6	BA 1422Z	—	—
17.462 (11/16)	IRB 1110	25.5	17.462 (11/16)	23.812 (15/16)	16.25	22.3	22.8	0.6	BA 1510Z	—	—
	IRB 1116	40.5	17.462 (11/16)	23.812 (15/16)	25.78	22.3	22.8	0.6	BA 1516Z	—	—
19.050 (3/4)	IRB 128	22	19.050 (3/4)	25.400 (1)	13.08	23.9	24.4	0.6	BA 168Z	BHA 168Z	YB 168 YBH 168
	IRB 1212	33	19.050 (3/4)	25.400 (1)	19.43	23.9	24.4	0.6	BA 1612Z	BHA 1612Z	YB 1612 YBH 1612
	IRB 1214	38.5	19.050 (3/4)	25.400 (1)	22.60	23.9	24.4	0.6	BA 1614Z	—	—
	IRB 1216	43.5	19.050 (3/4)	25.400 (1)	25.78	23.9	24.4	0.6	BA 1616Z	BHA 1616Z	YB 1616 YBH 1616
	IRB 1220	54.5	19.050 (3/4)	25.400 (1)	32.13	23.9	24.4	0.6	BA 1620Z	—	—
20.638 (13/16)	IRB 1316	34	20.638 (13/16)	25.400 (1)	25.78	24.9	24.9	0.6	BA 1616Z	BHA 1616Z	YB 1616 YBH 1616
22.225 (7/8)	IRB 148	25	22.225 (7/8)	28.575 (1 1/8)	13.08	27	27.5	0.6	BA 188Z	—	YB 188
	IRB 1412	37.5	22.225 (7/8)	28.575 (1 1/8)	19.43	27	27.5	0.6	BA 1812Z	BHA 1812Z	YB 1812
	IRB 1416	50	22.225 (7/8)	28.575 (1 1/8)	25.78	27	27.5	0.6	BA 1816Z	BHA 1816Z	YB 1816
	IRB 1420	62.5	22.225 (7/8)	28.575 (1 1/8)	32.13	27	27.5	0.6	BA 1820Z	BHA 1820Z	—
25.400 (1)	IRB 168	28.5	25.400 (1)	31.750 (1 1/4)	13.08	30	30.7	0.6	BA 208Z	—	—
	IRB 1610	35.5	25.400 (1)	31.750 (1 1/4)	16.25	30	30.7	0.6	BA 2010Z	—	YB 2010
	IRB 1612	42.5	25.400 (1)	31.750 (1 1/4)	19.43	30	30.7	0.6	BA 2012Z	—	YB 2012
	IRB 1616	56	25.400 (1)	31.750 (1 1/4)	25.78	30	30.7	0.6	BA 2016Z	BHA 2016Z	YB 2016
	IRB 1620	70	25.400 (1)	31.750 (1 1/4)	32.13	30	30.7	0.6	BA 2020Z	—	—
	IRB 168-1	36.5	25.400 (1)	33.338 (1 5/16)	13.08	30	32.1	0.6	BA 218Z	—	—
	IRB 1610-1	45.5	25.400 (1)	33.338 (1 5/16)	16.25	30	32.1	0.6	BA 2110Z	—	—
	IRB 1612-1	54.5	25.400 (1)	33.338 (1 5/16)	19.43	30	32.1	0.6	BA 2112Z	—	—

Note(1) Maximum allowable fillet corner radius of shaft
Remark No oil hole is provided.

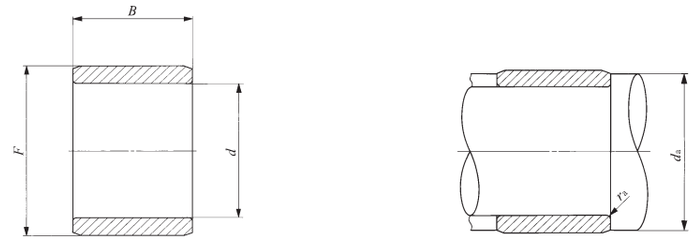

IRB

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch) d	F	B	Standard mounting dimensions mm d_a Min.	d_a Max.	$r_{as\,max}$ (1) Max.	Assembled bearings BA···Z (BAM)	BHA···Z (BHAM)	YB YBH
28.575 (1 1/8)	IRB 188	31.5	28.575 (1 1/8)	34.925 (1 3/8)	13.08	33.2	33.9	0.6	BA 228Z	—	YB 228
	IRB 1812	47	28.575 (1 1/8)	34.925 (1 3/8)	19.43	33.2	33.9	0.6	BA 2212Z	BHA 2212Z	YB 2212
	IRB 1816	62.5	28.575 (1 1/8)	34.925 (1 3/8)	25.78	33.2	33.9	0.6	BA 2216Z	BHA 2216Z	—
	IRB 1820	78	28.575 (1 1/8)	34.925 (1 3/8)	32.13	33.2	33.9	0.6	BA 2220Z	—	YB 2220
31.750 (1 1/4)	IRB 2010	43	31.750 (1 1/4)	38.100 (1 1/2)	16.25	37	37.1	0.6	BA 2410Z	—	—
	IRB 2014	60	31.750 (1 1/4)	38.100 (1 1/2)	22.60	37	37.1	0.6	BA 2414Z	—	YB 2414
	IRB 2016	68.5	31.750 (1 1/4)	38.100 (1 1/2)	25.78	37	37.1	0.6	BA 2416Z	—	YB 2416
	IRB 2020	85.5	31.750 (1 1/4)	38.100 (1 1/2)	32.13	37	37.1	0.6	BA 2420Z	—	YB 2420
34.925 (1 3/8)	IRB 2210	47	34.925 (1 3/8)	41.275 (1 5/8)	16.25	40.2	40.2	0.6	BA 2610Z	—	YB 2610
	IRB 2220	93.5	34.925 (1 3/8)	41.275 (1 5/8)	32.13	40.2	40.2	0.6	BA 2620Z	—	—
36.512 (1 7/16)	IRB 2316	99	36.512 (1 7/16)	44.450 (1 3/4)	25.78	42.5	43.2	0.6	BA 2816Z	—	—
38.100 (1 1/2)	IRB 2412	62	38.100 (1 1/2)	44.450 (1 3/4)	19.43	43.3	43.4	0.6	BA 2812Z	—	—
	IRB 2416	81	38.100 (1 1/2)	44.450 (1 3/4)	25.78	43.3	43.4	0.6	BA 2816Z	—	YB 2816
	IRB 2424	121	38.100 (1 1/2)	44.450 (1 3/4)	38.48	43.3	43.4	0.6	BA 2824Z	BHA 2824Z	—
	IRB 248-1	64	38.100 (1 1/2)	47.625 (1 7/8)	13.08	44.5	45.5	1	BA 308Z	—	—
	IRB 2410-1	79.5	38.100 (1 1/2)	47.625 (1 7/8)	16.25	44.5	45.5	1	BA 3010Z	—	—
41.275 (1 5/8)	IRB 2616	136	41.275 (1 5/8)	50.800 (2)	25.78	47.5	48.5	1	BA 3216Z	—	—
	IRB 2628	235	41.275 (1 5/8)	50.800 (2)	44.83	47.5	48.5	1	BAW 3228Z	—	—
42.862 (1 11/16)	IRB 2720	146	42.862 (1 11/16)	50.800 (2)	32.13	48.5	49.5	0.6	BA 3220Z	—	—
47.625 (1 7/8)	IRB 3016	100	47.625 (1 7/8)	53.975 (2 1/8)	25.78	52.9	52.9	0.6	BA 3416Z	—	—
	IRB 3024	149	47.625 (1 7/8)	53.975 (2 1/8)	38.48	52.9	52.9	0.6	BA 3424Z	—	—
57.150 (2 1/4)	IRB 3616	183	57.150 (2 1/4)	66.675 (2 5/8)	25.78	63.5	64.5	1	BA 4216Z	—	—
63.500 (2 1/2)	IRB 4016	131	63.500 (2 1/2)	69.850 (2 3/4)	25.78	68.7	68.8	0.6	BA 4416Z	—	—
	IRB 4020	164	63.500 (2 1/2)	69.850 (2 3/4)	32.13	68.7	68.8	0.6	BA 4420Z	—	—

Note(1) Maximum allowable fillet corner radius of shaft
Remark No oil hole is provided.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

INNER RINGS


Inner Rings for General Usage








LRT



LRTZ



Shaft dia. 5 — 20mm

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm d	F	B	(1) $r_{s\,min}$	Standard mounting dimension mm d_a Min.	Max.	Assembled bearings	
5	LRT 5710	—	1.4	5	7	10	0.15	6.2	6.7	RNA 495	
	LRT 5812	—	2.8	5	8	12	0.2	6.6	7.7	TAF 81512	
	LRT 5816	—	3.8	5	8	16	0.2	6.6	7.7	TAF 81516	
6	LRT 6810	—	1.7	6	8	10	0.15	7.2	7.7	RNA 496	
	LRT 6912	—	3.2	6	9	12	0.2	7.6	8.7	TAF 91612	
	LRT 6916	—	4.3	6	9	16	0.2	7.6	8.7	TAF 91616	
	LRT 61010	—	3.9	6	10	10	0.3	8	9.7	RNAF 101710	
7	LRT 7910	—	1.9	7	9	10	0.15	8.2	8.7	RNA 497	
	LRT 71012	—	3.6	7	10	12	0.2	8.6	9.7	TAF 101712	
	LRT 71012-1	—	3.6	7	10	12	0.3	9	9.7	RNAF 102012	
	LRT 71016	—	4.9	7	10	16	0.2	8.6	9.7	TAF 101716	NAX 1023
8	LRT 81011	—	2.4	8	10	11	0.2	9.6	9.9	RNA 498	
9	LRT 91211	—	3.1	9	12	11	0.3	11	11.5	RNA 499	
	LRT 91212	—	4.5	9	12	12	0.3	11	11.5	TAF 121912	RNAF 122212
	LRT 91216	—	6	9	12	16	0.3	11	11.5	TAF 121916	NAX 1223
10	LRT 101412	—	7	10	14	12	0.3	12	13	RNAF 142612	
	LRT 101413	—	7.5	10	14	13	0.3	12	13	RNA 4900	RNAF 142213
	—	LRTZ 101414	8.2	10	14	14	0.3	12	13	RNA 4900 UU	
	LRT 101416	—	9	10	14	16	0.3	12	13	TAF 142216	
	LRT 101420	—	11.5	10	14	20	0.3	12	13	TAF 142220	RNAFW142220
12	LRT 121516	—	8	12	15	16.5	0.3	14	14.5	NAX 1523	NBX 1523
	LRT 121612	—	8.5	12	16	12	0.3	14	15	RNAF 162812	
	LRT 121613	—	8.5	12	16	13	0.3	14	15	RNA 4901	RNAF 162413
	—	LRTZ 121614	9.6	12	16	14	0.3	14	15	RNA 4901 UU	
	LRT 121616	—	10.5	12	16	16	0.3	14	15	TAF 162416	
	LRT 121620	—	13.5	12	16	20	0.3	14	15	TAF 162420	RNAFW162420
12	LRT 121622	—	14.5	12	16	22	0.3	14	15	RNA 6901	
	—	LRTZ 121623	15.5	12	16	23	0.3	14	15	RNA 6901 UU	
14	LRT 141717	—	9.5	14	17	17	0.3	16	16.5	NAX 1725	NBX 1725
15	LRT 151916	—	12.5	15	19	16	0.3	17	18	TAF 192716	
	LRT 151920	—	16	15	19	20	0.3	17	18	TAF 192720	
	LRT 152012	—	12	15	20	12	0.3	17	19	RNAF 203212	
	LRT 152013	—	13.5	15	20	13	0.3	17	19	RNA 4902	RNAF 202813
	—	LRTZ 152014	14.5	15	20	14	0.3	17	19	RNA 4902 UU	
	LRT 152020	—	21.5	15	20	20.5	0.3	17	19	TR 203320	
	—	LRTZ 152020	21.5	15	20	20.5	0.3	17	19	GTR 203320	
	LRT 152023	—	24	15	20	23	0.3	17	19	RNA 6902	
	—	LRTZ 152024	25	15	20	24	0.3	17	19	RNA 6902 UU	
	LRT 152026	—	28	15	20	26	0.3	17	19	RNAFW 202826	
17	LRT 172020	—	13.5	17	20	20.5	0.3	19	19.5	NAX 2030	NBX 2030
	LRT 172116	—	14.5	17	21	16	0.3	19	20	TAF 212916	
	LRT 172120	—	18	17	21	20	0.3	19	20	TAF 212920	
	LRT 172213	—	15.5	17	22	13	0.3	19	21	RNA 4903	RNAF 223013
	—	LRTZ 172214	16.5	17	22	14	0.3	19	21	RNA 4903 UU	
	LRT 172216	—	19	17	22	16	0.3	19	21	RNAF 223516	
	LRT 172223	—	26.5	17	22	23	0.3	19	21	RNA 6903	
	—	LRTZ 172224	28	17	22	24	0.3	19	21	RNA 6903 UU	
	LRT 172225	—	30	17	22	25.5	0.3	19	21	TR 223425	
	—	LRTZ 172225	30	17	22	25.5	0.3	19	21	GTR 223425	
	LRT 172226	—	31	17	22	26	0.3	19	21	RNAFW 223026	
	LRT 172232	—	38	17	22	32	0.3	19	21	RNAFW 223532	
20	LRT 202416	—	16.5	20	24	16	0.3	22	23	TAF 243216	
	LRT 202420	—	20.5	20	24	20	0.3	22	23	TAF 243220	

Note(1) Minimum allowable value of chamfer dimension r
Remark No oil hole is provided.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

INNER RINGS


Inner Rings for General Usage








LRT



LRTZ



Shaft dia. 20 — 32mm

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm d	F	B	$r_{s\,min}$ (1)	Standard mounting dimension mm d_a Min.	Max.	Assembled bearings	
20	LRT 202516	—	22	20	25	16	0.3	22	24	RNAF 253716	
	LRT 202517	—	23	20	25	17	0.3	22	24	RNA 4904	RNAF 253517
	—	LRTZ 202518	24	20	25	18	0.3	22	24	RNA 4904 UU	
	LRT 202520	—	28	20	25	20.5	0.3	22	24	TR 253820	NAX 2530 NBX 2530
	—	LRTZ 202520	28	20	25	20.5	0.3	22	24	GTR 253820	
	LRT 202525	—	35	20	25	25.5	0.3	22	24	TR 253825	
	—	LRTZ 202525	35	20	25	25.5	0.3	22	24	GTR 253825	
	LRT 202526	—	36	20	25	26	0.3	22	24	RNAFW 253526	
	LRT 202530	—	40.5	20	25	30	0.3	22	24	RNA 6904	
	—	LRTZ 202531	41.5	20	25	31	0.3	22	24	RNA 6904 UU	
	LRT 202532	—	44	20	25	32	0.3	22	24	RNAFW 253732	
22	LRT 222616	—	17.5	22	26	16	0.3	24	25	TAF 263416	
	LRT 222620	—	24	22	26	20	0.3	24	25	TAF 263420	
	LRT 222817	—	30.5	22	28	17	0.3	24	27	RNA 49/22	
	—	LRTZ 222818	32	22	28	18	0.3	24	27	RNA 49/22 UU	
	LRT 222830	—	55	22	28	30	0.3	24	27	RNA 69/22	
	—	LRTZ 222831	55	22	28	31	0.3	24	27	RNA 69/22 UU	
25	LRT 252920	—	25	25	29	20	0.3	27	28	TAF 293820	
	LRT 252930	—	38	25	29	30	0.3	27	28	TAF 293830	
	LRT 253016	—	28	25	30	16	0.3	27	29	RNAF 304216	
	LRT 253017	—	28.5	25	30	17	0.3	27	29	RNA 4905	RNAF 304017
	—	LRTZ 253018	29.5	25	30	18	0.3	27	29	RNA 4905 UU	
	LRT 253020	—	34	25	30	20.5	0.3	27	29	NAX 3030	NBX 3030
	LRT 253025	—	42	25	30	25.5	0.3	27	29	TR 304425	
	—	LRTZ 253025	42	25	30	25.5	0.3	27	29	GTR 304425	
	LRT 253026	—	44.5	25	30	26	0.3	27	29	RNAFW 304026	
	LRT 253030	—	49	25	30	30	0.3	27	29	RNA 6905	
25	—	LRTZ 253031	51	25	30	31	0.3	27	29	RNA 6905 UU	
	LRT 253032	—	54	25	30	32	0.3	27	29	RNAFW 304232	
28	LRT 283217	—	24.5	28	32	17	0.3	30	31	RNA 49/28	
	—	LRTZ 283218	25.5	28	32	18	0.3	30	31	RNA 49/28 UU	
	LRT 283220	—	28.5	28	32	20	0.3	30	31	TAF 324220	
	LRT 283230	—	43	28	32	30	0.3	30	31	RNA 69/28	TAF 324230
	—	LRTZ 283230	43	28	32	30.5	0.3	30	31	GTR 324530	
	—	LRTZ 283231	44	28	32	31	0.3	30	31	RNA 69/28 UU	
30	LRT 303516	—	31.5	30	35	16	0.3	32	34	RNAF 354716	
	LRT 303517	—	33.5	30	35	17	0.3	32	34	RNA 4906	RNAF 354517
	—	LRTZ 303518	35	30	35	18	0.3	32	34	RNA 4906 UU	
	LRT 303520	—	38.5	30	35	20	0.3	32	34	TAF 354520	NAX 3530 NBX 3530
	LRT 303526	—	52	30	35	26	0.3	32	34	RNAFW 354526	
	LRT 303530	—	59	30	35	30	0.3	32	34	RNA 6906	TAF 354530
	LRT 303530-1	—	59	30	35	30.5	0.3	32	34	TR 354830	
	—	LRTZ 303530	59	30	35	30.5	0.3	32	34	GTR 354830	
	—	LRTZ 303531	61	30	35	31	0.3	32	34	RNA 6906 UU	
	LRT 303532	—	64	30	35	32	0.3	32	34	RNAFW 354732	
32	LRT 323720	—	43.5	32	37	20	0.3	34	36	TAF 374720	
	LRT 323730	—	63	32	37	30	0.3	34	36	TAF 374730	
	LRT 323830	—	77	32	38	30.5	0.6	36	37	TR 385230	
	—	LRTZ 323830	77	32	38	30.5	0.6	36	37	GTR 385230	
	LRT 324020	—	69	32	40	20	0.6	36	39	RNA 49/32	
	—	LRTZ 324021	72.5	32	40	21	0.6	36	39	RNA 49/32 UU	
	LRT 324036	—	123	32	40	36	0.6	36	39	RNA 69/32	
	—	LRTZ 324037	130	32	40	37	0.6	36	39	RNA 69/32 UU	

Note(1) Minimum allowable value of chamfer dimension *r*
Remark No oil hole is provided.

Note(1) Minimum allowable value of chamfer dimension *r*
Remark No oil hole is provided.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

INNER RINGS


Inner Rings for General Usage








LRT



LRTZ



Shaft dia. 35 — 50mm

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm d	F	B	(1) $r_{s\,min}$	Standard mounting dimension mm d_a Min.	Max.	Assembled bearings
35	LRT 354017	—	39	35	40	17	0.3	37	39	RNAF 405017
	LRT 354020	—	46	35	40	20	0.3	37	39	TAF 405020 RNAF 405520 NAX 4032 NBX 4032
	—	LRTZ 354020	46	35	40	20.5	0.6	39	39.5	GTR 405520
	LRT 354030	—	67	35	40	30	0.3	37	39	TAF 405030
	LRT 354034	—	78	35	40	34	0.3	37	39	RNAFW 405034
	LRT 354040	—	95	35	40	40	0.3	37	39	RNAFW 405540
	LRT 354220	—	65	35	42	20	0.6	39	41	RNA 4907
	—	LRTZ 354221	67	35	42	21	0.6	39	41	RNA 4907 UU
	LRT 354230	—	97	35	42	30.5	0.6	39	41	TR 425630
	—	LRTZ 354230	100	35	42	30.5	0.6	39	41	GTR 425630
	LRT 354236	—	120	35	42	36	0.6	39	41	RNA 6907
	—	LRTZ 354237	120	35	42	37	0.6	39	41	RNA 6907 UU
38	LRT 384320	—	47.5	38	43	20	0.3	40	42	TAF 435320
	LRT 384330	—	72	38	43	30	0.3	40	42	TAF 435330
40	LRT 404517	—	44.5	40	45	17	0.3	42	44	RNAF 455517
	LRT 404520	—	51	40	45	20	0.3	42	44	TAF 455520 RNAF 456220 NAX 4532 NBX 4532
	LRT 404530	—	77	40	45	30	0.3	42	44	TAF 455530
	LRT 404530-1	—	77	40	45	30.5	0.6	44	44.5	TR 455930
	—	LRTZ 404530	77	40	45	30.5	0.6	44	44.5	GTR 455930
	LRT 404534	—	88	40	45	34	0.3	42	44	RNAFW 455534
	LRT 404540	—	105	40	45	40	0.3	42	44	RNAFW 456240
	LRT 404822	—	93	40	48	22	0.6	44	47	RNA 4908
	—	LRTZ 404823	95	40	48	23	0.6	44	47	RNA 4908 UU
	LRT 404840	—	165	40	48	40	0.6	44	47	RNA 6908
	—	LRTZ 404841	170	40	48	41	0.6	44	47	RNA 6908 UU

Note(1) Minimum allowable value of chamfer dimension *r*
Remark No oil hole is provided.

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm d	F	B	(1) $r_{s\,min}$	Standard mounting dimension mm d_a Min.	Max.	Assembled bearings
42	LRT 424720	—	54	42	47	20	0.3	44	46	TAF 475720
	LRT 424730	—	81	42	47	30	0.3	44	46	TAF 475730
	LRT 424830	—	100	42	48	30.5	0.6	46	47	TR 486230
	—	LRTZ 424830	100	42	48	30.5	0.6	46	47	GTR 486230
45	LRT 455020	—	58	45	50	20	0.3	47	49	RNAF 506220
	LRT 455025	—	71	45	50	25	0.3	47	49	TAF 506225 NAX 5035 NBX 5035
	LRT 455030	—	90	45	50	30.5	0.6	49	49.5	TR 506430
	—	LRTZ 455030	90	45	50	30.5	0.6	49	49.5	GTR 506430
	LRT 455035	—	95	45	50	35	0.3	47	49	TAF 506235
	LRT 455040	—	115	45	50	40	0.3	47	49	RNAFW 506240
	LRT 455222	—	88	45	52	22	0.6	49	51	RNA 4909
	—	LRTZ 455223	93	45	52	23	0.6	49	51	RNA 4909 UU
	LRT 455240	—	165	45	52	40	0.6	49	51	RNA 6909
	—	LRTZ 455241	170	45	52	41	0.6	49	51	RNA 6909 UU
	LRT 455520	—	120	45	55	20	1	50	54	RNAF 557220
	LRT 455540	—	245	45	55	40	1	50	54	RNAFW 557240
50	LRT 505520	—	63	50	55	20	0.3	52	54	RNAF 556820
	LRT 505525	—	77	50	55	25	0.3	52	54	TAF 556825
	LRT 505535	—	110	50	55	35	0.3	52	54	TAF 556835
	LRT 505540	—	130	50	55	40	0.3	52	54	RNAFW 556840
	LRT 505822	—	116	50	58	22	0.6	54	57	RNA 4910
	—	LRTZ 505823	118	50	58	23	0.6	54	57	RNA 4910 UU
	LRT 505840	—	210	50	58	40	0.6	54	57	RNA 6910
	—	LRTZ 505841	215	50	58	41	0.6	54	57	RNA 6910 UU
	LRT 505845	—	235	50	58	45.5	1	55	57	TR 587745
	—	LRTZ 505845	235	50	58	45.5	1	55	57	GTR 587745
	LRT 506020	—	135	50	60	20	1	55	59	RNAF 607820

Note(1) Minimum allowable value of chamfer dimension *r*
Remark No oil hole is provided.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

INNER RINGS


Inner Rings for General Usage








LRT



LRTZ



Shaft dia. 50 — 80mm

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm d	F	B	$r_{s\,min}$ (1)	Standard mounting dimension mm d_a Min.	Max.	Assembled bearings
50	LRT 506025	—	165	50	60	25.5	1	55	59	NAX 6040 NBX 6040
	LRT 506040	—	265	50	60	40	1	55	59	RNAFW 607840
55	LRT 556025	—	88	55	60	25	0.3	57	59	TAF 607225
	LRT 556035	—	120	55	60	35	0.3	57	59	TAF 607235
	LRT 556238	—	190	55	62	38.5	1	60	60.5	TR 628138
	—	LRTZ 556238	190	55	62	38.5	1	60	60.5	GTR 628138
	LRT 556325	—	145	55	63	25	1	60	61	RNA 4911
	—	LRTZ 556326	150	55	63	26	1	60	61	RNA 4911 UU
	LRT 556345	—	255	55	63	45	1	60	61	RNA 6911
	—	LRTZ 556346	260	55	63	46	1	60	61	RNA 6911 UU
	LRT 556530	—	220	55	65	30	1.5	63	63.5	RNAF 658530
	LRT 556560	—	435	55	65	60	1.5	63	63.5	RNAFW 658560
60	LRT 606825	—	150	60	68	25	0.6	64	66	TAF 688225
	LRT 606825-1	—	150	60	68	25	1	65	66	RNA 4912
	—	LRTZ 606826	160	60	68	26	1	65	66	RNA 4912 UU
	LRT 606835	—	210	60	68	35	0.6	64	66	TAF 688235
	LRT 606845	—	275	60	68	45	1	65	66	RNA 6912
	—	LRTZ 606846	280	60	68	46	1	65	66	RNA 6912 UU
	LRT 607025	—	195	60	70	25.5	1	65	68	NAX 7040
	LRT 607030	—	240	60	70	30	1.5	68	68.5	RNAF 709030
	LRT 607045	—	355	60	70	45.5	1	65	68	TR 708945
	—	LRTZ 607045	360	60	70	45.5	1	65	68	GTR 708945
	LRT 607060	—	480	60	70	60	1.5	68	68.5	RNAFW 709060
65	LRT 657225	—	145	65	72	25	1	70	70.5	RNA 4913
	—	LRTZ 657226	150	65	72	26	1	70	70.5	RNA 4913 UU
	LRT 657245	—	255	65	72	45	1	70	70.5	RNA 6913
	—	LRTZ 657246	265	65	72	46	1	70	70.5	RNA 6913 UU
	LRT 657335	—	235	65	73	35	1	70	71	TAF 739035

Note(1) Minimum allowable value of chamfer dimension r
Remark No oil hole is provided.

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm d	F	B	$r_{s\,min}$ (1)	Standard mounting dimension mm d_a Min.	Max.	Assembled bearings
65	LRT 657530	—	260	65	75	30	1.5	73	73.5	RNAF 759530
	LRT 657560	—	520	65	75	60	1.5	73	73.5	RNAFW 759560
70	LRT 708025	—	225	70	80	25	1	75	78	TAF 809525
	LRT 708030	—	275	70	80	30	1	75	78	RNA 4914
	LRT 708030-1	—	275	70	80	30	1.5	78	78.5	RNAF 8010030
	—	LRTZ 708031	275	70	80	31	1	75	78	RNA 4914 UU
	LRT 708035	—	310	70	80	35	1	75	78	TAF 809535
	LRT 708054	—	490	70	80	54	1	75	78	RNA 6914
	—	LRTZ 708055	500	70	80	55	1	75	78	RNA 6914 UU
	LRT 708060	—	560	70	80	60	1.5	78	78.5	RNAFW 8010060
75	LRT 758345	—	350	75	83	45.5	1	80	81	TR 8310845
	—	LRTZ 758345	350	75	83	45.5	1	80	81	GTR 8310845
	LRT 758525	—	240	75	85	25	1	80	83	TAF 8510525
	LRT 758530	—	290	75	85	30	1	80	83	RNA 4915
	LRT 758530-1	—	290	75	85	30	1.5	83	83.5	RNAF 8510530
	—	LRTZ 758531	300	75	85	31	1	80	83	RNA 4915 UU
	LRT 758535	—	335	75	85	35	1	80	83	TAF 8510535
	LRT 758554	—	520	75	85	54	1	80	83	RNA 6915
	—	LRTZ 758555	530	75	85	55	1	80	83	RNA 6915 UU
80	LRT 809025	—	255	80	90	25	1	85	88	TAF 9011025
	LRT 809030	—	310	80	90	30	1	85	88	RNA 4916
	LRT 809030-1	—	310	80	90	30	1.5	88	88.5	RNAF 9011030
	—	LRTZ 809031	315	80	90	31	1	85	88	RNA 4916 UU
	LRT 809035	—	355	80	90	35	1	85	88	TAF 9011035
	LRT 809054	—	550	80	90	54	1	85	88	RNA 6916
	—	LRTZ 809055	560	80	90	55	1	85	88	RNA 6916 UU

Note(1) Minimum allowable value of chamfer dimension r
Remark No oil hole is provided.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

INNER RINGS


Inner Rings for General Usage








LRT



LRTZ



Shaft dia. 85 — 140mm

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm d	F	B	$r_{s\,min}$ (1)	Standard mounting dimension mm d_a Min.	Max.	Assembled bearings
85	LRT 859350	—	440	85	93	50.5	1	90	91	TR 9311850
	—	LRTZ 859350	440	85	93	50.5	1	90	91	GTR 9311850
	LRT 859526	—	280	85	95	26	1	90	93	TAF 9511526
	LRT 859530	—	330	85	95	30	1.5	93	93.5	RNAF 9511530
	LRT 859536	—	390	85	95	36	1	90	93	TAF 9511536
	LRT 859545	—	490	85	95	45.5	1.5	93	93.5	TR 9512045
	—	LRTZ 859545	490	85	95	45.5	1.5	93	93.5	GTR 9512045
	LRT 8510035	—	575	85	100	35	1.1	91.5	98	RNA 4917
	—	LRTZ 8510036	605	85	100	36	1.1	91.5	98	RNA 4917 UU
	LRT 8510063	—	1 040	85	100	63	1.1	91.5	98	RNA 6917
	—	LRTZ 8510064	1 060	85	100	64	1.1	91.5	98	RNA 6917 UU
90	LRT 9010026	—	295	90	100	26	1	95	98	TAF 10012026
	LRT 9010030	—	355	90	100	30	1.5	98	98.5	RNAF 10012030
	LRT 9010036	—	415	90	100	36	1	95	98	TAF 10012036
	LRT 9010050	—	580	90	100	50.5	1.5	98	98.5	TR 10012550
	—	LRTZ 9010050	580	90	100	50.5	1.5	98	98.5	GTR 10012550
	LRT 9010535	—	610	90	105	35	1.1	96.5	103	RNA 4918
	—	LRTZ 9010536	630	90	105	36	1.1	96.5	103	RNA 4918 UU
	LRT 9010563	—	1 100	90	105	63	1.1	96.5	103	RNA 6918
	—	LRTZ 9010564	1 120	90	105	64	1.1	96.5	103	RNA 6918 UU
95	LRT 9510526	—	315	95	105	26	1	100	103	TAF 10512526
	LRT 9510536	—	430	95	105	36	1	100	103	TAF 10512536
	LRT 9511035	—	650	95	110	35	1.1	101.5	108	RNA 4919
	—	LRTZ 9511036	660	95	110	36	1.1	101.5	108	RNA 4919 UU
	LRT 9511063	—	1 160	95	110	63	1.1	101.5	108	RNA 6919
	—	LRTZ 9511064	1 180	95	110	64	1.1	101.5	108	RNA 6919 UU

Note(1) Minimum allowable value of chamfer dimension *r*
Remark No oil hole is provided.

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm d	F	B	$r_{s\,min}$ (1)	Standard mounting dimension mm d_a Min.	Max.	Assembled bearings
100	LRT 10011030	—	380	100	110	30	1	105	108	TAF 11013030
	LRT 10011040	—	500	100	110	40	1	105	108	TAF 11013040
	LRT 10011050	—	640	100	110	50.5	1.5	108	108.5	TR 11013550
	—	LRTZ 10011050	640	100	110	50.5	1.5	108	108.5	GTR 11013550
	LRT 10011540	—	770	100	115	40	1.1	106.5	113	RNA 4920
	—	LRTZ 10011541	780	100	115	41	1.1	106.5	113	RNA 4920 UU
105	LRT 10511550	—	670	105	115	50.5	1.5	113	113.5	TR 11515350
	—	LRTZ 10511550	670	105	115	50.5	1.5	113	113.5	GTR 11515350
110	LRT 11012030	—	410	110	120	30	1	115	118	RNA 4822
	LRT 11012540	—	840	110	125	40	1.1	116.5	123	RNA 4922
	—	LRTZ 11012541	870	110	125	41	1.1	116.5	123	RNA 4922 UU
120	LRT 12013030	—	450	120	130	30	1	125	128	RNA 4824
	LRT 12013545	—	1 030	120	135	45	1.1	126.5	133	RNA 4924
	—	LRTZ 12013546	1 050	120	135	46	1.1	126.5	133	RNA 4924 UU
125	LRT 12514060	—	1 460	125	140	60.5	1.5	133	138	TR 14017860
	—	LRTZ 12514060	1 460	125	140	60.5	1.5	133	138	GTR 14017860
130	LRT 13014535	—	860	130	145	35	1.1	136.5	143	RNA 4826
	LRT 13015050	—	1 670	130	150	50	1.5	138	148	RNA 4926
	—	LRTZ 13015051	1 720	130	150	51	1.5	138	148	RNA 4926 UU
135	LRT 13515060	—	1 560	135	150	60.5	1.5	143	148	TR 15018860
	—	LRTZ 13515060	1 560	135	150	60.5	1.5	143	148	GTR 15018860
140	LRT 14015535	—	930	140	155	35	1.1	146.5	153	RNA 4828
	LRT 14016050	—	1 790	140	160	50	1.5	148	158	RNA 4928
	—	LRTZ 14016051	1 830	140	160	51	1.5	148	158	RNA 4928 UU

Note(1) Minimum allowable value of chamfer dimension *r*
Remark No oil hole is provided.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

INNER RINGS


Inner Rings for General Usage



Shaft dia. 150 — 440mm

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm d	F	B	$r_{s\,min}$ (1)	Standard mounting dimension mm d_a Min.	Max.	Assembled bearings
150	LRT 15016540	—	1 130	150	165	40	1.1	156.5	163	RNA 4830
	LRT 15017060	—	2 290	150	170	60	2	159	168	RNA 4930
160	LRT 16017540	—	1 200	160	175	40	1.1	166.5	173	RNA 4832
	LRT 16018060	—	2 440	160	180	60	2	169	178	RNA 4932
170	LRT 17018545	—	1 420	170	185	45	1.1	176.5	183	RNA 4834
	LRT 17019060	—	2 580	170	190	60	2	179	188	RNA 4934
180	LRT 18019545	—	1 500	180	195	45	1.1	186.5	193	RNA 4836
	LRT 18020569	—	3 950	180	205	69	2	189	203	RNA 4936
190	LRT 19021050	—	2 380	190	210	50	1.5	198	208	RNA 4838
	LRT 19021569	—	4 200	190	215	69	2	199	213	RNA 4938
200	LRT 20022050	—	2 520	200	220	50	1.5	208	218	RNA 4840
	LRT 20022580	—	5 000	200	225	80	2.1	211	223	RNA 4940
220	LRT 22024050	—	2 750	220	240	50	1.5	228	238	RNA 4844
	LRT 22024580	—	5 500	220	245	80	2.1	231	243	RNA 4944
240	LRT 24026560	—	4 530	240	265	60	2	249	262	RNA 4848
	LRT 24026580	—	6 000	240	265	80	2.1	251	262	RNA 4948
260	LRT 26028560	—	4 930	260	285	60	2	269	282	RNA 4852
	LRT 260290100	—	9 900	260	290	100	2.1	271	287	RNA 4952
280	LRT 28030569	—	6 050	280	305	69	2	289	302	RNA 4856
	LRT 280310100	—	10 600	280	310	100	2.1	291	307	RNA 4956
300	LRT 30033080	—	9 100	300	330	80	2.1	311	327	RNA 4860
	LRT 300340118	—	18 000	300	340	118	3	313	337	RNA 4960
320	LRT 32035080	—	9 600	320	350	80	2.1	331	347	RNA 4864
	LRT 320360118	—	19 200	320	360	118	3	333	357	RNA 4964

Note(1) Minimum allowable value of chamfer dimension r
Remark No oil hole is provided.

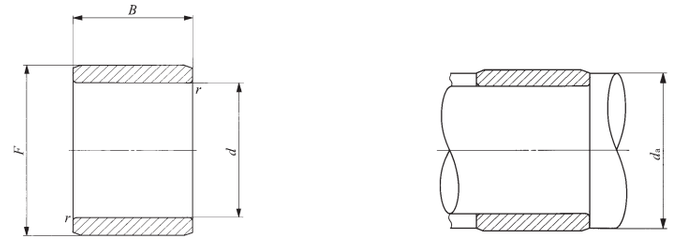

LRT

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm d	F	B	$r_{s\,min}$ (1)	Standard mounting dimension mm d_a Min.	Max.	Assembled bearings
340	LRT 34037080	—	10 200	340	370	80	2.1	351	367	RNA 4868
	LRT 340380118	—	20 300	340	380	118	3	353	377	RNA 4968
360	LRT 36039080	—	10 800	360	390	80	2.1	371	387	RNA 4872
	LRT 360400118	—	21 500	360	400	118	3	373	397	RNA 4972
380	LRT 380415100	—	16 700	380	415	100	2.1	391	412	RNA 4876
	LRT 380430140	—	33 900	380	430	140	4	396	427	RNA 4976
400	LRT 400450140	—	35 600	400	450	140	4	416	447	RNA 4980
420	LRT 420470140	—	37 300	420	470	140	4	436	467	RNA 4984
440	LRT 440490160	—	44 100	440	490	160	4	456	487	RNA 4988

Note(1) Minimum allowable value of chamfer dimension r
Remark No oil hole is provided.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

INNER RINGS


Inner Rings for General Usage Inch Series









LRB



LRBZ



LRBZ···B



Shaft dia. 9.525 — 22.225mm

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch) d	F	B	Standard mounting dimensions mm d_a Min.	d_a Max.	$r_{as\ max}$ (1) Max.	Assembled bearings
9.525 (3/8)	LRB 61012	—	18.5	9.525 (3/8)	15.875 (5/8)	19.300	14	14.5	0.6	BR 101812 GBR 101812 GBR 101816UU BR 101816UU
	—	LRBZ 61012	18.5	9.525 (3/8)	15.875 (5/8)	19.300	14	14.5	0.6	
	—	LRBZ 61016	25	9.525 (3/8)	15.875 (5/8)	25.650	14	14.5	0.6	
	—	LRBZ 61016 B	25	9.525 (3/8)	15.875 (5/8)	25.650	14	14.5	0.6	
12.700 (1/2)	LRB 81212	—	23.5	12.700 (1/2)	19.050 (3/4)	19.300	17.5	18	1	BR 122012 BR 122016 GBR 122012 GBR 122016UU BR 122016UU
	LRB 81216	—	31	12.700 (1/2)	19.050 (3/4)	25.650	17.5	18	1	
	—	LRBZ 81212	23.5	12.700 (1/2)	19.050 (3/4)	19.300	17.5	18	0.6	
	—	LRBZ 81216	31	12.700 (1/2)	19.050 (3/4)	25.650	17.5	18	0.6	
	—	LRBZ 81216 B	31	12.700 (1/2)	19.050 (3/4)	25.650	17.5	18	0.6	
15.875 (5/8)	LRB 101412	—	28	15.875 (5/8)	22.225 (7/8)	19 300	21	21.2	1	BR 142212 BR 142216 GBR 142212 GBR 142216 GBR 142216UU BR 142216UU
	LRB 101416	—	37.5	15.875 (5/8)	22.225 (7/8)	25.650	21	21.2	1	
	—	LRBZ 101412	28	15.875 (5/8)	22.225 (7/8)	19.300	21	21.2	0.6	
	—	LRBZ 101416	37.5	15.875 (5/8)	22.225 (7/8)	25.650	21	21.2	0.6	
	—	LRBZ 101416 B	37.5	15.875 (5/8)	22.225 (7/8)	25.650	21	21.2	0.6	
19.050 (3/4)	LRB 121612	—	33	19.050 (3/4)	25.400 (1)	19.300	24	24.4	1	BR 162412 BR 162416 GBR 162412 GBR 162416 GBR 162416UU BR 162416UU
	LRB 121616	—	44	19.050 (3/4)	25.400 (1)	25.650	24	24.4	1	
	—	LRBZ 121612	33	19.050 (3/4)	25.400 (1)	19.300	24	24.4	0.6	
	—	LRBZ 121616	44	19.050 (3/4)	25.400 (1)	25.650	24	24.4	0.6	
	—	LRBZ 121616 B	44	19.050 (3/4)	25.400 (1)	25.650	24	24.4	0.6	
22.225 (7/8)	LRB 141816	—	50	22.225 (7/8)	28.575 (1 1/8)	25.650	27	27.5	1	BR 182616 BR 182620 GBR 182616 GBR 182620UU BR 182620UU
	LRB 141820	—	62	22.225 (7/8)	28.575 (1 1/8)	32.000	27	27.5	1	
	—	LRBZ 141816	50	22.225 (7/8)	28.575 (1 1/8)	25.650	27	27.5	0.6	
	—	LRBZ 141820	62	22.225 (7/8)	28.575 (1 1/8)	32.000	27	27.5	0.6	
	—	LRBZ 141820 B	62	22.225 (7/8)	28.575 (1 1/8)	32.000	27	27.5	0.6	

Note(1) Maximum allowable fillet corner radius of shaft
Remark LRBZ has no oil hole. LRB and LRBZ···B are provided with an oil groove and an oil hole.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

INNER RINGS


Inner Rings for General Usage Inch Series









LRB



LRBZ



LRBZ···B



Shaft dia. 25.400 — 38.100mm

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch) d	F	B	Standard mounting dimensions mm da Min.	da Max.	ras max (1) Max.	Assembled bearings
25.400 (1)	LRB 162016	—	56	25.400 (1)	31.750 (1 1/4)	25.650	30.5	30.7	1	BR 202816
	LRB 162020	—	72	25.400 (1)	31.750 (1 1/4)	32.000	30.5	30.7	1	BR 202820
	—	LRBZ 162016	56	25.400 (1)	31.750 (1 1/4)	25.650	30.5	30.7	0.6	GBR 202816
	—	LRBZ 162020	72	25.400 (1)	31.750 (1 1/4)	32.000	30.5	30.7	0.6	GBR 202820UU
	—	LRBZ 162020 B	72	25.400 (1)	31.750 (1 1/4)	32.000	30.5	30.7	0.6	BR 202820UU
28.575 (1 1/8)	LRB 182216	—	63	28.575 (1 1/8)	34.925 (1 3/8)	25.650	33.5	33.9	1	BR 223016
	LRB 182220	—	77	28.575 (1 1/8)	34.925 (1 3/8)	32.000	33.5	33.9	1	BR 223020
	—	LRBZ 182216	63	28.575 (1 1/8)	34.925 (1 3/8)	25.650	33.5	33.9	0.6	GBR 223016
	—	LRBZ 182220	77	28.575 (1 1/8)	34.925 (1 3/8)	32.000	33.5	33.9	0.6	GBR 223020UU
	—	LRBZ 182220 B	77	28.575 (1 1/8)	34.925 (1 3/8)	32.000	33.5	33.9	0.6	BR 223020UU
31.750 (1 1/4)	LRB 202416	—	71	31.750 (1 1/4)	38.100 (1 1/2)	25.650	37	37.1	1.5	BR 243316
	LRB 202420	—	86	31.750 (1 1/4)	38.100 (1 1/2)	32.000	37	37.1	1.5	BR 243320
	—	LRBZ 202416	71	31.750 (1 1/4)	38.100 (1 1/2)	25.650	37	37.1	0.6	GBR 243316
	—	LRBZ 202420	86	31.750 (1 1/4)	38.100 (1 1/2)	32.000	37	37.1	0.6	GBR 243320 GBR 243320UU
	—	LRBZ 202420 B	86	31.750 (1 1/4)	38.100 (1 1/2)	32.000	37	37.1	0.6	BR 243320UU
34.925 (1 3/8)	LRB 222616	—	77	34.925 (1 3/8)	41.275 (1 5/8)	25.650	40.2	40.2	1.5	BR 263516
	LRB 222620	—	96	34.925 (1 3/8)	41.275 (1 5/8)	32.000	40.2	40.2	1.5	BR 263520
	—	LRBZ 222616	77	34.925 (1 3/8)	41.275 (1 5/8)	25.650	40.2	40.2	0.6	GBR 263516
	—	LRBZ 222620	96	34.925 (1 3/8)	41.275 (1 5/8)	32.000	40.2	40.2	0.6	GBR 263520 GBR 263520UU
	—	LRBZ 222620 B	96	34.925 (1 3/8)	41.275 (1 5/8)	32.000	40.2	40.2	0.6	BR 263520UU
38.100 (1 1/2)	LRB 242816	—	80	38.100 (1 1/2)	44.450 (1 3/4)	25.650	43.3	43.4	1.5	BR 283716
	LRB 242820	—	100	38.100 (1 1/2)	44.450 (1 3/4)	32.000	43.3	43.4	1.5	BR 283720 BR 283820
	LRB 243020	—	155	38.100 (1 1/2)	47.625 (1 7/8)	32.000	43.3	45	1.5	BR 303920
	—	LRBZ 242820	100	38.100 (1 1/2)	44.450 (1 3/4)	32.000	43.3	43.4	0.6	GBR 283720 GBR 283820 GBR 283720UU
	—	LRBZ 242820 B	100	38.100 (1 1/2)	44.450 (1 3/4)	32.000	43.3	43.4	0.6	BR 283720UU
	—	LRBZ 243020	160	38.100 (1 1/2)	47.625 (1 7/8)	32.000	43.3	45	1	GBR 303920 GBR 303920UU
	—	LRBZ 243020 B	160	38.100 (1 1/2)	47.625 (1 7/8)	32.000	43.3	45	1	BR 303920UU

Note(1) Maximum allowable fillet corner radius of shaft
Remark LRBZ has no oil hole. LRB and LRBZ···B are provided with an oil groove and an oil hole.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

INNER RINGS


Inner Rings for General Usage Inch Series









LRB



LRBZ



LRBZ···B



Shaft dia. 41.275 — 63.500mm

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch) d	F	B	Standard mounting dimensions mm da Min.	da Max.	ras max (1) Max.	Assembled bearings
41.275 (1 5/8)	LRB 263216	—	135	41.275 (1 5/8)	50.800 (2)	25.650	48	49	1.5	BR 324116
	LRB 263220	—	170	41.275 (1 5/8)	50.800 (2)	32.000	48	49	1.5	BR 324120
	—	LRBZ 263216	135	41.275 (1 5/8)	50.800 (2)	25.650	48	49	1	GBR 324116
	—	LRBZ 263220	170	41.275 (1 5/8)	50.800 (2)	32.000	48	49	1	GBR 324120 GBR 324120UU
	—	LRBZ 263220 B	170	41.275 (1 5/8)	50.800 (2)	32.000	48	49	1	BR 324120UU
44.450 (1 3/4)	LRB 283624	—	300	44.450 (1 3/4)	57.150 (2 1/4)	38.350	52.5	55	1.5	BR 364824
	LRB 283628	—	345	44.450 (1 3/4)	57.150 (2 1/4)	44.700	52.5	55	1.5	BR 364828
	—	LRBZ 283624	300	44.450 (1 3/4)	57.150 (2 1/4)	38.350	52.5	55	1.5	GBR 364824
	—	LRBZ 283628	345	44.450 (1 3/4)	57.150 (2 1/4)	44.700	52.5	55	1.5	GBR 364828 GBR 364828UU
	—	LRBZ 283628 B	345	44.450 (1 3/4)	57.150 (2 1/4)	44.700	52.5	55	1.5	BR 364828UU
50.800 (2)	LRB 324024	—	335	50.800 (2)	63.500 (2 1/2)	38.350	58	61	2	BR 405224
	LRB 324028	—	390	50.800 (2)	63.500 (2 1/2)	44.700	58	61	2	BR 405228
	—	LRBZ 324024	335	50.800 (2)	63.500 (2 1/2)	38.350	58	61	1.5	GBR 405224
	—	LRBZ 324028	390	50.800 (2)	63.500 (2 1/2)	44.700	58	61	1.5	GBR 405228 GBR 405228UU
	—	LRBZ 324028 B	390	50.800 (2)	63.500 (2 1/2)	44.700	58	61	1.5	BR 405228UU
57.150 (2 1/4)	LRB 364424	—	375	57.150 (2 1/4)	69.850 (2 3/4)	38.350	65	67	2	BR 445624
	LRB 364428	—	440	57.150 (2 1/4)	69.850 (2 3/4)	44.700	65	67	2	BR 445628
	—	LRBZ 364424	375	57.150 (2 1/4)	69.850 (2 3/4)	38.350	65	67	1.5	GBR 445624
	—	LRBZ 364428	440	57.150 (2 1/4)	69.850 (2 3/4)	44.700	65	67	1.5	GBR 445628 GBR 445628UU
	—	LRBZ 364428 B	440	57.150 (2 1/4)	69.850 (2 3/4)	44.700	65	67	1.5	BR 445628UU
63.500 (2 1/2)	LRB 404824	—	410	63.500 (2 1/2)	76.200 (3)	38.350	71	73	2	BR 486024
	LRB 404828	—	480	63.500 (2 1/2)	76.200 (3)	44.700	71	73	2	BR 486028
	—	LRBZ 404824	410	63.500 (2 1/2)	76.200 (3)	38.350	71	73	1.5	GBR 486024
	—	LRBZ 404828	480	63.500 (2 1/2)	76.200 (3)	44.700	71	73	1.5	GBR 486028 GBR 486028UU
	—	LRBZ 404828 B	480	63.500 (2 1/2)	76.200 (3)	44.700	71	73	1.5	BR 486028UU

Note(1) Maximum allowable fillet corner radius of shaft
Remark LRBZ has no oil hole. LRB and LRBZ···B are provided with an oil groove and an oil hole.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

INNER RINGS


Inner Rings for General Usage Inch Series









LRB



LRBZ



LRBZ···B



Shaft dia. 69.850 — 95.250mm

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch) d	F	B	Standard mounting dimensions mm da Min.	da Max.	ras max (1) Max.	Assembled bearings
69.850 (2 3/4)	LRB 445228	—	530	69.850 (2 3/4)	82.550 (3 1/4)	44.700	77	79	2	BR 526828
	LRB 445232	—	600	69.850 (2 3/4)	82.550 (3 1/4)	51.050	77	79	2	BR 526832
	—	LRBZ 445228	530	69.850 (2 3/4)	82.550 (3 1/4)	44.700	77	79	1.5	GBR 526828 GBR 526828UU
	—	LRBZ 445228 B	530	69.850 (2 3/4)	82.550 (3 1/4)	44.700	77	79	1.5	BR 526828UU
	—	LRBZ 445232	600	69.850 (2 3/4)	82.550 (3 1/4)	51.050	77	79	1.5	GBR 526832
76.200 (3)	LRB 485632	—	640	76.200 (3)	88.900 (3 1/2)	51.050	83.5	86	2	BR 567232
	—	LRBZ 485632	640	76.200 (3)	88.900 (3 1/2)	51.050	83.5	86	1.5	GBR 567232 GBR 567232UU
	—	LRBZ 485632 B	640	76.200 (3)	88.900 (3 1/2)	51.050	83.5	86	1.5	BR 567232UU
82.550 (3 1/4)	LRB 526032	—	690	82.550 (3 1/4)	95.250 (3 3/4)	51.050	91	93	2.5	BR 607632
	—	LRBZ 526032	690	82.550 (3 1/4)	95.250 (3 3/4)	51.050	91	93	1.5	GBR 607632 GBR 607632UU
	—	LRBZ 526032 B	690	82.550 (3 1/4)	95.250 (3 3/4)	51.050	91	93	1.5	BR 607632UU
88.900 (3 1/2)	LRB 566432	—	750	88.900 (3 1/2)	101.600 (4)	51.050	97	99	2.5	BR 648032
	—	LRBZ 566432	750	88.900 (3 1/2)	101.600 (4)	51.050	97	99	1.5	GBR 648032 GBR 648032UU
95.250 (3 3/4)	—	LRBZ 606832	800	95.250 (3 3/4)	107.950 (4 1/4)	51.050	103	105	1.5	GBR 688432 GBR 688432UU

Note(1) Maximum allowable fillet corner radius of shaft

Remark LRBZ has no oil hole. LRB with inner ring bore diameter d of 76.200 mm or less and LRBZ···B are provided with an oil groove and an oil hole.
Other models are provided with an oil groove and two oil holes.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

CAM FOLLOWERS

- Standard Type Cam Followers
- Solid Eccentric Stud Type Cam Followers
- Eccentric Type Cam Followers
- Thrust Disk Type Cam Followers
- Capilube Cam Followers
- Centralized Lubrication Type Cam Followers
- Easy Mounting Type Cam Followers
- Heavy Duty Type Cam Followers
- Miniature Type Cam Followers
- Thrust Disk Type Miniature Cam Followers




Structure and Features


IKO Cam Followers are bearings with a stud incorporating needle rollers in a thick walled outer ring. These bearings are designed for outer ring rotation, and have superior rotational performance with a small coefficient of friction and high load capacity.
As studs already have threads or steps, they are easy to mount.
Cam Followers are follower bearings for cam mechanisms and linear motions and have high rigidity and high accuracy. They are, therefore, used widely for machine tools, industrial robots, electronic devices, and OA equipment.
Stainless steel made Cam Followers are superior in corrosion resistance and suitable for applications in environments where oil cannot be used or water splashed, and in clean rooms.

Structure of Cam Followers


Structure of Standard Type Cam Follower(1)
CF···BUU




Structure of Thrust Disk Type Cam Follower
CF···WBUUR




Structure of Capilube Cam Follower(2)
CF···WBUUR/SG



Structure of Heavy Duty Type Cam Follower
NUCF···BR



Structure of Miniature Type Cam Follower
CFS



Note(1) In case of the stud diameter (d_1) 5 to 10mm, a lubrication fitting is provided in the stud head hex hole. The stud diameter (d_1) 12 to 30mm, a grease nipple is provided in the stud head hex hole.
(2) For the detail of Capilube, please refer page A55.