



# Trimble® Earthworks Soil Compactor

**For SITECH Only**

Version 2.24.x  
Revision A  
March 2026

# Contents

|          |                                                                          |           |
|----------|--------------------------------------------------------------------------|-----------|
| <b>1</b> | <b>Soil compactor commissioning checklists</b>                           | <b>4</b>  |
| 1.1      | Checklist—Configuring a system                                           | 5         |
| <b>2</b> | <b>Soil compactor measure-up best practices guide</b>                    | <b>7</b>  |
| 2.1      | Overview of compactor measure-up                                         | 7         |
| 2.1.1    | Purpose of this guide                                                    | 7         |
| 2.1.2    | Compactor measure-up specifics                                           | 7         |
| 2.1.3    | Prerequisites                                                            | 8         |
| 2.1.4    | Measure-up workflow                                                      | 8         |
| 2.1.5    | Equipment list                                                           | 8         |
| 2.1.6    | Machine setup                                                            | 9         |
| 2.2      | Preparing for measure-up                                                 | 9         |
| 2.2.1    | Overview                                                                 | 9         |
| 2.2.2    | Set up the machine for measurement                                       | 9         |
| 2.3      | Mark measure-up points                                                   | 9         |
| 2.3.1    | Introduction                                                             | 9         |
| 2.3.2    | Best practices                                                           | 9         |
| 2.3.3    | Mark measurement points                                                  | 9         |
| 2.4      | Position the total station instrument                                    | 14        |
| 2.5      | Measure-up                                                               | 14        |
| 2.5.1    | Overview                                                                 | 14        |
| 2.5.2    | Measurement workflow                                                     | 15        |
| 2.5.3    | Measure the drum                                                         | 15        |
| 2.5.4    | Measure the padfoot height (if applicable)                               | 15        |
| 2.5.5    | Measure the position of the EC520                                        | 16        |
| 2.5.6    | Entering the values into the Measure-up section in the Web Interface     | 17        |
| 2.6      | Using a USB flash drive to transfer measure-up data in .csv format       | 18        |
| 2.6.1    | Prerequisites                                                            | 18        |
| 2.6.2    | Exporting the machine measurements as a .csv file                        | 18        |
| 2.6.3    | If required, edit the .csv file                                          | 18        |
| 2.6.4    | Import the .csv file into the Web Interface                              | 19        |
| <b>3</b> | <b>Soil compactor measure-up and sensor calibration validation guide</b> | <b>20</b> |
| 3.1      | Overview of compactor measure-up and sensor calibration validation       | 20        |
| 3.1.1    | Purpose of this guide                                                    | 20        |
| 3.1.2    | Prerequisites                                                            | 20        |
| 3.1.3    | Equipment list                                                           | 21        |
| 3.2      | Check horizontal guidance on the level                                   | 21        |
| 3.2.1    | Check                                                                    | 21        |
| 3.2.2    | Corrective action                                                        | 21        |
| 3.3      | Check horizontal guidance on a slope                                     | 22        |
| 3.3.1    | Check                                                                    | 22        |
| 3.3.2    | Corrective action                                                        | 22        |
| 3.4      | Validating the compaction sensor                                         | 22        |

|       |                                             |    |
|-------|---------------------------------------------|----|
| 3.4.1 | Prerequisite .....                          | 22 |
| 3.4.2 | Check .....                                 | 22 |
| 3.4.3 | Corrective action .....                     | 22 |
| 3.5   | Validating the machine ECM connection ..... | 23 |
| 3.5.1 | Prerequisite .....                          | 23 |
| 3.5.2 | Check .....                                 | 23 |
| 3.5.3 | Corrective action .....                     | 23 |
| 3.6   | Save and activate machine files .....       | 24 |
| 3.6.1 | Save a machine file .....                   | 24 |
| 3.6.2 | Activate, or restore, a machine file .....  | 24 |
| 4     | Notices .....                               | 26 |

# Soil compactor commissioning checklists

## In this guide:

- ▶ [Checklist—Configuring a system](#)

## 1.1 Checklist—Configuring a system

- ☐ Connect all system components:
  - EC520
  - Display
  - GNSS receivers
  - MT900 target (optional)
  - CM310 compaction sensor (optional)
  - Remote switch (optional)
  - Internet gateway (optional)
  - Radio (optional)
- ☐ Complete the EC520 firmware installation as per the release notes.
- ☐ Turn on the ignition to start the display.
- ☐ Confirm that the display's date and time are correct. To change the date and time, open Settings > System > Date & Time > Time Zone and select the correct time zone.
- ☐ Tap the Web Interface icon and log in.
- ☐ If this is the first Web Interface log in:
  - set an admin password
  - configure Wi-Fi
  - complete the setup section of the Install Assistant
- ☐ If this is a subsequent Web Interface login – the home page opens.
- ☐ Open Advanced > Licenses and apply a core bundle license.
- ☐ Open Configure > Install Assistant and complete each section. Use a TD5x0 or Wi-Fi BYOD display to perform valve calibrations.
- ☐ Select Network > GNSS Correction Source and select a correction source.
- ☐ Select Monitor > GNSS Details and check the GNSS receiver.
- ☐ Close the Web Interface, open the Operator App, log in and log out again. If the Operator App launcher is not installed, use MC Installer to install it.
- ☐ Open the Web Interface's Advanced > Licenses screen and apply the remaining module licenses to the display.
- ☐ If you have a WorksManager/Connected Community subscription:
  - Select Network > Cloud Services; set up WorksManager/Connected Community.
  - Upload project files to WorksManager/Connected Community to sync to the machine.
  - Select Operation > Projects and set up the interval the EC520 synchronizes with WorksManager/Connected Community.
- ☐ Close the Web Interface again, and re-open the Operator App.
- ☐ If you are using a USB flash drive to transfer project files onto the system, insert and transfer from the USB flash drive to the machine.

## 1 Soil compactor commissioning checklists

- ☐ Confirm that all tiles on the Dashboard are not red. The Start button is then enabled, and tapping the button opens the work screen.
- ☐ Touch and hold on the text ribbon to configure the text items.
- ☐ Confirm that 3D guidance is correct: confirm the Northing, Easting and Elevation position at the Focus tip.

Test the system gives accurate position while working on a design.

# Soil compactor measure-up best practices guide

## In this guide:

- ▶ Overview of compactor measure-up
- ▶ Preparing for measure-up
- ▶ Mark measure-up points
- ▶ Position the total station instrument
- ▶ Measure-up
- ▶ Using a USB flash drive to transfer measure-up data in .csv format

## 2.1 Overview of compactor measure-up

### 2.1.1 Purpose of this guide

This guide supports the precision measure-up of the compactor body and guidance components as part of the configuration of a Trimble® Earthworks compactor system.

The measure-up procedure generates the measured values entered into the Measure-up section of the Web Interface's Configure > Install Assistant screen. Sensor data is taken while the Measure-up section screens are completed, so it is critical that the machine is in the measure-up position both when the points are measured *and* when the values are entered into the Measure-up section.

The measure-up procedure requires the use of a total station instrument to achieve the measurement accuracies needed for accurate positioning.

### 2.1.2 Compactor measure-up specifics

If you intend to use the compactor with single GNSS and dual GNSS, you require a separate measure-up and hence a separate machine file for each configuration. If the operator will switch between configurations, they will need to be able to load machine files so they will require Operator Plus permission. However, you can switch between UTS and single GNSS guidance within the same machine file.

If you are measuring up the system for UTS guidance, in the Web Interface's Configure > Install Assistant > Setup section select the Mount for Quick Release option. Remove the

MT9xx target and place the measure-up tool on the short mast mount. You cannot place the measure-up tool on top of an MT9xx target.

### 2.1.3 Prerequisites

Before starting the compactor measure-up:

- Know how to set up and use a total station, for example a Trimble TS/SPS Series total station or a Nikon M Series total station.
- Know how to use SCS900/Siteworks Site Controller software, or the total station's on-board software.
- Install the cab and body components, and validate the installation.
- Complete the preceding sections of the Web Interface's Configure > Install Assistant screen.
- Review this entire guide. This ensures that you understand the full measure-up workflow.

### 2.1.4 Measure-up workflow

1. Prepare for the measure-up:
  - a. Position the machine.
  - b. Mark all measurement points.
  - c. Place the measure-up targets on the marked points.
  - d. Position the total station.
2. Measure the position of all points.
3. Complete the Measure-up section of the Install Assistant to enter the point positions and take the sensor readings.
4. Remove the measure-up targets.

### 2.1.5 Equipment list

- Total station, in good adjustment, and with a charged battery
- If required, a data collector with a charged battery, and software
- Measure-up target kit (P/N 105568)
- Cleaner/de-greaser
- Cleaning rags
- Marker pen – choose a color easily visible against the frame of the compactor
- Self-adhesive or magnetic acrylic targets (do not use DR measurement mode, it does not provide the accuracy of measurement required)
- Scissors
- Straight edge
- Digital level
- Tape measure
- These instructions



### 2.1.6 Machine setup

Before proceeding with the measure-up process, ensure the EC520 is mounted per the installation instructions. If it is mounted in a different position or orientation, the accuracy of the system will be compromised.

If the EC520 is moved or replaced at any time, you must perform the Measure-up section of the Install Assistant again.

## 2.2 Preparing for measure-up

### 2.2.1 Overview

A precision measure-up requires:

- A stable, flat pad for the machine
- A stable, safe position for the total station instrument

### 2.2.2 Set up the machine for measurement

#### Machine position

Park the machine on a level, smooth, hard surface.

#### Drum position

Ensure there is no articulation, so the drum is approximately square to the machine.

## 2.3 Mark measure-up points

### 2.3.1 Introduction

This section describes how and where to attach the acrylic targets for the total station to measure.

**NOTE** – Do not use DR measurement mode. Always measure to acrylic targets to get an accurate measure-up.


### 2.3.2 Best practices

**NOTE** – Position targets accurately. Your measurements cannot be more accurate than your target positions.


- *Clean* all measurement points.
- *Mark* all measurement points with an acrylic target.
- *Label* all measurement points with the point ID. Write the ID beside the target so you can see it through the instrument.

### 2.3.3 Mark measurement points

This section shows how to place the targets to perform a compactor measure-up.

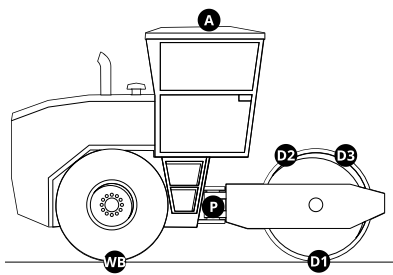

Single Guidance Sensor

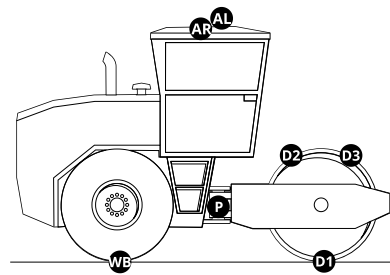


Dual Guidance Sensor

### Drum (D1, D2 and D3)


1. Place an acrylic target on the rim of the drum at its lowest point so the target crosshairs mark where the drum pad meets the ground. This is point D1.
2. Place 2 more targets on the drum rim, at approximately evenly spaced distances. Point D2 is behind the drum axle and point D3 is in front of the drum axle.

Ensure that the 3 points are all on the same plane. Together, these 3 points enable the system to calculate the position and diameter of the drum.

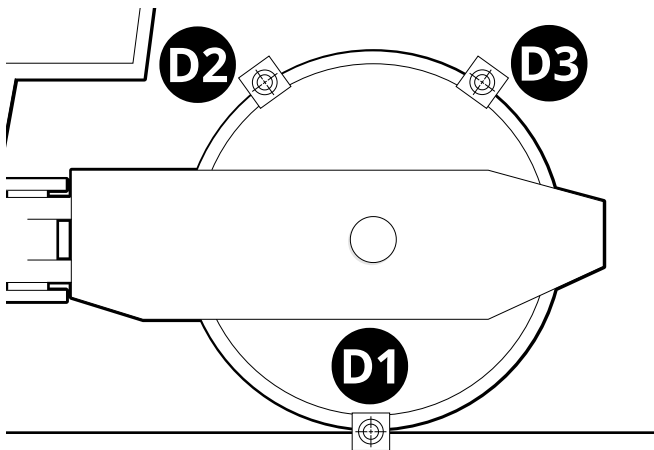

### Pivot point (P)


Place a target (point P) on the pivot point. Ensure the target crosshairs mark the axis of articulation in the machine's forward/back direction. It is acceptable for the target to be closer to the total station than the axis of articulation.

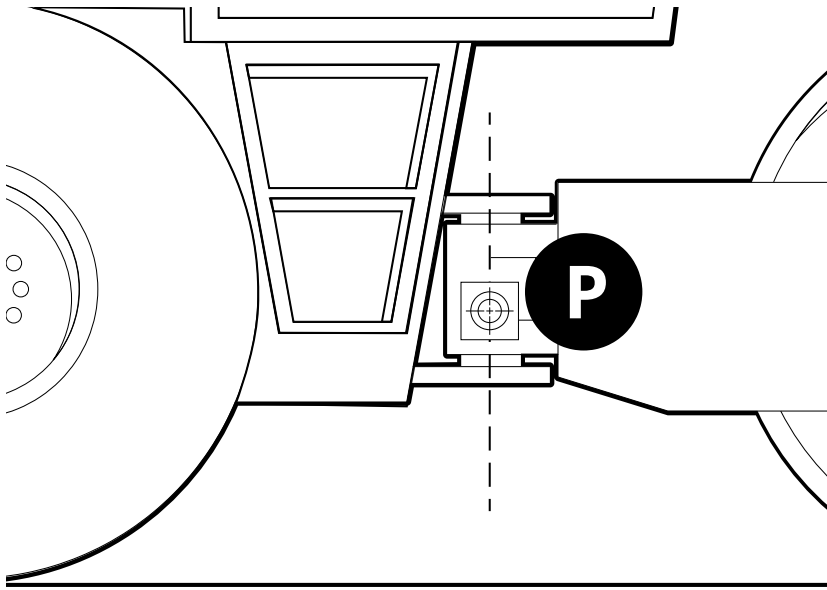

### Base of rear wheel (WB)

Place a target (point WB) on the lowest point on the rear wheel so the crosshairs mark where the wheel contacts the ground.

The accurate positioning of targets WB and D1 is important to ensure the body sensor mainfall is accurately calibrated.



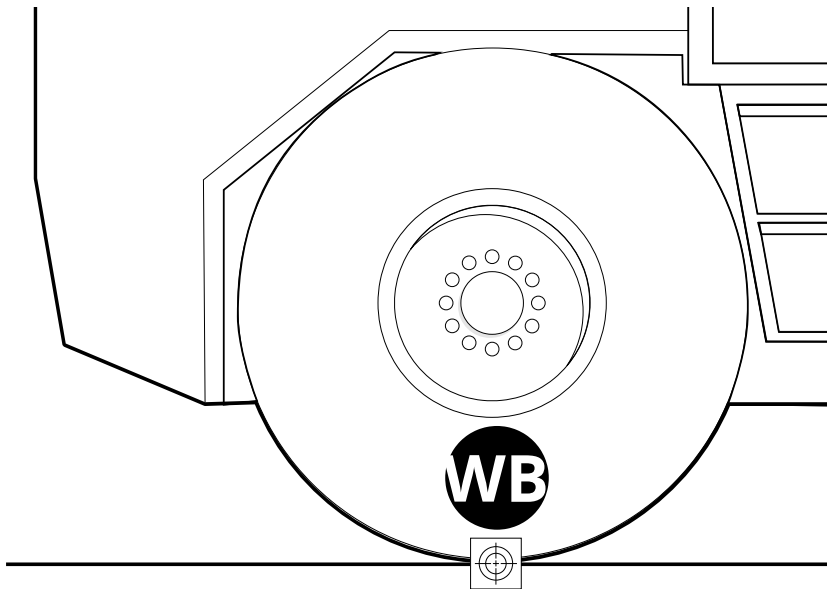


### GNSS receiver/antenna position (A, or AL and AR)

Use a measure-up target kit (105568) to measure the position of the cab-mounted GNSS receivers or antennas.




In the Setup section, you can select whether the target is sitting on a GNSS receiver or on a quick-release mast.

To measure up on top of a fixed mount GNSS receiver:
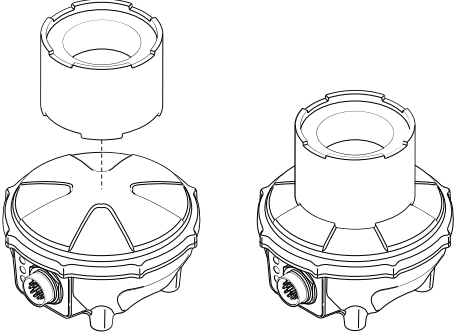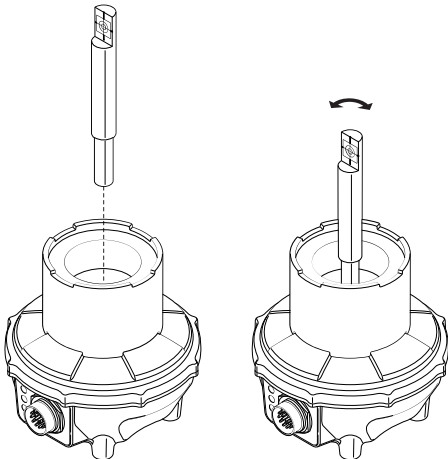
| Steps                                                                               | Description                                                                                                                                                                                                                                                                 |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | <p>Mount the base on top of the GNSS receiver or antenna radome you are going to measure.</p> <p>The base should fit securely onto the features of the radome. If the base does not engage the radome features securely, flip the base over, and try to mount it again.</p> |
|   | <p>Remove the paper backing from the 25 mm acrylic target, exposing the adhesive.</p> <p>Place the target onto the rod. Smooth out the acrylic target to ensure good adhesion.</p> <p><b>NOTE</b> - The 60 mm acrylic target is not used.</p>                               |
|  | <p>Insert the target rod into the base.</p> <p>Rotate the rod so the acrylic target faces the expected position of the total station.</p>                                                                                                                                   |


## 2 Soil compactor measure-up best practices guide

To measure up on the quick-release mast:
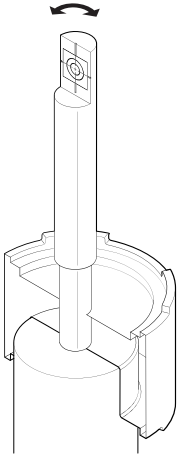
| Steps                                                                               | Description                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | Mount the base on top of the mast.<br>The base should fit securely. If not, flip the base over and try to mount it again.                                                                                                      |
|   | Remove the paper backing from the 25 mm acrylic target, exposing the adhesive.<br>Place the target onto the rod. Smooth out the acrylic target to ensure good adhesion.<br><b>NOTE</b> – The 60 mm acrylic target is not used. |
|  | Insert the target rod into the base. The rod must be approximately vertical.<br>Rotate the rod to face the expected position of the instrument.                                                                                |
|                                                                                     | Repeat this process for the second mast if necessary.                                                                                                                                                                          |

## 2.4 Position the total station instrument

- Place the tripod on the right-hand side of the machine. You may perform the measure-up from the left, but the right side is recommended.
- Position the instrument approximately two machine lengths from the machine, ensuring that you can see all of the points through the instrument. If any targets are hidden, move the instrument.
- Ensure that the maximum horizontal angle between any acrylic target being measured and the total station is less than approximately 30°.

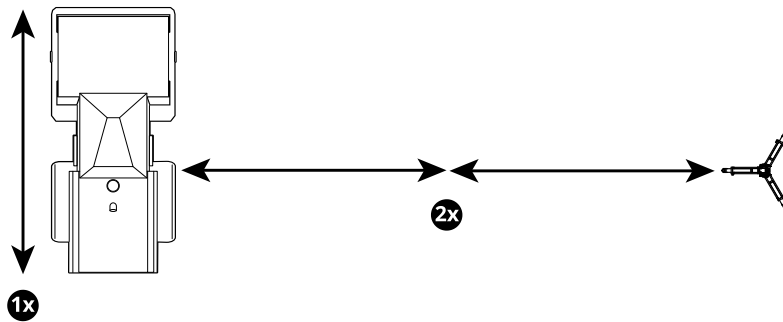

## 2.5 Measure-up

### 2.5.1 Overview

This section provides a general outline that enables technicians experienced with Trimble SCS900/Siteworks, or the total station's on-board software, to use a total station instrument to perform a compactor measure-up.

**NOTE** –Make sure the instrument you are using is within adjustment. Instrument adjustment can be performed on some models with SCS900/Siteworks if required, or by a SITECH® service center. An instrument that is not within adjustment may not provide accurate measurement results.

**TIP** – Use a USB flash drive to transfer measured points from the total station onto the system.

To use this method:

- To enable checking, before you begin the measure-up, make sure that the data collector is set to use the same measurement units and the same coordinate order as set in the Web Interface.
- Name the measured points as they are named in the Measure-up section of the Install Assistant.

For more information, see [Using a USB flash drive to transfer measure-up data in .csv format](#).

### 2.5.2 Measurement workflow

1. Establish a position for the instrument.

**TIP** – Use short coordinates to avoid having to enter extra digits in the Measure-up section in the Web Interface. For example, use Northing = 50, Easting = 30, Elevation = 10 for the instrument position.

2. Measure all measurement points.


**NOTE** –The Target Height for the A measurements must be *0.00*.

3. Enter the measured coordinate values for each point into the fields in the Enter Coordinates screens in the Web Interface's Configure > Install Assistant > Measure-up section.

**WARNING** –Moving a machine with a GNSS measure-up tool attached can dislodge the tool from the machine. Always remove and store removable measure-up tools prior to moving the machine. Only move the machine when instructed in the Measure-up section. When the measured coordinate values are entered, the machine must be in the same position it was in when the measurements were taken.

### 2.5.3 Measure the drum

Use a tape measure to measure the width of the drum.

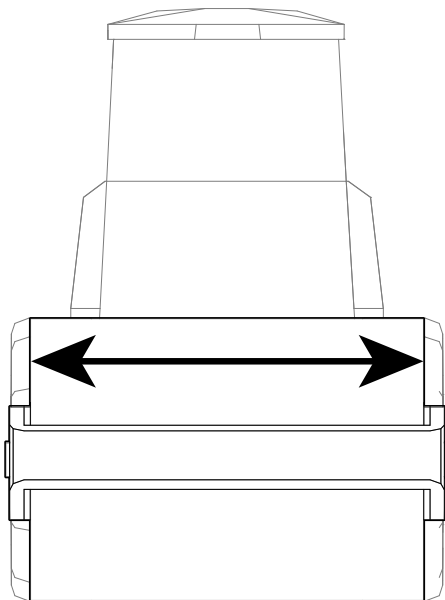


### 2.5.4 Measure the padfoot height (if applicable)

If the machine is equipped with a padfoot drum, use a tape measure to measure the height from the drum to the top of a padfoot. Measure from the surface of the drum, as marked

by points D1, D2 and D3.

The padfoot height contributes to the calculations so ensure the measurement is accurate.

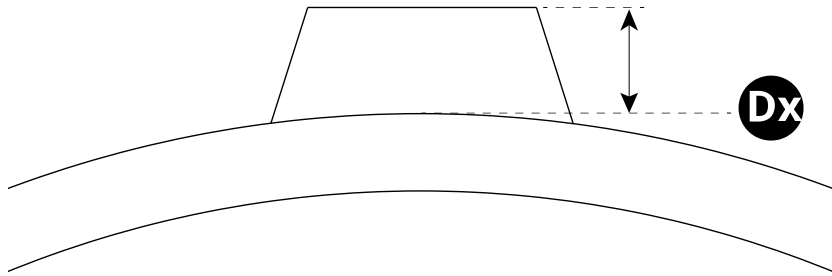

If the machine does not have a padfoot drum, enter 0.000.


### 2.5.5 Measure the position of the EC520

**NOTE** –This step is only required for dual GNSS configurations.

When measuring the position, measure to the approximate center point on the top side of the EC520. The accuracy required for these measurements is  $\pm 0.300$  m (1 foot).


The EC520 position is measured:

- From the pivot (P) for the X dimension (left or right of the centerline). This value can be positive or negative. If the EC520 is to the right of the pivot point, the value is positive.
- From the pivot (P) for the Y dimension (forward or behind the pivot). This value can be positive or negative. If the EC520 is installed behind the pivot point, the value is negative.

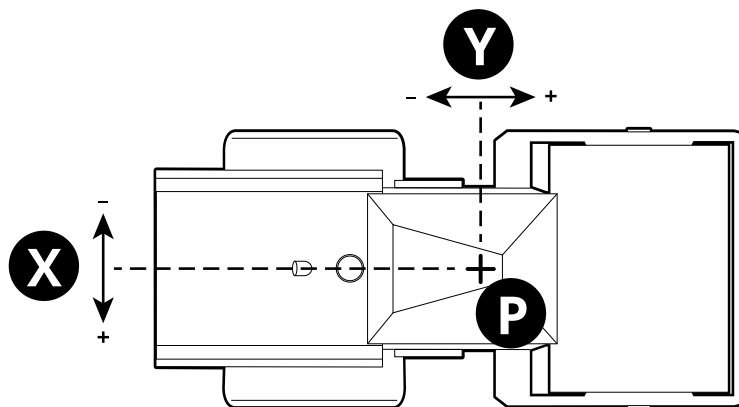



- From the ground for the Z dimension (above or below the pivot). This is always a positive value.

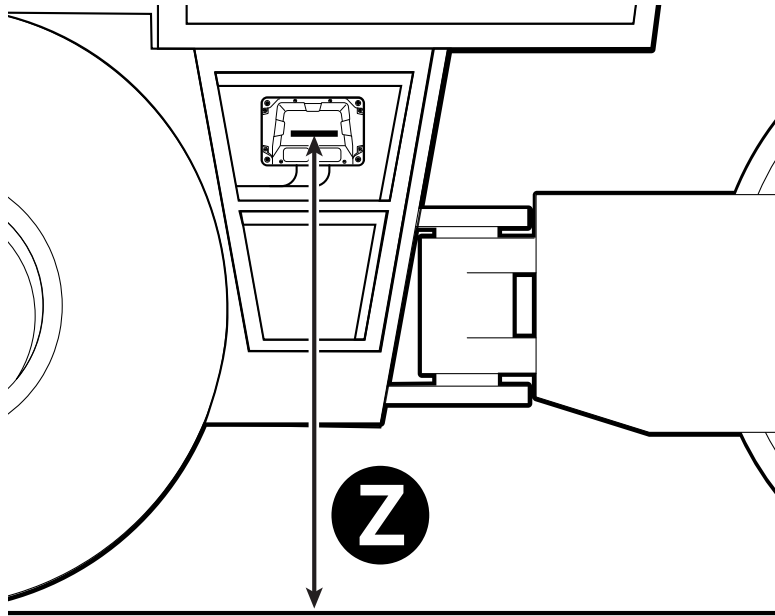

### 2.5.6 Entering the values into the Measure-up section in the Web Interface

Consider the following tips:

- Set your coordinate order in the Web Interface's Units dialog first to match your measured point coordinate order in SCS900/Siteworks.
- If sitting in the cab to enter the measured coordinates, lock out the hydraulics to avoid accidentally moving the attachment.
- If using your laptop to enter the measured coordinates, you can select E, N, Elv at the same time for each measured point in a CSV file exported from SCS900/Siteworks and paste all three at the same time into the first field for each point in the Web Interface Measure-up sequences. This can increase the accuracy of data entry and decrease the time taken.
- If the measure-up fails on the Save step and the message, "Measure-up calculations failed. Check the measure-up values and readings, then try again." displays, the distance between two measured points is greater than the range specified in the software. Check that all measured values are entered correctly and accurately.

## 2.6 Using a USB flash drive to transfer measure-up data in .csv format

You can export comma separated value (.csv) files from most common survey data collectors onto a USB flash drive. You can edit .csv files using a text editor, or by opening the .csv file in a product such as Microsoft® Excel.

**TIP** – For technicians working in regions where it is common for .csv files to use semicolons to separate fields, and commas as decimal fraction markers, then the Web Interface .csv import tool is also able to import these .csv files.

When formatted correctly, as described below, the .csv file can be imported into the Web Interface from the USB flash drive, reducing the amount of manual data entry required during machine commissioning.

### 2.6.1 Prerequisites

1. The measurements were made using a data collector running software capable of exporting .csv files.
2. The measurement units configured in the data collector are the same as the measurement units used in the Measure-up section of the Install Assistant.
3. The measured points are named as shown in the Measure-up section of the Install Assistant.

### 2.6.2 Exporting the machine measurements as a .csv file

On the data collector used to make the machine measurements, export the measured points to a USB flash drive in the usual way. If you are using Trimble SCS900 or Trimble Siteworks software on your data collector, make sure you select Include QA Data in the Export dialog, and select Memory Card as the destination.

### 2.6.3 If required, edit the .csv file

The final .csv file should resemble the example below when it is opened in a spreadsheet editor. This example shows a typical set of measurements.

The column headings must be:

- In English.
- Spelled as shown.
- Capitalized as shown.

**NOTE** –The order of the columns and point measurements is not important. You can change the coordinate order for your project to suit the region, and you can measure the points in any order.

If you are editing the .csv file in a text editor, then the contents can look like:

```
Point Name,Northing,Easting,Elevation
```

If you are editing a semicolon separated .csv file in a text editor, then the contents can look like:

```
Point Name;Northing;Easting;Elevation
```

When you save the edited file, you must save it as a .csv file.

### 2.6.4 Import the .csv file into the Web Interface

1. Insert the USB flash drive into the device running the Web Interface.
2. Proceed through the Web Interface's Install Assistant > Measure-up section as usual until you reach the .csv file upload screen.

**TIP** – If you choose the Skip to Entry option when it is offered, you will still have an opportunity to upload your .csv file.

3. In the .csv file upload screen, browse to the required file.
4. Select the Upload button. The file is uploaded and the measured points in the .csv file are copied into the Web Interface.
5. Proceed through the subsequent screens and confirm that the point data has been correctly imported.

**NOTE** – After measuring the points, the machine *must not be moved* until the .csv file import completes, and all the screens in the Measure-up section have been completed.

# Soil compactor measure-up and sensor calibration validation guide

## In this guide:

- ▶ Overview of compactor measure-up and sensor calibration validation
- ▶ Check horizontal guidance on the level
- ▶ Check horizontal guidance on a slope
- ▶ Validating the compaction sensor
- ▶ Validating the machine ECM connection
- ▶ Save and activate machine files

## 3.1 Overview of compactor measure-up and sensor calibration validation

### 3.1.1 Purpose of this guide

This guide supports the validation of the compactor measure-up and sensor calibration as part of the commissioning of a new system.

The validation procedures enable you to:

- [3.2 Check horizontal guidance on the level](#)
- [3.3 Check horizontal guidance on a slope](#)

You can perform the checks in any order.

If the required accuracy is not achieved, the procedures describe diagnostic methods for identifying issues.

### 3.1.2 Prerequisites

Before starting the compactor measure-up and sensor calibration validation:

- Install the cab components and GNSS receiver or MT9xx target, and validate the physical installation.
- Complete all the sections in the Web Interface's Configure > Install Assistant screen.
- In the Operator App's Work Settings > Drum Manager screen, verify the drum dimensions are correct. Update the Elevation Mapping Adjustment if required for the height of the padfoot.

- Know how to set-up and use a total station or a GNSS rover, and data collector.
- Validate the total station or GNSS rover on a known control point.
- If you are using a GNSS rover, make sure both the Earthworks system and the rover are using the same site calibration / coordinate system.
- A site with:
  - A level pad wide enough to perform 2 parallel passes with the compactor
  - A sloping pad with a cross slope representative of the slope the machine will work on
  - A swath of land that will compact when driven over by the compactor
- Review this entire guide. This ensures that you understand the full validation workflow.

#### 3.1.3 Equipment list

- A total station in good adjustment or a GNSS receiver, with a fully charged battery
- If required, a data collector with a fully charged battery
- A note book and pens
- These instructions

## 3.2 Check horizontal guidance on the level

### 3.2.1 Check

1. Move the machine on to a level pad. Remove any articulation from the machine.
2. Set the drum focus to left.
3. Drive in a straight line for approximately 5 m (16 feet).
4. Ensure that the machine travel direction (forward/back) is correctly established and shown on the shortcut button  in the Operator App.
5. Stop the machine and record the Northing, Easting, and Elevation values for the left drum side, either from the Operator App's Text Items or the Web Interface's Monitor > Machine Positions screen.
6. Use spray paint to mark a "T" on the ground on the drum's left side, comprising:
  - A line along the side of the drum.
  - A line marking the centerline of the drum: the axis along the ground beneath the axle of the drum.
7. Move the machine.
8. Use a rover (total station or GNSS) to record the position on the "T" and compare the readings. The readings should be within  $\pm 0.03$  m (~1 inch).

### 3.2.2 Corrective action

If the drum position does not align with the starting position:

1. Ensure that the machine is not articulated.
2. Repeat the Measure-up section of the Web Interface's Configure > Install Assistant screen.

### 3.3 Check horizontal guidance on a slope

#### 3.3.1 Check

Repeat the steps from [Check horizontal guidance on the level](#) using sloping ground.

#### 3.3.2 Corrective action

If the drum position does not align with the starting position:

1. Ensure that the machine is not articulated.
2. Repeat the Measure-up section of the Web Interface's Configure > Install Assistant screen.

### 3.4 Validating the compaction sensor

#### 3.4.1 Prerequisite

Complete the installation process.

Position the machine where it can perform a pass with the drum vibration enabled.

#### 3.4.2 Check

Check that the system detects the compaction sensor:

- In the Web Interface, select Monitor > Onboard Devices. Ensure that Compaction Sensor has a green tick.
- From the Operator App's Dashboard, tap the System Status tile. Ensure that Compaction Sensor has a green tick.

If the sensor is present:

1. In the Operator App, add CMV, Amplitude and Frequency to the text ribbon.
2. Perform a pass over compactable ground with the vibrating drum active.
3. Ensure that CMV, Amplitude and Frequency text items are showing appropriate values.

**NOTE** –CMV values will differ by machine.

#### 3.4.3 Corrective action

If the system does not detect the sensor or the text ribbon values are not displayed, check the connection.

## 3.5 Validating the machine ECM connection

### 3.5.1 Prerequisite

If the machine is a Cat compactor, you can connect the system to the machine ECM. This enables the system to receive data from machine sensors for CMV and/or MDP.

Complete the installation process as described in the *Compactor Hardware Install Manual*.

Complete the Web Interface's Install Assistant > Setup section:

1. Set the Manufacturer to Caterpillar.
2. On the Optional Devices screen, do one or both of the following:
  - Set the CMV Sensor to Cat ECM.
  - Set the MDP Sensor to Cat ECM.

### 3.5.2 Check

Check that the system detects the machine ECM:

- In the Web Interface, select Monitor > Onboard Devices. Ensure that Machine ECM has a green tick.
- From the Operator App's Dashboard, tap the System Status tile. Ensure that Machine ECM has a green tick.

If the ECM is present:

1. In the Operator App, add CMV, MDP, or both to the text ribbon.
2. For CMV, perform a pass over compactable ground with the vibrating drum active.
3. For MDP, perform a pass over compactable ground in low gear at more than 0.8 km/h (0.5 mph).
4. Ensure that the text items are showing appropriate values.

**NOTE** –CMV values will differ by machine.

### 3.5.3 Corrective action

If the system does not detect the sensor or the text ribbon values are not displayed, check the connection.

The potential causes of a fault are:

- The Cat ECM is not responding.
- The Cat CMV or MDP sensor is not physically present or is not responding.
- The sensor is responding, but there is an error.
- No data is received.

If there is a fault with the machine ECM, you have two options:

- Return to the Setup section and disable the sensor. This enables the operator to continue working, but data from the sensor will not be collected.
- Repair the CMV or MDP sensor or the connection to the machine ECM, if the data is essential.

## 3.6 Save and activate machine files

### 3.6.1 Save a machine file

The current settings save automatically in the system memory and persist over power cycles. Current settings are overwritten when you activate or restore a saved machine file. Saving the current settings to a machine file makes the settings available for activating or restoring as needed.

**NOTE** –Users with Operator Plus accounts can access the Machine Settings Files screen to apply machine files. From within the Operator App, tap System Settings > Manage Machine File. To give an operator Operator Plus access, within the Web Interface open Configure > Install Assistant > User Permissions.

Consider when to save a machine file:

- After installing, commissioning and validating guidance accuracy of the system
- Before and after a new valve calibration so you can compare previous settings to the new settings
- After completing and validating a measure-up (delete the previous machine file to avoid using the old settings instead of the new settings)
- After completing a new machine setup. You must complete a new valve air purge followed by a valve calibration and any other required machine calibrations for each machine using additional attachments and sensors. The machine file is then available for activation when the machine setup changes.

To save a machine file:

1. Open the Machine Settings Files page in the Web Interface.
2. Select  and then Save Settings.
3. Give the file a unique name and save.

### 3.6.2 Activate, or restore, a machine file

Activating, or restoring, a machine file is useful for returning the system back to a state that was previously saved.

Most system settings are overwritten with the values from the machine file when that machine file is activated or restored.

After activating a machine file, check the following items to ensure accurate guidance:

- Pad foot wear
- Currently loaded project and 2D bench or 3D design settings




### 3 Soil compactor measure-up and sensor calibration validation guide

- Operational settings such as focus
- Items such as Wi-Fi configurations and delayed shutdowns do not reset when activating a machine file.
- System licenses are not affected by activating a machine settings file.

To activate a machine setting file:

1. Open the Web Interface and then Advanced > Machine Settings.
2. Select the file to activate.
3. Select Make Active.



# Notices

© 2017, Trimble Incorporated. All rights reserved.

See <https://heavyindustry.trimble.com/earthworksreleases> for the latest:

- Terms and conditions.
- Important safety information.
- Warranty and compliance information.

To provide feedback on this document, email [feedback\\_documentation@trimble.com](mailto:feedback_documentation@trimble.com).