

Non-Invasive Monitoring and Modulation of Fascial Quantum Coherence via SU(2) Spinor Field Mapping

Justin Bilyeu and BDS Team

April 12, 2025

1 SU(2) Spinor Field Equations

The fascial coherence field $\psi(x, t)$ is modeled as an SU(2) spinor:

$$\psi(x, t) = \sqrt{\rho(x, t)} e^{i\theta(x, t)} \begin{pmatrix} \cos(\alpha/2) \\ e^{i\phi} \sin(\alpha/2) \end{pmatrix} \quad (1)$$

where:

- $\rho(x, t)$: Fascial strain energy density
- $\theta(x, t)$: Global phase coherence
- α, ϕ : Euler angles for spin orientation

The Hamiltonian incorporates piezoelectric coupling:

$$\mathcal{H} = -\frac{\hbar^2}{2m} \nabla^2 \psi + \underbrace{\kappa P_{\text{piezo}}}_{\text{stress coupling}} + \underbrace{g\mu_B B_i \sigma^i}_{\text{EM field interaction}} \quad (2)$$

2 Device Schematics

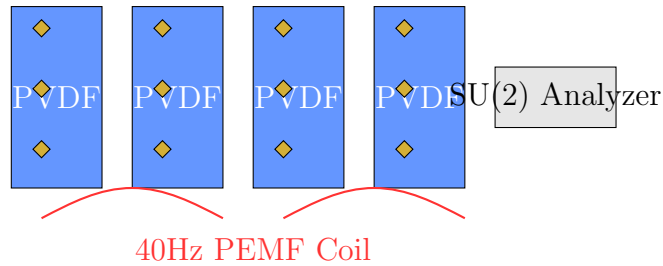


Figure 1: Fascial Interface Device: PVDF sensors (blue), gold nanoparticles (1.618m grid), and PEMF coils.


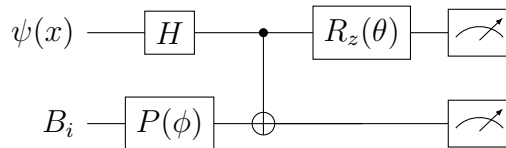


Figure 2: Quantum circuit for spinor coherence measurement.


3 Coherence Phase Maps

4 Patent Claims

1. A system for monitoring fascial quantum coherence comprising:



Coherent Phase (SU(2) Symmetry)



Decoherent Phase (Broken Symmetry)

Figure 3: Spinor phase maps showing coherence states.

- Piezoelectric sensor array
 - SU(2) spinor field processor
 - Feedback interface displaying coherence metrics
2. The system of claim 1 wherein gold nanoparticles are arranged in a 1.618m grid pattern.