



Bypass capacitors are 50V rated for overvoltage events
 IC has reverse input protection at -65V and 65V positive input range
 Input TVS for positive and negative spikes (36V standoff, 58.1V clamping)
 UVLO @ 10.46V rising & 9.62V falling
 12V nominal design intentions
 18V max for bench testing
 OVLO @ 20.98V rising & 19.256V falling


Output schottky for negative spikes
 Output TVS for positive spikes (20V breakdown) (max clamping voltage at 29.2V)
 Turn-on inrush current limiting @ 1.70A for 145uF output capacitance

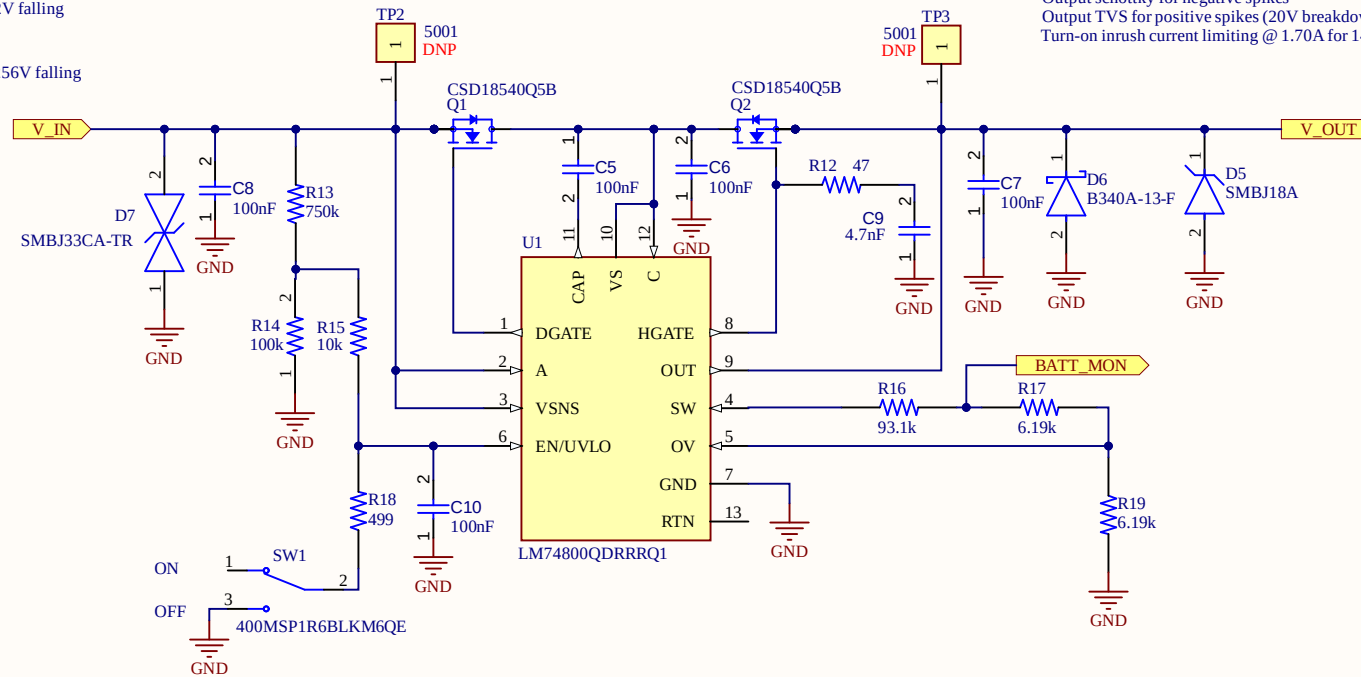


Title Entry Block		
Size A4	Number 2	Revision 1
Date: 2-19-2026	Sheet of	
File: C:\Users\...\EntryBlock.SchDoc	Drawn By: Justin Lalonde	

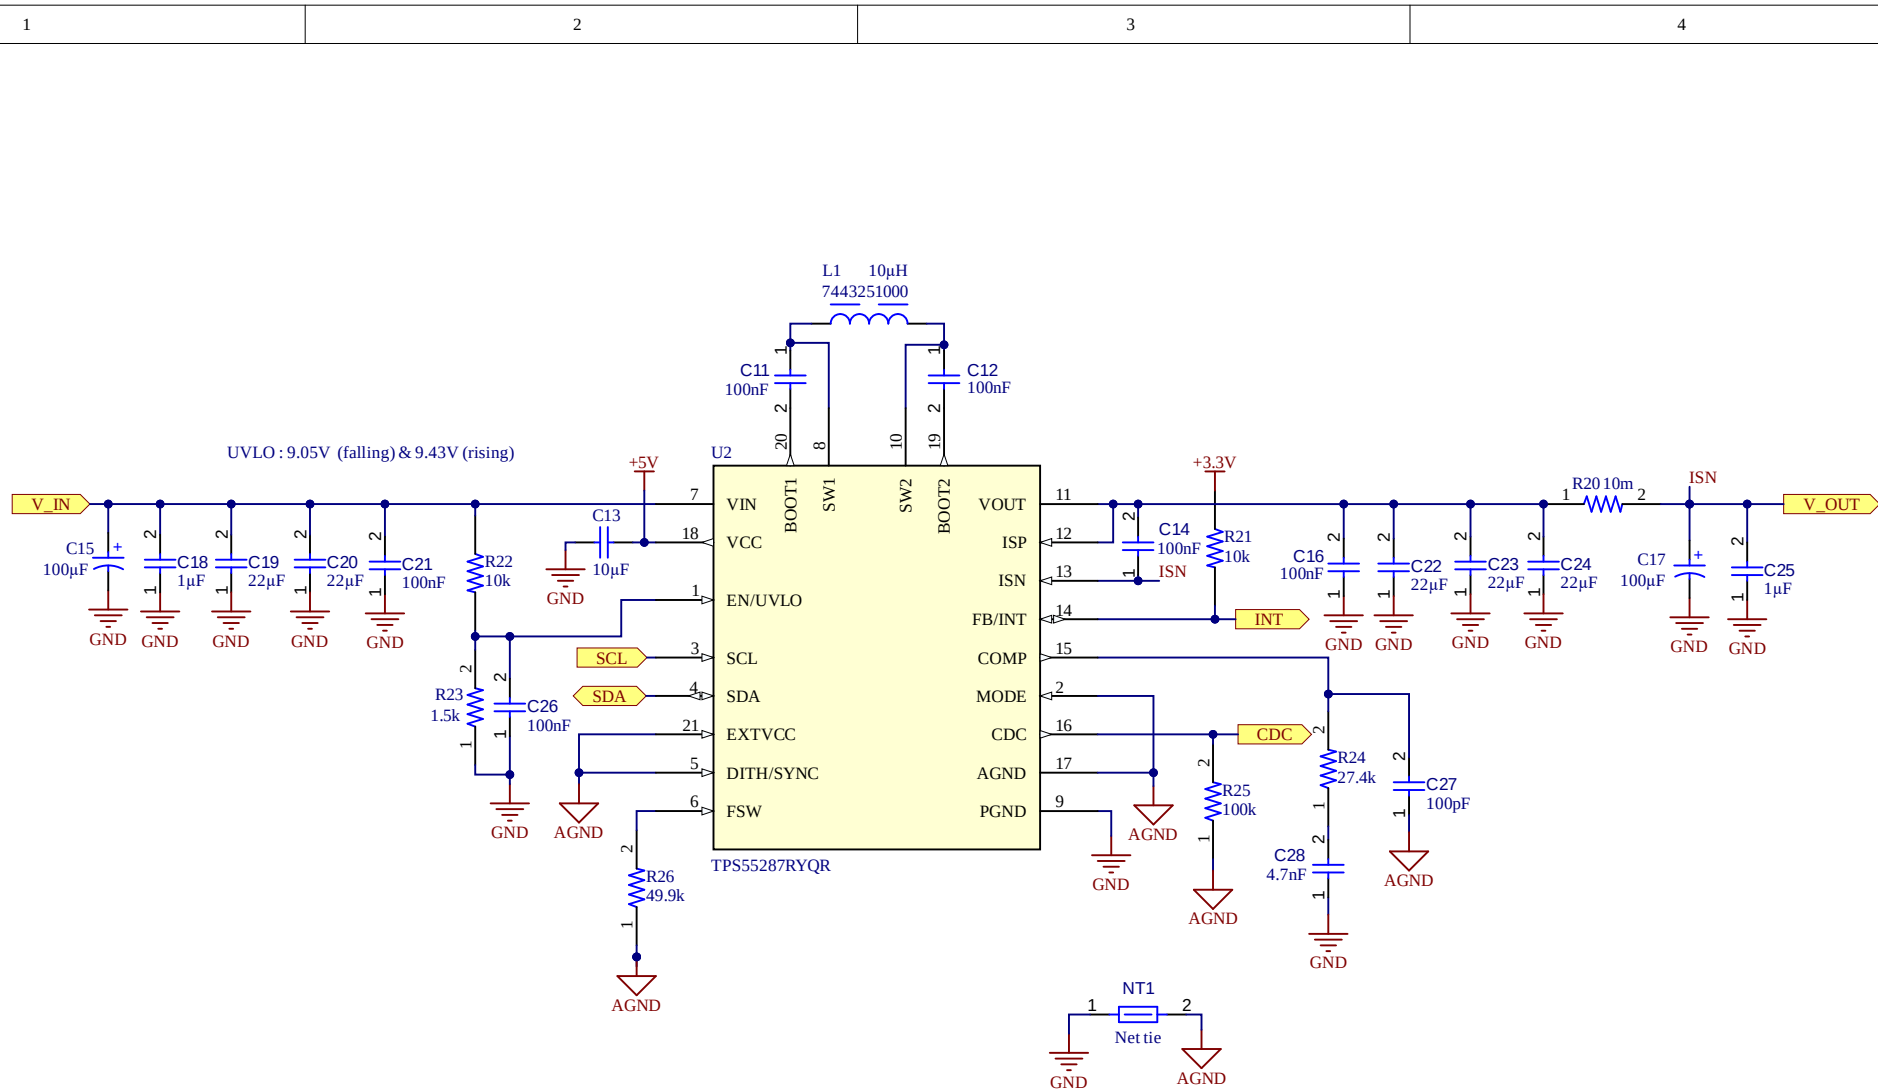


Title		
Buck / Boost Converter		
Size	Number	Revision
A4	3	1
Date:	2-19-2026	Sheet of
File:	C:\Users\BuckBoostConverter.SchDoc	Drawn By: Justin Lalonde

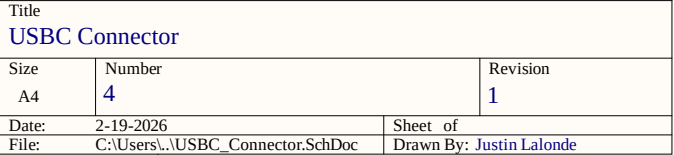


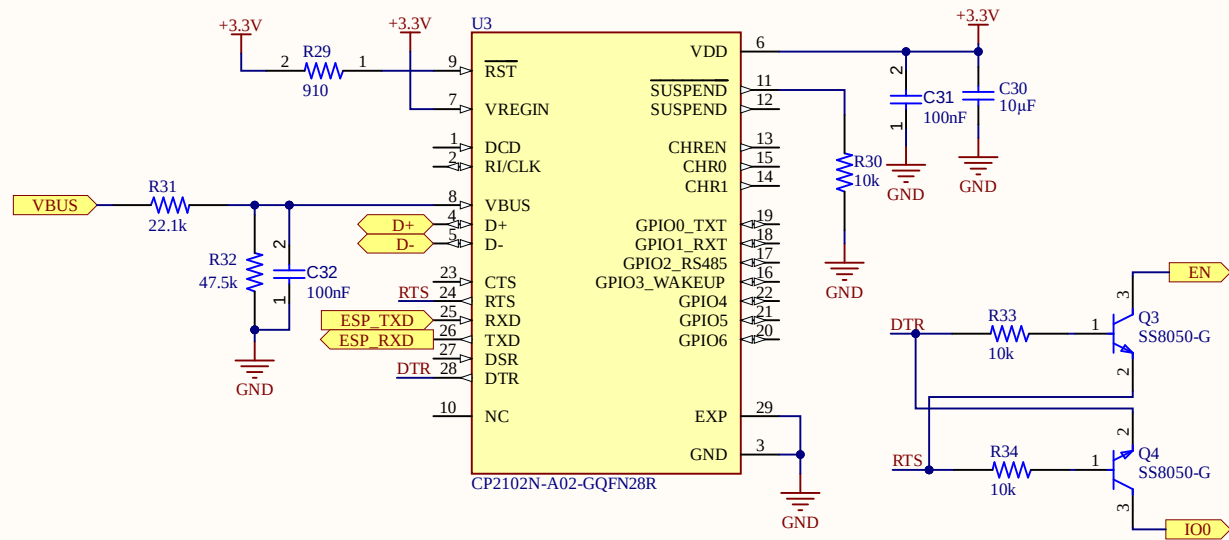


Title			
USB To UART			
Size	Number	Revision	
A4	5	1	
Date:	2-19-2026	Sheet of	
File:	C:\Users\...\USB_To_UART.SchDoc	Drawn By: Justin Lalonde	

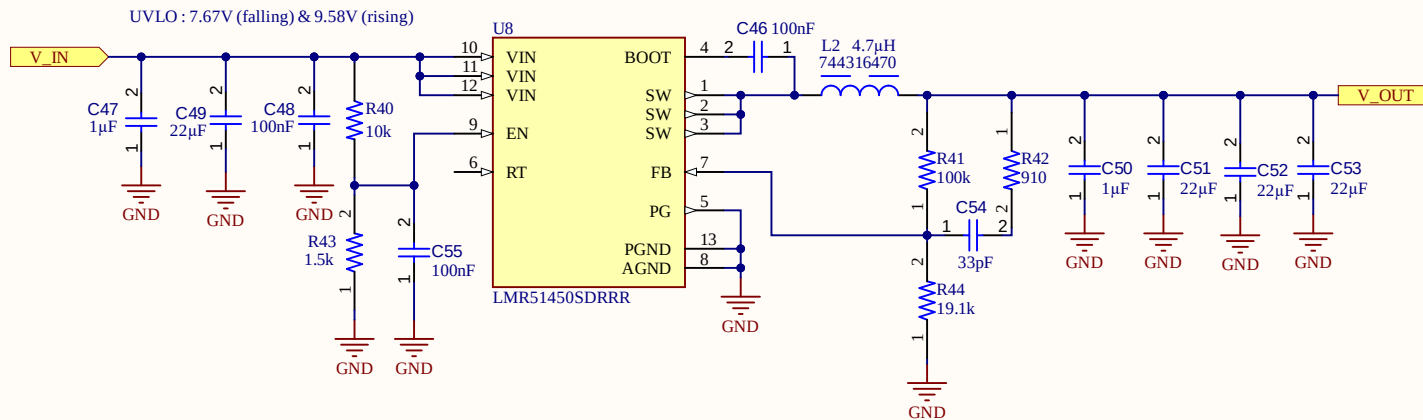

Title 5V Converter			
Size A4	Number 8		Revision 1
Date:	2-19-2026	Sheet of	
File:	C:\Users\...\5V_Converter.SchDoc	Drawn By: Justin Lalonde	

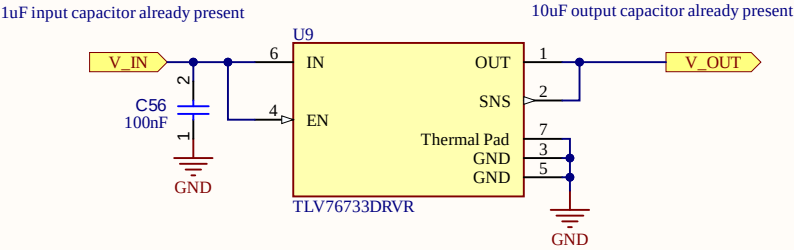


Title			
3.3V Regulator			
Size	Number		Revision
A4	9		1
Date:	2-19-2026		Sheet of
File:	C:\Users\...\3V3_Regulator.SchDoc		Drawn By: Justin Lalonde

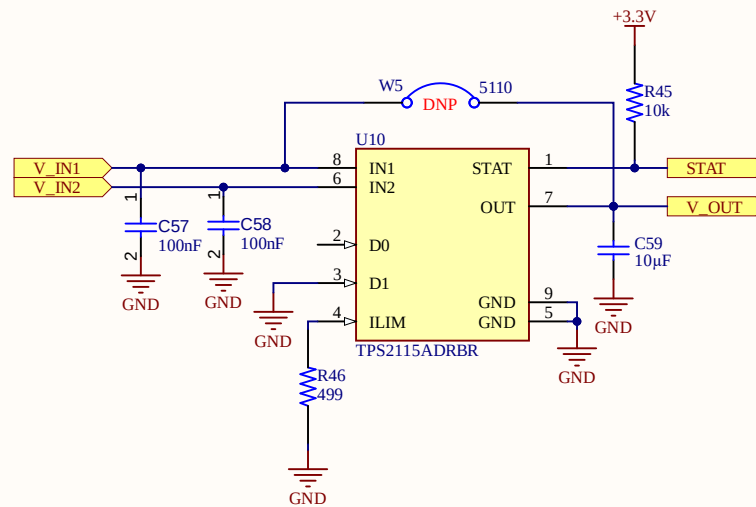


Title		
Power MUX		
Size	Number	Revision
A4	10	1
Date:	2-19-2026	Sheet of
File:	C:\Users\...\PowerMUX.SchDoc	Drawn By: Justin Lalonde

Output schottky diode for negative spike clamping
Input TVS diode for positive input spikes clamping | 20V standoff, 22.2V breakdown & 32.4V clamping

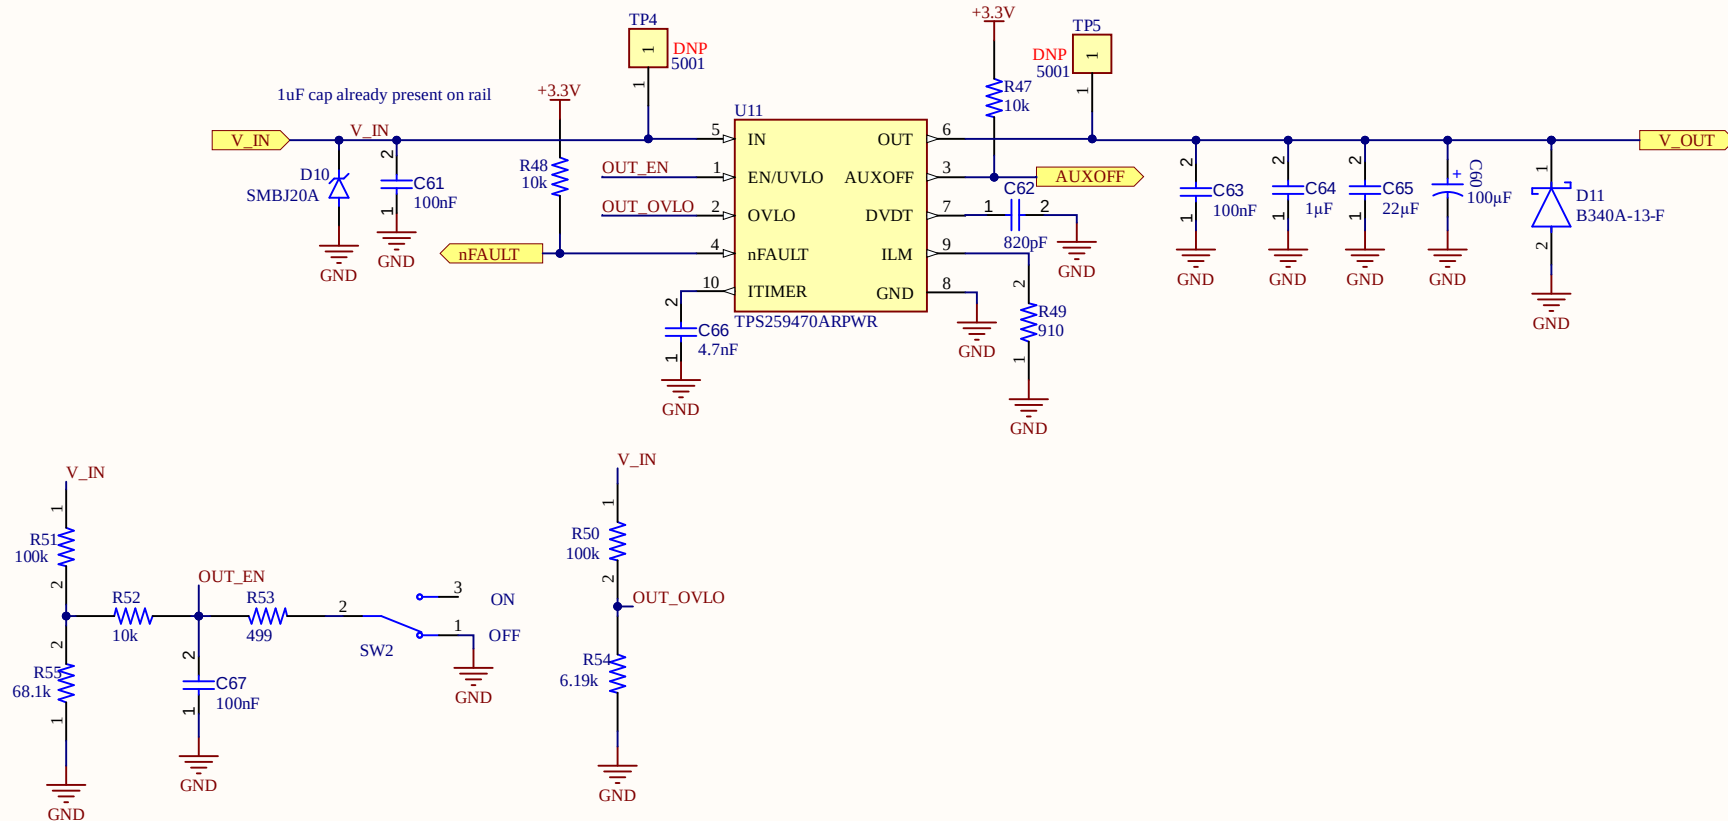

Title Exit Block		
Size A4	Number 11	Revision 1
Date: 2-19-2026	Sheet of	
File: C:\Users\...\ExitBlock.SchDoc	Drawn By:	Justin Lalonde

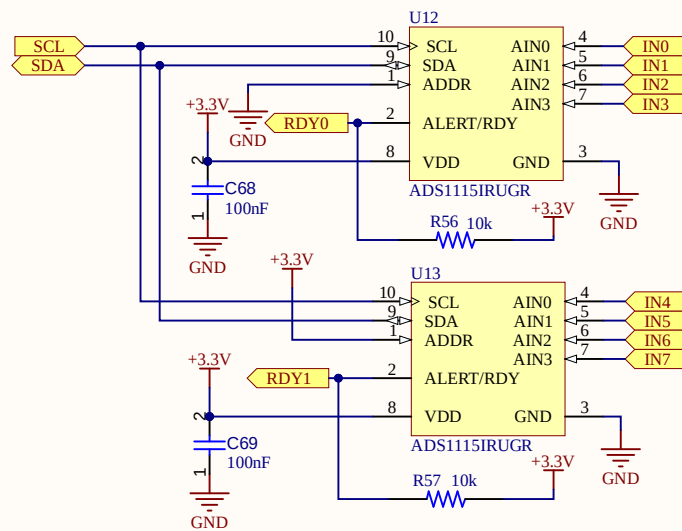

Title ADC		
Size A4	Number 12	Revision 1
Date:	2-19-2026	Sheet of
File:	C:\Users\...\ADC.SchDoc	Drawn By: Justin Lalonde

