




convenience test points for ground




GPIO

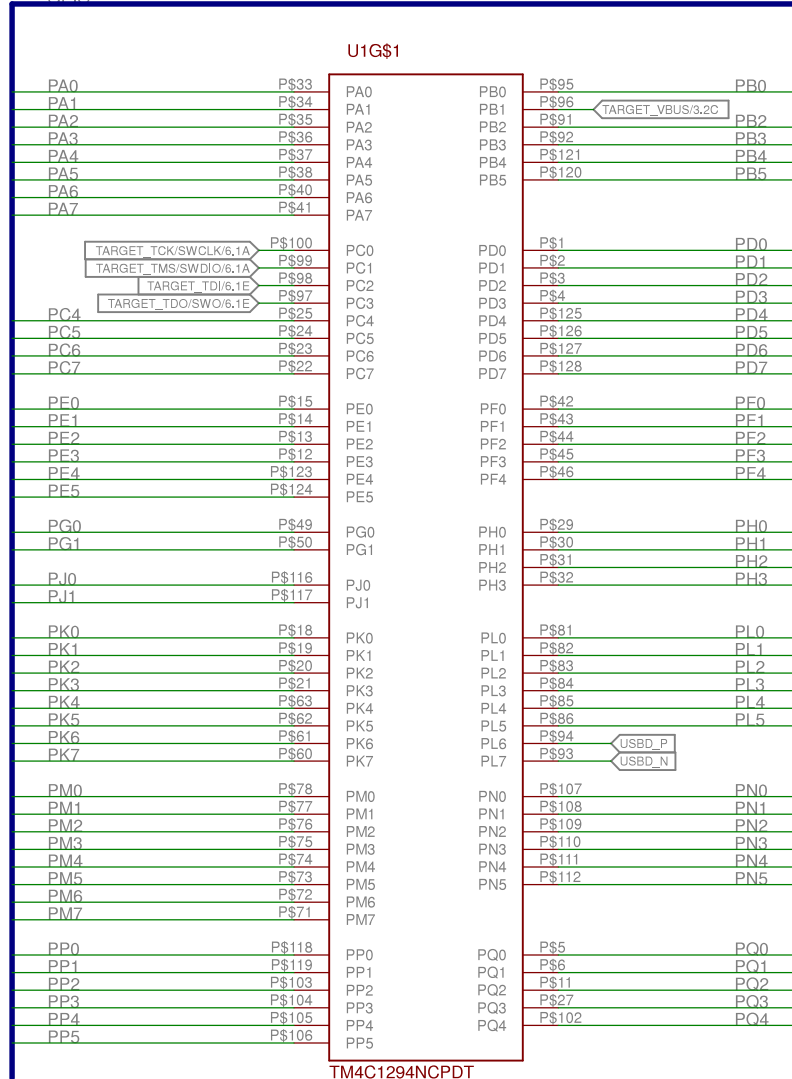

TM4C1294NCPDT

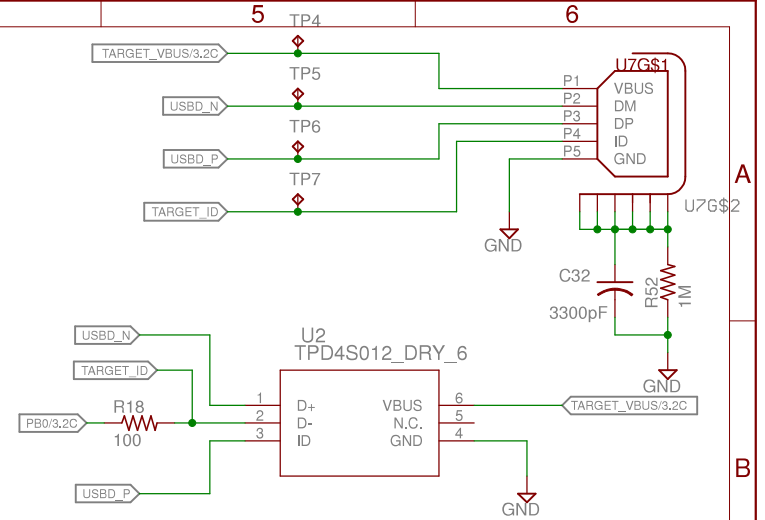

NOTE: TPD4S012 all protection circuits are identical.
Connections chosen for simple routing.

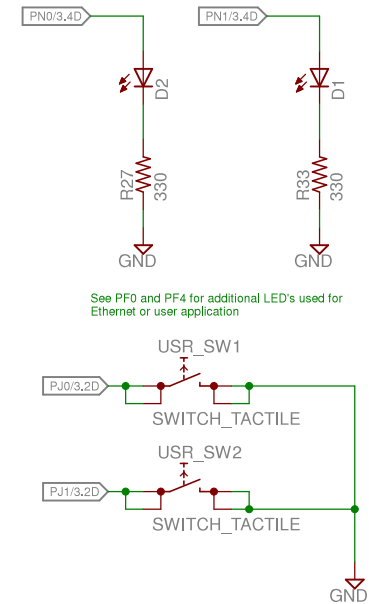

See PF0 and PF4 for additional LED's used for Ethernet or user application


TITLE: EK-TM4C1294XL REV D


Document Number:

REV:

Date: 1/24/2014 4:55:11 PM

Sheet: 1/6

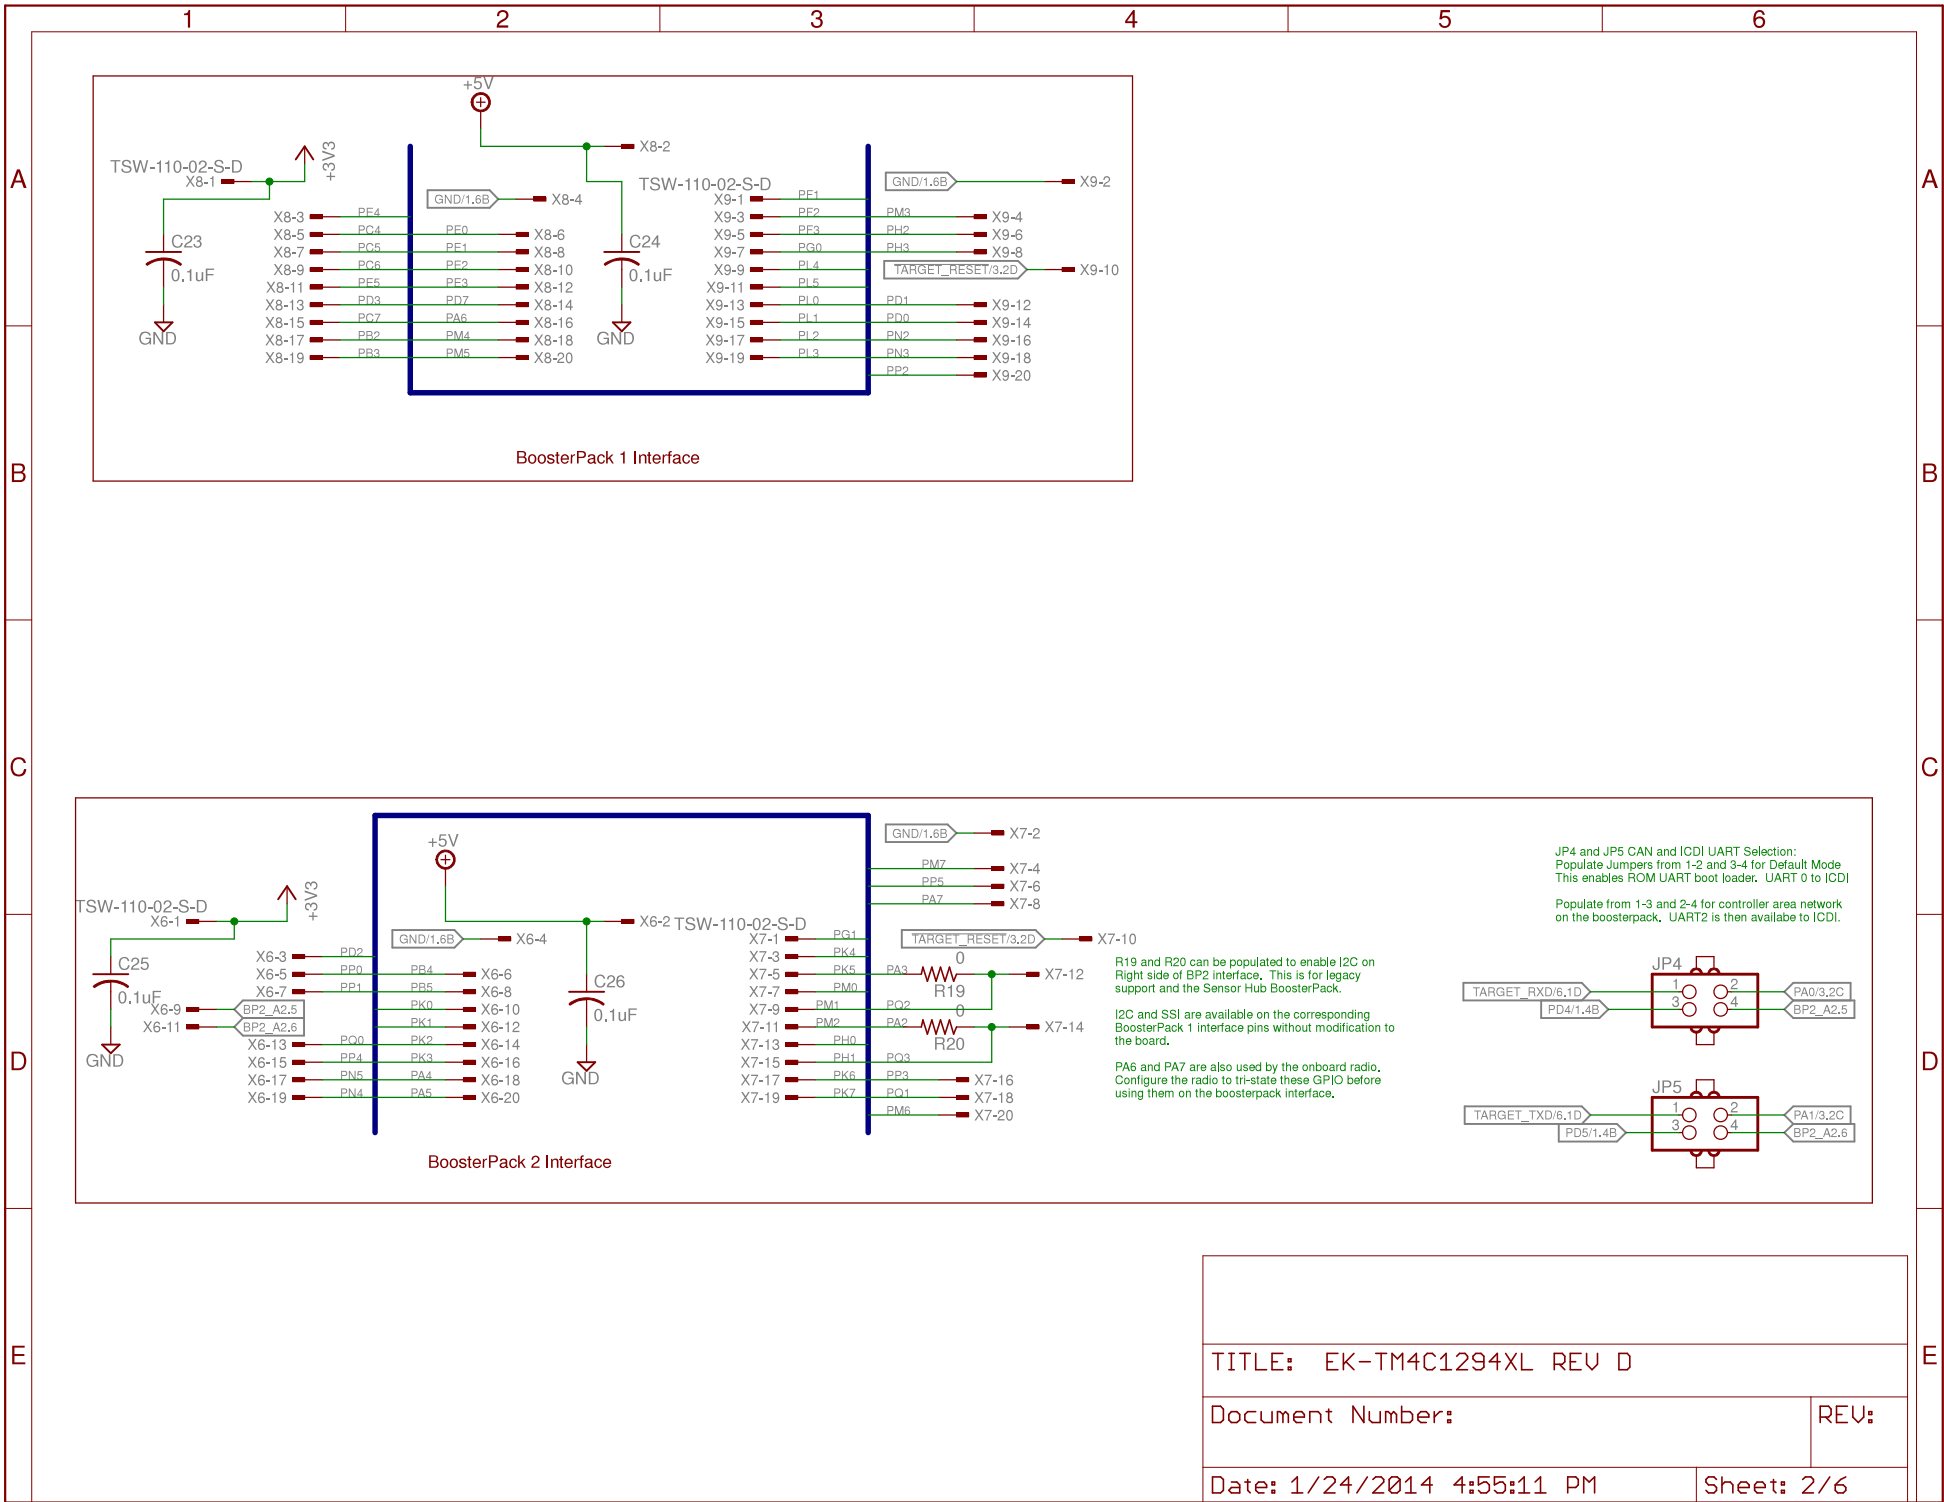

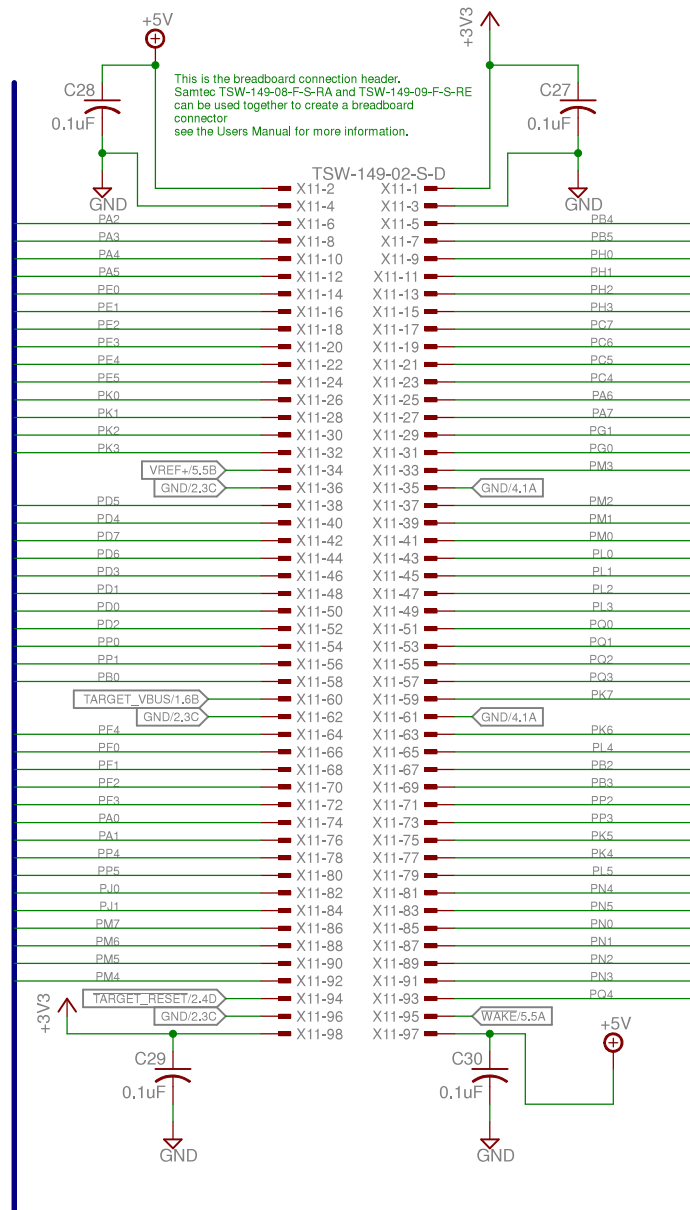

NOTE: PB0 and PB1 are used in some configurations with 5V signals especially in USB Host or OTG mode. Be aware the 5V may be present on these pins depending on system jumper configuration.

These pins are only 5V tolerant when configured for USB mode applications.

TITLE: EK-TM4C1294XL REV D

Document Number:

REV:

Date: 1/24/2014 4:55:11 PM

Sheet: 3/6

