
Flexi™ acoustic wall panel

Fabric wrapped panel, bevel edged or straight edged, for walls

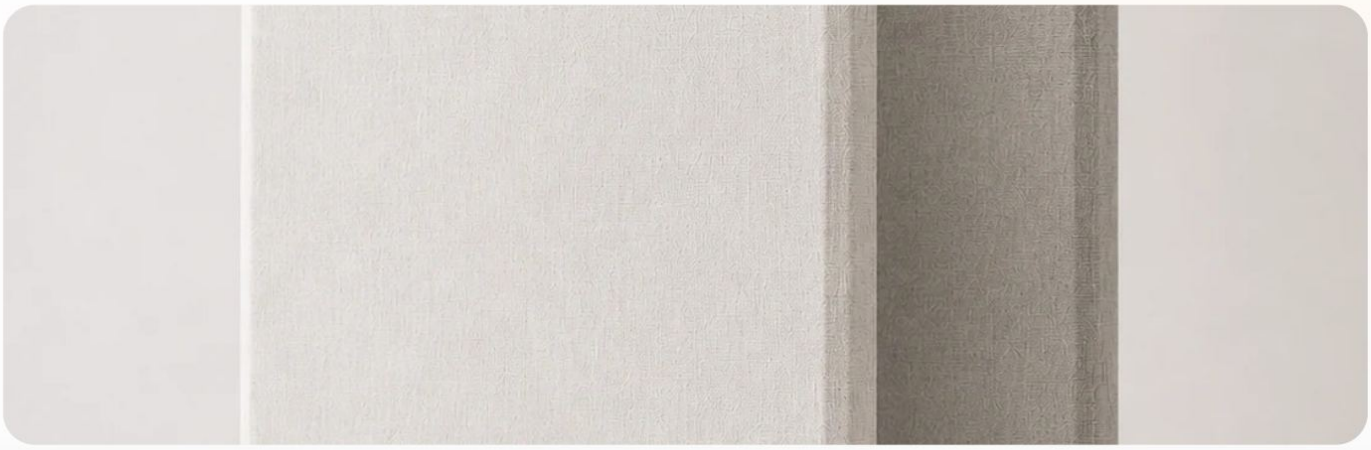

Sizes	600 × 600 mm · 1200 × 600 mm (standard) · 1800 × 600 mm (tall) · Custom sizes on request
Thickness	25 mm or 50 mm
Acoustic	NRC 1.00 at 50 mm, NRC 0.80 at 25 mm (supplier data, lab report [check]). Weighted αw 0.90 (EN ISO 354 / EN ISO 11654, core test, SGS report)
Core	High-density semi-rigid glass fibre, 96 kg/m³, resin-hardened edges, glass tissue micro-mesh backing
Face	Acoustically transparent polyester fabric, 39 standard colours; or paintable white glass fibre tissue face
Edges	Bevel edged (standard) or straight edged
Weight	About 4 kg for 1200 × 600 × 50 mm
Fixing	Impaling clips and adhesive (no drilling), or mechanical clips on board and masonry
Typical use	Meeting rooms, offices, restaurants, classrooms, studios, homes
Colours	39 standard Flexi™ fabric colours; physical swatch card on request
Fire and emissions	Flexi™ core: EN 13501-1 Class A1 (membrane components), formaldehyde not detected, asbestos negative (SGS XMIN180901795CCM). Fabric: UK FFR 1988 Sch. 4/5 Part I pass (SGS SDHL1803005038FB)
Lead time	About 15 working days production after deposit, plus shipping; about 4 to 6 weeks to installed
Warranty	1 year on materials and workmanship
Care	Vacuum gently or wipe lightly with a dry or slightly damp cloth. Do not soak or scrub