



Mechanical Seal Refurbishment Process

Modelled in SolidWorks: assembly, exploded view, GA drawing and component drawings

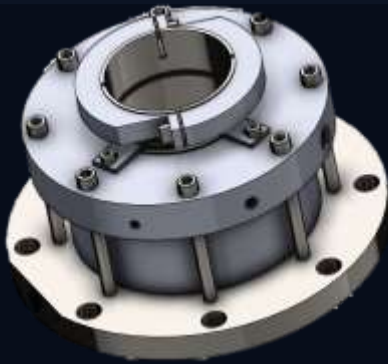


01 3D ASSEMBLY MODEL

Complete seal assembly modelled in SolidWorks.

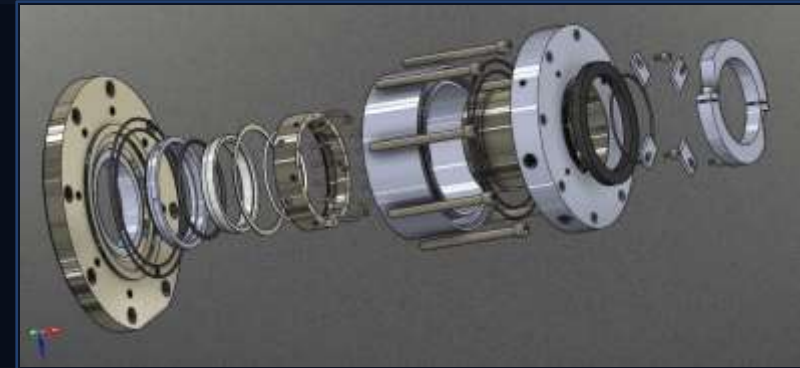

02 EXPLODED VIEW

Each component separated to show how the seal fits together.

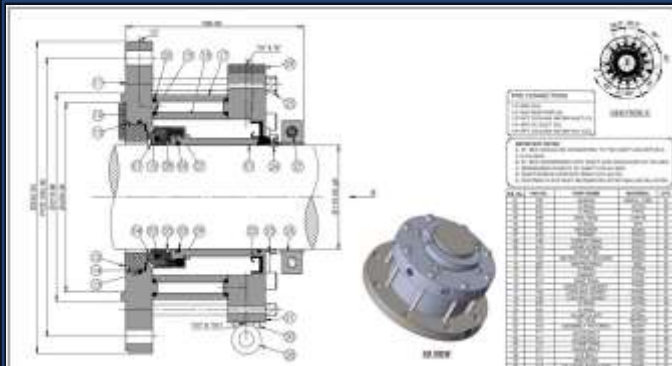

03 GA DRAWING

General arrangement with part list, notes and 3D view.



04 COMPONENT 2D & 3D DRAWING

Sleeve: dimensioned drawing with tolerances and 3D view.

Type of Mechanical Seal Jobs



Agitator Mechanical Seal

New Manufacture

Type: AEAG2000 – 100.0 mm
MOC: Car-M/SSiC/FEP/SS316
Application: Sulphur
Temp/Pr: 70°C / 6 bar
End User: Al-Tayseer



Single Cartridge Seal

New Manufacture

Type: AESCRS – 125.0 mm
MOC: TC/TC/FKM/SS316
Application: Pulp Paper
Temp/Pr: 120°C / 5.0 bar
End User: Waraq



Double Component Seal

New Manufacture

Type: AEDCS2500 – 53/58 mm
MOC: SSiC/SSiC/Car-M/SSiC/FKM/SS316/PP
Application: Water + Glycerol
Temp/Pr: 60°C / 5.5 bar
End User: Jana



Teflon Bellow Seal

New Manufacture

Type: AETB1000 – 1.125"
MOC: GFT/Cer/PTFE/SS316
Application: Hot Water
Temp/Pr: 180°C / 10 bar
End User: Tayseer



Single Component Seal

New Manufacture

Type: AE28 – 35.0 mm
MOC: SSiC/SSiC/FKM/SS316
Application: Waste Water
Temp/Pr: 35°C / 5.0 bar
End User: Waraq



Double Cartridge Seal

Refurbishment · OEM: AES

Type: DMSF – 1.125"
MOC: TC/TC/Car-M/TC/FFKM
Application: Resin
Temp/Pr: 65°C / 5 bar
End User: Jana



LP/HP Mechanical Seal

Refurbishment · OEM: John Crane

Type: T8B1/T8B1 – 4.250"
MOC: SSiC/SSiC/Car-M/SSiC/FFKM
Application: Calcium Chloride
Temp/Pr: 70°C / 6.5 bar
End User: Jana



Single Component Seal

New Manufacture

Type: AE32 – 35.0 mm
MOC: Car-M/CER./FKM/SS316
Application: Sulphuric Acid
Temp/Pr: 20°C / 4.0 bar
End User: Jana



Seal Sleeve

New Manufacture

Size: OD-65 x L-180mm
MOC: Duplex
End User: Aminat



Double Cartridge Seal

Refurbishment · OEM: Flowserve

Type: AEDMSF – 1.375"
MOC: TC/TC/Car-M/TC/FFKM/SS316L
Application: Hot Salt Water
Temp/Pr: 60°C / 2.0 bar
End User: Jana