


USB-C input, PD sink (requests 9 V)

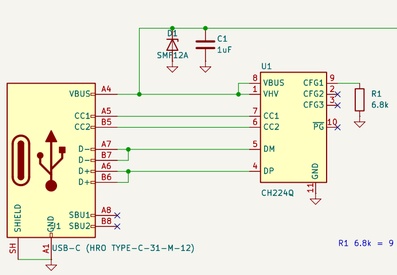


Charger BQ25606 (standalone NVDC, 1.44 A charge, 1.92 A input limit)

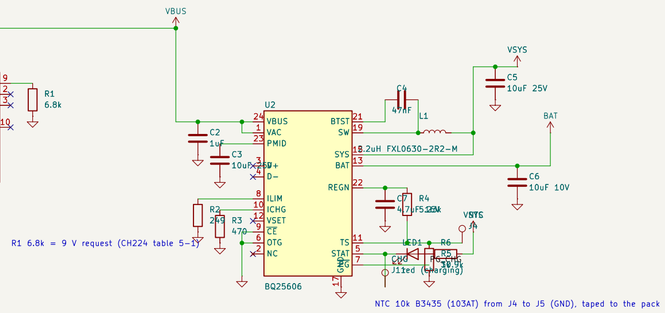


1S2P pack: reverse block, HY2113 protector, fuse

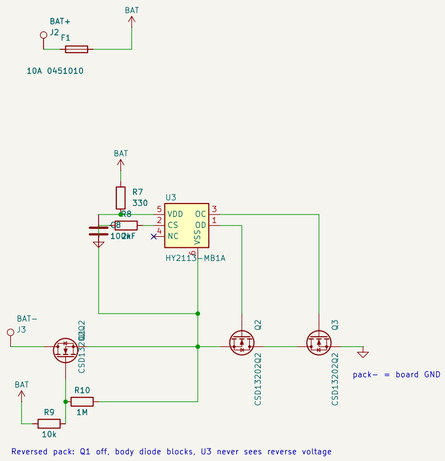


Solder pads, enable switch, battery sense

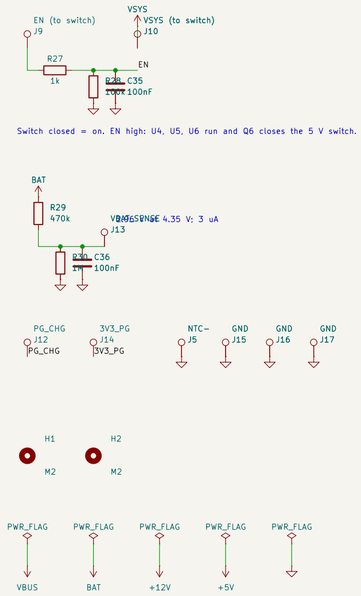


12 V / 0.5 A boost TPS61178 (WEBENCH design 33)

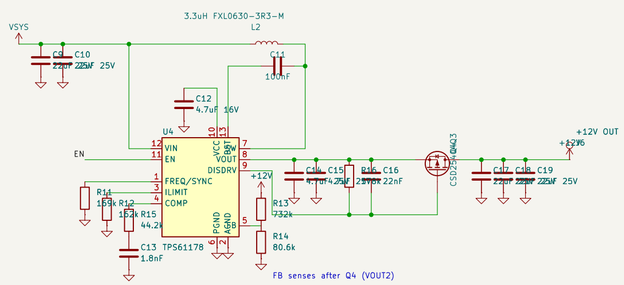

5 V / 2.5 A boost TPS61088-Q1 (WEBENCH design 37) + load switch

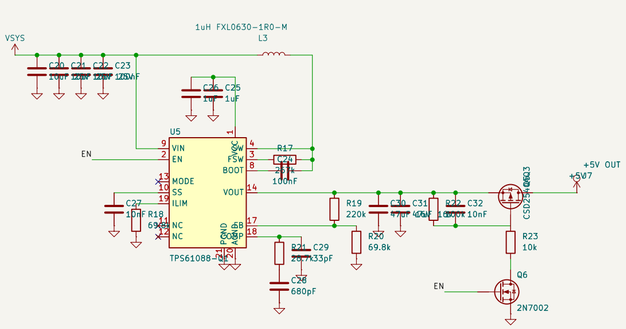

3.3 V / 1.5 A buck-boost TPS63802 (WEBENCH design 36)

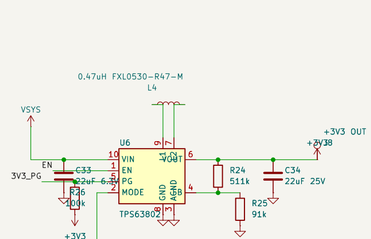

Sheet: /		
File: minipc-power.kicad_sch		
Title: minipc-power: USB-C PD / 1S2P power board		
Size: A2	Date: 2026-10-24	**Rev: 1**
KiCad E.D.A. 10.0.1		Id: 1/1