

Achieving Optimal Horizontal Drill Operations

Daniel Serna¹, James Vasquez^{1,2}, and Donald Markley²

¹ Southern Methodist University, Dallas TX 75275 USA
{dserna, vasquezj}@smu.edu

² Triple Crown Resources, 1722 Routh St. Suite 1750, Dallas TX 75201 USA
dmarkley@triplecrownresources.com

Abstract. In this paper we present a novel method of predicting when a slide event will occur in horizontal drilling operations. A slide event occurs when a drill stops efficiently rotating through the subsurface. Rate of penetration is significantly reduced during a slide event. We achieve this novel method by creating a predictive model based on a number of features present in time series data provided by Triple Crown Resources.

1 Introduction

Drilling a well involves many moving parts to reach total depth of the well. While drilling in a horizontal fashion, drill sensors record the rate of penetration. The higher the rate of penetration, the quicker the drill penetrates through the subsurface rock. A stable and higher rate of penetration will allow the drilling operations to reach total depth faster. Total depth is reached fastest when the drill is in a state of rotation as this provides the greatest rate of penetration. However, when the drill is in a sliding state, rate of penetration is significantly reduced.

The team has created a predictive model that minimizes the mean squared error in predicted versus actual slide events. The team’s model predicts an impending slide event within a specified time frame.

During drilling operations, slide events are identified by monitoring the rate of penetration, bit inclination, and pipe consumption. When a slide event is detected, drill operators use the ROCKit system for adjustments. With this system, the drill pipe is rocked back and forth in an effort to return the drill back to a rotating state¹. Using our predictive model, drill operators can employ the ROCKit system or other methods prior to a slide event occurring in order to prevent the drill from ever entering a sliding state.

Triple Crown Resources’s budget for capital expenditures is dominated by the expenses associated with drilling and hydrocarbon production. By reducing capital spend in this area, Triple Crown Resources would be able to obtain larger investments and expand their drilling operations to surrounding areas. Furthermore, by reducing the time needed to reach total depth, Triple Crown Resources

¹ Nabors. “ROCKit System”, <https://www.nabors.com/software/performance-drilling-software/rockit-system> [Accessed 13 July 2019]

would be signalling to equity partners that they have mastered advanced analytic techniques allowing them to perform better than their competitors.

Our paper first provides context around the problem domain in Section 2.1, specifically explaining what a slide event is. We then provide an explanation of horizontal drilling operations and a bit of history regarding earlier drilling techniques in Sections 2.2 and 2.3. Section 2.4 provides an explanation as to why there is such interest in the Permian Basin currently for horizontal drilling operations. An explanation of our data and cleansing techniques follows in Section 3.1 with an brief discussion of our exploratory data analysis in Section 3.2. Section 4 explains why we chose certain features for our model. In Section 5, we give a brief overview of some of the terms and metrics we will use when discussing our model selections and results. Sections 6, 7, and 8 discuss our application of Support Vector Machine, Random Forest, and Logistic Regression models to the data. We then discuss our results in Section 9. We point out ethical considerations in Section 10 and lay out our conclusions in Section 11.

2 Drilling and Slide Events

As drilling technology advanced, the need to optimize drill operations to prevent slide events became more important. While optimal drilling parameters have always been a concern, slide events are less prevalent in vertical drilling operations. As horizontal drilling operations became more popular, the focus on preventing slide events increased.

2.1 Slide Events

A slide event occurs when the rate of penetration of the rotary drill decreases and the drill bit no longer rotates at optimal conditions. Ideally, rotation is the desired state of a drill bit. One can think of efficient drill rotation as similar to how a screw rotates through a piece of wood. When a drill is sliding, it is pushing through the rock formation instead of efficiently rotating. Slide events can occur due to the type of rock formation encountered by the drill bit, the bit condition, and the amount of formation pressure encountered.

2.2 Horizontal Drilling

A horizontal well is constructed such that it can make a turn in the subsurface usually at 75 or 85 degrees. In Fig. 1, well paths labeled "H" are considered horizontal wells whereas well paths labeled "V" are considered vertical wells. The key difference among these two wells is well paths labeled "V" never reach an inclination of 75 degrees or greater, and as such are not considered a horizontal well. Horizontal drills operate in order to maximize reservoir extraction by allowing the lateral portion of the well to stay within the producing rock formation longer.

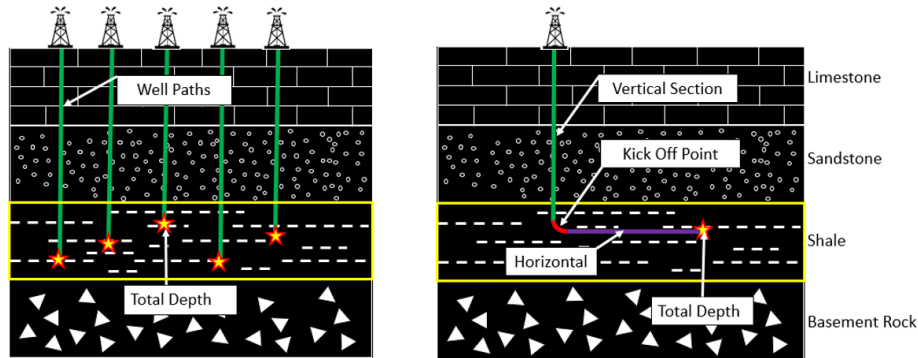


Fig. 1. Types of Well Paths: Vertical wells were the dominant type early in the industry as technology and understanding of reservoirs were not as advanced as they are today. Horizontal wells gained acceptance in the early 2000's and are now a standard type for drilling operations.

2.3 Drilling Advances

A traditional vertical well contains a bore hole that extends vertically below the derrick. In a true horizontal well, the bore hole goes from vertical to horizontal at a point in the well path (see Fig. 1). The first vertical well was drilled in 1895 using a percussion drilling method and reached a depth of sixty five feet. For comparison, modern day deep water wells have reached depths of 24,000 feet. Technology advancements led to a new type of drilling technique called rotary drilling. The basic concepts for rotary drilling brought forth in the late 1800's can still be seen in today's operations as drill pipes spin as they drill down into the subsurface. This type of drilling operation is a necessity for energy companies to reach deep target depths.

Directional drilling was initiated to fish tools lost in a bore hole [2]. Intentional directional drilling methods were first used in 1930 on the shores of Huntington Beach, California. In 1934, directional drilling was used to kill a well blowout by pumping heavy mud into a deviated borehole.

A leap in technology and computing power thrust many industries, including Energy, into Big Data Analytics. However, the velocity of the data captured proved to complicate analysis for the Energy industry [3]. Specifically, real time drilling sensors capture data every second. Many in the industry were not experienced in how to analyze and make the best use of this data. With the market drop in 2014, Energy companies began to realize this data was a valuable asset. Efforts were put forth to recruit talent that could make use of these large datasets that had been sitting idle in 3rd party vendor databases.

2.4 Permian Basin

The Permian Basin stretches from the lower Southern portion of New Mexico and extends to much of West Texas (see Fig. 2). This basin was formed during

the Paleozoic era. From the geological timeline, much of the structures which ultimately formed the traps for hydrocarbon were created during the late Paleozoic Era (251 million years ago) [7].

The basin is divided into three structural development phases. This paper concentrates on the tectonic activity of the Hercynian Orogeny which occurs when the North America plate collides with the South American plate. This tectonic activity is one of the major factors that contributed to the conventional traps exploited by early gas and oil exploration. Eventually, as tectonic activity slowed and mountains eroded, sediment consisting of limestone, shale, and fine-grained sandstone layered the basin [6].

Oil was first produced from the basin in the middle of the 1920's, and major activity started during the 1950s. Much of the data from these early periods is still used today to deliver control points of the basin. These control points help geologists map different formations in the subsurface layers [4].

In modern development, companies now have higher quality data available and are able to divide previous grouped formations into sub-formations. The Wolfcamp formation is one such sub-formation that resulted from higher quality data. This formation is a target for most companies involved in the Permian Basin. Using today's mapping technology, this formation has been divided into three benches - upper, middle, and lower Wolfcamp.

Though the Permian Basin has been producing for more than five decades, new technology emerged that brought additional life to the basin in recent years. Hydraulic fracturing ("fracking") has been around since 1949, but it was not until the early 2000's that fracking was combined with horizontal drilling techniques. The ability to drill in a horizontal direction to stay within a formation gave an unprecedented way to drain reservoirs that were once thought to be on the decline for producing hydrocarbons (see Fig. 3).

Recently, it has been reported that the Permian Basin is the world's top oil producer. Saudi Aramco's Ghawar field produced 3.8 million barrels per day in 2018. The Energy Information Administration reports that the Permian Basin is now producing 4.2 million barrels per day compared to an average of 3.4 million barrels per day for 2018 [5]. Thus, oil production in the Basin is increasing and companies are investing more capital.

3 Data

The data provided to our team originates from drilling operations conducted by Nabors Industries. This data is streamed real-time to data stores and exposed for analysis through the MyWells portal. The data provided covers twenty one wells and is quite large. Our methods of cleansing and sampling are explained in detail in Section 3.1. Our exploratory data analysis and resampling techniques are explained in Section 3.2. Most importantly, the data set contains a feature "Rockit-OnOff" which indicates if a drill is in a sliding or rotating state. This feature is used as our prediction variable. The Nabors system allows for moni-

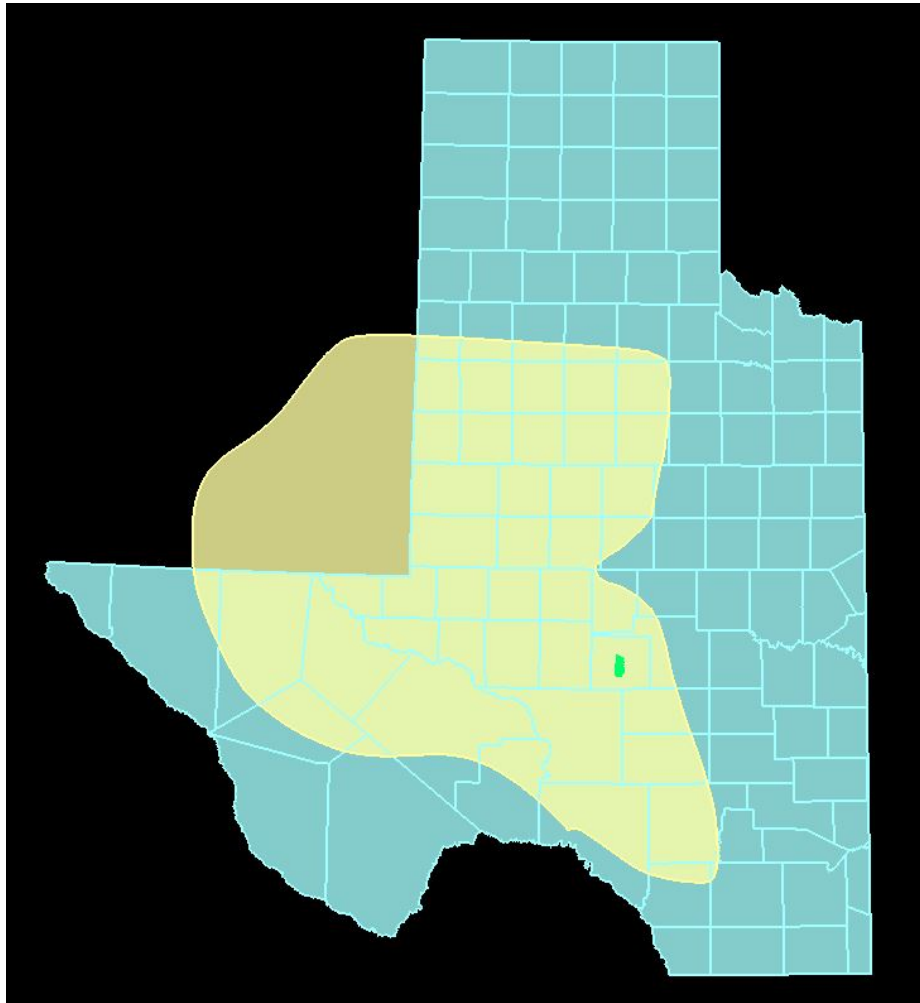


Fig. 2. Permian Basin: The Permian Basin is roughly 86,000 square miles and split into multiple sub basins. Midland, Delaware, and Val Verde make up the larger Permian Basin. Each basin comes with its own unique challenges such as shale thickness, mineralogy, pressure, and access to drill sites. Formation water is an operational challenge that affects all companies in the basin. Water that is produced from a well cannot be pumped back down and requires transportation and treatment. Up to 15,000 barrels of formation water can be produced daily from a producing well.

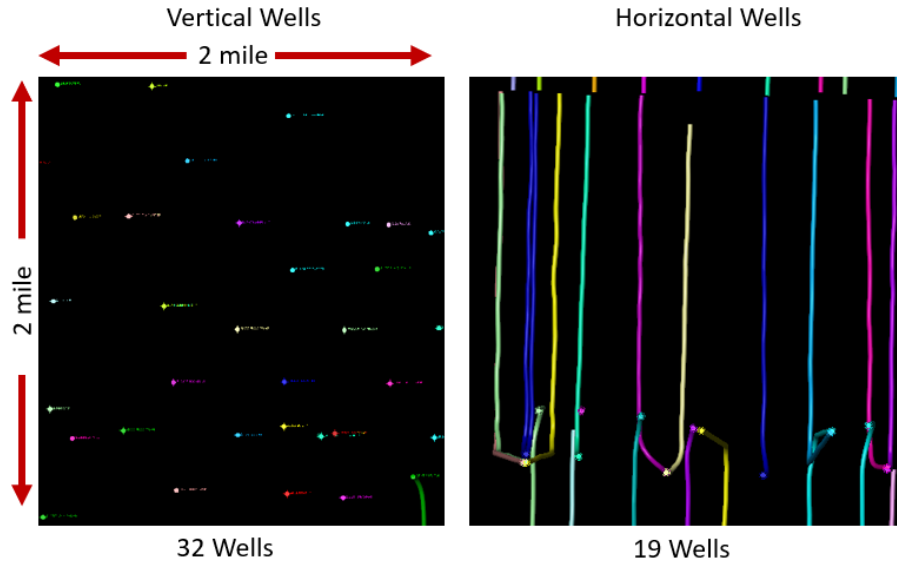


Fig. 3. Vertical versus Horizontal Drilling: Horizontal drilling programs bring a lesser environmental impact than traditional vertical wells. Draining a reservoir with vertical wells requires a much bigger environmental footprint, requires more drills, and costs more. A single pad can hold as many as eight horizontal wells.

toring of drill operations which can be used to validate the success of our model (see Fig. 4).

3.1 Cleansing and Preparation

Triple Crown Resources has access to proprietary sensor data of 21 wells currently and the well count is increasing. Data points are captured every second while drilling which results in an extremely large dataset. Due to the size of the dataset, it is the team's decision to take samples of the data every 10 seconds. This decision reduced the amount of data to 2.98 million records initially which is more feasible to consume.

The dataset initially contained 506 features. The team decided to reduce the number of features to further reduce the size of the dataset. The team removed columns only containing NULL values or single values. In addition, the team removed columns that contained less than 90% of filled values. These decisions reduced the feature count for initial analysis down to 122.

In addition, by utilizing industry specific business insight, our team was able to further reduce the size of our dataset. Triple Crown Resources indicates records with an inclination value greater than or equal to 85 degrees is relevant to our problem domain. This inclination value indicates the record is related to the horizontal section of the well which is the focus of our problem statement.

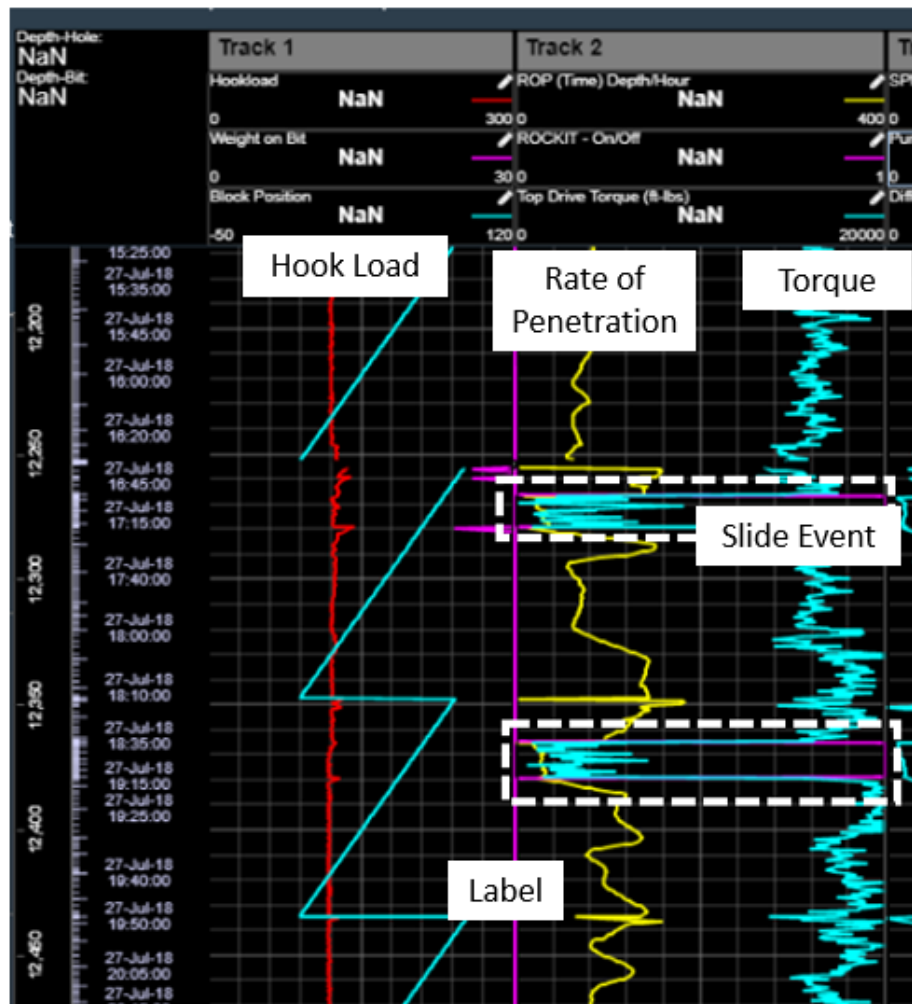


Fig. 4. MyWells Interface: A real time operational dashboard used while drilling. Drill operators use this information to control drilling operations and maintain optimal drilling parameters. The highlighted areas above shows how the rate of penetration drops significantly during a slide event.

Removing records not meeting this criteria reduced our initial dataset to 725,000 records.

3.2 Exploratory Data Analysis

The team performed exploratory data analysis on the original dataset as well as the reduced feature dataset. Fortunately, the data is populated well. Only two features have notable NA percentages. MWDContinuousInclination has an NA percentage of 3.25% and MWDGammaAPI has an NA percentage of 1.66%. These features turn out not to be a concern as they were excluded from our reduced feature dataset used for analysis.

With our reduced feature dataset, none of our features have NA values. However, we do have some issues with the feature distribution. ROPMinuteDepth, Depth_Bit, ADROPSetpointValue, and DepthHoleTVD are all right-skewed. Also, TopDriveTorqueCommand shows significant deviation from normality. Since we have a large sample size, the central limit theorem should come into play and the deviations from normality are not a concern.

The team additionally chose to experiment with data re-sampling to decrease the time required to run analysis. The team attempted re-sampling windows of one minute, five minutes, and ten minutes. The results of this analysis are seen in Fig. 5. The team experienced only minor drops in model performance at the one minute re-sampling rate. Across all the metrics used to gauge model performance, one-minute re-sampling only resulted in drops of 0.01 to 0.02. Re-sampling rates of five minutes and ten minutes resulted in significant decrease of model performance. As such, the team decided to proceed with re-sampling of the data using a one minute re-sampling rate. This struck a good balance between speed and accuracy.

4 Feature Selection

After this data cleansing was performed, the team applied a Decision Tree feature selection process to select the most relevant features. Ultimately our chosen features explained 97% of the variance. Table 1 describes features we used for analysis in our model.

Table 1: Chosen Features for Analysis

Variable	Calculation/Description
ROPMinuteDepth	Rate of penetration.
TorqueDelta	The twisting force that causes rotation.
Hookload	Total force pulling down on the hook. Includes the weight of the drillstring, drill collars, and any ancillary equipment.
BitRPM	Current rate of bit penetration.

TopDriveTorqueft_lb	Amount of torque generated from the top drive.
ADROPSetpointValue	The setpoint value entered on the HMI for ROP.
DepthHoleTVD	Position of the bit in terms of true vertical depth.
RotaryRPM	Rotation rate per minute.
PumpPressure	The pressure sensor is used to monitor mud pump pressure.
ROCKIT_RPMRW	RPM set point RockIT uses when correcting the quill position.

5 Metrics

Prior to discussing our model selection and results, a brief overview of the metrics we will be using is warranted. For our models, we focused on accuracy, precision, recall, and F1 scores as metrics to gauge the effectiveness of our models.

It is important to understand some key terms when describing the above metrics. All of the above metrics are measures of proportion when looking at true positives, true negatives, false positives, and false negatives. A true positive occurs when the predicted value is positive and the actual value is positive. Similarly, a true negative occurs when the predicted value is negative and the actual value is negative. Conversely, a false positive occurs when the predicted value is positive and the actual value is negative. A false negative occurs when the predicted value is negative and the actual value is positive. see Fig. 6 for an overview of these terms. A relevant result is a result where the actual value is positive (true positive or false negative).

Accuracy is the proportion of correctly predicted true outcomes in the dataset. Accuracy works well as a measure of model effectiveness when the dataset is well balanced. Accuracy be explained by the formula:

$$Accuracy = (TruePositive + TrueNegative) / (TruePositive + FalsePositive + FalseNegative + TrueNegative)$$

Precision is the proportion of true positives compared to all positive results returned by the model. This metric is useful for determining the percentage of your model prediction that is relevant. Precision is explained by the formula:

$$Precision = (TruePositive) / (TruePositive + FalsePositive)$$

Recall is the proportion of actual positives that are predicted correctly by the model. This metric indicates the percentage of total relevant results that are correctly predicted by the model. Recall is explained by the formula:

$$Recall = (TruePositive) / (TruePositive + FalseNegative)$$

F1 score takes both precision and recall into account (using their harmonic mean) and is another measure used to determine the effectiveness of a model. F1 score is explained by the formula:

$$F1 = 2 * ((Precision * Recall) / (Precision + Recall))$$

	Raw			
Model Type	Accuracy	Precision	Recall	F1 Score
Support Vector Machine	0.98966	0.97791	0.98811	0.98298
Logistic Regression	0.98639	0.97685	0.97816	0.97751
Random Forest	0.97823	0.97612	0.95127	0.96353

	1 Minute			
Support Vector Machine	0.98004	0.95853	0.96932	0.96389
Logistic Regression	0.97578	0.95408	0.95776	0.95591
Random Forest	0.95285	0.91211	0.91675	0.91443

	5 min			
Support Vector Machine	0.9241	0.86704	0.85674	0.86186
Logistic Regression	0.92081	0.86647	0.84346	0.85481
Random Forest	0.89532	0.86584	0.73515	0.79516

	10 min			
Logistic Regression	0.8622	0.7765	0.71409	0.74399
Random Forest	0.82009	0.75185	0.53491	0.62509
Support Vector Machine	0.86183	0.78947	0.69169	0.73735

Fig. 5. Re-sampling: Re-sampling rates of one minute, five minutes, and ten minutes were attempted. Notable decreases in model performance were experienced with five minute and ten minute re-sampling rates. However, a one minute re-sampling rate resulted in only minor decreases in model performance.

		Actual	
		Positive	Negative
Predicted	Positive	True Positive	False Positive
	Negative	False Negative	True Negative

Fig. 6. Metric Terms: True Positives, True Negatives, False Positives, and False Negatives are all used when calculating accuracy, precision, recall, and F1 scores.

6 Support Vector Machine

Background of SVM Model....placeholder text.

The team applied a Support Vector Machine model against the data using a Radial Basis Function kernel. With the Support Vector Machine model, the team achieved an accuracy of 0.98966, precision of 0.97791, recall of 0.98811, and an F1 score of 0.98298.

7 Random Forest

Background of Random Forest Model...placeholder text.

The team applied Random Forest against the data using 10 estimators. With the Random Forest model, the team achieved an accuracy of 0.97823, precision of 0.97612, recall of 0.95127, and an F1 score of 0.96353.

8 Logistic Regression

Background of Logistic Regression Model...placeholder text.

The team applied Logistic Regression against the data using a limited memory Broyden-Fletcher-Goldfarb-Shanno solver. With the Logistic Regression model, the team achieved an accuracy of 0.98639, precision of 0.97685, recall of 0.97816, and an F1 score of 0.97751.

9 Results and Analysis

For predicting the very next data point, the team achieved the best model performance (as determined by F1 score) with the Support Vector Machine model (see Fig. 7).

Model Type	Accuracy	Precision	Recall	F1 Score
Support Vector Machine	0.98966	0.97791	0.98811	0.98298
Logistic Regression	0.98639	0.97685	0.97816	0.97751
Random Forest	0.97823	0.97612	0.95127	0.96353

Fig. 7. Model Results: The Support Vector Machine model performed the best as determined by F1 score. Logistic Regression was a close second while Random Forest performed the worst.

Using the Support Vector Machine model, the team's model only misclassified five events (see Fig. 8). It appears the model is misclassifying the beginning and end of a slide event.

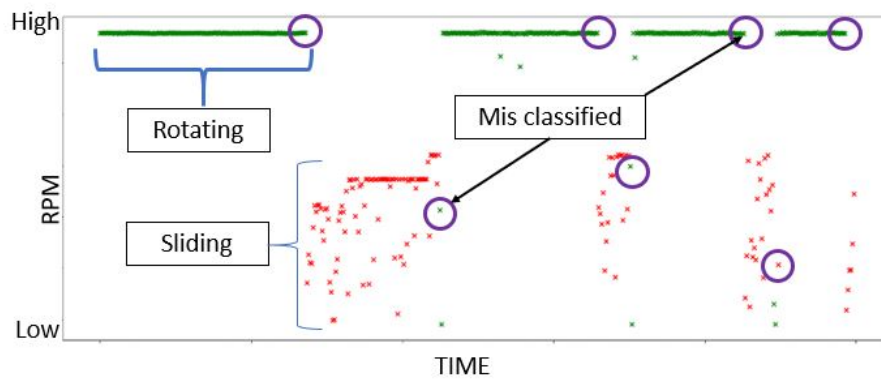


Fig. 8. Classification Results: Five events were misclassified using the Support Vector Machine model. It appears the model is misclassifying the beginning and end of a slide event.

When incorporating our future time-window predictions, the team achieved 82% and 83% accuracy with Logistic Regression and Support Vector Machine models respectively at the ten-minute window. These accuracy scores dropped to 73% for both Logistic Regression and Support Vector Machine at the thirty-minute prediction as seen in Fig. 9. The Random Forest model performed the worst for all prediction time windows and thus was not a candidate for optimal model choice.

Actionable features placeholder text....

Our team is not the first to be interested in optimizing drill operations. Understandably, there is prior work related to our problem domain. US Patent 6,152,246 describes a database application designed to measure drilling parame-

	Jump Ahead 30			
Model Type	Accuracy	Precision	Recall	F1 Score
Support Vector Machine	0.725670466	0.528301887	0.0172653	0.033437827
Logistic Regression	0.725924671	0.569230769	0.01140743	0.022366631
Random Forest	0.674532898	0.296422487	0.134114383	0.184674167
	Jump Ahead 25			
Support Vector Machine	0.726614133	0.53046595	0.045629721	0.084031228
Logistic Regression	0.724538214	0.492370295	0.07461076	0.129585007
Random Forest	0.669505169	0.345919325	0.227377833	0.27439308
	Jump Ahead 20			
Support Vector Machine	0.74403728	0.622185612	0.174657006	0.272749157
Logistic Regression	0.738487609	0.552298468	0.255588099	0.349457266
Random Forest	0.720398221	0.481850305	0.231231694	0.3125
	Jump Ahead 15			
Support Vector Machine	0.779547573	0.657037944	0.413750578	0.507756337
Logistic Regression	0.772049479	0.617860188	0.446893788	0.518651042
Random Forest	0.724646276	0.498332906	0.299522121	0.37415752
	Jump Ahead 10			
Support Vector Machine	0.831871902	0.717820069	0.639586866	0.67644901
Logistic Regression	0.824713009	0.700940975	0.631570834	0.664450211
Random Forest	0.749565807	0.549339283	0.493448435	0.519896053

Fig. 9. Future Prediction: Support Vector Machine performed the best at predicting future events with Logist Regression a close second. Random Forest performed the worst at all time windows.

ters, apply operating limits, and alert operators when specified events occur [1]. While this work is intriguing, this invention is geared towards real time event monitoring and alerts. Our slide event prediction model achieves additional benefit by being able to alert operators of an upcoming slide event. This allows operators to take preventative measures before the event ever occurs.

10 Ethics

Creating a more efficient drilling program does allow for monetary gains for the industry, however the environmental impact cannot be ignored. Byproducts of drilling include large amounts of formation water that require treatment and cannot be used for irrigation due to chemical contamination. In addition, earthquakes have been on the increase in areas where fracking operations are conducted. Weighing the environmental costs against shareholder return is an ethical issue that must be discussed. The improved drilling efficiency our model brings could result in expanded drilling operations, and thus more environmental concerns.

11 Conclusions

Ultimately, the team decided the Logistic Regression model was the optimal choice for our problem at hand. Although the Support Vector Machine model performed slightly better (2% greater accuracy), the Logistic Regression model ran much quicker making it easier to deploy in a business setting. Also, the Logistic Regression model was found to be more readily understood by business stakeholders.

By identifying controllable features as part of the classification model, the team has demonstrated a viable means for mitigating slide events.

References

1. Charles H. King, Mitchell D. Pinckard, D.P.S.A.O.D.W.: Method of and system for monitoring drilling parameters. (11 2000), <http://patft.uspto.gov>, patent Number - 6,152,246
2. Ma, T., Chen, P., Zhao, J.: Overview on vertical and directional drilling technologies for the exploration and exploitation of deep petroleum resources. *Geomechanics and Geophysics for Geo-Energy and Geo-Resources* **2**(4), 365–395 (Dec 2016). <https://doi.org/10.1007/s40948-016-0038-y>, <https://doi.org/10.1007/s40948-016-0038-y>
3. Mohammadpoor, M., Torabi, F.: Big data analytics in oil and gas industry: An emerging trend. *Petroleum* (2018). <https://doi.org/https://doi.org/10.1016/j.petlm.2018.11.001>, <http://www.sciencedirect.com/science/article/pii/S2405656118301421>
4. Rapier, R.: Fracking has been around since 1949, why the recent controversy? Global Energy Initiative (12 2014), globalenergyinitiative.org/insights/58-fracking-has-been-around-since-1949-why, accessed 3 June 2019

5. Rapiert, R.: The permian basin is now the world's top oil producer. Forbes (4 2019), <https://www.forbes.com/sites/rrapiert/2019/04/05/the-permian-basin-is-now-the-worlds-top-oil-producer/#6534487d3eff>, accessed 8 July 2019
6. Sepmstrata.org: Permian basin tectonics - SEPM strata. SEPM Strata (2019), <http://www.sepmstrata.org/page.aspx?pageid=137>, accessed 8 July 2019
7. Tang, C.M.: Permian basin. Encyclopedia Britannica (5 2015), www.britannica.com/place/Permian-Basin, accessed 3 June 2019

Appendix