


MicroSAL — Config / Data Split (FLASH vs RAM)

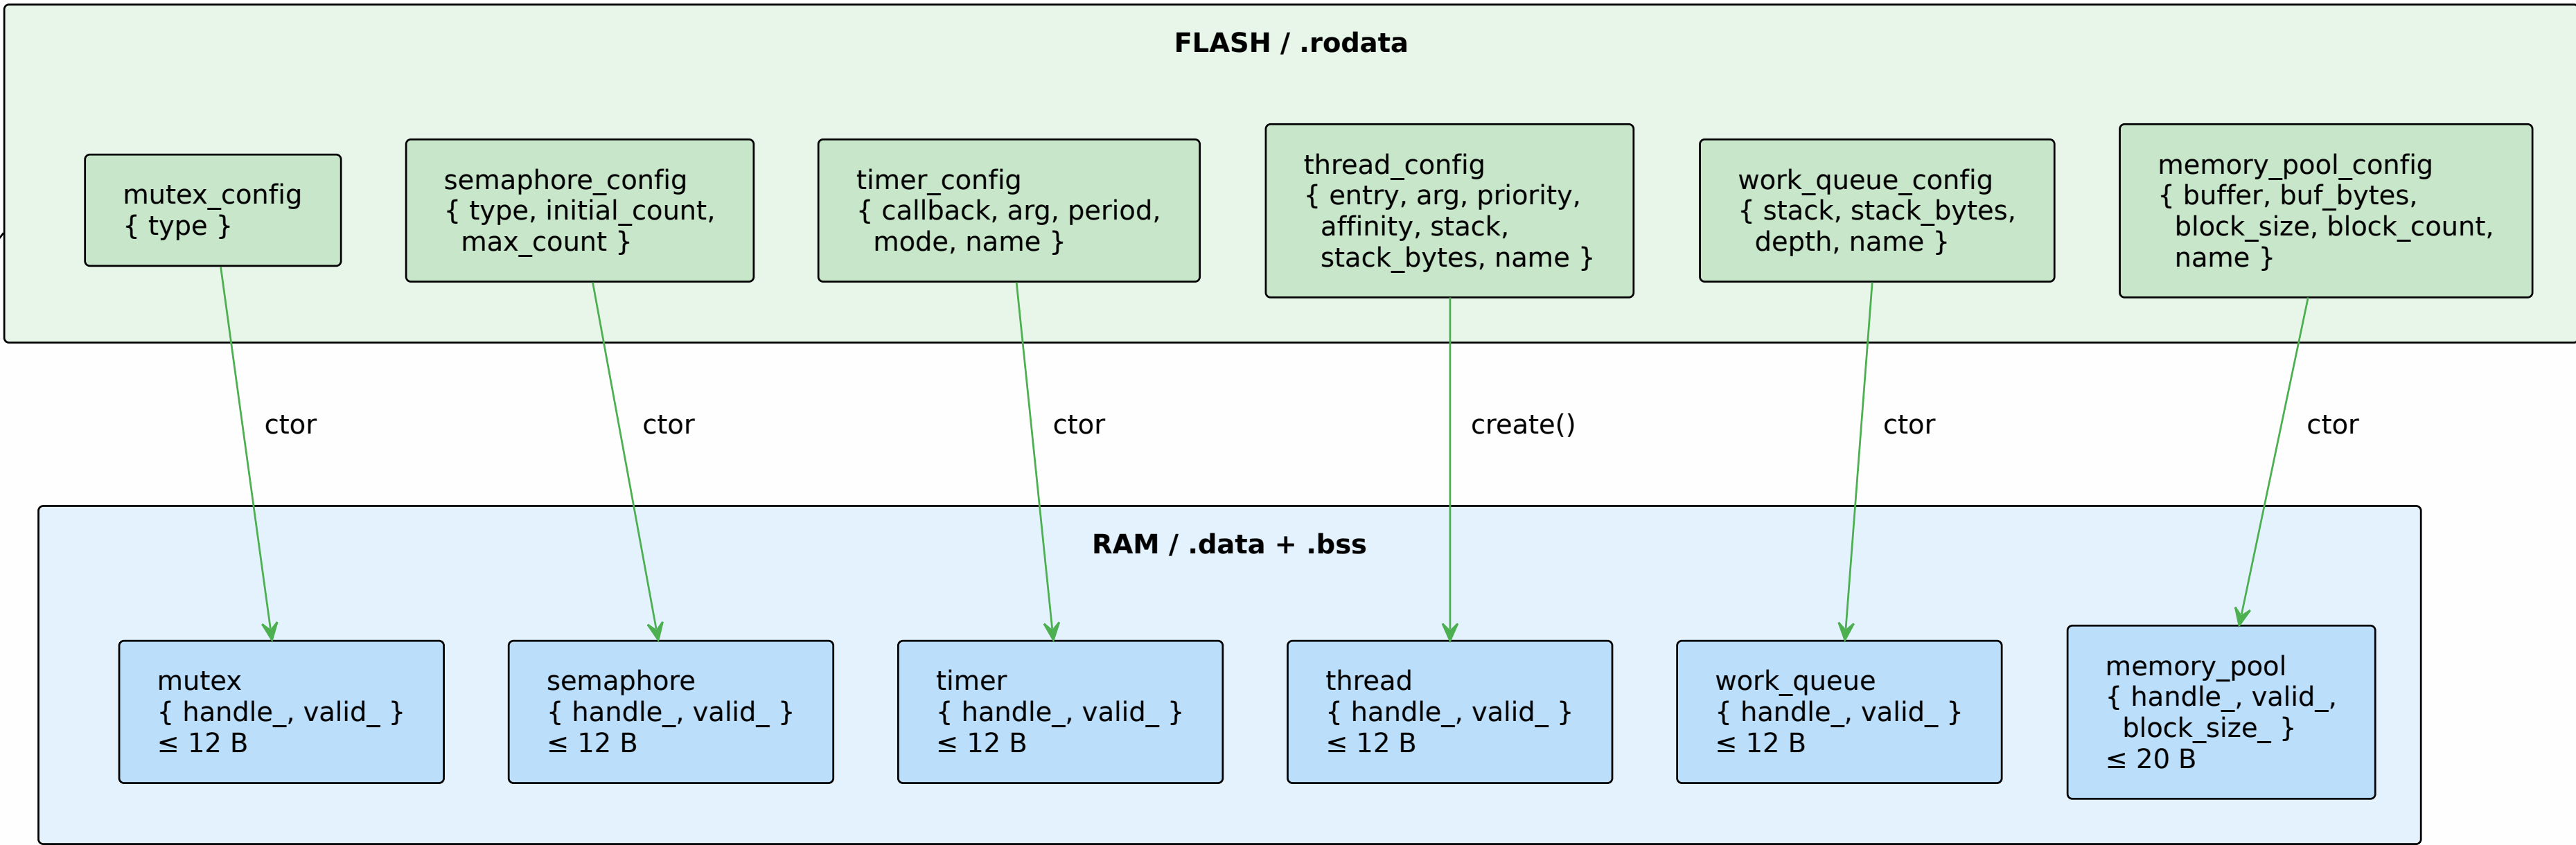

Config structs are declared **const / constexpr**. The linker places them in **.rodata** (FLASH). Zero RAM cost for the descriptors themselves.

Only the OS handle (void*) and a valid flag reside in RAM. Dead stored fields (type_ from mutex, type_ from semaphore) were removed.