Firefly Mini (Gen. 2.5)


Barefoot Power

Results based on test procedures detailed in IEC 62257-9-5, ed. 2.0

Verify Online: www.lightingglobal.org/products/bf-

fireflymini

Valid Until: May 2015

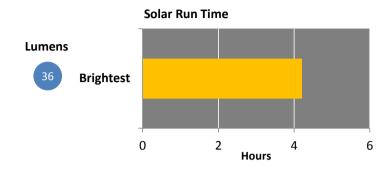



Meets Lighting Global Minimum Quality Standards

1 Light Point



Warranty Information

A 1-year warranty for replacement of defective parts.

Performance Details	
	Brightness Setting***
Performance Measure	Brightest
Full battery run time* (hours)	4.2
Run time per day of solar charging* (hours)	4.2
Total light output (lumens)	36
Total area with illumination > 25 lux** (m ²)	0.1
Total lighting service (lumen-hours / solar-day)	150

^{*} Run time estimates do not account for mobile phone charging or other auxiliary loads; the run time is defined as the time until the output is 70% of the initial, stabilized output.

^{***} Additional brightness settings (not tested): Lowest

Lighting Details	
Lamp type	LED
Description of light points	Single unit on gooseneck with 5 LEDs
Colour characteristics	CRI 73
	CCT "Cool" (5000-7000 K)
Distribution type	Wide
Lumen maintenance	98% of the original output remains after 2,000
	hours run time

^{**} Total area with illumination > 25 lux is determined by the maximum area with adequate illumination at a 0.75 m distance and at the distance from which the product would normally provide task lighting service.

Durability		
Overall durability and workmanship	Pass	
Durability tests passed	Drop test, switch and connector cycling, gooseneck	
	test, strain relief test, physical ingress protection	
	test, and protection from occassional rain	
	•	
Solar Details		
PV module type	Polycrystalline silicon	
PV maximum power point	1.1 watts	
Battery Details		
Battery replaceability	Easily replaceable with common tools	
Battery chemistry	Lithium iron phosphate	
Appropriate battery protection circuit	Pass	
Replacement batteries are available from the product manufacturer		
Marks and Certifications		
Other certification	UNBS, KEBS	
Product Details		
Manufacturer name	Barefoot Power	
Product name	Firefly Mini (Gen. 2.5)	
Product model / ID number	010-25-0005-1	
Contact information	info@barefootpower.com	
Website	www.barefootpower.com	
SSS Information		
Specs sheet expiration date	May 2015	
Minimum Quality Standards Framework Version	2012	
Revision	2015.01	