
## Awango TS120

Schneider Electric

Verify www.lightingglobal.org/products/se-ts120

Results based on test procedures detailed in IEC 62257-9-5, ed. 2.0

Valid Until: June 30, 2016

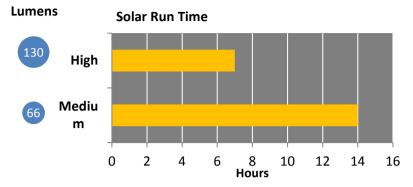





Meets Lighting Global Minimum Quality Standards



**Mobile Charging** 

1 Light Point

## **Warranty Information**

A 2-year warranty covering manufacturing defects.

Performance Details		
	Brightness Setting***	
Performance Measure	High	Medium
Full battery run time* (hours)	7.4	16
Run time per day of solar charging* (hours)	7.0	14
Total light output (lumens)	130	66
Total area with illumination > 50 lux** (m <sup>2</sup> )	0.65	0.32
Total lighting service (lumen-hours / solar-day)	910	920

<sup>\*</sup> Run time estimates do not account for mobile phone charging or other auxiliary loads; the run time is defined as the time until the output is 70% of the initial, stabilized output.

<sup>\*\*\*</sup> Additional brightness settings (not tested): Low

Lighting Details	
Lamp type	LED
Description of light points	6
Colour characteristics	CRI 70
	CCT "Near Daylight" (3000-5000 K)
Distribution type	Wide
Lumen maintenance	97% of the original output remains after 2,000 hours
	run time

<sup>\*\*</sup> Total area with illumination > 50 lux is determined by the maximum area with adequate illumination at a 0.75 m distance and at the distance from which the product would normally provide task lighting service.

Special Features		
Mobile charging	Adapters included to charge mobile phone from battery	
	-	
Durability		
Overall durability and workmanship	Pass	
Durability tests passed	Drop test, switch and connector cycling, strain relief test, physical ingress protection test, and protection from occassional rain	
Solar Details		
PV module type	Polycrystalline silicon	
PV maximum power point	2.5 watts	
D-11 D-1		
Battery Details	Coolly was lacable with common tools	
Battery replaceability	Easily replaceable with common tools	
Battery chemistry	Lithium iron phosphate	
Battery package type Battery capacity	2 x 18650 cylindrical cells 1500 mAh	
Battery nominal voltage	6.4 V	
Appropriate battery protection circuit	Pass	
Appropriate battery protestion orealt	1 455	
Marks and Certifications		
Factory certification	ISO 9001:2008	
	•	
Product Details		
Manufacturer name	Schneider Electric	
Product name	Awango TS120	
Product model / ID number	TS120	
Contact information	Ezhilmaran.ranga@schneider-electric.com Prashanth.nagaraja@schneider-electric.com	
Website	www.schneider-electric.com	
SSS Information		
Specs sheet expiration date	June 30, 2016	
Minimum Quality Standards Framework Version	2014	
Revision	2015.04	