




# Electric Shielding Comparison

## Introduction

---

The electric shielding boundary condition is meant to approximate a thin layer of highly conductive material that provides an additional current path tangential to a boundary. This example compares the electric shielding boundary condition to a full-fidelity model and discusses the range of applicability of this boundary condition.

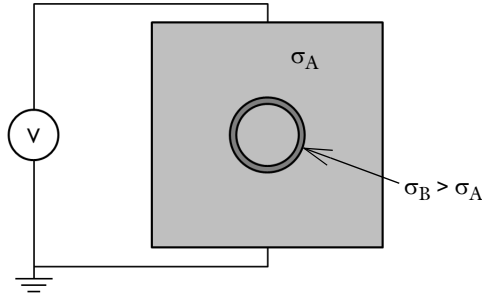

*Figure 1: A square 2D domain of conductive material, with a circular inclusion. The wall of the inclusion is made of a material with higher conductivity.*

## Model Definition


---

The situation being modeled is shown in [Figure 1](#). A 1 m square two-dimensional domain of conductive material has a DC voltage difference applied to it. Within the square domain, there is a circular inclusion of radius 0.25 m. The 0.01 m thick walls of this inclusion are modeled two ways, first using a full fidelity model that includes the thickness of the walls, and also using the electric shielding boundary condition. The inside of the inclusion has the same properties as the bulk.

The location of the electric shielding condition is at the centerline, midway between the inner and outer radii of the full fidelity model. Note that, when using the electric shielding condition, the total volume of the surrounding material is slightly larger, since the thickness of the wall is not being explicitly modeled. The conductivity of the wall of the inclusion is varied.

## Results and Discussion

The voltage distribution and the electric field strength is plotted in [Figure 2](#) for the case where the electric conductivity is one thousand times greater in the wall of the inclusion than in the bulk. This represents a thin walled object that allows significant current flow along its surface, that is, it shields whatever is inside the inclusion from the electric fields and current flow. The current can be observed to flow toward the inclusion, and then along the surface. The solutions for the full fidelity and electric shielding model agree well for the cases where the conductivity is greater than the surrounding medium.

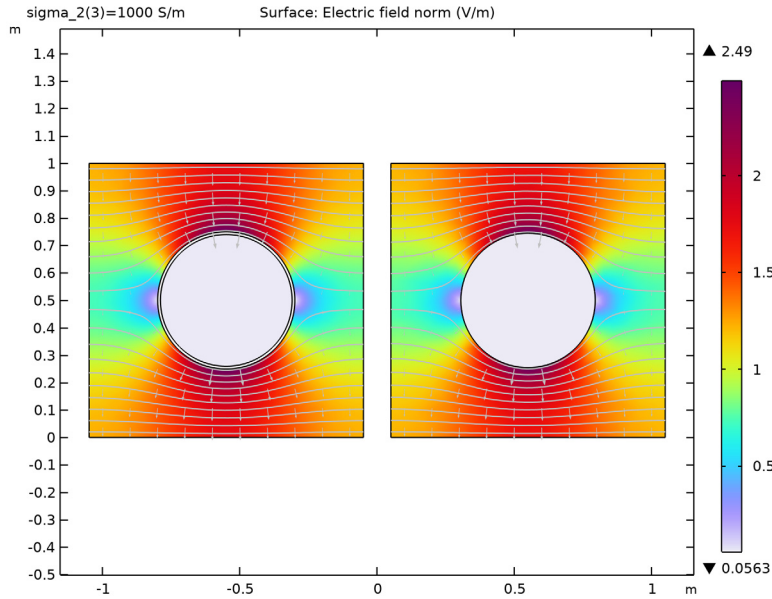

*Figure 2: A surface plot of the electric field norm, together with isolines of the electric potential and an arrow plot indicating the electric field direction, for the case of a thin layer of material that has a high conductivity. The full fidelity (left) and electric shielding (right) solutions are almost identical.*

Figure 3 shows the case where the electric conductivity in the wall of the inclusion is only ten times greater than the surroundings. The electric shielding condition still agrees well with the full fidelity model.

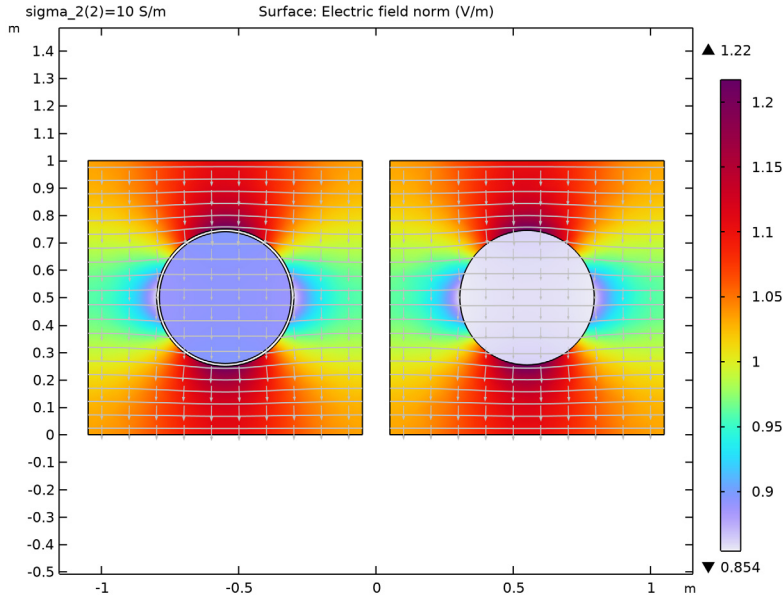


Figure 3: A surface plot of the electric field norm, together with isolines of the electric potential and an arrow plot indicating the electric field direction, for the case of a thin layer of material that has conductivity ten times greater than the surrounding material.

Figure 4 shows the case where the electric conductivity in the wall of the inclusion is ten times less than the surroundings. The electric shielding condition no longer agrees with the full fidelity model. Although an additional conduction path has been added tangential to the boundary, the magnitude of this conduction path is less than in the surrounding material, thus it does not noticeably alter the current flow. The electric shielding boundary condition also does not impede the current flow normal to the boundary, which is the case, as can be seen in the full fidelity model. The Contact Impedance boundary condition would be more appropriate for this case.

The electric shielding boundary condition can be used in cases where the thickness of the boundary being approximated is much smaller than the characteristic size of the model domain, and when the conductivity of the layer is greater than the surrounding medium.

When this boundary condition can be used, the resulting mesh size is much smaller, saving solution time and memory.

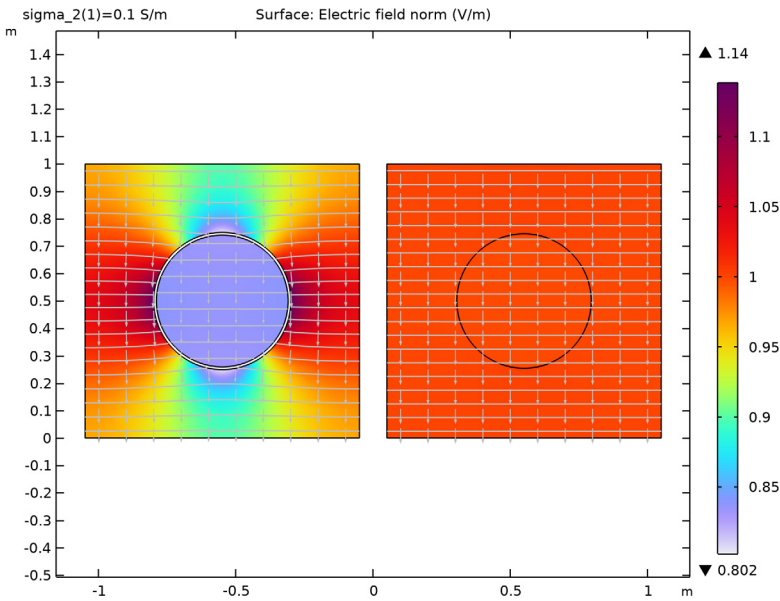


Figure 4: For the case of a thin layer of material that has conductivity ten times less than the surrounding material. The solutions do not agree for this case.

---

**Application Library path:** ACDC\_Module/Introductory\_Electric\_Currents/  
electric\_shielding\_comparison


---

### Modeling Instructions

---



From the **File** menu, choose **New**.

#### NEW

In the **New** window, click  **Model Wizard**.

#### MODEL WIZARD

- 1 In the **Model Wizard** window, click  **2D**.
- 2 In the **Select Physics** tree, select **AC/DC>Electric Fields and Currents>Electric Currents (ec)**.

- 3 Click **Add**.
- 4 Click  **Study**.
- 5 In the **Select Study** tree, select **General Studies>Stationary**.
- 6 Click  **Done**.

## GLOBAL DEFINITIONS


### *Parameters 1*

- 1 In the **Model Builder** window, under **Global Definitions** click **Parameters 1**.
- 2 In the **Settings** window for **Parameters**, locate the **Parameters** section.
- 3 In the table, enter the following settings:


Name	Expression	Value	Description
sigma_1	1[S/m]	1 S/m	Conductivity, material 1
sigma_2	1[S/m]	1 S/m	Conductivity, material 2

## GEOMETRY 1


### *Square 1 (sq1)*

- 1 In the **Geometry** toolbar, click  **Square**.
- 2 In the **Settings** window for **Square**, locate the **Position** section.
- 3 In the **x** text field, type 0.05.

### *Square 2 (sq2)*

- 1 In the **Geometry** toolbar, click  **Square**.
- 2 In the **Settings** window for **Square**, locate the **Position** section.
- 3 In the **x** text field, type -1.05.

### *Circle 1 (c1)*

- 1 In the **Geometry** toolbar, click  **Circle**.
- 2 In the **Settings** window for **Circle**, locate the **Size and Shape** section.
- 3 In the **Radius** text field, type 0.245.
- 4 Locate the **Position** section. In the **x** text field, type 0.55.
- 5 In the **y** text field, type 0.5.



### *Circle 2 (c2)*


- 1 In the **Geometry** toolbar, click  **Circle**.

- 2 In the **Settings** window for **Circle**, locate the **Size and Shape** section.
- 3 In the **Radius** text field, type 0.25.
- 4 Locate the **Position** section. In the **x** text field, type -0.55.
- 5 In the **y** text field, type 0.5.
- 6 Click to expand the **Layers** section. In the table, enter the following settings:

Layer name	Thickness (m)
Layer 1	0.01

*Form Union (fin)*

- 1 In the **Geometry** toolbar, click  **Build All**.
- 2 Click the  **Zoom Extents** button in the **Graphics** toolbar.
- 3 In the **Model Builder** window, click **Form Union (fin)**.

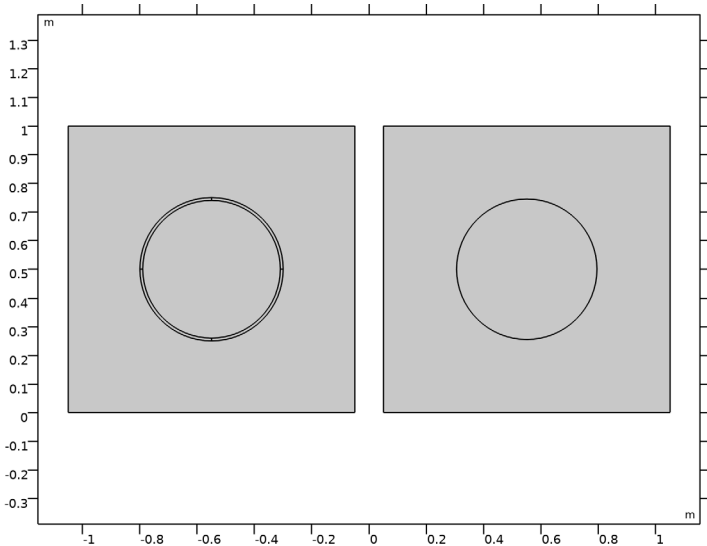


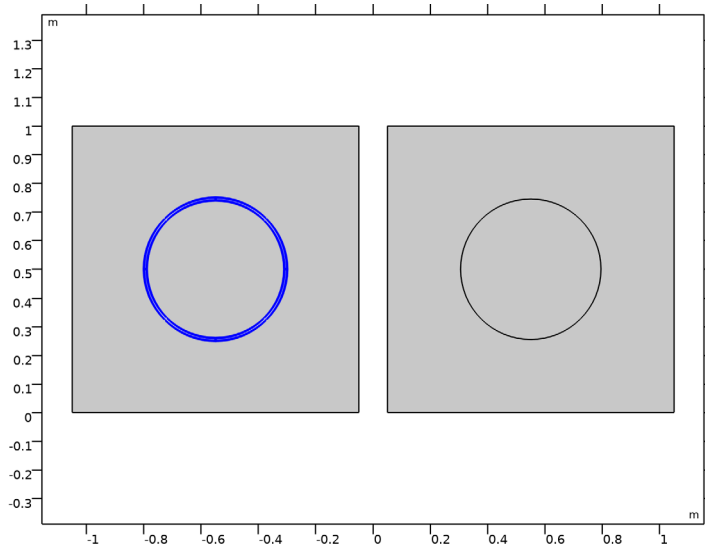
The geometry on the left side describes the full fidelity model. The geometry on the right side replaces the thin layer with a boundary in order to use the **Electric Shielding** feature.

Create a set of selections for use before setting up the physics. First, create a selection for the wall of the inclusion.

## DEFINITIONS


### *Full Fidelity*

- 1 In the **Definitions** toolbar, click  **Explicit**.
- 2 Select Domains 2–5 only.
- 3 In the **Settings** window for **Explicit**, type Full Fidelity in the **Label** text field.




Next, add a selection for the electric shielding boundaries.

### *Electric Shielding*



- 1 In the **Definitions** toolbar, click  **Explicit**.
- 2 In the **Settings** window for **Explicit**, locate the **Input Entities** section.
- 3 From the **Geometric entity level** list, choose **Boundary**.
- 4 Select Boundaries 21–24 only.

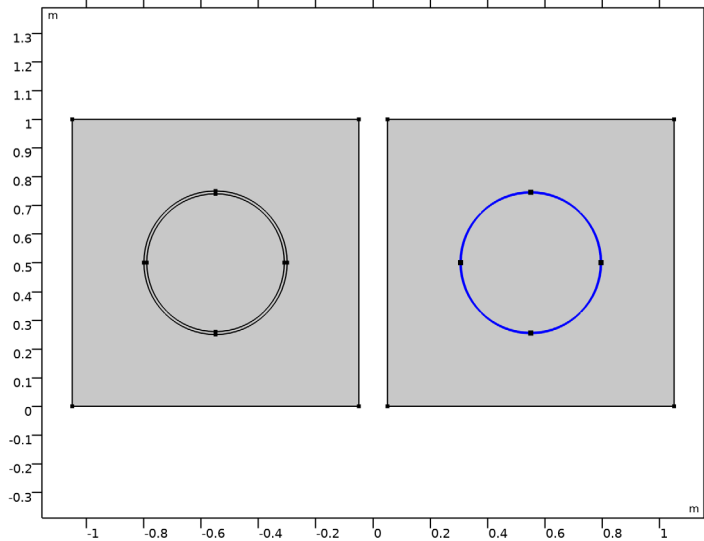


5 In the **Label** text field, type Electric Shielding.



#### Bulk

- 1 In the **Definitions** toolbar, click  **Complement**.
- 2 In the **Settings** window for **Complement**, locate the **Input Entities** section.
- 3 Under **Selections to invert**, click  **Add**.
- 4 In the **Add** dialog box, select **Full Fidelity** in the **Selections to invert** list.
- 5 Click **OK**.

6 In the **Settings** window for **Complement**, type Bulk in the **Label** text field.

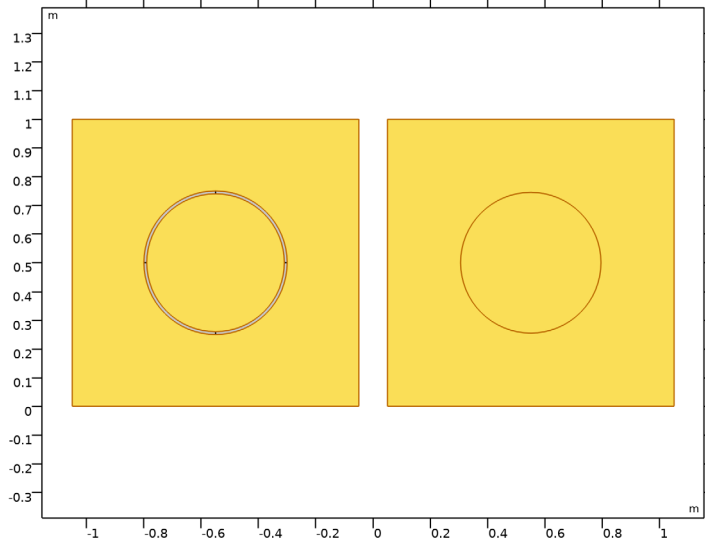


## ELECTRIC CURRENTS (EC)

### *Ground 1*

1 In the **Model Builder** window, under **Component 1 (compl)** right-click **Electric Currents (ec)** and choose **Ground**.


2 Select Boundary 10 only.

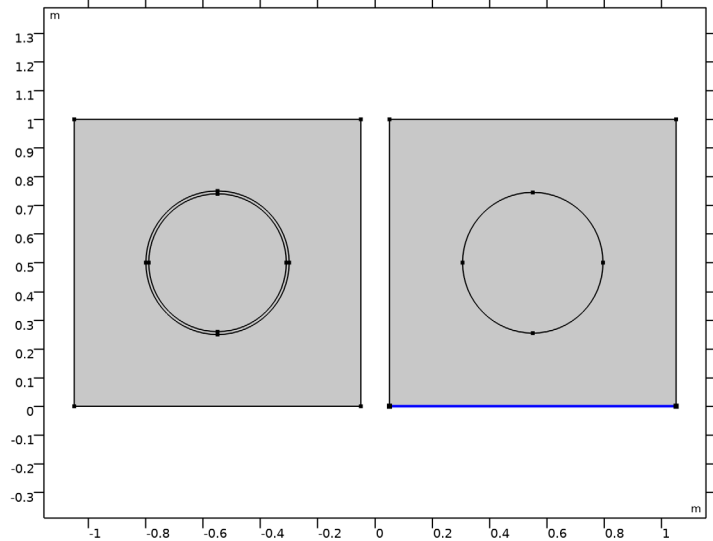

Ground 2


1 In the **Physics** toolbar, click  **Boundaries** and choose **Ground**.

2 Select Boundary 2 only.

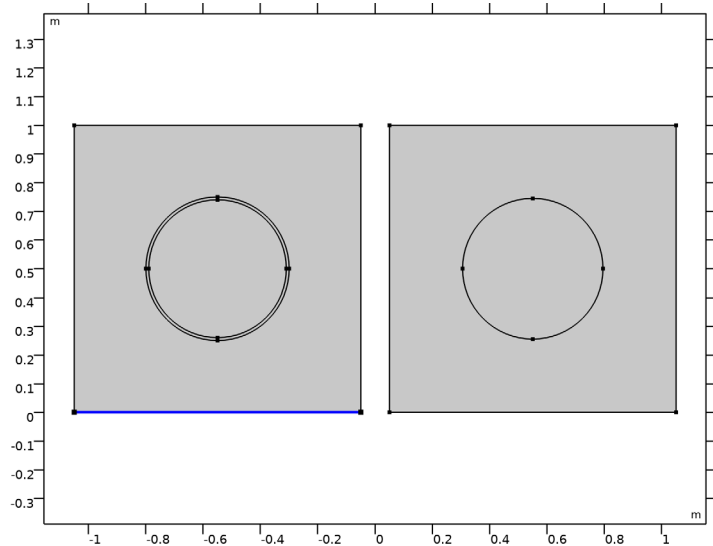

### Terminal 1

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Terminal**.
- 2 Select Boundary 11 only.

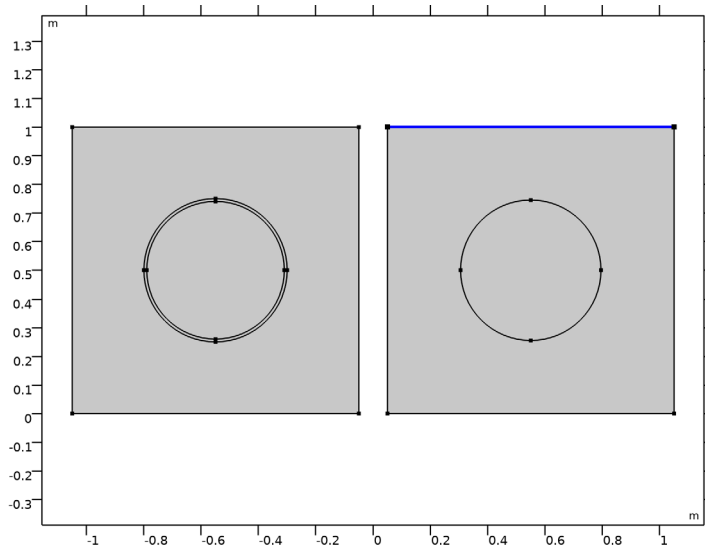


- 3 In the **Settings** window for **Terminal**, locate the **Terminal** section.
- 4 From the **Terminal type** list, choose **Voltage**.

### Terminal 2


- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Terminal**.

- 2 Select Boundary 3 only.

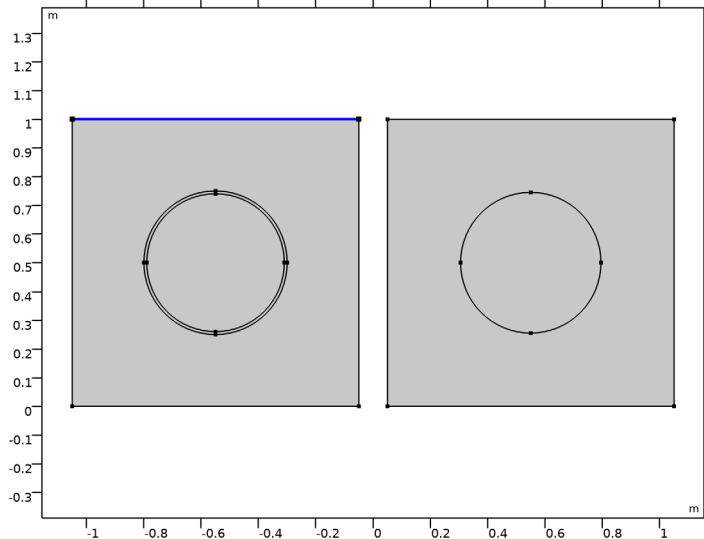

- 3 In the **Settings** window for **Terminal**, locate the **Terminal** section.
- 4 From the **Terminal type** list, choose **Voltage**.

#### *Electric Shielding I*

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Electric Shielding**.
- 2 In the **Settings** window for **Electric Shielding**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Electric Shielding**.

### **MATERIALS**

#### *Material I (mat1)*

- 1 In the **Model Builder** window, under **Component I (comp1)** right-click **Materials** and choose **Blank Material**.
- 2 In the **Settings** window for **Material**, locate the **Geometric Entity Selection** section.
- 3 From the **Selection** list, choose **Bulk**.

4 Locate the **Material Contents** section. In the table, enter the following settings:

Property	Variable	Value	Unit	Property group
Electrical conductivity	sigma_iso ; sigma_ii = sigma_iso, sigma_ij = 0	sigma_1	S/m	Basic
Relative permittivity	epsilon_nr_iso ; epsilon_nr_ii = epsilon_nr_iso, epsilon_nr_ij = 0	1	I	Basic

#### *Material 2 (mat2)*

- 1 Right-click **Materials** and choose **Blank Material**.
- 2 In the **Settings** window for **Material**, locate the **Geometric Entity Selection** section.
- 3 From the **Selection** list, choose **Full Fidelity**.
- 4 Locate the **Material Contents** section. In the table, enter the following settings:

Property	Variable	Value	Unit	Property group
Electrical conductivity	sigma_iso ; sigma_ii = sigma_iso, sigma_ij = 0	sigma_2	S/m	Basic
Relative permittivity	epsilon_nr_iso ; epsilon_nr_ii = epsilon_nr_iso, epsilon_nr_ij = 0	1	I	Basic

#### *Material 3 (mat3)*


- 1 Right-click **Materials** and choose **Blank Material**.
- 2 In the **Settings** window for **Material**, locate the **Geometric Entity Selection** section.
- 3 From the **Geometric entity level** list, choose **Boundary**.
- 4 From the **Selection** list, choose **Electric Shielding**.

5 Locate the **Material Contents** section. In the table, enter the following settings:

Property	Variable	Value	Unit	Property group
Relative permittivity	epsilon <sub>nr_ii</sub> ; epsilon <sub>nr_ii</sub> = epsilon <sub>nr_ii</sub> , epsilon <sub>nrij</sub> = 0	1		Basic
Electrical conductivity	sigma <sub>iso</sub> ; sigma <sub>ii</sub> = sigma <sub>iso</sub> , sigma <sub>ij</sub> = 0	sigma_2	S/m	Basic


### MESH 1

In the **Model Builder** window, under **Component 1 (comp1)** right-click **Mesh 1** and choose **Build All**.

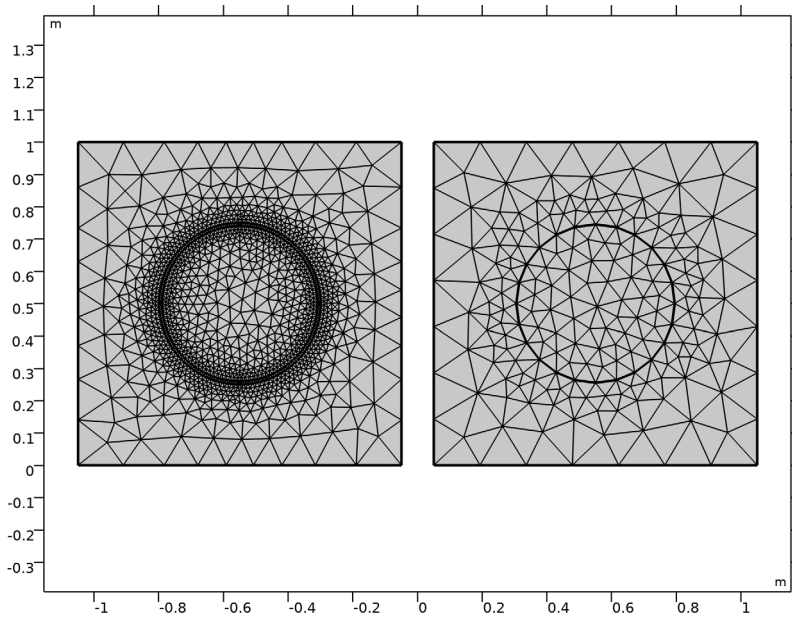

### STUDY 1


#### Parametric Sweep

- 1 In the **Study** toolbar, click  **Parametric Sweep**.
- 2 In the **Settings** window for **Parametric Sweep**, locate the **Study Settings** section.

3 Click  **Add**.

4 In the table, enter the following settings:

Parameter name	Parameter value list	Parameter unit
sigma_2 (Conductivity, material 2)	1e-1 1e1 1e3	S/m

5 In the **Study** toolbar, click  **Compute**.

Begin the result analysis by excluding the interior of the wall from the selection. The walls interior is not of interest in this comparison.

## RESULTS

### *Selection*

- 1 In the **Model Builder** window, expand the **Results>Datasets** node.
- 2 Right-click **Study I/Solution I (sol1)** and choose **Selection**.
- 3 In the **Settings** window for **Selection**, locate the **Geometric Entity Selection** section.
- 4 From the **Geometric entity level** list, choose **Domain**.
- 5 From the **Selection** list, choose **Bulk**.

The first default plot shows the electric potential, while the second plot shows the norm of the electric field. Modify the plot group to get a better view on the field shape. Start by disabling the streamlines and adding some contours.

### *Streamline I*

- 1 In the **Model Builder** window, expand the **Results>Electric Field Norm (ec)** node.
- 2 Right-click **Streamline I** and choose **Disable**.

### *Contour I*



- 1 In the **Model Builder** window, right-click **Electric Field Norm (ec)** and choose **Contour**.
- 2 In the **Settings** window for **Contour**, click to expand the **Title** section.
- 3 From the **Title type** list, choose **None**.
- 4 Locate the **Coloring and Style** section. From the **Coloring** list, choose **Uniform**.
- 5 From the **Color** list, choose **Gray**.
- 6 Clear the **Color legend** check box.

Then, add an arrow plot of the electric field.



### *Arrow Surface I*

- 1 Right-click **Electric Field Norm (ec)** and choose **Arrow Surface**.



- 2 In the **Settings** window for **Arrow Surface**, click **Replace Expression** in the upper-right corner of the **Expression** section. From the menu, choose **Component 1 (comp1)>Electric Currents>Electric>ec.Ex,ec.Ey - Electric field**.
  - 3 Click to expand the **Title** section. From the **Title type** list, choose **None**.
  - 4 Locate the **Arrow Positioning** section. Find the **x grid points** subsection. In the **Points** text field, type 21.
  - 5 Find the **y grid points** subsection. In the **Points** text field, type 14.
  - 6 Locate the **Coloring and Style** section. From the **Color** list, choose **Gray**.
  - 7 In the **Electric Field Norm (ec)** toolbar, click  **Plot**.
  - 8 Click the  **Zoom Extents** button in the **Graphics** toolbar.
- Compare the resulting plot with [Figure 2](#).

#### *Electric Field Norm (ec)*

- 1 In the **Model Builder** window, click **Electric Field Norm (ec)**.
  - 2 In the **Settings** window for **2D Plot Group**, locate the **Data** section.
  - 3 From the **Parameter value (sigma\_2 (S/m))** list, choose **10**.
  - 4 In the **Electric Field Norm (ec)** toolbar, click  **Plot**.
- This should look like [Figure 3](#).
- Finish by reproducing [Figure 4](#).
- 5 From the **Parameter value (sigma\_2 (S/m))** list, choose **0.1**.
  - 6 In the **Electric Field Norm (ec)** toolbar, click  **Plot**.

