



BL808

Reference Manual

Version: 1.3

Copyright @ 2023

www.bouffalolab.com

Contents

1	System and Memory	35
1.1	System Architecture	35
1.2	CPU	37
1.2.1	M0	37
1.2.1.1	Features	37
1.2.1.2	Extended Functions	38
1.2.1.3	Implemented Standards	38
1.2.2	D0	38
1.2.2.1	Features	38
1.2.2.2	Extended Functions	39
1.2.2.3	Implemented Standards	39
1.2.3	LP	40
1.2.3.1	Features	40
1.2.3.2	Implemented Standards	40
1.3	Boot	40
1.4	Address Mapping	41
1.5	Interrupt Source	43
2	Reset and Clock	46
2.1	Overview	46
2.2	Reset Management	46
2.3	Clock Source	48
3	GLB	52
3.1	Overview	52
3.2	Functional Description	52
3.2.1	Clock Management	52
3.2.2	Reset Management	52

3.2.3	Bus Management	52
3.2.4	Memory Management	53
4	GPIO	54
4.1	Overview	54
4.2	Features	54
4.3	GPIO function list	54
4.4	GPIO Input Settings	56
4.5	GPIO Output Settings	56
4.5.1	Normal Output Mode	56
4.5.2	Set/Clear Output Mode	56
4.5.3	Buffer Output Mode	57
4.5.4	Cache Set/Clear Output Mode	60
4.6	I/O FIFO	60
4.7	I/O Interrupt	61
4.8	Register description	62
4.8.1	gpio_cfg0	64
4.8.2	gpio_cfg1	65
4.8.3	gpio_cfg2	67
4.8.4	gpio_cfg3	69
4.8.5	gpio_cfg4	71
4.8.6	gpio_cfg5	72
4.8.7	gpio_cfg6	74
4.8.8	gpio_cfg7	76
4.8.9	gpio_cfg8	78
4.8.10	gpio_cfg9	79
4.8.11	gpio_cfg10	81
4.8.12	gpio_cfg11	83
4.8.13	gpio_cfg12	85
4.8.14	gpio_cfg13	87
4.8.15	gpio_cfg14	89
4.8.16	gpio_cfg15	91
4.8.17	gpio_cfg16	93
4.8.18	gpio_cfg17	95
4.8.19	gpio_cfg18	97
4.8.20	gpio_cfg19	99
4.8.21	gpio_cfg20	101
4.8.22	gpio_cfg21	103
4.8.23	gpio_cfg22	105
4.8.24	gpio_cfg23	107

4.8.25	gpio_cfg24	109
4.8.26	gpio_cfg25	111
4.8.27	gpio_cfg26	113
4.8.28	gpio_cfg27	115
4.8.29	gpio_cfg28	117
4.8.30	gpio_cfg29	119
4.8.31	gpio_cfg30	121
4.8.32	gpio_cfg31	123
4.8.33	gpio_cfg32	125
4.8.34	gpio_cfg33	127
4.8.35	gpio_cfg34	129
4.8.36	gpio_cfg35	131
4.8.37	gpio_cfg36	133
4.8.38	gpio_cfg37	135
4.8.39	gpio_cfg38	137
4.8.40	gpio_cfg39	139
4.8.41	gpio_cfg40	141
4.8.42	gpio_cfg41	143
4.8.43	gpio_cfg42	145
4.8.44	gpio_cfg43	147
4.8.45	gpio_cfg44	149
4.8.46	gpio_cfg45	151
4.8.47	gpio_cfg128	153
4.8.48	gpio_cfg129	155
4.8.49	gpio_cfg136	156
4.8.50	gpio_cfg137	157
4.8.51	gpio_cfg138	158
4.8.52	gpio_cfg139	161
4.8.53	gpio_cfg141	165
5	ADC	169
5.1	Overview	169
5.2	Features	169
5.3	Functional Description	170
5.3.1	ADC Pins and Internal Signals	171
5.3.2	ADC Channels	171
5.3.3	ADC Clocks	172
5.3.4	ADC Conversion Mode	173
5.3.5	ADC Result	173
5.3.6	ADC Interrupt	174

5.3.7	ADC FIFO	175
5.3.8	ADC Setup Process	175
5.3.9	VBAT Measurement	176
5.3.10	TSEN Measurement	176
5.4	Register description	177
5.4.1	gpadc_config	177
5.4.2	gpadc_dma_rdata	178
5.4.3	gpadc_pir_train	179
6	DAC	180
6.1	Overview	180
6.2	Features	180
6.3	Functional Description	180
6.3.1	DAC channel enable	181
6.3.2	DAC data format	182
6.3.3	DAC output voltage	182
6.3.4	DAC conversion	183
6.3.4.1	CPU mode	183
6.3.4.2	DMA mode	183
6.4	Register description	184
6.4.1	gpdac_config	184
6.4.2	gpdac_dma_config	185
6.4.3	gpdac_dma_wdata	186
6.4.4	gpdac_tx_fifo_status	186
7	DMA	187
7.1	Overview	187
7.2	Features	187
7.3	Functional Description	188
7.3.1	Operating Principle	188
7.3.2	DMA Channel Configuration	189
7.3.3	Supported Peripherals	189
7.3.4	Linked List Mode	191
7.3.5	DMA Interrupt	192
7.4	Transfer Mode	192
7.4.1	Memory to Memory	192
7.4.2	Memory to Peripherals	193
7.4.3	Peripheral to Memory	193
7.5	Register description	194
7.5.1	DMA_IntStatus	196
7.5.2	DMA_IntTCStatus	197

7.5.3	DMA_IntTCClear	197
7.5.4	DMA_IntErrorStatus	197
7.5.5	DMA_IntErrClr	198
7.5.6	DMA_RawIntTCStatus	198
7.5.7	DMA_RawIntErrorStatus	199
7.5.8	DMA_EnbldChns	199
7.5.9	DMA_SoftBReq	200
7.5.10	DMA_SoftSReq	200
7.5.11	DMA_SoftLBReq	200
7.5.12	DMA_SoftLSReq	201
7.5.13	DMA_Config	201
7.5.14	DMA_Sync	201
7.5.15	DMA_C0SrcAddr	202
7.5.16	DMA_C0DstAddr	202
7.5.17	DMA_C0LLI	202
7.5.18	DMA_C0Control	203
7.5.19	DMA_C0Config	204
7.5.20	DMA_C0RSVD	205
7.5.21	DMA_C1SrcAddr	206
7.5.22	DMA_C1DstAddr	206
7.5.23	DMA_C1LLI	207
7.5.24	DMA_C1Control	207
7.5.25	DMA_C1Config	208
7.5.26	DMA_C1RSVD	209
7.5.27	DMA_C2SrcAddr	210
7.5.28	DMA_C2DstAddr	210
7.5.29	DMA_C2LLI	210
7.5.30	DMA_C2Control	211
7.5.31	DMA_C2Config	212
7.5.32	DMA_C2RSVD	213
7.5.33	DMA_C3SrcAddr	213
7.5.34	DMA_C3DstAddr	214
7.5.35	DMA_C3LLI	214
7.5.36	DMA_C3Control	214
7.5.37	DMA_C3Config	216
7.5.38	DMA_C3RSVD	216
7.5.39	DMA_C4SrcAddr	217
7.5.40	DMA_C4DstAddr	217
7.5.41	DMA_C4LLI	218

7.5.42	DMA_C4Control	218
7.5.43	DMA_C4Config	219
7.5.44	DMA_C4RSVD	220
7.5.45	DMA_C5SrcAddr	221
7.5.46	DMA_C5DstAddr	221
7.5.47	DMA_C5LLI	221
7.5.48	DMA_C5Control	222
7.5.49	DMA_C5Config	223
7.5.50	DMA_C5RSVD	224
7.5.51	DMA_C6SrcAddr	224
7.5.52	DMA_C6DstAddr	225
7.5.53	DMA_C6LLI	225
7.5.54	DMA_C6Control	225
7.5.55	DMA_C6Config	227
7.5.56	DMA_C6RSVD	227
7.5.57	DMA_C7SrcAddr	228
7.5.58	DMA_C7DstAddr	228
7.5.59	DMA_C7LLI	229
7.5.60	DMA_C7Control	229
7.5.61	DMA_C7Config	230
7.5.62	DMA_C7RSVD	231
8	DMA2D	232
8.1	Overview	232
8.2	Features	232
8.3	Functional Description	233
8.3.1	Operating Principle	233
8.3.2	Image Translation	234
8.3.3	Image Rotation	236
8.3.4	Image Folding	237
8.3.5	Image Filling	239
8.3.6	Color Key	240
8.4	Register description	240
8.4.1	DMA2D_IntStatus	241
8.4.2	DMA2D_IntTCStatus	242
8.4.3	DMA2D_IntTCClear	242
8.4.4	DMA2D_EnbldChns	243
8.4.5	DMA2D_Config	243
8.4.6	DMA2D_Sync	244
8.4.7	DMA2D_SoftBReq	244

8.4.8	DMA2D_SoftLBReq	244
8.4.9	DMA2D_SoftSReq	245
8.4.10	DMA2D_SoftLSReq	245
8.4.11	DMA2D_C0SrcAddr	245
8.4.12	DMA2D_C0DstAddr	246
8.4.13	DMA2D_C0LLI	246
8.4.14	DMA2D_C0_BUS	247
8.4.15	DMA2D_C0_SRC_CNT	248
8.4.16	DMA2D_C0_SRC_XIC	248
8.4.17	DMA2D_C0_SRC_YIC	248
8.4.18	DMA2D_C0_DST_CNT	249
8.4.19	DMA2D_C0_DST_XIC	249
8.4.20	DMA2D_C0_DST_YIC	250
8.4.21	DMA2D_C0_KEY	250
8.4.22	DMA2D_C0_KEY_EN	250
8.4.23	DMA2D_C0_CFG	251
9	LZ4D	253
9.1	Overview	253
9.2	Features	253
9.3	Functional Description	253
9.4	Clock	254
9.5	Programming Flow	254
9.5.1	Data Decompression	254
9.6	Register description	254
9.6.1	lz4_config	255
9.6.2	lz4_src_fix	255
9.6.3	lz4_dst_fix	256
9.6.4	lz4_src_start	256
9.6.5	lz4_src_end	257
9.6.6	lz4_dst_start	257
9.6.7	lz4_dst_end	257
9.6.8	lz4_int_en	258
9.6.9	lz4_int_sta	258
9.6.10	lz4_monitor	259
10	DBI	260
10.1	Overview	260
10.2	Features	260

10.3 Functional Description	261
10.3.1 DBI Type B	261
10.3.1.1 Write Timing	261
10.3.1.2 Read Timing	263
10.3.1.3 Output RGB565	263
10.3.1.4 Output RGB666	265
10.3.1.5 Output RGB888	266
10.3.2 DBI Type C 3-Line	267
10.3.2.1 Write Timing	267
10.3.2.2 Read Timing	267
10.3.2.3 Output RGB565	268
10.3.2.4 Output RGB666	269
10.3.2.5 Output RGB888	269
10.3.3 DBI Type C 4-Line	269
10.3.3.1 Write Timing	269
10.3.3.2 Read Timing	270
10.3.3.3 Output RGB565	271
10.3.3.4 Output RGB666	272
10.3.3.5 Output RGB888	272
10.3.4 Input Pixel Format	273
10.3.5 Interrupt	274
10.3.6 DMA	274
10.4 Register description	274
10.4.1 dbi_config	275
10.4.2 dbi_int_sts	276
10.4.3 dbi_bus_busy	277
10.4.4 dbi_pix_cnt	278
10.4.5 dbi_prd	278
10.4.6 dbi_wdata	279
10.4.7 dbi_rdata	279
10.4.8 dbi_fifo_config_0	279
10.4.9 dbi_fifo_config_1	281
10.4.10 dbi_fifo_wdata	281
11 DPI	282
11.1 Overview	282
11.2 Features	282
11.3 Functional Description	283
11.3.1 DPI Timing	283
11.3.2 Programmable timing parameters	285

11.3.3	Single Buffer	286
11.3.4	Ping-Pong Buffer	286
11.3.5	Test Mode	287
11.3.6	Input Pixel Format	288
11.3.6.1	YUV422 (Interleaved)	288
11.3.6.2	RGB888	289
11.3.6.3	RGB565	289
11.3.6.4	RGBA8888	290
11.3.6.5	YUV420 (Planar)	291
11.3.7	Programmable Interrupt	292
11.3.8	Use with OSD	293
12	DSI	294
12.1	Overview	294
12.2	Features	294
12.3	Functional Description	295
12.3.1	DSI Protocol Layering	295
12.3.2	Physical Layer	297
12.3.3	Clock Lane	298
12.3.3.1	Low Power Mode (LPM, LP11)	299
12.3.3.2	UltraLow Power Mode (ULPM, LP00)	300
12.3.3.3	High Speed Clock Mode (HSCM, HS0/1)	301
12.3.4	Data Lanes	302
12.3.4.1	HighSpeed Data Transmission (HSDT)	302
12.3.4.2	Bus Turn-Around(BTA)	304
12.3.4.3	Escape Mode	305
12.3.4.4	Low Power Data Transmission (LPDT)	306
12.3.4.5	UltraLow Power State (ULPS)	308
12.3.4.6	Remote Application Reset (RAR)	309
12.3.4.7	Acknowledgement (ACK)	310
12.3.5	Lane Management Layer	311
12.3.6	Protocol Layer	314
12.3.6.1	Short Packet	314
12.3.6.2	Long Packet	315
12.3.6.3	Multiple Packets per Transmission	316
12.3.6.4	Bit Order of Bytes in a Packet	317
12.3.6.5	Byte Order in a Packet	318
12.3.6.6	Packet Header (PH)	319
12.3.6.7	Data Identification (DI)	319
12.3.6.8	Virtual Channel (VC)	319

12.3.6.9 Data Type (DT)	319
12.3.6.10 Packet Data (PD)	321
12.3.6.11 Word Count (WC)	321
12.3.6.12 Error Correction Code (ECC)	321
12.3.6.13 Packet Footer (PF)	323
12.3.7 Application Layer	323
12.3.8 Command Mode	324
12.3.9 Video Mode	324
12.3.9.1 Non-Burst Mode with SYNC Pulses	324
12.3.9.2 Non-Burst Mode with SYNC Events	325
12.3.9.3 Burst Mode	326
12.3.10 Line Buffer	327
12.3.11 Display Data Format	328
12.3.11.1 YUV422(8-bit)	328
12.3.11.2 RGB565	329
12.3.11.3 RGB666(loosely packed)	329
12.3.11.4 RGB888	330
12.3.12 Interrupt	331
12.3.13 DMA	332
12.3.14 Use with OSD	333
12.4 Register description	333
12.4.1 dsi_config	334
12.4.2 dsi_esc_config	335
12.4.3 dsi_lpdt_tx_config	336
12.4.4 dsi_hstx_config	336
12.4.5 dsi_int_status	337
12.4.6 dsi_int_mask	338
12.4.7 dsi_int_clear	339
12.4.8 dsi_int_enable	339
12.4.9 dsi_fifo_config_0	340
12.4.10 dsi_fifo_config_1	341
12.4.11 dsi_fifo_wdata	341
12.4.12 dsi_fifo_rdata	342
12.4.13 dphy_config_0	342
12.4.14 dphy_config_1	344
12.4.15 dphy_config_2	344
12.4.16 dphy_config_3	345
12.4.17 dphy_config_4	345
12.4.18 dphy_config_5	346

12.4.19 dphy_config_6	346
12.4.20 dphy_config_7	347
12.4.21 dphy_config_8	348
12.4.22 dphy_config_9	349
12.4.23 dphy_config_10	349
12.4.24 dphy_config_11	351
12.4.25 dphy_config_12	351
12.4.26 dphy_config_13	351
12.4.27 dphy_config_14	352
12.4.28 dphy_config_15	352
12.4.29 dphy_config_16	353
12.4.30 dummy_reg	354
13 CAM	355
13.1 Overview	355
13.2 Features	355
13.3 Function description	356
13.3.1 DVP (Digital Video Port) signal and configuration	356
13.3.2 YCbCr format	356
13.3.3 Movie Mode/Photo Mode	357
13.3.4 RGB888 to RGB565/RGBA8888 output	357
13.3.5 Image rectangle crop	357
13.3.6 Frame rounding function	358
13.3.7 Line Frame Sync Signal Integrity Detection	358
13.3.8 Cache image information	358
13.3.9 Support a variety of interrupt information (can be configured independently of the switch)	359
13.4 Register description	359
13.4.1 dvp2axi_configue	360
13.4.2 dvp2axi_addr_start	362
13.4.3 dvp2axi_mem_bcnt	363
13.4.4 dvp_status_and_error	363
13.4.5 dvp2axi_frame_bcnt	364
13.4.6 dvp_frame_fifo_pop	365
13.4.7 dvp2axi_frame_vld	365
13.4.8 dvp2axi_frame_period	366
13.4.9 dvp2axi_misc	366
13.4.10 dvp2axi_hsync_crop	367
13.4.11 dvp2axi_vsync_crop	367
13.4.12 dvp2axi_fram_exm	368

13.4.13 frame_start_addr0	368
13.4.14 frame_start_addr1	368
13.4.15 frame_start_addr2	369
13.4.16 frame_start_addr3	369
13.4.17 frame_id_sts01	369
13.4.18 frame_id_sts23	370
13.4.19 dvp_debug	370
13.4.20 dvp_dummy_reg	371
14 IR	372
14.1 Overview	372
14.2 Features	372
14.3 Functional Description	373
14.3.1 Fixed Protocol Based Receiving	373
14.3.2 Pulse width receiving	374
14.3.3 Normal sending mode	374
14.3.4 Pulse width sending	375
14.3.5 Carrier modulation	375
14.3.6 Free mode	375
14.3.7 DMA mode	375
14.3.8 IR Interrupt	375
14.4 Register description	376
14.4.1 irtx_config	376
14.4.2 irtx_int_sts	378
14.4.3 irtx_pulse_width	379
14.4.4 irtx_pw_0	379
14.4.5 irtx_pw_1	380
14.4.6 irrx_config	380
14.4.7 irrx_int_sts	381
14.4.8 irrx_pw_config	382
14.4.9 irrx_data_count	383
14.4.10 irrx_data_word0	383
14.4.11 irrx_data_word1	383
14.4.12 irtx_fifo_config_0	384
14.4.13 irtx_fifo_config_1	385
14.4.14 ir_fifo_wdata	385
14.4.15 ir_fifo_rdata	386
15 SPI	387
15.1 Overview	387
15.2 Features	387

15.3 Functional Description	388
15.3.1 Clock Control	388
15.3.2 Master Continuous Transfer Mode	389
15.3.3 Master-Slave: Transfer and Receive Data	389
15.3.4 Receive Ignore Function	389
15.3.5 Filtering Function	390
15.3.6 Configurable MSB/LSB Transfer	390
15.3.7 Adjustable Byte Transfer Sequence	391
15.3.8 Slave Mode Timeout Mechanism	391
15.3.9 I/O Transfer Mode	391
15.3.10 DMA Transfer Mode	391
15.3.11 SPI Interrupt	392
15.4 Register description	392
15.4.1 spi_config	393
15.4.2 spi_int_sts	394
15.4.3 spi_bus_busy	396
15.4.4 spi_prd_0	397
15.4.5 spi_prd_1	397
15.4.6 spi_rxd_ignr	397
15.4.7 spi_sto_value	398
15.4.8 spi_fifo_config_0	399
15.4.9 spi_fifo_config_1	399
15.4.10 spi_fifo_wdata	400
15.4.11 spi_fifo_rdata	401
15.4.12 backup_io_en	401
16 UART	402
16.1 Overview	402
16.2 Features	402
16.3 Functional Description	403
16.3.1 Data Formats	403
16.3.2 Basic Architecture	404
16.3.3 Transmitter	404
16.3.4 Receiver	405
16.3.5 Baud Rate Setting	405
16.3.6 Filtering	406
16.3.7 Automatic Baud Rate Detection	406
16.3.8 Hardware Flow Control	407
16.3.9 DMA Transfer	408
16.3.10 Support for LIN Bus	409

16.3.11 RS485 mode	411
16.3.12 UART Interrupt	411
16.3.13 TX/RX end of transfer interrupt	411
16.3.14 TX/RX FIFO request interrupt	412
16.3.15 RX timeout interrupt	413
16.3.16 RX parity check error interrupt	413
16.3.17 TX/RX FIFO overflow interrupt	413
16.3.18 RX BCR interrupt	413
16.3.19 LIN synchronization error interrupt	414
16.3.20 Auto baud rate detection (universal/fixed characters mode) interrupt	414
16.4 Register description	414
16.4.1 utx_config	415
16.4.2 urx_config	416
16.4.3 uart_bit_prd	417
16.4.4 data_config	417
16.4.5 utx_ir_position	418
16.4.6 urx_ir_position	418
16.4.7 urx_rto_timer	418
16.4.8 uart_sw_mode	419
16.4.9 uart_int_sts	419
16.4.10 uart_int_mask	420
16.4.11 uart_int_clear	421
16.4.12 uart_int_en	422
16.4.13 uart_status	423
16.4.14 sts_urx_abr_prd	423
16.4.15 urx_abr_prd_b01	424
16.4.16 urx_abr_prd_b23	424
16.4.17 urx_abr_prd_b45	424
16.4.18 urx_abr_prd_b67	425
16.4.19 urx_abr_pw_tol	425
16.4.20 urx_bcr_int_cfg	426
16.4.21 utx_rs485_cfg	426
16.4.22 uart_fifo_config_0	427
16.4.23 uart_fifo_config_1	427
16.4.24 uart_fifo_wdata	428
16.4.25 uart_fifo_rdata	428
17 I2C	430
17.1 Overview	430
17.2 Features	430

17.3 Functional Description	431
17.3.1 Start and stop conditions	431
17.3.2 Data Transfer Format	431
17.3.3 Arbitration	434
17.4 I2C Clock Setting	434
17.5 I2C Configuration Flow	435
17.5.1 Configuration Items	435
17.5.2 Read/Write Flag Bit	435
17.5.3 Slave Address	435
17.5.4 Slave Register Address	436
17.5.5 Slave Register Address Length	436
17.5.6 Data	436
17.5.7 Data Length	436
17.5.8 Enable Signal	436
17.6 FIFO Management	437
17.7 Use with DMA	437
17.7.1 DMA Sending Flow	438
17.7.2 DMA Receiving Flow	438
17.8 Interrupt	439
17.9 Register description	439
17.9.1 i2c_config	440
17.9.2 i2c_int_sts	441
17.9.3 i2c_sub_addr	442
17.9.4 i2c_bus_busy	443
17.9.5 i2c_prd_start	443
17.9.6 i2c_prd_stop	444
17.9.7 i2c_prd_data	444
17.9.8 i2c_fifo_config_0	445
17.9.9 i2c_fifo_config_1	445
17.9.10 i2c_fifo_wdata	446
17.9.11 i2c_fifo_rdata	446
18 PWM	447
18.1 Overview	447
18.2 Features	447
18.3 Functional Description	448
18.3.1 Clock and Frequency Divider	448
18.3.2 Active Level	448
18.3.3 Principle of Pulse Generation	448
18.3.4 Brake	449

18.3.5	Dead Zone	450
18.3.6	Cycle and Duty Ratio Calculation	451
18.3.7	PWM Interrupt	451
18.3.8	ADC Linkage	452
18.4	Register description	452
18.4.1	pwm_int_config	454
18.4.2	pwm_mc0_config0	454
18.4.3	pwm_mc0_config1	456
18.4.4	pwm_mc0_period	457
18.4.5	pwm_mc0_dead_time	457
18.4.6	pwm_mc0_ch0_thre	459
18.4.7	pwm_mc0_ch1_thre	459
18.4.8	pwm_mc0_ch2_thre	459
18.4.9	pwm_mc0_ch3_thre	460
18.4.10	pwm_mc0_int_sts	460
18.4.11	pwm_mc0_int_mask	461
18.4.12	pwm_mc0_int_clear	462
18.4.13	pwm_mc0_int_en	463
18.4.14	pwm_mc1_config0	464
18.4.15	pwm_mc1_config1	465
18.4.16	pwm_mc1_period	466
18.4.17	pwm_mc1_dead_time	467
18.4.18	pwm_mc1_ch0_thre	468
18.4.19	pwm_mc1_ch1_thre	469
18.4.20	pwm_mc1_ch2_thre	469
18.4.21	pwm_mc1_ch3_thre	469
18.4.22	pwm_mc1_int_sts	470
18.4.23	pwm_mc1_int_mask	471
18.4.24	pwm_mc1_int_clear	472
18.4.25	pwm_mc1_int_en	473
19	TIMER	474
19.1	Overview	474
19.2	Features	475
19.3	Functional Description	476
19.3.1	Working Principle of General Purpose Timer	476
19.3.1.1	PreLoad mode	477
19.3.1.2	FreeRun mode	477
19.3.1.3	Measuring External GPIO Pulse Width	478
19.3.2	Working Principle of Watchdog Timer	479

19.3.3	Alarm Setting	479
19.3.4	Watchdog Alarm	479
19.4	Register description	480
19.4.1	TCCR	482
19.4.2	TMR2_0	482
19.4.3	TMR2_1	483
19.4.4	TMR2_2	483
19.4.5	TMR3_0	483
19.4.6	TMR3_1	484
19.4.7	TMR3_2	484
19.4.8	TCR2	484
19.4.9	TCR3	485
19.4.10	TSR2	485
19.4.11	TSR3	486
19.4.12	TIER2	486
19.4.13	TIER3	487
19.4.14	TPLVR2	487
19.4.15	TPLVR3	487
19.4.16	TPLCR2	488
19.4.17	TPLCR3	488
19.4.18	WMER	489
19.4.19	WMR	489
19.4.20	WVR	490
19.4.21	WSR	490
19.4.22	TICR2	491
19.4.23	TICR3	491
19.4.24	WICR	492
19.4.25	TCER	492
19.4.26	TCMR	493
19.4.27	TILR2	493
19.4.28	TILR3	494
19.4.29	WCR	494
19.4.30	WFAR	495
19.4.31	WSAR	495
19.4.32	TCVWR2	495
19.4.33	TCVWR3	496
19.4.34	TCVSYN2	496
19.4.35	TCVSYN3	496
19.4.36	TCDR	497

19.4.37 GPIO	497
19.4.38 GPIO_LAT1	498
19.4.39 GPIO_LAT2	498
19.4.40 TCDR_FORCE	499
20 I2S	500
20.1 Overview	500
20.2 Features	500
20.3 Functional Description	501
20.3.1 Data formats	501
20.3.2 I2S single channel mode	504
20.3.3 Data MSB/LSB justification	504
20.3.4 Binaural data merge and exchange	504
20.3.5 Silent mode	505
20.3.6 Clock source	505
20.3.7 I2S Interrupt	505
20.4 Register description	506
20.4.1 i2s_config	506
20.4.2 i2s_int_sts	508
20.4.3 i2s_bclk_config	509
20.4.4 i2s_fifo_config_0	509
20.4.5 i2s_fifo_config_1	510
20.4.6 i2s_fifo_wdata	511
20.4.7 i2s_fifo_rdata	511
20.4.8 i2s_io_config	512
21 PDM	513
21.1 Overview	513
21.2 Features	513
21.3 Functional Description	513
21.3.1 PDM Interrupt	514
21.3.2 FIFO Format Control	514
21.3.3 Startup of FIFO and DMA Transfer	515
21.4 Register description	516
21.4.1 audpdm_top	517
21.4.2 audpdm_itf	517
21.4.3 pdm_adc_0	518
21.4.4 pdm_adc_1	519
21.4.5 pdm_dac_0	520
21.4.6 pdm_pdm_0	522
21.4.7 pdm_rsvo0	523

21.4.8 pdm_dbg_0	523
21.4.9 pdm_dbg_1	524
21.4.10 pdm_dbg_2	524
21.4.11 pdm_dbg_3	525
21.4.12 pdm_dbg_4	526
21.4.13 pdm_adc_s0	526
21.4.14 pdm_adc_s1	527
21.4.15 pdm_adc_s2	527
21.4.16 pdm_rx_fifo_ctrl	528
21.4.17 pdm_rx_fifo_status	530
21.4.18 pdm_rx_fifo_data	531
22 AUDIO	532
22.1 Overview	532
22.2 Features	532
22.3 Functional Description	533
22.3.1 AUDIO Interrupt	533
22.3.2 FIFO Format Control	534
22.3.3 Startup of FIFO and DMA transfer	536
23 PSRAM Contorller	537
23.1 Overview	537
23.2 Features	537
23.3 Functional Description	537
23.4 Register description	537
23.4.1 psram_configure	538
24 Emac	540
24.1 Overview	540
24.2 Features	540
24.3 Functional Description	541
24.4 Clock	543
24.5 RX/TX BD	543
24.6 PHY Interaction	543
24.7 Programming Flow	544
24.7.1 PHY initialization	544
24.7.2 Send Data Frame	544
24.7.3 Receive Data Frame	545
24.8 Register description	546
24.8.1 MODE	546
24.8.2 INT_SOURCE	548
24.8.3 INT_MASK	550

24.8.4	IPGT	551
24.8.5	PACKETLEN	551
24.8.6	COLLCONFIG	552
24.8.7	TX_BD_NUM	553
24.8.8	MIIMODE	553
24.8.9	MIICOMMAND	554
24.8.10	MIIADDRESS	555
24.8.11	MIITX_DATA	555
24.8.12	MIIRX_DATA	555
24.8.13	MIISTATUS	556
24.8.14	MAC_ADDR0	556
24.8.15	MAC_ADDR1	557
24.8.16	HASH0_ADDR	557
24.8.17	HASH1_ADDR	558
24.8.18	TXCTRL	558
25	USB	559
25.1	Overview	559
25.2	Features	559
25.3	Functional Description	560
25.3.1	Operating Steps of USB	560
25.3.2	Partial Register Configuration and Functional Description	560
25.3.3	Interrupt Processing Flow for USB Enumeration Phase	560
26	SDH	561
26.1	Overview	561
26.2	Features	561
26.3	Functional Description	561
26.3.1	SDH Overall Structure	562
26.3.2	Register Mapping	563
26.3.3	Support for Multiple Card Slots	564
26.3.4	Supporting DMA	565
26.3.5	SD Command Generation	565
26.3.6	Suspend and Resume Mechanism	566
26.3.7	Buffer Control	567
26.3.7.1	Control of Buffer Pointer	567
26.3.7.2	Determination of Buffer Block Length	567
26.3.7.3	Dividing Large Data Transfer	567
26.3.8	Relationship Between Interrupt Control Registers	567
26.3.9	Hardware Block Diagram and Timing Part	568
26.3.10	Auto CMD12	569

26.3.11 Controlling SDCLK	569
26.3.12 Advanced DMA	570
26.3.12.1 Block Diagram of ADMA2	571
26.3.12.2 Data Address and Data Length Requirements	572
26.3.12.3 Descriptor Table	573
26.3.12.4 ADMA2 State	574
26.3.13 Test Register	575
26.3.14 Block Count	575
26.3.15 Sampling Clock Tuning	576
26.3.16 SD Host Standard Register	576
26.3.16.1 SD Host Control Register Mapping	576
26.3.16.2 Configuration of Register Type	578
26.3.16.3 Initial Value of Register	579
26.3.16.4 Reserved Bits of a Register	579
26.4 寄存器描述	579
26.4.1 SDMA_System_Address_Argument_2	580
26.4.2 Block_Size	581
26.4.3 Block_Count	583
26.4.4 Argument_1	584
26.4.5 Transfer_Mode	585
26.4.6 Command	586
26.4.7 Response_1	588
26.4.8 Response_2	588
26.4.9 Response_3	588
26.4.10 Response_4	589
26.4.11 Buffer_Data_Port	589
26.4.12 Present_State	590
26.4.13 Host_Control_1	596
26.4.14 Power_Control	600
26.4.15 Block_Gap_Control	601
26.4.16 Wakeup_Control	603
26.4.17 Clock_Control	605
26.4.18 Timeout_Control	607
26.4.19 Software_Reset	608
26.4.20 Normal_Interrupt_Status	609
26.4.21 Error_Interrupt_Status	615
26.4.22 Normal_Interrupt_Status_Enable	619
26.4.23 Error_Interrupt_Status_Enable	621
26.4.24 Normal_Interrupt_Signal_Enable	622

26.4.25 Error_Interrupt_Signal_Enable	623
26.4.26 Auto_CMD_Error_Status	624
26.4.27 Host_Control_2	625
26.4.28 Capabilities_1	628
26.4.29 Capabilities_2	631
26.4.30 Maximum_Current_Capabilities	632
26.4.31 Force_Event_Register_for_Auto_CMD_Error_Status	633
26.4.32 Force_Event_Register_for_Error_Interrupt_Status	634
26.4.33 ADMA_Error_Status	635
26.4.34 Shared_Bus_Control	636
26.4.35 Slot_Interrupt_Status	638
26.4.36 Host_Controller_Version	638
27 MJPEG	640
27.1 Overview	640
27.2 Features	640
27.3 Functional Description	641
27.3.1 Input Configuration	641
27.3.2 Quantization Coefficient Table	641
27.3.3 Software Mode and Linked Mode	641
27.3.4 Swap Mode	642
27.3.5 Kick Mode	642
27.3.6 Jpg Function	642
27.3.7 Cached Image Information	642
27.3.8 Multiple Interrupts (Separately Configured)	642
28 JDEC	643
28.1 Overview	643
28.2 Features	643
28.3 Functional Description	643
28.3.1 Output Configuration	643
28.3.2 Quantization Coefficient	644
28.3.3 Swap Mode	644
28.3.4 Skip Mode	644
28.3.5 Buffer	644
28.3.6 Operating Process	644
28.4 Precautions	645
29 VENC	646
29.1 Overview	646
29.2 Features	646

29.3 Functional Description	647
29.3.1 Software Mode and Linked Mode	647
29.3.2 CBR/VBR Mode	647
29.3.3 Dual-Stream	647
29.3.4 Region of Interest (ROI)	647
29.3.5 OSD Coding Area	647
29.3.6 Dynamically Configurable Max/Min Quantization Parameters	648
29.3.7 Dynamically Configurable I/P-Frame Target Bit	648
29.3.8 Dynamically Configurable I-Frame Distance	648
29.3.9 Video Sequence Interrupt	648
29.3.10 Frame Interrupt	648
29.3.11 Input Cache Overflow Alert	648
30 NPU toolchain	649
30.1 GUI Flow chart	649
30.2 Network Structure	649
30.3 ONNX Converter	650
30.4 Optimizer	651
30.5 Generator & Simulator	652
31 NPU	653
31.1 Overview	653
31.2 Features	653
31.3 Feature List	653
31.4 API Reference	654
31.5 Data Structure Reference	657
32 IPC	662
32.1 Overview	662
32.2 Features	662
32.3 Functional Description	662
32.3.1 Basic Principle	662
32.3.2 Operating Process	662
33 LowPower	664
33.1 Overview	664
33.2 Features	664
33.3 Functional Description	665
33.3.1 Power Domain	665
33.3.2 Wake-up Source	667
33.3.3 Power Modes	667
33.3.4 IO Retention	668

34 SEC ENG	670
34.1 Overview	670
34.1.1 AES	670
34.1.2 MD5	670
34.1.3 SHA	670
34.1.4 CRC	670
34.1.5 GMAC	671
34.2 Features	671
34.3 Principle	671
34.3.1 Implementation of MD5	672
34.3.2 Implementation of SHA256	673
34.3.3 Principle of GMAC	674
34.4 Functional Description	676
34.4.1 AES Accelerator	676
34.4.2 SHA Accelerator	677
34.4.3 Random Number Generator (RNG)	678
34.4.4 GMAC(link Mode)	679
34.5 Register description	679
34.5.1 se_sha_0_ctrl	682
34.5.2 se_sha_0_msa	683
34.5.3 se_sha_0_status	683
34.5.4 se_sha_0_endian	684
34.5.5 se_sha_0_hash_l_0	684
34.5.6 se_sha_0_hash_l_1	685
34.5.7 se_sha_0_hash_l_2	685
34.5.8 se_sha_0_hash_l_3	685
34.5.9 se_sha_0_hash_l_4	686
34.5.10 se_sha_0_hash_l_5	686
34.5.11 se_sha_0_hash_l_6	686
34.5.12 se_sha_0_hash_l_7	687
34.5.13 se_sha_0_hash_h_0	687
34.5.14 se_sha_0_hash_h_1	687
34.5.15 se_sha_0_hash_h_2	688
34.5.16 se_sha_0_hash_h_3	688
34.5.17 se_sha_0_hash_h_4	688
34.5.18 se_sha_0_hash_h_5	689
34.5.19 se_sha_0_hash_h_6	689
34.5.20 se_sha_0_hash_h_7	689
34.5.21 se_sha_0_link	690

34.5.22 se_sha_0_ctrl_prot	690
34.5.23 se_aes_0_ctrl	690
34.5.24 se_aes_0_msa	691
34.5.25 se_aes_0_mda	692
34.5.26 se_aes_0_status	692
34.5.27 se_aes_0_iv_0	692
34.5.28 se_aes_0_iv_1	693
34.5.29 se_aes_0_iv_2	693
34.5.30 se_aes_0_iv_3	693
34.5.31 se_aes_0_key_0	694
34.5.32 se_aes_0_key_1	694
34.5.33 se_aes_0_key_2	694
34.5.34 se_aes_0_key_3	695
34.5.35 se_aes_0_key_4	695
34.5.36 se_aes_0_key_5	695
34.5.37 se_aes_0_key_6	696
34.5.38 se_aes_0_key_7	696
34.5.39 se_aes_0_key_sel	696
34.5.40 se_aes_1_key_sel	697
34.5.41 se_aes_0_endian	698
34.5.42 se_aes_sboot	698
34.5.43 se_aes_0_link	699
34.5.44 se_aes_0_ctrl_prot	699
34.5.45 se_trng_0_ctrl_0	700
34.5.46 se_trng_0_status	701
34.5.47 se_trng_0_dout_0	701
34.5.48 se_trng_0_dout_1	701
34.5.49 se_trng_0_dout_2	702
34.5.50 se_trng_0_dout_3	702
34.5.51 se_trng_0_dout_4	702
34.5.52 se_trng_0_dout_5	703
34.5.53 se_trng_0_dout_6	703
34.5.54 se_trng_0_dout_7	703
34.5.55 se_trng_0_test	704
34.5.56 se_trng_0_ctrl_1	704
34.5.57 se_trng_0_ctrl_2	705
34.5.58 se_trng_0_ctrl_3	705
34.5.59 se_trng_0_test_out_0	706
34.5.60 se_trng_0_test_out_1	706

34.5.61 se_trng_0_test_out_2	706
34.5.62 se_trng_0_test_out_3	707
34.5.63 se_trng_0_ctrl_prot	707
34.5.64 se_pka_0_ctrl_0	707
34.5.65 se_pka_0_seed	709
34.5.66 se_pka_0_ctrl_1	709
34.5.67 se_pka_0_rw	710
34.5.68 se_pka_0_rw_burst	710
34.5.69 se_pka_0_ctrl_prot	710
34.5.70 se_cdet_0_ctrl_0	711
34.5.71 se_cdet_0_ctrl_1	711
34.5.72 se_cdet_0_ctrl_prot	712
34.5.73 se_gmac_0_ctrl_0	713
34.5.74 se_gmac_0_lca	713
34.5.75 se_gmac_0_status	714
34.5.76 se_gmac_0_ctrl_prot	714
34.5.77 se_ctrl_prot_rd	715
35 Revision history	716

List of Figures

1.1 Block Diagram of System	35
2.1 System Clock Architecture	49
2.2 Module Clock Architecture	50
2.3 Peripheral Clock Architecture	51
4.1 General GPIO Output Waveform	58
4.2 Output Waveform of Inverted Level of Logical ‘1’ in Default High Level	58
4.3 Output Waveform of Inverted Level of Logical ‘0’ in Default Low Level	59
4.4 Output Waveforms of Inverted Levels of Logical ‘0’ and Logical ‘1’ in Default High Level	59
5.1 Block Diagram of ADC	170
5.2 ADC Clocks	172
6.1 Block Diagram of DAC	181
7.1 Block Diagram of DMA	188
7.2 Peripheral Type Selection	190
7.3 LLI Framework	192
8.1 Operating Principle	234
8.2 Image Translation	235
8.3 Image Rotation	236
8.4 Image Folding	238
8.5 Image Filling	239
8.6 Color Key	240
10.1 Block Diagram of DBI	261
10.2 Write Timing	262
10.3 Read Timing	263

10.4 RGB565 Output	264
10.5 RGB666 Output	265
10.6 RGB888 Output	266
10.7 Write Timing	267
10.8 Read Timing	268
10.9 RGB565 Output	268
10.10 RGB666 Output	269
10.11 RGB888 Output	269
10.12 Write Timing	270
10.13 Read Timing	271
10.14 RGB565 Output	271
10.15 RGB666 Output	272
10.16 RGB888 Output	272
10.17 Input Pixel Format	273
11.1 Block Diagram of DPI	283
11.2 DPI Timing	284
11.3 Timing Parameters	285
11.4 Ranges of Timing Parameters	286
11.5 Test Mode	287
11.6 YUV422 Processing Process	288
11.7 RGB888 Processing Process	289
11.8 RGB565 Processing Process	290
11.9 RGBA8888 Processing Process	291
11.10 YUV420 Processing Process	292
12.1 Block Diagram of DSI	295
12.2 Protocol Layering	296
12.3 Levels in HS and LP Modes	297
12.4 Lane Status Code	298
12.5 Clock Lane Mode Switching	299
12.6 Switching from ULP to LPM	300
12.7 Switching from HSCM to LPM	300
12.8 Switching from LPM to ULP	301
12.9 Switching from LPM to HSCM	301
12.10 Entering and Leaving Sequences of Three Modes of Data Lanes	302
12.11 Sequence of Entering HSDT Mode	302
12.12 Sequence of Leaving HSDT Mode	303
12.13 HSDT Burst Sequence	304
12.14 Bus Turnaround Sequence	304
12.15 Escape Mode Sequence	305
12.16 Escape Commands	306

12.17 LPDT Sequence	307
12.18 ULPS Sequence	308
12.19 RAR Sequence	309
12.20 ACK Sequence	310
12.21 TX End Distribution	312
12.22 RX End Merging	313
12.23 Transmission of Bytes (Non-integral Multiple of the Number of Lanes)	314
12.24 Structure of Short Packet	315
12.25 Structure of Long Packet	316
12.26 Multiple Packets per Transmission	317
12.27 Bit Order of Bytes in a Packet	318
12.28 Byte Order in a Packet	318
12.29 Data Types from the MCU to the Display Module	320
12.30 Data Types from the Display Module to the MCU	321
12.31 Example of ECC Calculation	322
12.32 CRC Calculation Method	323
12.33 Example of CRC Calculation	323
12.34 Timing of NonBurst Mode with SYNC Pulses	325
12.35 Timing of NonBurst Mode with SYNC Events	326
12.36 Timing of Burst Mode	327
12.37 YUV422 Pixel Format	328
12.38 RGB565 Pixel Format	329
12.39 RGB666 Pixel Format	330
12.40 RGB888 Pixel Format	331
13.1 CAM block diagram	355
13.2 FIFO framework	358
13.3 Memory	359
14.1 NEC Logic Waveform	373
14.2 NEC Protocol Waveform	373
14.3 RC5 Logic Waveform	374
14.4 RC5 Protocol Waveform	374
15.1 SPI Timing	388
15.2 SPI Ignore Waveform	389
15.3 SPI Filter Waveform	390
16.1 UART Data Format	403
16.2 UART Architecture	404
16.3 UART Sampling Waveform	405
16.4 UART Filter Waveform	406
16.5 Waveform of UART in fixed character mode	407

16.6 UART hardware flow control	408
16.7 A typical LIN frame	409
16.8 Break Field of LIN	409
16.9 Sync Field of LIN	410
16.10 ID Field of LIN	410
17.1 Start and stop conditions of I2C	431
17.2 Master transmit and slave receive data formats	432
17.3 Master receive and slave transmit data formats	432
17.4 Timing of master transmitter and slave receiver	432
17.5 Timing of master receiver and slave transmitter	432
17.6 Master transmit and slave receive data format (10bit slave address)	433
17.7 Master receive and slave transmit data format (10bit slave address)	433
17.8 Waveform of simultaneous data transfer	434
17.9 I2C clock setting	435
18.1 Waveform of PWM in different configurations	449
18.2 PWM insertion deadband output waveform	450
19.1 Block diagram of timer	474
19.2 Block diagram of watchdog timer	475
19.3 Working sequence of timer in preLoad mode	477
19.4 Working sequence of watchdog	479
19.5 Watchdog alarm mechanism	480
20.1 Normal I2S	502
20.2 I2S LeftJustified/RightJustified	503
20.3 PCM/TDM mode	504
20.4 I2S clock	505
24.1 Block diagram of EMAC	542
26.1 SDH Hardware and Driver Structure	562
26.2 Standard Register Mapping Classification	563
26.3 Register Mapping of Multi-Card Slot Controller	564
26.4 Register for Generating SD Commands	565
26.5 Suspend and Resume Mechanism	566
26.6 Block Diagram of Host Controller	568
26.7 Controlling SDCLK by the SD Bus Power and SD Clock Enable	569
26.8 Block Diagram of ADMA2	571
26.9 32-Bit Address Descriptor Table	573
26.10 ADMA2 States	574
26.11 SD Host Control Register Mapping	577

26.12 Types of Registers and Register Bit Fields	578
32.1 IPC Flow	663
33.1 Low power modes	664
34.1 AES Encryption Process	671
34.2 MD5 Padding	672
34.3 MAC Flow Chart	675
34.4 AES Operation Modes	676

List of Tables

1.1 Boot mode	40
1.2 Memory Map	41
1.3 Memory Map	41
1.4 MRAM/VRAM address space	42
1.5 Interrupt assignment	43
1.6 Interrupt assignment	44
2.1 Software reset function table 1	46
2.2 Software reset function table 2	47
4.1 GPIO function list	54
5.1 ADC internal signal	171
5.2 ADC external pin	171
5.3 Meaning of ADC Conversion Result	174
6.1 Data transfer format	182
6.2 Internal reference voltage output voltage	182
17.1 I2C pin list	431
18.1 Clock source	448
18.2 Deadband length calculation formula	450
19.1 gpio_tmr_clk function configuration	478
24.1 Transmission signal	543
33.1 Power mode	666
33.2 Wakeup source	667



System and Memory

1.1 System Architecture

BL808 series chips mainly include wireless and multimedia subsystems.

With one RISC-V 32-bit high-performance CPU and Wi-Fi/BT/Zigbee, the wireless subsystem supports wireless connection and data transmission in multiple ways, creating diversified experience.

With one RISC-V 64-bit ultra-high performance CPU and DVP/CSI/ H264/NPU, the multimedia subsystem can be widely used in AI fields like video surveillance and smart speakers.

BL808 system architecture:

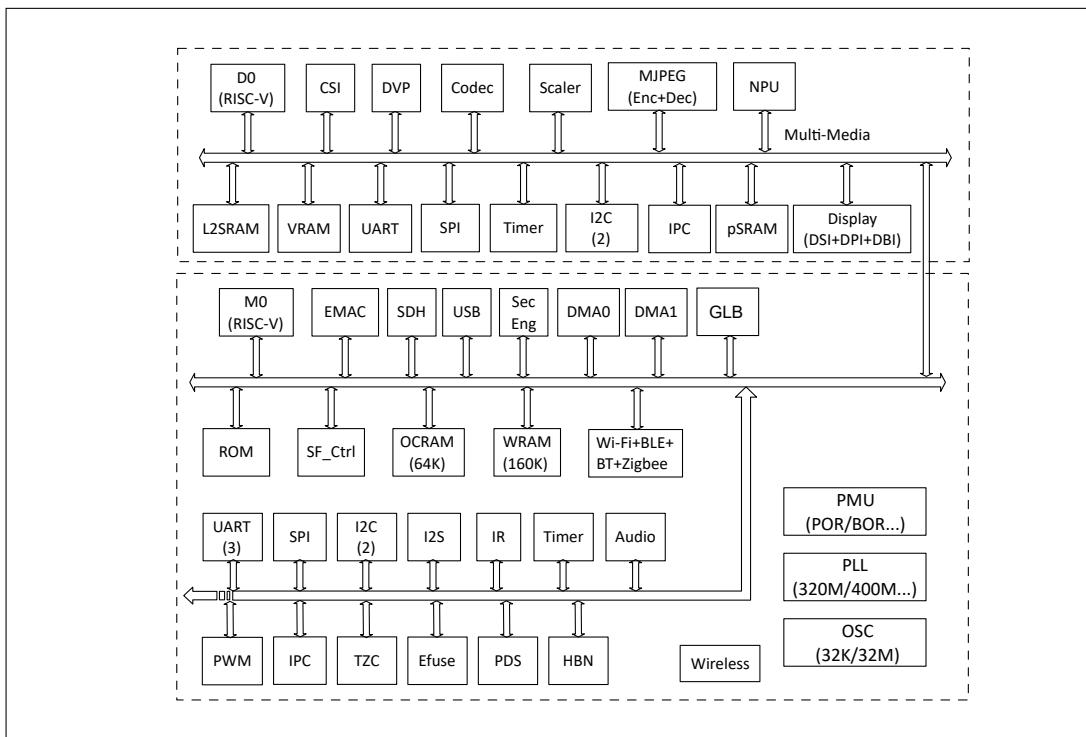


Fig. 1.1: Block Diagram of System

Composition of wireless subsystem:

- CPU
 - One RISC-V high-performance CPU (M0) and one RISC-V low-power CPU (LP)
 - Wireless connection and data transmission in multiple ways, diversified user experience
- Bus interface: AXI and AHB
 - CPU accesses the memory through AXI
 - CPU accesses peripherals through AHB
 - Low power and high performance
- Peripherals
 - Has 30 peripheral modules including UART/SPI/I2C/PWM/SDH/EMAC/USB, allowing connection and storage to and control of peripherals
 - Integrates the Audio module, and supports the input of audio data, analog microphone, and digital microphone, making audio application development easy for users
 - Suits low-power application scenarios, for example, disabling other CPUs and peripherals in low-power scenarios of smart speakers, and using LP for wake-up test of VAD

Composition of multimedia subsystem:

- CPU
 - One RISC-V ultra-high performance CPU (D0)
 - For application fields like video surveillance, smart doorbell, smart cat eye, and smart speaker
 - NPU module for various AI scenarios that accelerates neural network operators
- Peripherals
 - Conventional peripherals like UART/SPI/I2C, facilitating development of system functions
 - CMOS Sensor connected with CSI and DVP interfaces to acquire images and videos; built-in Codec modules for video coding; OSD/Scaler/2DDMA modules for importing video data stream into the Display module

1.2 CPU

BL808 chip contains three RISC-V CPUs, namely M0, D0, and LP. M0 mainly processes network data stream and peripheral access. LP mainly implements some functions in the low-power mode.

1.2.1 M0

1.2.1.1 Features

M0, a 32-bit RISC-V CPU, uses a 5-stage pipeline: fetch, decode, execute, memory access, and write back. This high-performance embedded microprocessor has the following features:

- 32-bit RISC processor
- Supports RISC-V RV32IMAFCP instruction set
- Supports RISC-V 32-bit/16-bit mixed instruction set
- Supports RISC-V machine mode and user mode
- Thirty-two 32-bit integer general purpose registers (GPR) and thirty-two 32-bit/64-bit floating-point GPRs
- Integer (5-stage)/floating-point (7-stage), single-issue, sequentially executed pipeline
- Supports AXI 4.0 main device interface and AHB 5.0 peripheral interface
- 32K instruction cache, two-way set associative structure
- 16K data cache, two-way set associative structure
- Unaligned memory access
- Double-cycle hardware multiplier and Radix-4 hardware divider
- Supports BHT (8K) and BTB
- Supports extended enhanced instruction set
- Supports MCU feature extension technique, including interrupt processing acceleration technique and MCU extension feature
- Compatible with RISC-V CLIC interrupt standard and interrupt nesting; 96 external interrupt sources, 4 bits for configuring interrupt priority
- Compatible with RISC-V PMP, 8 configurable areas
- Supports hardware performance monitor (HPM) units
- Supports RISC-V Debug Specification

1.2.1.2 Extended Functions

- Bit operation instruction, arithmetic operation instruction, and enhanced memory access instruction
- CACHE operation instruction and synchronization instruction, making programming easy for software programmers
- Interrupt speculative push technique and vector interrupt tail-biting technique, accelerated interrupt response, with interrupt response delay of 20 processor clock cycles
- Common application requirements in MCU fields like NMI, low-power mode for deep/light sleep, low-power wake-up events, and locking
- Supports unaligned memory access, which can be enabled/disabled by software, making programming and debugging easy for software programmers

1.2.1.3 Implemented Standards

M0 is compatible with the following RISC-V standards:

- The RISC-V Instruction Set Manual, Volume I: RISC-V User-Level ISA, Version 2.2
- The RISC-V Instruction Set Manual, Volume II: RISC-V Privileged Architecture, Version 1.10
- RISC-V Core-Local Interrupt Controller (CLIC) Version 0.8
- RISC-V External Debug Support Version 0.13.2
- RISC-V “P” Extension Proposal Version 0.9

1.2.2 D0

1.2.2.1 Features

D0 is a 64-bit RISC-V CPU with 5-stage pipeline. This ultra-high performance embedded microprocessor suits fields like security monitoring, intelligent audio processing, and intelligent video processing, and has the following features:

- 64-bit RISC processor
- Supports RISC-V RV64IMAFCV instruction architecture
- Five-stage single-issue sequentially executed pipeline
- Level-1 instruction and data cache of Harvard architecture, with a size of 32 KB and a cache line of 64B
- Sv39 memory management unit, realizing the conversion of virtual and real addresses and memory management
- jTLB that supports 128 entries

- Supports AXI 4.0 128-bit master interface
- Supports core local interrupt (CLINT) and platform-level interrupt controller (PLIC)
- With 80 external interrupt sources, 3 bits for configuring interrupt priority
- Supports BHT (8K) and BTB
- Compatible with RISC-V PMP, 8 configurable areas
- Supports hardware performance monitor (HPM) units

Features of the vector computing unit:

- Compatible with RISC-V V vector extension standard (revision 0.7.1)
- Supports vector execution unit (128 bits)
- Supports INT8/INT16/INT32/FP16/FP32 vector operations
- Supports segment load and store instructions

1.2.2.2 Extended Functions

- Bit operation instruction, arithmetic operation instruction, and enhanced memory access instruction
- CACHE operation instruction and synchronization instruction, making programming easy for software programmers
- Supports unaligned memory access, which can be enabled/disabled by software, making programming and debugging easy for software programmers

1.2.2.3 Implemented Standards

D0 is compatible with the following RISC-V standards:

- The RISC-V Instruction Set Manual, Volume I: RISC-V User-Level ISA, Version 2.2
- The RISC-V Instruction Set Manual, Volume II: RISC-V Privileged Architecture, Version 1.10
- RISC-V “V” Vector Extension, Version 0.7.1-20190610-Workshop-Release.
- RISC-V External Debug Support Version 0.13.2

1.2.3 LP

1.2.3.1 Features

LP, a 32-bit RISC-V CPU, uses a 2-stage pipeline (fetch, decode, execute, and write back), characterized by ultra-low power, ultra-low cost, high code density, and the following features:

- 32-bit RISC processor
- Supports RISC-V RV32EMC instruction set
- Supports RISC-V 32-bit/16-bit mixed instruction set
- Sixteen 32-bit integer GPRs
- Two-stage sequentially executed pipeline
- Supports RISC-V machine mode and user mode
- Compatible with RISC-V CLIC interrupt standard and interrupt nesting, with 32 external interrupt sources
- Supports AHBLite bus protocol, instruction bus, and system bus
- No internal cache
- No PMP
- Supports 2-wire debugging interface

1.2.3.2 Implemented Standards

LP is compatible with the following RISC-V standards:

- The RISC-V Instruction Set Manual, Volume I: RISC-V User-Level ISA, Version 2.2
- The RISC-V Instruction Set Manual, Volume II: RISC-V Privileged Architecture, Version 1.10
- RISC-V Core-Local Interrupt Controller (CLIC) Version 0.8

1.3 Boot

The system supports boot from Flash/UART/USB, as described below:

Table 1.1: Boot mode

Boot Pin	Level	Description
GPIO39	1	Boot from UART (GPIO20/21)/USB for downloading Flash or downloading image to RAM for execution
	0	Boot the application image from Flash

1.4 Address Mapping

Table 1.2: Memory Map

Module	Size	Base Address(M0)		Base Address(D0)	
		Cache	Non-cache	Cache	Non-cache
OCRAM(MCU)	64KB	0x62020000	0x22020000	-	0x22020000
WRAM(MCU)	160KB	0x62030000	0x22030000	-	0x22030000
DRAM(MM)	512KB	-	0x3EF80000	0x3EF80000	-
VRAM(MM)	32KB	-	0x3F000000	0x3F000000	-

OCRAM and WRAM can be accessed either through AHB bus or through AXI. When the CPU accesses OCRAM using the address of 0x62020000, it will go through the internal cache and transfer AXI to AHB to achieve access to OCRAM. When the CPU uses the 0x22020000 address to access OCRAM, it does not go through the internal cache and directly accesses OCRAM through the AHB bus.

Table 1.3: Memory Map

Module	Target	Base Address	Size	Description
pSRAM	pSRAM	0x50000000	64MB	pSRAM memory address space, actual size depends on chip model
XRAM	XRAM	0x40000000	16KB	XRAM memory address space
FLASH	FlashA	0x58000000	64MB	Application address space, the actual size depends on the chip model
MMPERI	TIMER1	0x30009000	4KB	TIMER1 control register
	SPI1	0x30008000	4KB	SPI1 control register
	MM_GLB	0x30007000	4KB	Multimedia side global register
	DMA2D	0x30006000	4KB	DMA2D control register
	I2C3	0x30004000	4KB	I2C3 control register
	I2C2	0x30003000	4KB	I2C2 control register
	UART3	0x30002000	4KB	UART3 control register
	DMA2	0x30001000	4KB	DMA2 control register
	DMA1	0x20071000	4KB	DMA1 control register
	EMAC	0x20070000	4KB	EMAC control register
	AUDIO	0x20055000	4KB	Audio control register
	USB	0x20072000	4KB	USB control register

Table 1.3: Memory Map (continued)

Module	Target	Base Address	Size	Description
MCUPERI	HBN	0x2000F000	4KB	Hibernate register
	PDS	0x2000E000	4KB	Power-Down sleep register
	DMA0	0x2000C000	4KB	DMA0 control register
	I2S	0x2000AB00	256B	I2S control register
	UART2	0x2000AA00	256B	UART2 control register
	I2C1	0x2000A900	256B	I2C1 control register
	IR	0x2000A600	256B	IR control register
	TIMER0	0x2000A500	256B	TIMER0 control register
	PWM	0x2000A400	256B	PWM control register
	I2C0	0x2000A300	256B	I2C0 control register
	SPI0	0x2000A200	256B	SPI0 control register
	UART1	0x2000A100	256B	UART1 control register
	UART0	0x2000A000	256B	UART0 control register
	eFuse	0x20056000	4KB	eFuse memory control register
	TZ	0x20005000	4KB	Security Zone partition
	SEC_ENG	0x20004000	4KB	Security engine control register
	GPIP	0x20002000	1KB	General purpose DAC/ADC/ACOMP interface control register
	GLB	0x20000000	4KB	Global control register
ROM	ROM	0x90000000	128KB	Bootrom address space

Table 1.4: MRAM/VRAM address space

MRAM/VRAM	Configure(reg_h2pf_sram_rel , reg_vram_sram_sel , reg_ispl_sram_rel , reg_bla1_sram_rel)							
	0 , 0 , 0 , 0	0 , 0 , 0 , 1	1 , 0 , 0 , 0	3 , 0 , 0 , 0	0 , 0 , 1 , 0	0 , 1 , 0 , 0	2 , 0 , 0 , 1	3 , 1 , 1 , 1
MRAM	0x3EF80000 - 0x3EF8FFFF	-	-	-	-	-	-	64K
	0x3EF90000 - 0x3EF9FFFF	-	-	-	-	-	-	64K
	0x3EFA0000 - 0x3EFAFFFF	-	-	-	-	-	-	64K
	0x3EFB0000 - 0x3EFBFFFF	-	-	-	-	-	64K	64K
	0x3EFC0000 - 0x3EFCFFFF	-	-	-	64K	-	64K	64K
	0x3EFD0000 - 0x3EFDFFFF	-	64K	-	64K	-	64K	64K

Table 1.4: MRAM/VRAM address space(continued)

MRAM/VRAM		Configure(reg_h2pf_sram_rel , reg_vram_sram_sel , reg_ispl_sram_rel , reg_blai_sram_rel)							
		0 , 0 , 0 , 0	0 , 0 , 0 , 1	1 , 0 , 0 , 0	3 , 0 , 0 , 0	0 , 0 , 1 , 0	0 , 1 , 0 , 0	2 , 0 , 0 , 1	3 , 1 , 1 , 1
	0x3EFE0000 - 0x3EFEFFFF	-	64K						
	0x3EFF0000 - 0x3EFFFFFF	64K	64K	64K	64K	64K	64K	64K	64K
VRAM	0x3F000000 - 0x3F007FFF	32K	32K	32K	32K	32K	32K	32K	32K
	0x3F008000 - 0x3F017FFF	64K	64K	64K	64K	64K	-	64K	-

1.5 Interrupt Source

CPU_M0 and CPU_LP contain 23 interrupt sources. The interrupt sources and interrupt numbers are shown in the following table:

Table 1.5: Interrupt assignment

Interrupt source		Interrupt Number	Description
DMA	DMA0_ALL	IRQ_NUM_BASE+15	DMA0 ALL Interrupt
	DMA1_ALL	IRQ_NUM_BASE+16	DMA1 ALL Interrupt
IR	IRTX	IRQ_NUM_BASE+19	IR TX Interrupt
	IRRX	IRQ_NUM_BASE+20	IR RX Interrupt
USB	USB	IRQ_NUM_BASE+21	USB Interrupt
EMAC	EMAC	IRQ_NUM_BASE+24	EMAC Interrupt
ADC	GPADC_DMA	IRQ_NUM_BASE+25	GPADC_DMA Interrupt
SPI	SPI0	IRQ_NUM_BASE+27	SPI Interrupt
UART	UART0	IRQ_NUM_BASE+28	UART0 Interrupt
	UART1	IRQ_NUM_BASE+29	UART1 Interrupt
	UART2	IRQ_NUM_BASE+30	UART2 Interrupt
GPIO	GPIO_DMA	IRQ_NUM_BASE+31	GPIO DMA Interrupt
I2C	I2C0	IRQ_NUM_BASE+32	I2C0 Interrupt
	I2C1	IRQ_NUM_BASE+39	I2C1 Interrupt
PWM	PWM	IRQ_NUM_BASE+33	PWM Interrupt
TIMER0	TIMER0_CH0	IRQ_NUM_BASE+36	Timer0 Channel 0 Interrupt
	TIMER0_CH1	IRQ_NUM_BASE+37	Timer0 Channel 1 Interrupt

Table 1.5: Interrupt assignment (continued)

Interrupt source		Interrupt Number	Description
	TIMER0_WDT	IRQ_NUM_BASE+38	Timer0 Watch Dog Interrupt
I2S	I2S	IRQ_NUM_BASE+40	I2S Interrupt
GPIO	GPIO_INT0	IRQ_NUM_BASE+44	GPIO Interrupt
PDS	PDS_WAKEUP	IRQ_NUM_BASE+50	PDS Wakeup Interrupt
HBN	HBN_OUT0	IRQ_NUM_BASE+51	Hibernate out 0 Interrupt
	HBN_OUT1	IRQ_NUM_BASE+52	Hibernate out 1 Interrupt

CPU_D0 contains 21 interrupt sources. The interrupt sources and interrupt numbers are shown in the following table:

Table 1.6: Interrupt assignment

Interrupt source		Interrupt Number	Description
UART	UART3	IRQ_NUM_BASE+4	UART3 Interrupt
I2C	I2C2	IRQ_NUM_BASE+5	I2C2 Interrupt
	I2C3	IRQ_NUM_BASE+6	I2C3 Interrupt
SPI	SPI1	IRQ_NUM_BASE+7	SPI1 Interrupt
DMA2	DMA2_INT0	IRQ_NUM_BASE+24	DMA INT0 Interrupt
	DMA2_INT1	IRQ_NUM_BASE+25	DMA INT1 Interrupt
	DMA2_INT2	IRQ_NUM_BASE+26	DMA INT2 Interrupt
	DMA2_INT3	IRQ_NUM_BASE+27	DMA INT3 Interrupt
	DMA2_INT4	IRQ_NUM_BASE+28	DMA INT4 Interrupt
	DMA2_INT5	IRQ_NUM_BASE+29	DMA INT5 Interrupt
	DMA2_INT6	IRQ_NUM_BASE+30	DMA INT6 Interrupt
	DMA2_INT7	IRQ_NUM_BASE+31	DMA INT7 Interrupt
EMAC	EMAC2	IRQ_NUM_BASE+36	EMAC2 Interrupt
DMA2D	DMA2D_INT0	IRQ_NUM_BASE+45	DMA2D INT0 Interrupt
	DMA2D_INT1	IRQ_NUM_BASE+46	DMA2D INT1 Interrupt
PWM	PWM	IRQ_NUM_BASE+48	PWM1 Interrupt
TIMER1	TIMER0_CH0	IRQ_NUM_BASE+61	Timer1 Channel 0 Interrupt
	TIMER0_CH1	IRQ_NUM_BASE+62	Timer1 Channel 1 Interrupt
	TIMER0_WDT	IRQ_NUM_BASE+63	Timer1 Watch Dog Interrupt
AUDIO	AUDIO	IRQ_NUM_BASE+64	Audio Interrupt
PDS	PDS	IRQ_NUM_BASE+66	PDS Interrupt

Note: IRQ_NUM_BASE is 16 and the interrupt number 015 is RISC-V reserved interrupt.

Reset and Clock

2.1 Overview

The clock sources in the chip include XTAL, PLL, and RC. They are sent to each module along with frequency division configuration.

2.2 Reset Management

Table 2.1: Software reset function table 1

BL808	RST_PIN /Watch Dog / PDS Software Power On (swrst_cfg2[0])	SW.Reset (swrst_cfg1)	System Reset (swrst_cfg2[2])/ PDS	PDS /CPU	PDS
CPU(M0)	✓			✓	
CPU(LP)	✓				
bus	✓		✓		
glb	✓	swrst_s1[0]			
mix	✓	swrst_s1[1]			✓
gpip	✓	swrst_s1[2]	✓		
sec_eng	✓	swrst_s1[4]	✓		
TZ	✓		✓		
efuse	✓				
dma	✓	swrst_s1[12]	✓		
psram	✓	swrst_s1_ext[2]	✓		
usb	✓	swrst_s1_ext[3]	✓		
emac	✓	swrst_s1_ext[3]	✓		
audio	✓	swrst_s1_ext[5]	✓		
dma2	✓	swrst_s1_ext[8]	✓		

Table 2.1: Software reset function table 1(continued)

BL808	RST_PIN /Watch Dog / PDS Software Power On (swrst_cfg2[0])	SW.Reset (swrst_cfg1)	System Reset (swrst_cfg2[2])/ PDS	PDS /CPU	PDS
pds		swrst_s1[14]			
uart0	✓	swrst_s1a[0]	✓		
uart1	✓	swrst_s1a[1]	✓		
spi	✓	swrst_s1a[2]	✓		
i2c	✓	swrst_s1a[3]	✓		
pwm	✓	swrst_s1a[4]	✓		
timer	✓	swrst_s1a[5]	✓		
irr	✓	swrst_s1a[6]	✓		
uart2	✓	swrst_s1a[10]	✓		
i2s	✓	swrst_s1a[11]	✓		
pdm	✓	swrst_s1a[12]	✓		
wifi	✓	swrst_s2[0]			✓
ble	✓	swrst_s3[0][2]			✓

Table 2.2: Software reset function table 2

BL808_MM	Watch Dog / Software Power On (swrst_cfg2[0])	SW.Reset (swrst_cfg1)	System Reset (swrst_cfg2[2])	MMCPU0
CPU(D0)	✓			✓
bus	✓		✓	
mm_misc	✓	swrst_mm_misc	✓	
mm_dma	✓	swrst_dma	✓	
mm_2ddma	✓	swrst_dma2d	✓	
mm_uart	✓	swrst_uart0	✓	
mm_i2c	✓	swrst_i2c0	✓	
mm_ipc	✓	swrst_i2c1	✓	
mm_timer	✓	swrst_timer	✓	
uhs_ctrl	✓	swrst_pUHS	✓	
disp_tsrc	✓	swrst_dp_tsrc	✓	
nr3d_ctrl	✓	swrst_nr3d_ctrl	✓	
dvp2busA	✓	swrst_dvp2busA	✓	
dvp2busB	✓	swrst_dvp2busB	✓	

Table 2.2: Software reset function table 2(continued)

BL808_MM	Watch Dog / Software Power On (swrst_cfg2[0])	SW.Reset (swrst_cfg1)	System Reset (swrst_cfg2[2])	MMCPU0
dvp2busC	✓	swrst_dvp2busC	✓	
dvp2busD	✓	swrst_dvp2busD	✓	
dvp2busE	✓	swrst_dvp2busE	✓	
dvp2busF	✓	swrst_dvp2busF	✓	
dvp2busG	✓	swrst_dvp2busG	✓	
dvp2busH	✓	swrst_dvp2busH	✓	
jdec	✓	swrst_mjpeg_dec	✓	
blai	✓	swrst_cnn	✓	

2.3 Clock Source

Types:

- XTAL: external crystal oscillator clock, with optional frequencies of 24, 32, 38.4, and 40 MHz depending on system requirements
- XTAL32K: external crystal oscillator clock, with frequency of 32 kHz
- RC32K: RC oscillator clock with frequency of 32 kHz and calibration
- RC32M: RC oscillator clock with frequency of 32 MHz and calibration
- PLL: multiple PLL modules, which can generate several clocks with different frequencies to meet various application scenarios

The clock control unit distributes the clocks from the oscillator to the core and peripheral devices. You can choose the system clock source, dynamic frequency divider, and clock configuration, and use the 32 kHz clock in sleep to achieve low-power clock management.

Peripheral clocks include Flash, UART, I2C, SPI, PWM, IR-remote, ADC, and DAC.

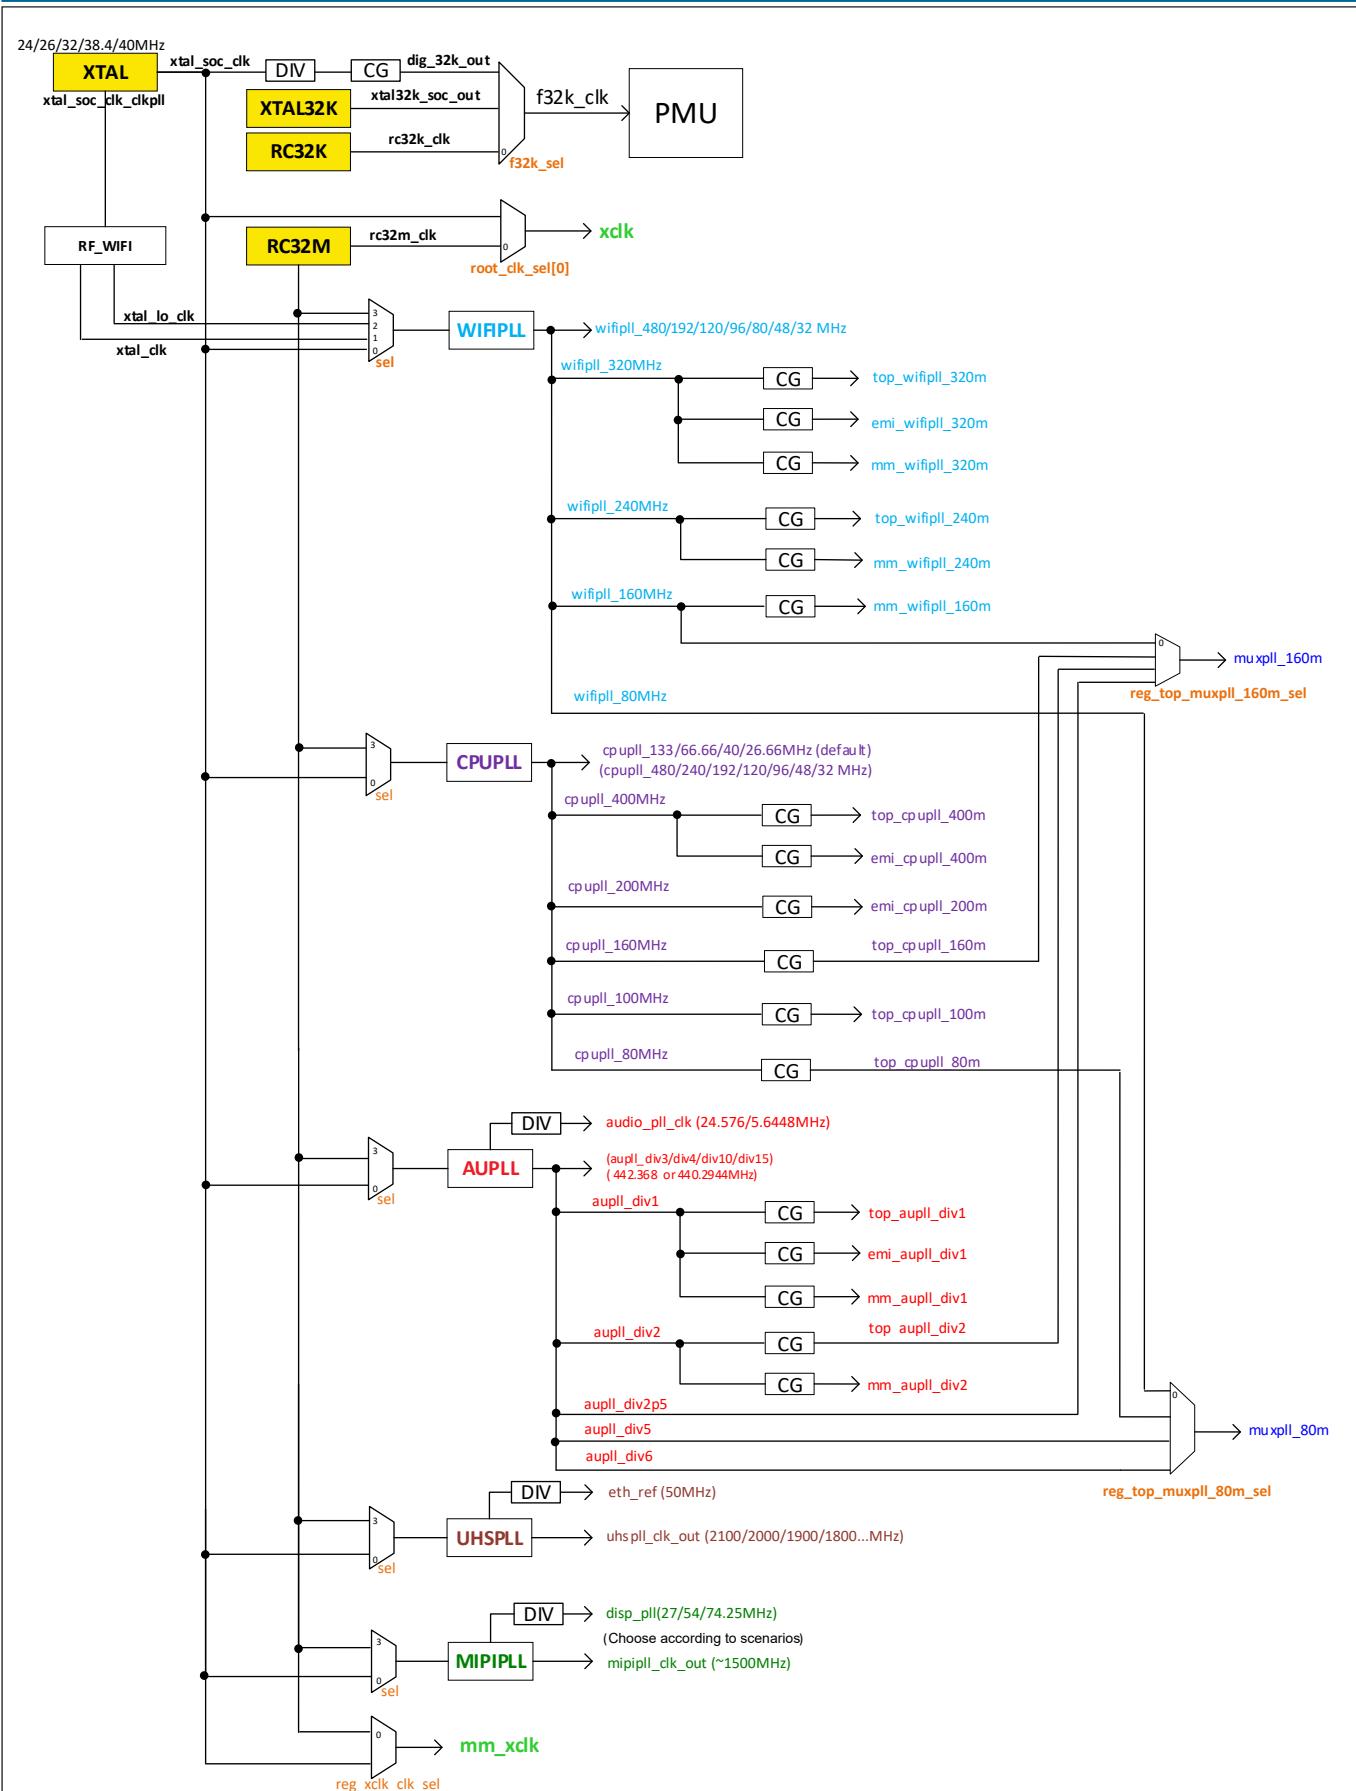


Fig. 2.1: System Clock Architecture

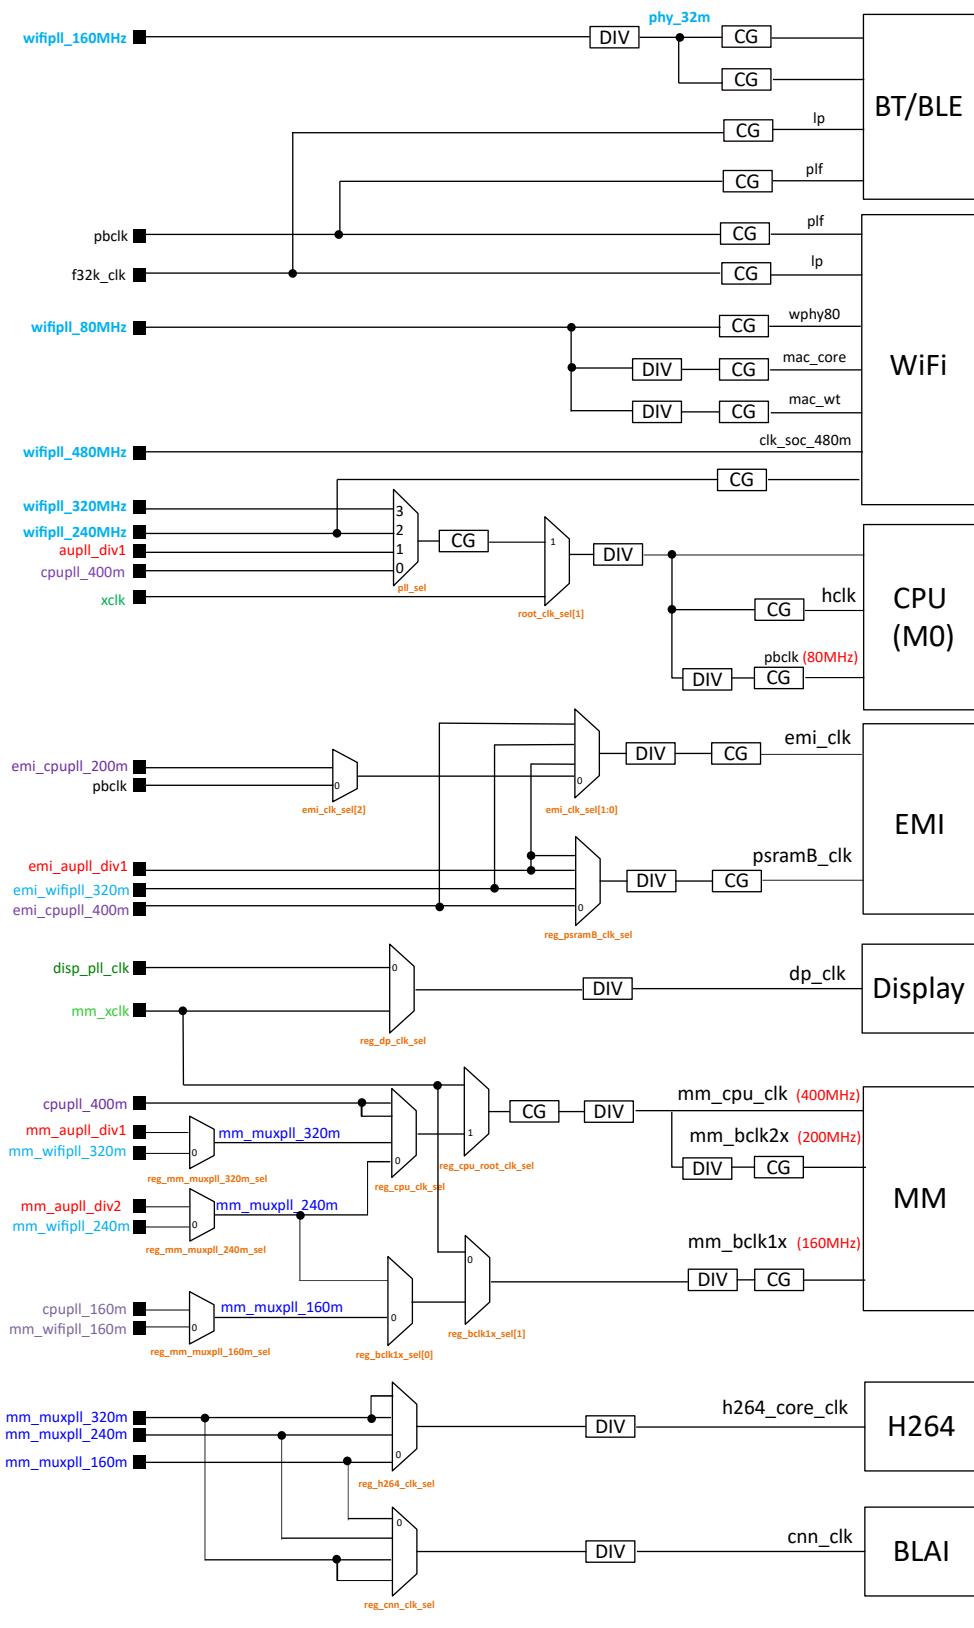


Fig. 2.2: Module Clock Architecture

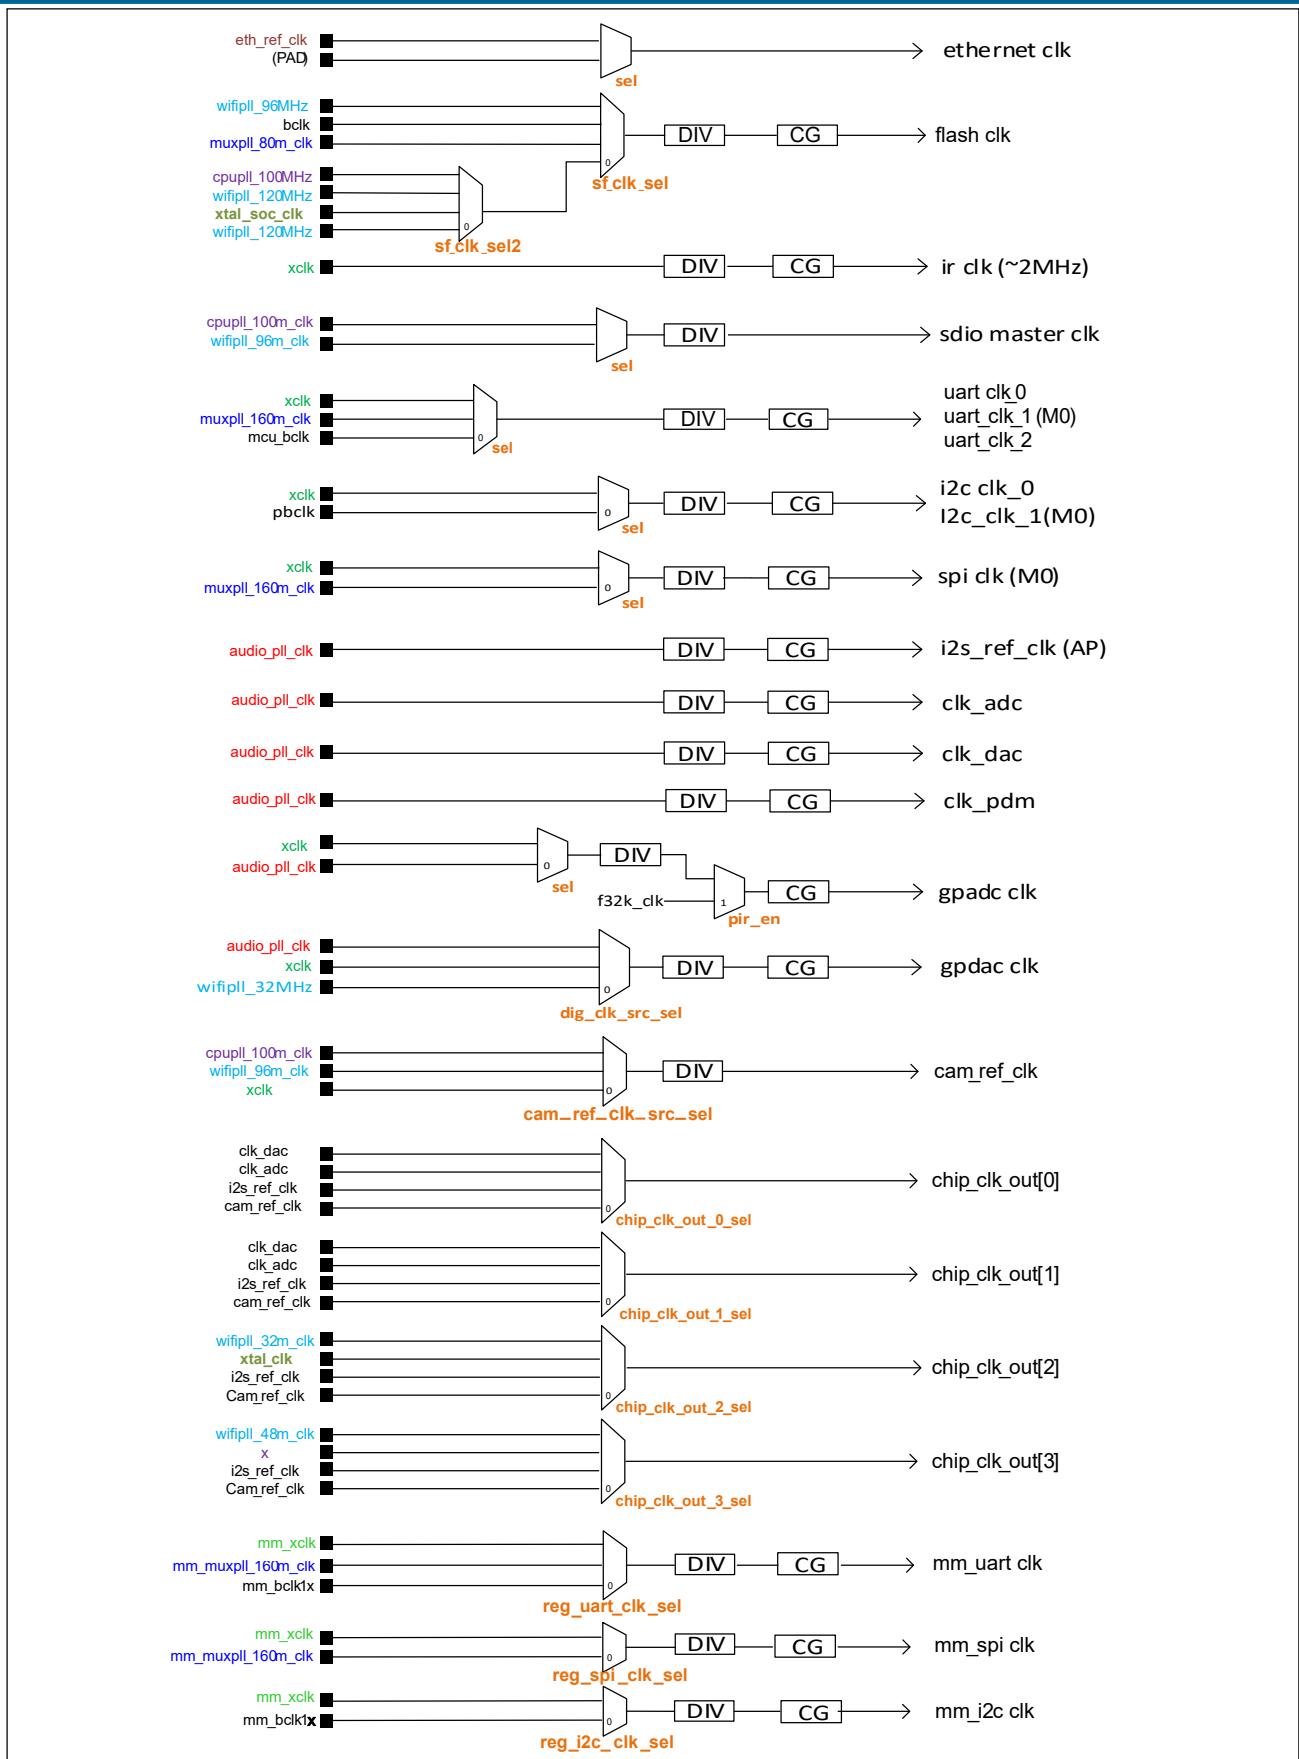


Fig. 2.3: Peripheral Clock Architecture

3.1 Overview

3.2 Functional Description

3.2.1 Clock Management

It is mainly used to set the clocks of processors, buses, and peripherals, set the clock source and frequency division of the above modules, and achieve the clock gating of these modules, to save power for the system. For more details, see system clock sections.

3.2.2 Reset Management

It provides the separate reset function of each peripheral module and the chip reset function.

Chip reset:

- CPU reset: Only CPU is reset. The program will roll back, and peripherals will not be reset
- System reset: All peripherals and CPUs will be reset, but the registers in the AON field will not be reset
- Power-on reset: The whole system including the registers in the AON field will be reset

The application can select a proper reset mode as required.

3.2.3 Bus Management

It provides bus arbitration and bus error settings, so that users can set whether to interrupt and provide the error bus address information when a bus error occurs, facilitating program debugging by users.

3.2.4 Memory Management

It provides power management of each memory module in the low-power mode of the chip system, including two setting modes:

- Retention mode: The data in the memory can be saved, but it cannot be read or written before exiting the low-power mode
- Sleep mode: This mode is only used to reduce system power consumption, because it will cause memory data to lose

4

GPIO

4.1 Overview

Users can connect General Purpose I/O Ports (GPIO) with external hardware devices to control these devices.

4.2 Features

- Up to 40 I/O pins
- Each I/O pin supports up to 25 functions
- Each I/O pin can be configured in pull-up, pull-down, or floating mode
- Each I/O pin can be configured as input, output or Hi-Z state mode
- The output mode of each I/O pin has 4 optional drive capabilities
- The input mode of each I/O pin can be set to enable/disable the Schmitt trigger
- Each I/O pin supports 9 external interrupt modes
- FIFO depth: 128 * 16-bit
- Data can be transferred through DMA from RAM to I/O pins for output

4.3 GPIO function list

The reg_gpio_xx_func_sel bit of the GPIO_CFGxx (where xx represents the GPIO pin number) register is used to set the multiplexing function of GPIO. The multiplexing function number is shown in the following table:

Table 4.1: GPIO function list

Number	Function
0	SDH

Table 4.1: GPIO function list (continued)

Number	Function
1	SPI
2	FLASH
3	I2S
4	PDM
5	I2C0
6	I2C1
7	UART0
8	EMAC
9	CAM
10	ANALOG
11	GPIO
16	PWM0
17	PWM1
18	MM_SPI
19	MM_I2C0
20	MM_I2C1
21	MM_UART
22	DBI_B
23	DBI_C
24	DPI
26	M0_JTAG
27	D0_JTAG

Note: If the GPIO is set as a peripheral function, just set the `reg_gpio_xx_func_sel` bit of the `GPIO_CFGxx` register to the corresponding number of the peripheral.

4.4 GPIO Input Settings

Set the register GPIO_CFGxx to configure the general interface to the input mode as described below (xx denotes the GPIO pin number):

- Set reg_gpio_xx_ie to 1 to enable the GPIO input mode
- Set reg_gpio_xx_func_sel to 11 to enter the SWGPIO mode
- In the SWGPIO mode, set to enable/disable the Schmitt trigger through reg_gpio_xx_smt for waveform shaping
- Set to enable/disable the internal pull-up and pull-down functions through reg_gpio_xx_pu and reg_gpio_xx_pd
- Set the type of external interrupt through reg_gpio_xx_int_mode_set , and then read the level value of I/O pin through reg_gpio_xx_i

4.5 GPIO Output Settings

The following four output modes of GPIO can be set through the register GPIO_CFGxx.

4.5.1 Normal Output Mode

- Set reg_gpio_xx_oe to 1 to enable the GPIO output mode
- Set reg_gpio_xx_func_sel to 11 to enter the SWGPIO mode
- Set reg_gpio_xx_mode to 0 to enable the normal output function of I/O
- Set to enable/disable the internal pull-up and pull-down functions through reg_gpio_xx_pu and reg_gpio_xx_pd , and then set the level of I/O pin through reg_gpio_xx_o

4.5.2 Set/Clear Output Mode

- Set reg_gpio_xx_oe to 1 to enable the GPIO output mode
- Set reg_gpio_xx_func_sel to 11 to enter the SWGPIO mode
- Set reg_gpio_xx_mode to 1 to enable the Set/Clear output function of I/O
- Set to enable/disable the internal pull-up and pull-down functions through reg_gpio_xx_pu and reg_gpio_xx_pd

In the Set/Clear output mode, you can set reg_gpio_xx_set to 1 to keep the I/O pin at the high level, or set reg_gpio_xx_clr to 1 to keep the I/O pin at the low level. If both reg_gpio_xx_set and reg_gpio_xx_clr are set to 1, the I/O pin is kept at the high level. If both of them are set to 0, the setting does not work.

4.5.3 Buffer Output Mode

- Set reg_gpio_xx_oe to 1 to enable the GPIO output mode
- Set reg_gpio_xx_func_sel to 11 to enter the SWGPIO mode
- Set reg_gpio_xx_mode to 2 to enable the buffer output function of I/O
- Set to enable/disable the internal pull-up and pull-down functions through reg_gpio_xx_pu and reg_gpio_xx_pd

In the buffer output mode, when the cr_gpio_tx_en bit in the register GPIO_CFG142 is set to 1, the data stored in the register GPIO_CFG144 is written into the corresponding I/O pins one by one in order, to set the level of pin. The size of the buffer area is 128 * 16 bits.

The level state output to the pin can be set freely. With XCLK as the clock source, the value set to cr_code_total_time in the register GPIO_CFG142 is one cycle:

Level state of logical ‘1’ : For a high level set by cr_code1_high_time plus a low level set by cr_code_total_time cr_code1_high_time , when cr_invert_code1_high is 0, logical ‘1’ outputs high level first and then low level, and otherwise, low level first and then high level.

Level state of logical ‘0’ : For a high level set by cr_code0_high_time plus a low level set by cr_code_total_time cr_code0_high_time , when cr_invert_code0_high is 0, logical ‘0’ outputs high level first and then low level, and otherwise, low level first and then high level.

Note: As the register of the buffer is 16-bit wide, every 16 pins form a group, and the pins with the lowest to highest serial numbers in a group are controlled by the corresponding bits in the buffer. The cr_gpio_dma_out_sel_latch bit in the register GPIO_CFG143 shall be set to 0. cr_gpio_dma_park_value is used to set the default level of I/O, namely 1 for high level and 0 for low level.

When cr_code_total_time = 10, cr_code0_high_time = 1, cr_code1_high_time = 5, cr_invert_code0_high = 0, cr_invert_code1_high = 0, cr_gpio_dma_park_value =0, and cr_gpio_dma_out_sel_latch = 0, the waveform is shown as follows:

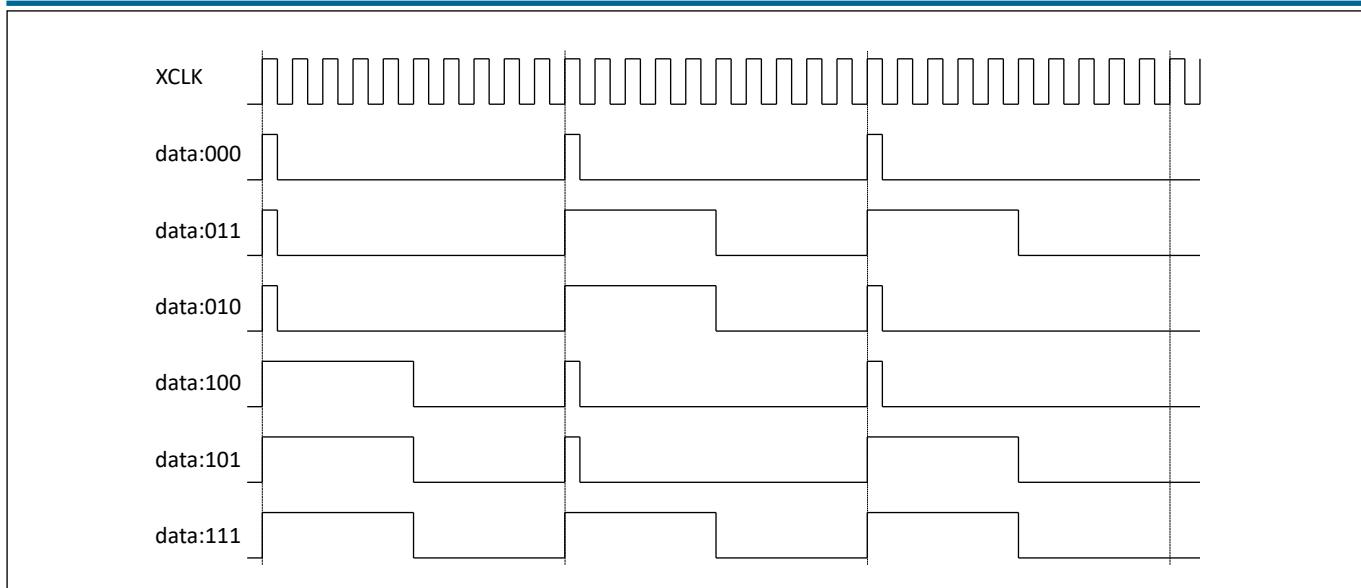


Fig. 4.1: General GPIO Output Waveform

When `cr_code_total_time = 10`, `cr_code0_high_time = 1`, `cr_code1_high_time = 5`, `cr_invert_code0_high = 0`, `cr_invert_code1_high = 1`, `cr_gpio_dma_park_value = 1`, and `cr_gpio_dma_out_sel_latch = 0`, the waveform is shown as follows:


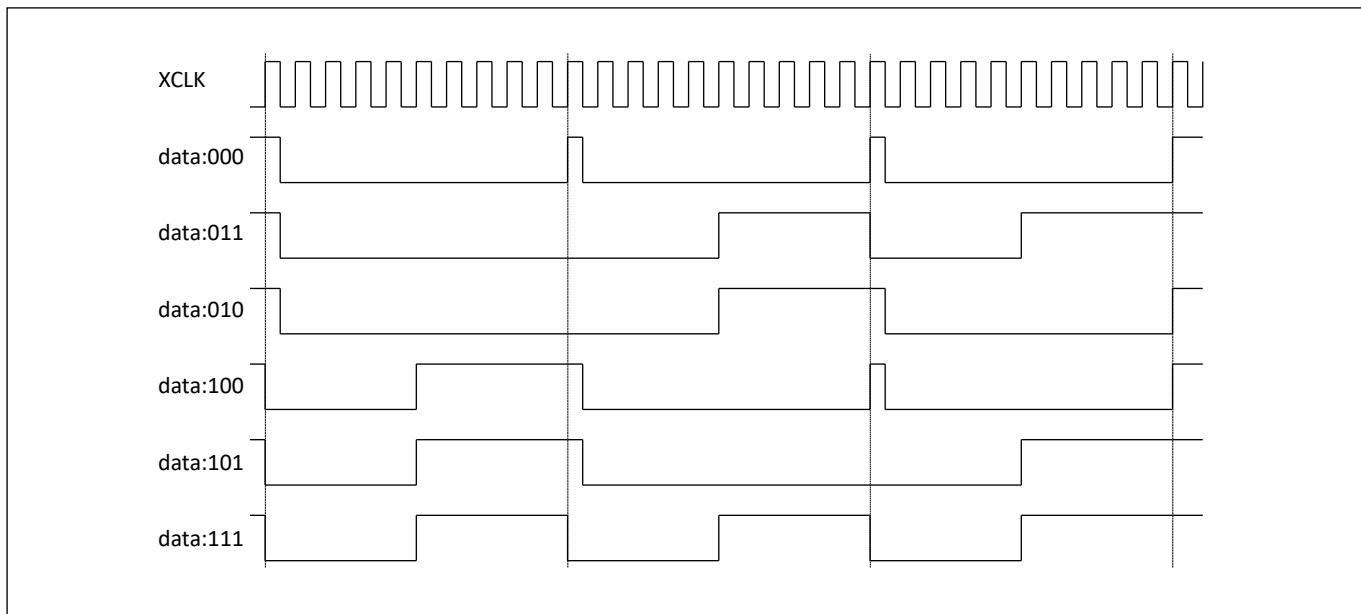


Fig. 4.2: Output Waveform of Inverted Level of Logical ‘1’ in Default High Level

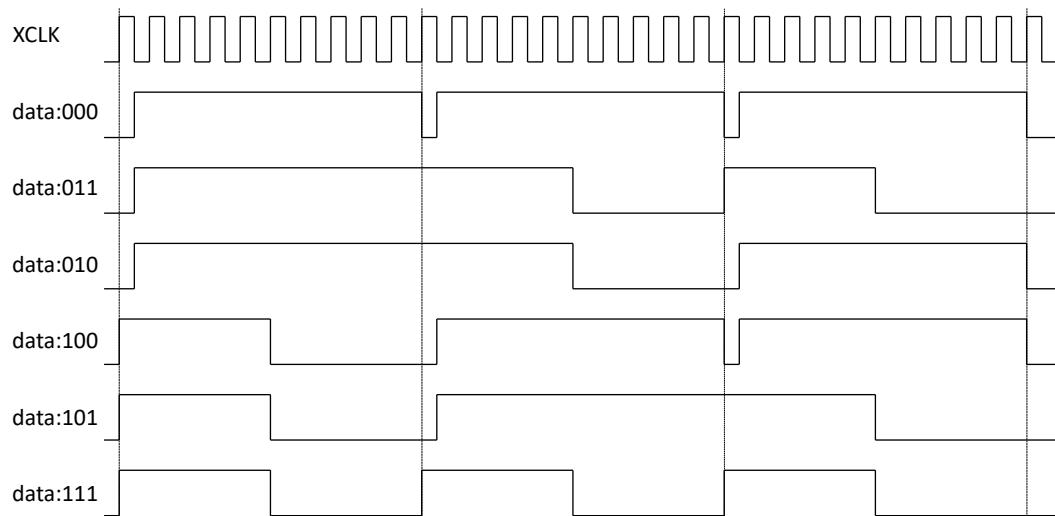When `cr_code_total_time = 10`, `cr_code0_high_time = 1`, `cr_code1_high_time = 5`, `cr_invert_code0_high = 1`, `cr_invert_code1_high = 0`, `cr_gpio_dma_park_value = 0`, and `cr_gpio_dma_out_sel_latch = 0`, the waveform is shown as follows:



configuration: T12 = 10, L0T1 = 1, L1T1 = 5, L0S1 = 1, L1S1 = 0, PS = 0, TM = 0

Example 3 of GPIO output tx configuration

Fig. 4.3: Output Waveform of Inverted Level of Logical ‘0’ in Default Low Level

When cr_code_total_time = 10, cr_code0_high_time = 1, cr_code1_high_time = 5, cr_invert_code0_high = 1, cr_invert_code1_high = 1, cr_gpio_dma_park_value = 1, and cr_gpio_dma_out_sel_latch = 0, the waveform is shown as follows:

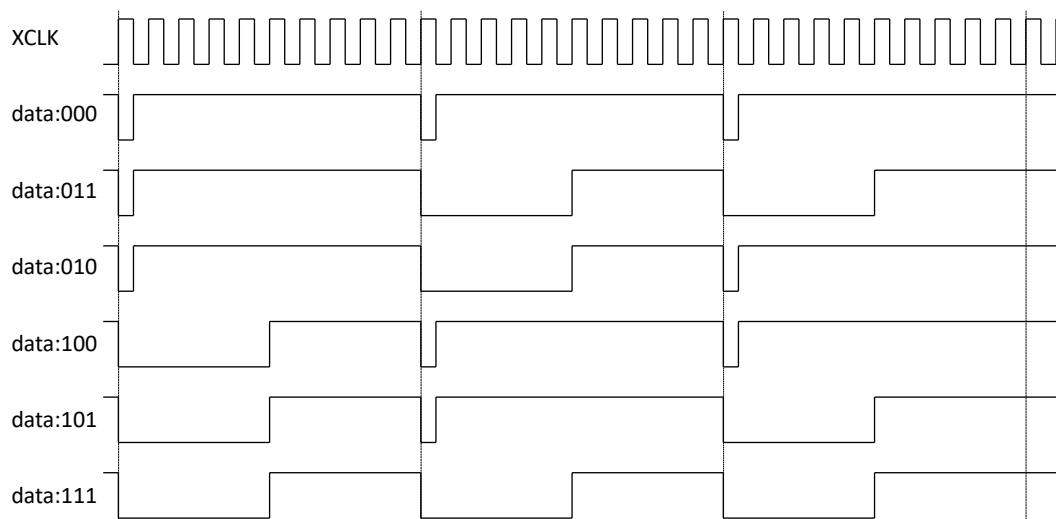


Fig. 4.4: Output Waveforms of Inverted Levels of Logical ‘0’ and Logical ‘1’ in Default High Level

4.5.4 Cache Set/Clear Output Mode

- Set reg_gpio_xx_oe to 1 to enable the GPIO output mode
- Set reg_gpio_xx_func_sel to 11 to enter the SWGPIO mode
- Set reg_gpio_xx_mode to 3 to enable the Cache Set/Clear output function of I/O
- Set to enable/disable the internal pull-up and pull-down functions through reg_gpio_xx_pu and reg_gpio_xx_pd

When the cr_gpio_tx_en bit in the register GPIO_CFG142 is set to 1, the data written into the FIFO by the GPIO_CFG144 register will be written to the corresponding pins one by one in order, to set the level of pin. The size of the buffer area is 128 * 16 bits.

The level state output to the pin can be set freely. With XCLK as the clock source, the value set to the cr_code_total_time bit in the register GPIO_CFG142 is one cycle:

Every 8 pins form a group. The low 8 bits and high 8 bits of the register GPIO_CFG144 set the output high/low level of 8 pins respectively. If the low 8 bits are written to 1, the corresponding pin outputs a high level. If the high 8 bits are written to 1, that outputs a low level. The bits written to 0 in this register shall be invalid. When the corresponding bits in the high 8 bits and low 8 bits are written to 1 simultaneously for the same pin, the pin outputs a high level.

The cr_gpio_dma_out_sel_latch bit in the register GPIO_CFG143 shall be set to 1. cr_gpio_dma_park_value is used to set the default level of I/O, namely 1 for high level and 0 for low level.

4.6 I/O FIFO

The depth of I/O FIFO is 128 * 16-bit. The gpio_tx_fifo_cnt bit in the register GPIO_CFG143 indicates the current available space of FIFO (128 by default). Every time a value is written into the GPIO_CFG144 register, the value of gpio_tx_fifo_cnt will decrease by 1. After it decreases to 0, if a value is continuously written to the register GPIO_CFG144 and cr_gpio_tx_fer_en is 1, the error interrupt will be enabled and this interrupt will occur.

When the cr_gpio_tx_en bit in the GPIO_CFG142 register is 1, the data of I/O FIFO will be sent to I/O pins one by one, and the value of gpio_tx_fifo_cnt will increment. When it is incremented to greater than cr_gpio_tx_fifo_th and cr_gpio_tx_fifo_en is 1, the FIFO interrupt is enabled and this interrupt will occur.

If the cr_gpio_dma_tx_en bit in the register CR_GPIO_CFG143 is 1, DMA is enabled to send data. If cr_gpio_tx_fifo_th is less than gpio_tx_fifo_cnt, DMA will transfer the data from the preset RAM to the buffer, whereas the interrupt flag r_gpio_tx_fifo_int will be cleared automatically.

4.7 I/O Interrupt

I/O supports various external interrupts. Setting the `reg_gpio_xx_int_mask` in the register `GPIO_CFGxx` to 0 can enable the external interrupt of the corresponding pin. `reg_gpio_xx_int_mode_set` is used to set the external interrupt type of that pin.

The supported interrupt types are as follows:

- Synchronous Falling Edge Interrupt
 - Based on the `f32k_clk` clock, the input pin level is sampled once on each rising edge of the clock. If a high level is followed by two low levels, a synchronous falling edge interrupt will be generated at this time
- Synchronous Rising Edge Interrupt
 - Based on the `f32k_clk` clock, the input pin level is sampled once on each rising edge of the clock. If a low level is followed by two high levels, a synchronous rising edge interrupt will be generated at this time
- Synchronous Low Level Interrupt
 - Based on the `f32k_clk` clock, after detecting a low level, a synchronous low-level interrupt is generated at the rising edge of the third clock
- Synchronous High Level Interrupt
 - Based on the `f32k_clk` clock, after detecting a high level, a synchronous high-level interrupt is generated at the rising edge of the third clock
- Synchronous Double Edge Interrupt
 - Based on the `f32k_clk` clock, if a high level transition to low level (low level transition to high level) is detected, a falling edge (rising edge) event will be generated. After the event is generated, at the third rising edge of the clock, synchronous double edge interrupt will be generated
- Asynchronous Falling Edge Interrupt
 - When a high-to-low transition is detected, an asynchronous falling edge interrupt is triggered immediately
- Asynchronous Rising Edge Interrupt
 - When a low-to-high transition is detected, an asynchronous rising edge interrupt is triggered immediately
- Asynchronous Low Level Interrupt
 - Based on the `f32k_clk` clock, the input pin level is sampled once on each rising edge of the clock. If it is low for 3 consecutive times, an asynchronous low-level interrupt is triggered
- Asynchronous High Level Interrupt
 - Based on the `f32k_clk` clock, the input pin level is sampled once on each rising edge of the clock. If it is high for 3 consecutive times, an asynchronous high-level interrupt will be triggered

In the interrupt function, you can obtain the interrupt-generating GPIO state through the gpio_xx_int_stat of the register GPIO_CFGxx, and clear the interrupt flag through reg_gpio_xx_int_clr .


4.8 Register description

Name	Description
gpio_cfg0	
gpio_cfg1	
gpio_cfg2	
gpio_cfg3	
gpio_cfg4	
gpio_cfg5	
gpio_cfg6	
gpio_cfg7	
gpio_cfg8	
gpio_cfg9	
gpio_cfg10	
gpio_cfg11	
gpio_cfg12	
gpio_cfg13	
gpio_cfg14	
gpio_cfg15	
gpio_cfg16	
gpio_cfg17	
gpio_cfg18	
gpio_cfg19	
gpio_cfg20	
gpio_cfg21	
gpio_cfg22	
gpio_cfg23	
gpio_cfg24	

Name	Description
gpio_cfg25	
gpio_cfg26	
gpio_cfg27	
gpio_cfg28	
gpio_cfg29	
gpio_cfg30	
gpio_cfg31	
gpio_cfg32	
gpio_cfg33	
gpio_cfg34	
gpio_cfg35	
gpio_cfg36	
gpio_cfg37	
gpio_cfg38	
gpio_cfg39	
gpio_cfg40	
gpio_cfg41	
gpio_cfg42	
gpio_cfg43	
gpio_cfg44	
gpio_cfg45	
gpio_cfg128	
gpio_cfg129	
gpio_cfg136	
gpio_cfg137	
gpio_cfg138	
gpio_cfg139	
gpio_cfg141	

4.8.1 gpio_cfg0

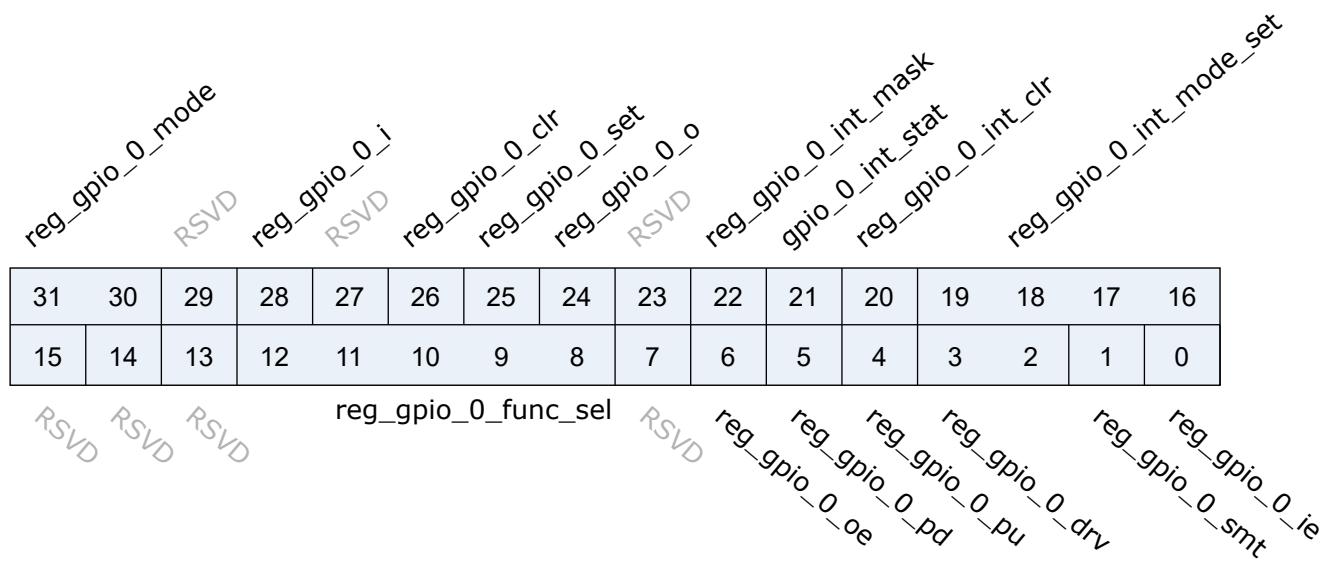Address: 0x2000008c4




Bits	Name	Type	Reset	Description
31:30	reg_gpio_0_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_0_i	r	0	
27	RSVD			
26	reg_gpio_0_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_0_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect

Bits	Name	Type	Reset	Description
24	reg_gpio_0_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_0_int_mask	r/w	1	mask interrupt (1)
21	gpio_0_int_stat	r	0	interrupt status
20	reg_gpio_0_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_0_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_0_func_sel	r/w	5'hB	GPIO Function Select (Default : SWGPIO)
7	RSVD			
6	reg_gpio_0_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_0_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_0_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_0_drv	r/w	0	GPIO Driving Control
1	reg_gpio_0_smt	r/w	1	GPIO SMT Control
0	reg_gpio_0_ie	r/w	0	GPIO Input Enable

4.8.2 gpio_cfg1

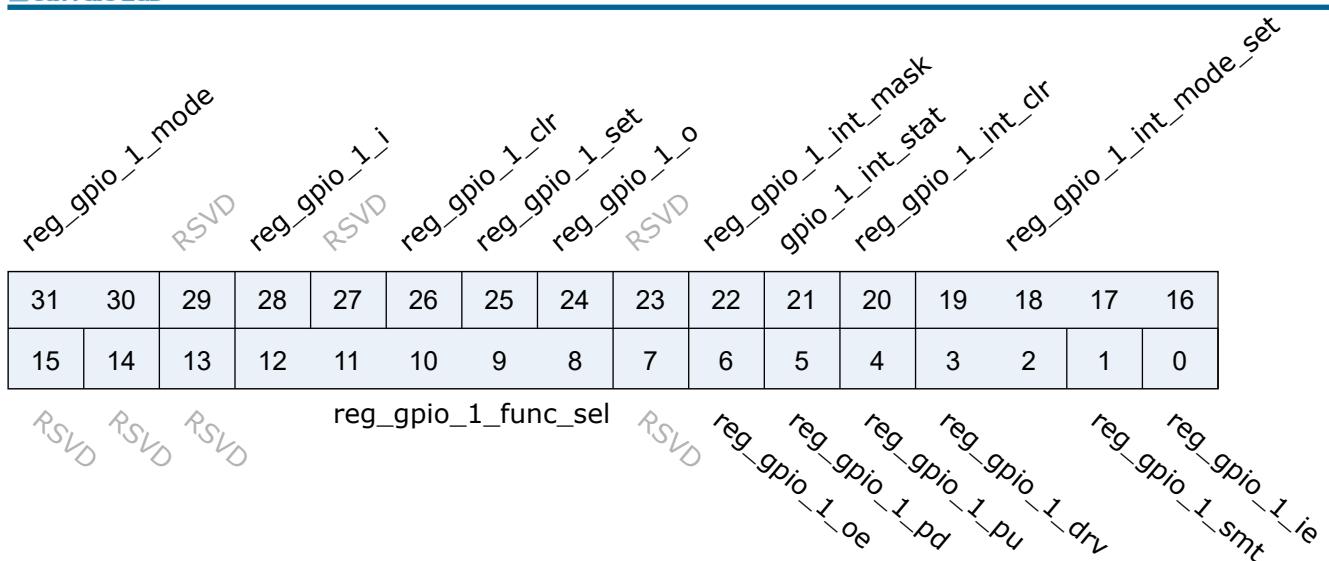Address: 0x2000008c8




Bits	Name	Type	Reset	Description
31:30	reg_gpio_1_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_1_i	r	0	
27	RSVD			
26	reg_gpio_1_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_1_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_1_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_1_int_mask	r/w	1	mask interrupt (1)
21	gpio_1_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_1_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_1_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_1_func_sel	r/w	5'hB	GPIO Function Select (Default : SWGPIO)
7	RSVD			
6	reg_gpio_1_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_1_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_1_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_1_drv	r/w	0	GPIO Driving Control
1	reg_gpio_1_smt	r/w	1	GPIO SMT Control
0	reg_gpio_1_ie	r/w	0	GPIO Input Enable

4.8.3 gpio_cfg2

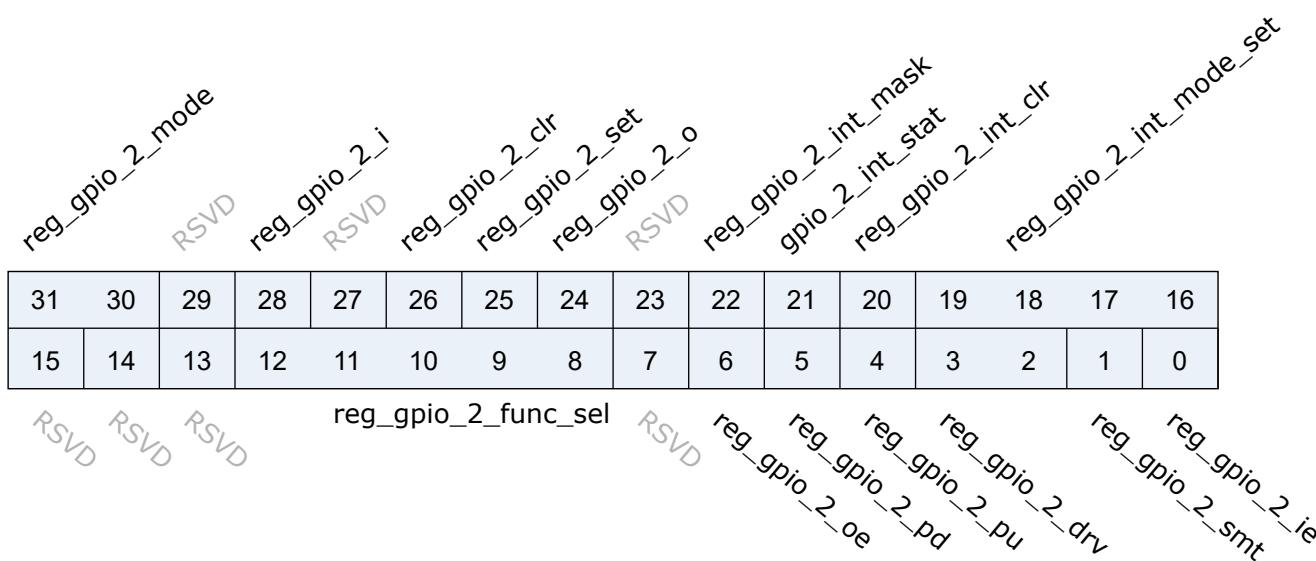Address: 0x2000008cc




Bits	Name	Type	Reset	Description
31:30	reg_gpio_2_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_2_i	r	0	
27	RSVD			
26	reg_gpio_2_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_2_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_2_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_2_int_mask	r/w	1	mask interrupt (1)
21	gpio_2_int_stat	r	0	interrupt status
20	reg_gpio_2_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_2_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_2_func_sel	r/w	5'hB	GPIO Function Select (Default : SWGPIO)
7	RSVD			

Bits	Name	Type	Reset	Description
6	reg_gpio_2_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_2_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_2_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_2_drv	r/w	0	GPIO Driving Control
1	reg_gpio_2_smt	r/w	1	GPIO SMT Control
0	reg_gpio_2_ie	r/w	0	GPIO Input Enable

4.8.4 gpio_cfg3

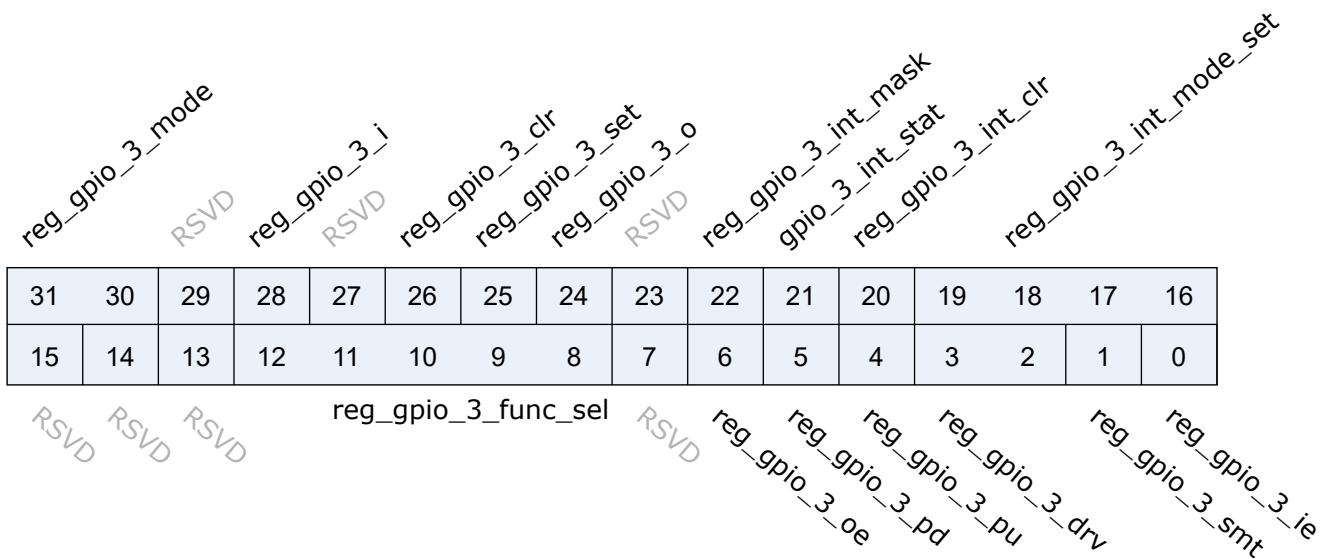Address: 0x2000008d0




Bits	Name	Type	Reset	Description
31:30	reg_gpio_3_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			

Bits	Name	Type	Reset	Description
28	reg_gpio_3_i	r	0	
27	RSVD			
26	reg_gpio_3_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_3_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_3_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_3_int_mask	r/w	1	mask interrupt (1)
21	gpio_3_int_stat	r	0	interrupt status
20	reg_gpio_3_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_3_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_3_func_sel	r/w	5'hF	GPIO Function Select (Default : CCI)
7	RSVD			
6	reg_gpio_3_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_3_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_3_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_3_drv	r/w	0	GPIO Driving Control
1	reg_gpio_3_smt	r/w	1	GPIO SMT Control
0	reg_gpio_3_ie	r/w	1	GPIO Input Enable

4.8.5 gpio_cfg4

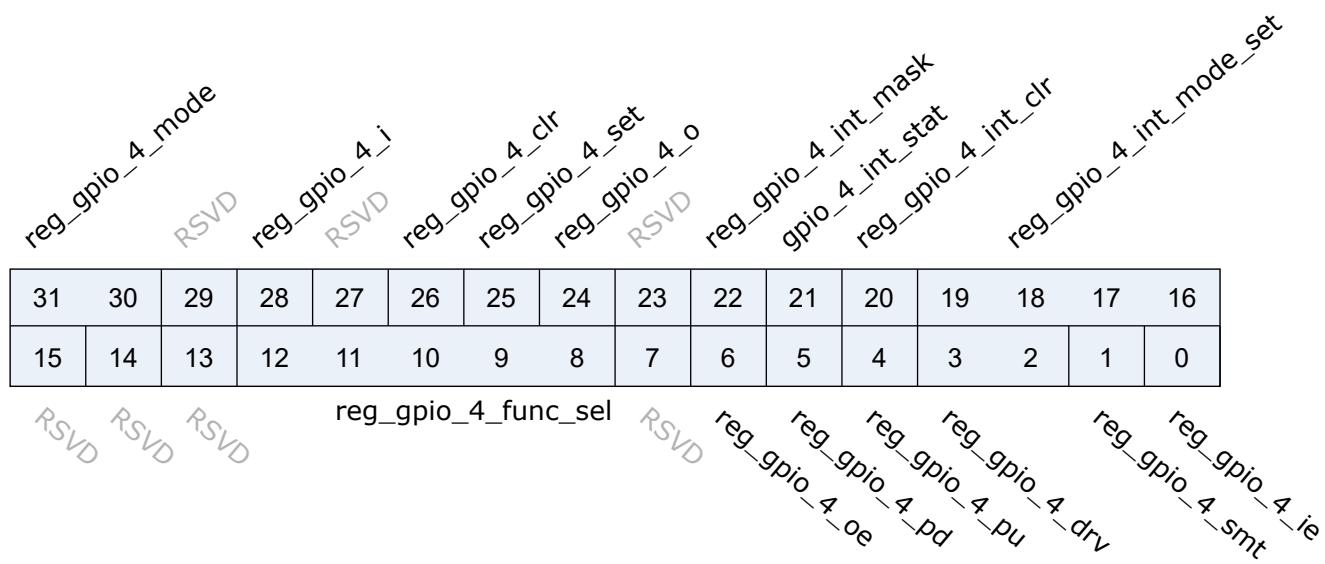Address: 0x2000008d4




Bits	Name	Type	Reset	Description
31:30	reg_gpio_4_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_4_i	r	0	
27	RSVD			
26	reg_gpio_4_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_4_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_4_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			

Bits	Name	Type	Reset	Description
22	reg_gpio_4_int_mask	r/w	1	mask interrupt (1)
21	gpio_4_int_stat	r	0	interrupt status
20	reg_gpio_4_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_4_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_4_func_sel	r/w	5'hF	GPIO Function Select (Default : CCI)
7	RSVD			
6	reg_gpio_4_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_4_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_4_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_4_drv	r/w	0	GPIO Driving Control
1	reg_gpio_4_smt	r/w	1	GPIO SMT Control
0	reg_gpio_4_ie	r/w	1	GPIO Input Enable

4.8.6 gpio_cfg5

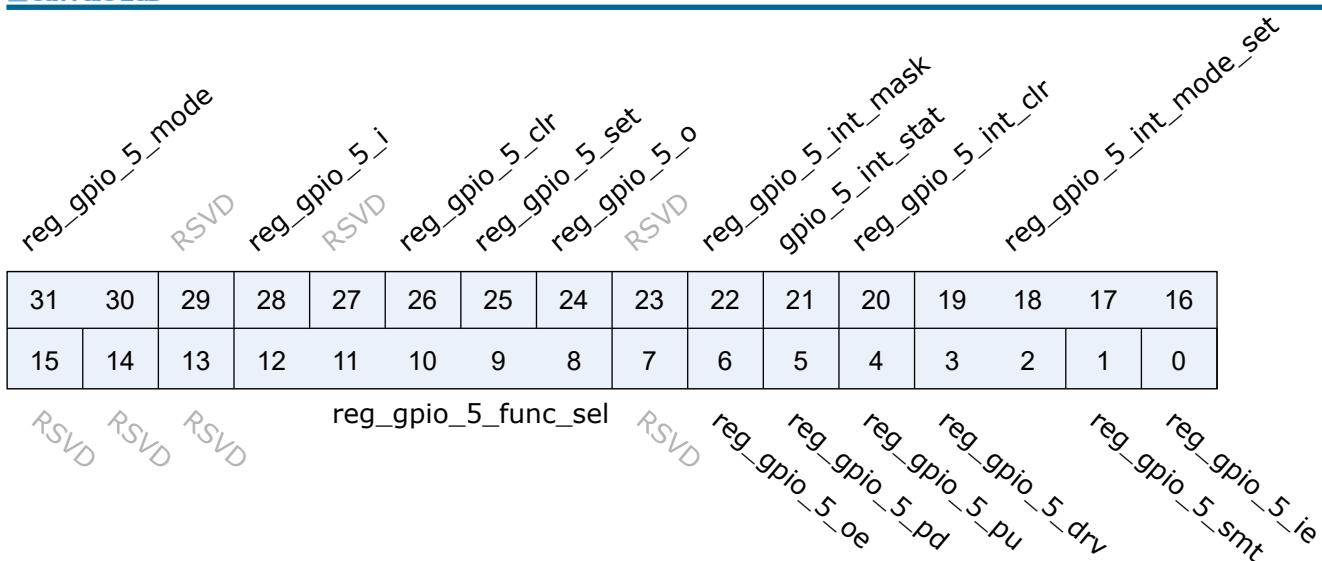Address: 0x2000008d8




Bits	Name	Type	Reset	Description
31:30	reg_gpio_5_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_5_i	r	0	
27	RSVD			
26	reg_gpio_5_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_5_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_5_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_5_int_mask	r/w	1	mask interrupt (1)
21	gpio_5_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_5_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_5_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_5_func_sel	r/w	5'hF	GPIO Function Select (Default : CCI)
7	RSVD			
6	reg_gpio_5_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_5_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_5_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_5_drv	r/w	0	GPIO Driving Control
1	reg_gpio_5_smt	r/w	1	GPIO SMT Control
0	reg_gpio_5_ie	r/w	1	GPIO Input Enable

4.8.7 gpio_cfg6

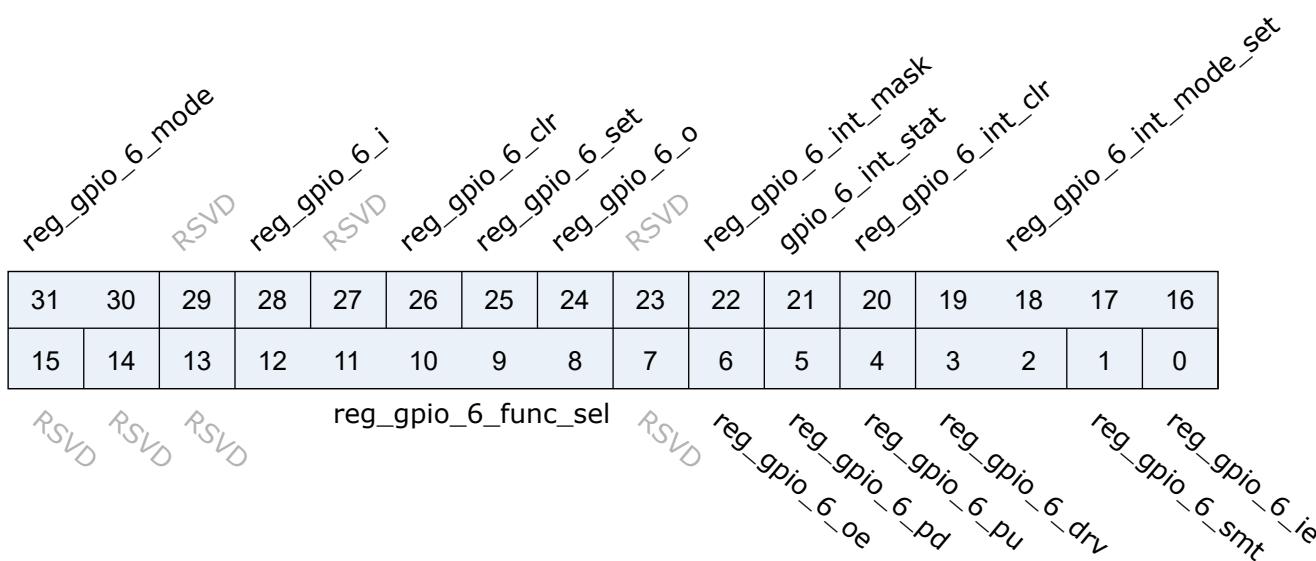Address: 0x2000008dc




Bits	Name	Type	Reset	Description
31:30	reg_gpio_6_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_6_i	r	0	
27	RSVD			
26	reg_gpio_6_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_6_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_6_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_6_int_mask	r/w	1	mask interrupt (1)
21	gpio_6_int_stat	r	0	interrupt status
20	reg_gpio_6_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_6_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_6_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			

Bits	Name	Type	Reset	Description
6	reg_gpio_6_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_6_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_6_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_6_drv	r/w	0	GPIO Driving Control
1	reg_gpio_6_smt	r/w	1	GPIO SMT Control
0	reg_gpio_6_ie	r/w	0	GPIO Input Enable

4.8.8 gpio_cfg7

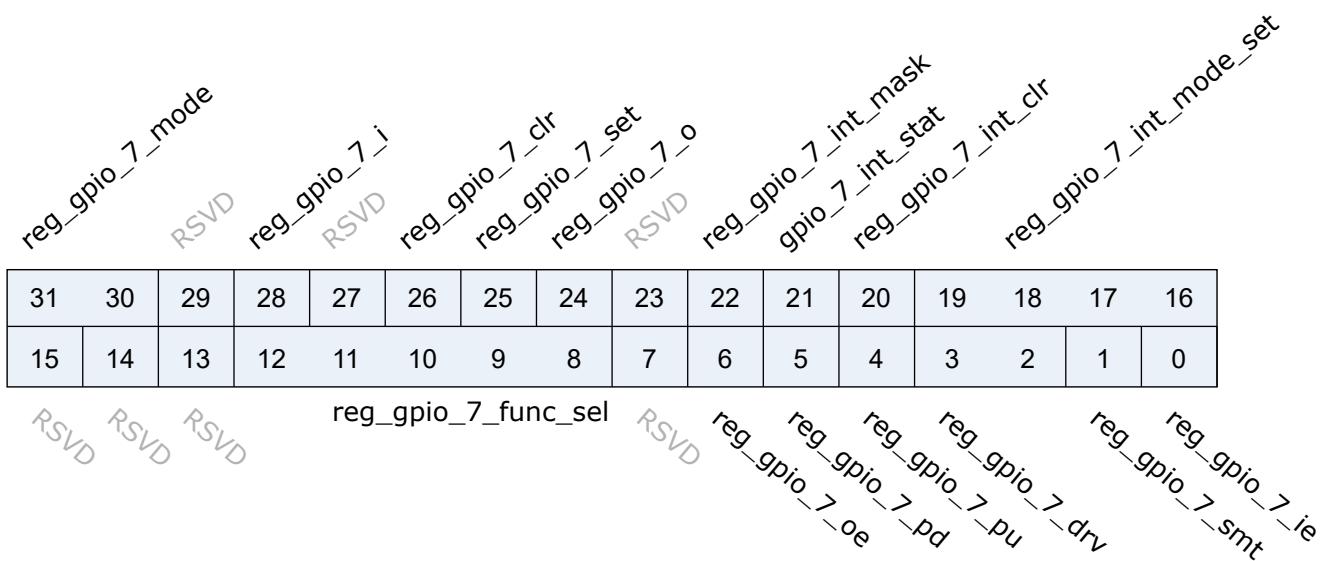Address: 0x2000008e0




Bits	Name	Type	Reset	Description
31:30	reg_gpio_7_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			

Bits	Name	Type	Reset	Description
28	reg_gpio_7_i	r	0	
27	RSVD			
26	reg_gpio_7_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_7_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_7_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_7_int_mask	r/w	1	mask interrupt (1)
21	gpio_7_int_stat	r	0	interrupt status
20	reg_gpio_7_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_7_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_7_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_7_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_7_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_7_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_7_drv	r/w	0	GPIO Driving Control
1	reg_gpio_7_smt	r/w	1	GPIO SMT Control
0	reg_gpio_7_ie	r/w	0	GPIO Input Enable

4.8.9 gpio_cfg8

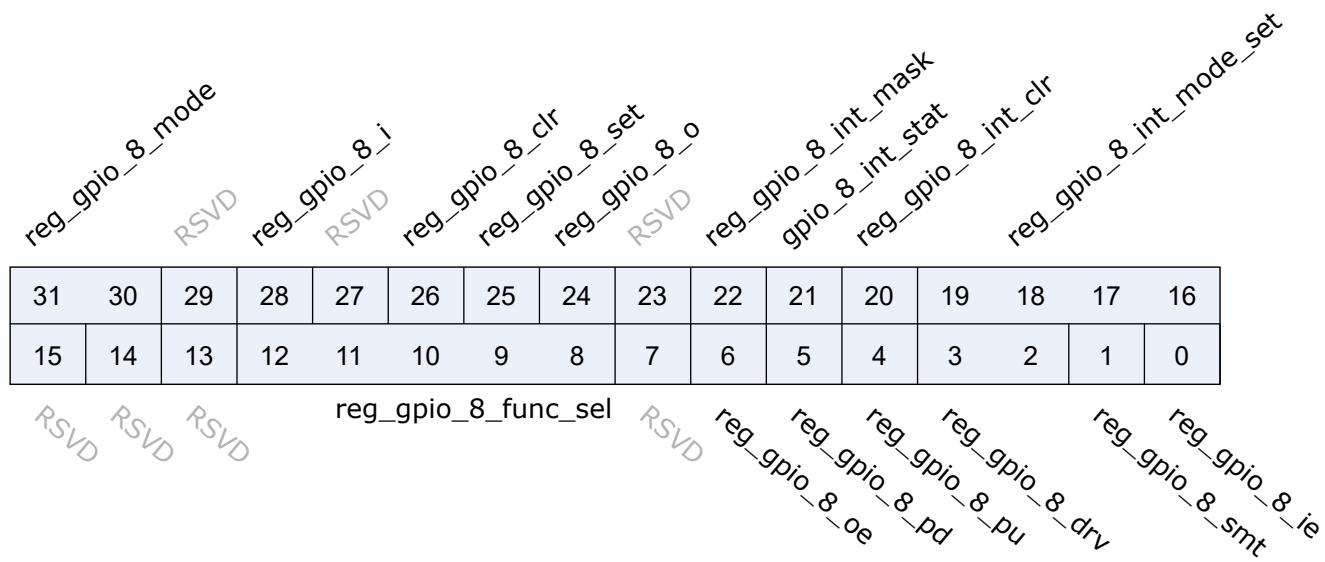Address: 0x2000008e4




Bits	Name	Type	Reset	Description
31:30	reg_gpio_8_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_8_i	r	0	
27	RSVD			
26	reg_gpio_8_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_8_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_8_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			

Bits	Name	Type	Reset	Description
22	reg_gpio_8_int_mask	r/w	1	mask interrupt (1)
21	gpio_8_int_stat	r	0	interrupt status
20	reg_gpio_8_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_8_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_8_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_8_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_8_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_8_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_8_drv	r/w	0	GPIO Driving Control
1	reg_gpio_8_smt	r/w	1	GPIO SMT Control
0	reg_gpio_8_ie	r/w	0	GPIO Input Enable

4.8.10 gpio_cfg9

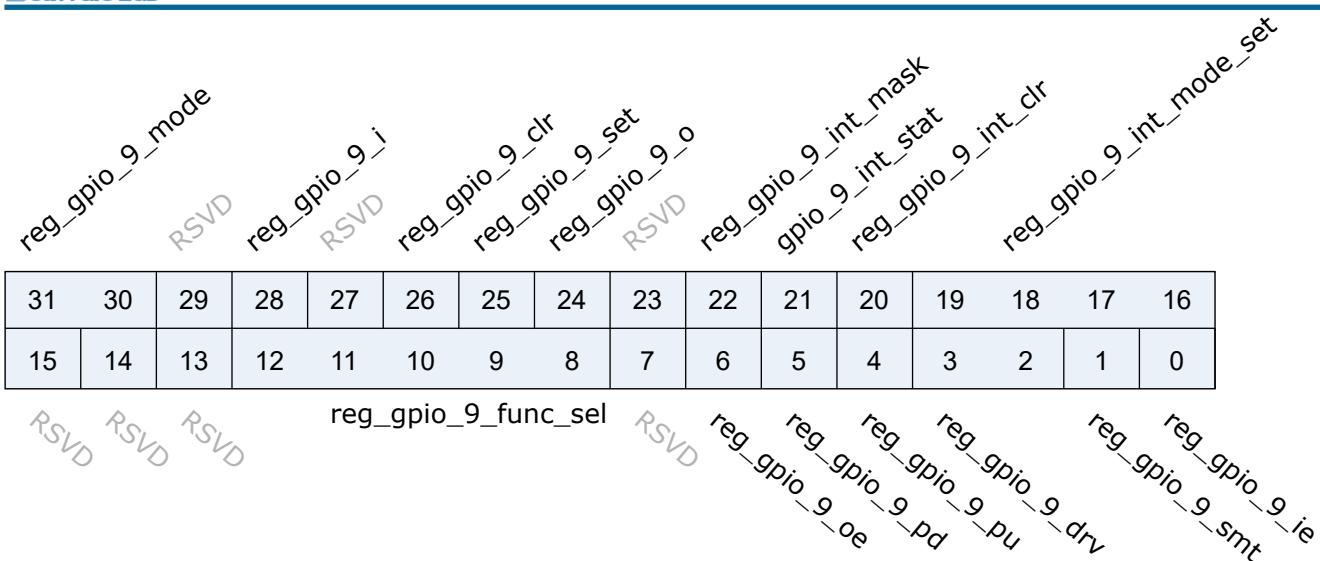Address: 0x2000008e8




Bits	Name	Type	Reset	Description
31:30	reg_gpio_9_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_9_i	r	0	
27	RSVD			
26	reg_gpio_9_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_9_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_9_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_9_int_mask	r/w	1	mask interrupt (1)
21	gpio_9_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_9_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_9_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_9_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_9_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_9_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_9_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_9_drv	r/w	0	GPIO Driving Control
1	reg_gpio_9_smt	r/w	1	GPIO SMT Control
0	reg_gpio_9_ie	r/w	0	GPIO Input Enable

4.8.11 gpio_cfg10

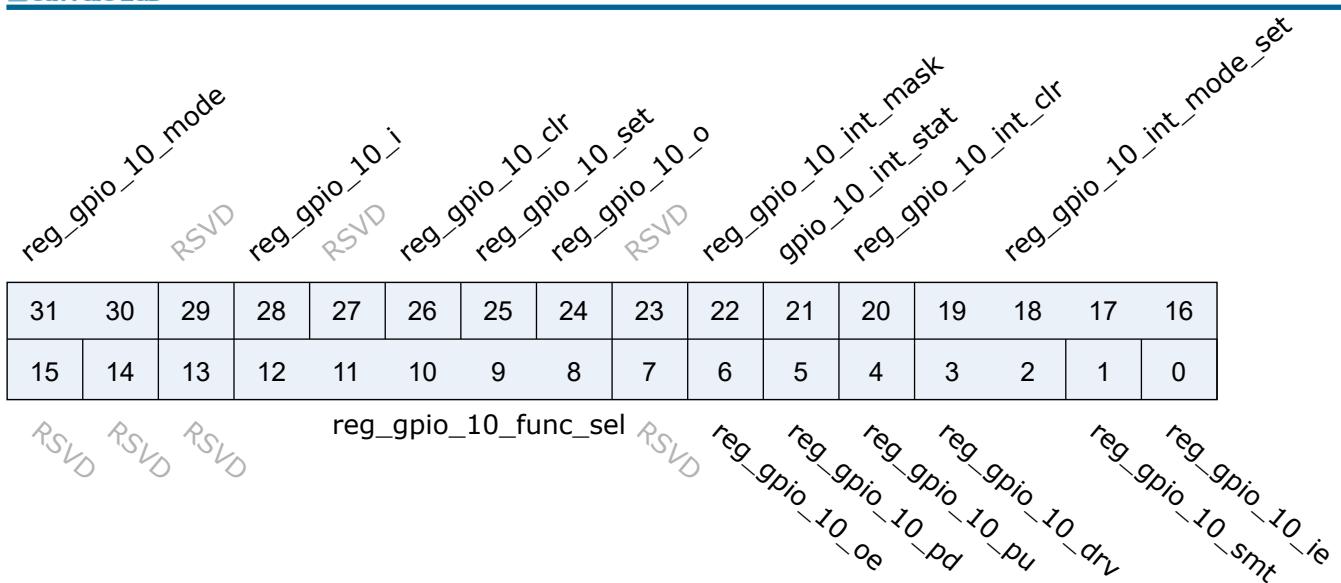Address: 0x200008ec




Bits	Name	Type	Reset	Description
31:30	reg_gpio_10_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_10_i	r	0	
27	RSVD			
26	reg_gpio_10_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_10_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_10_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_10_int_mask	r/w	1	mask interrupt (1)
21	gpio_10_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_10_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_10_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_10_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_10_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_10_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_10_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_10_drv	r/w	0	GPIO Driving Control
1	reg_gpio_10_smt	r/w	1	GPIO SMT Control
0	reg_gpio_10_ie	r/w	0	GPIO Input Enable

4.8.12 gpio_cfg11

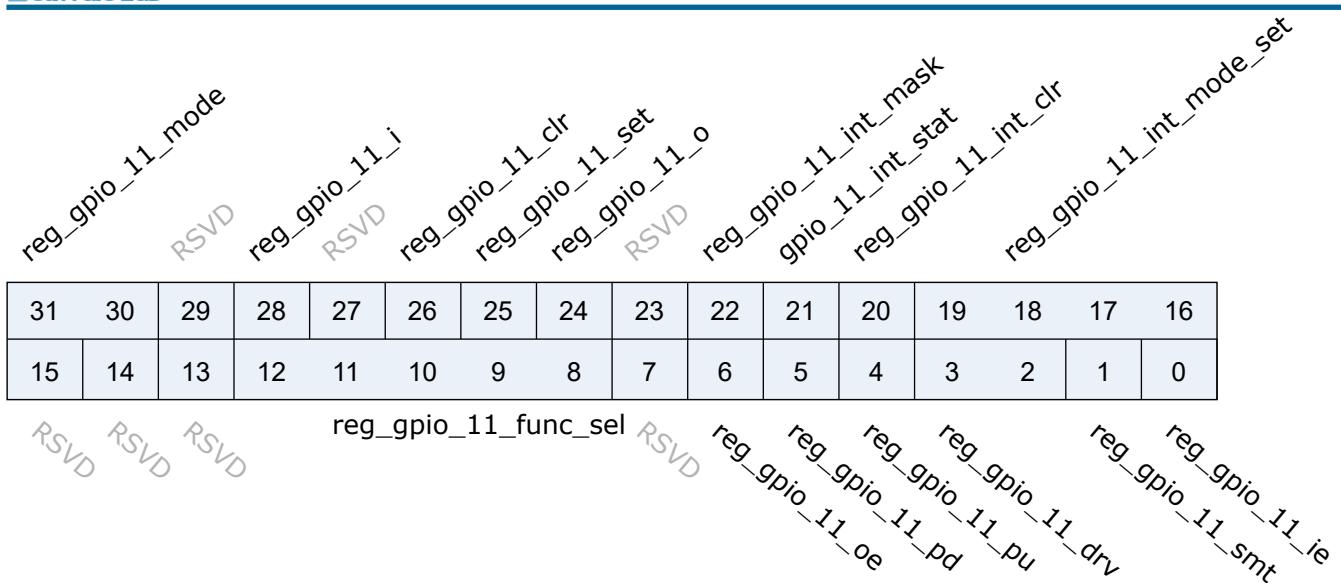Address: 0x2000008f0




Bits	Name	Type	Reset	Description
31:30	reg_gpio_11_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_11_i	r	0	
27	RSVD			
26	reg_gpio_11_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_11_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_11_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_11_int_mask	r/w	1	mask interrupt (1)
21	gpio_11_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_11_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_11_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_11_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_11_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_11_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_11_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_11_drv	r/w	0	GPIO Driving Control
1	reg_gpio_11_smt	r/w	1	GPIO SMT Control
0	reg_gpio_11_ie	r/w	0	GPIO Input Enable

4.8.13 gpio_cfg12

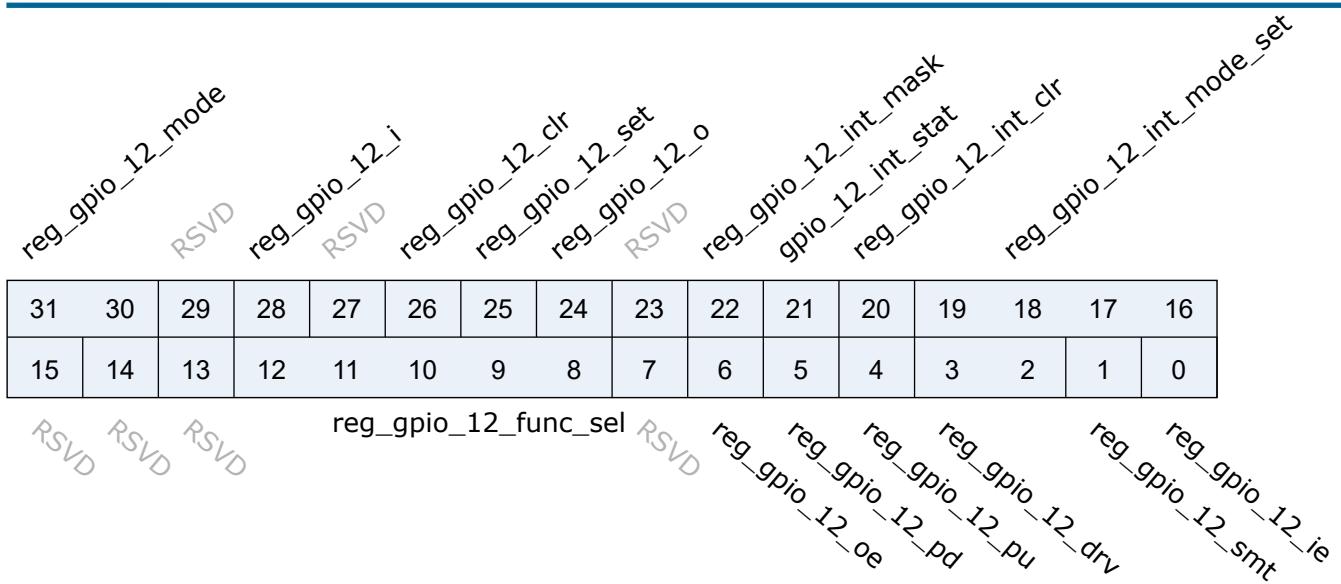Address: 0x2000008f4




Bits	Name	Type	Reset	Description
31:30	reg_gpio_12_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_12_i	r	0	
27	RSVD			
26	reg_gpio_12_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_12_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_12_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_12_int_mask	r/w	1	mask interrupt (1)
21	gpio_12_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_12_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_12_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_12_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_12_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_12_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_12_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_12_drv	r/w	0	GPIO Driving Control
1	reg_gpio_12_smt	r/w	1	GPIO SMT Control
0	reg_gpio_12_ie	r/w	0	GPIO Input Enable

4.8.14 gpio_cfg13

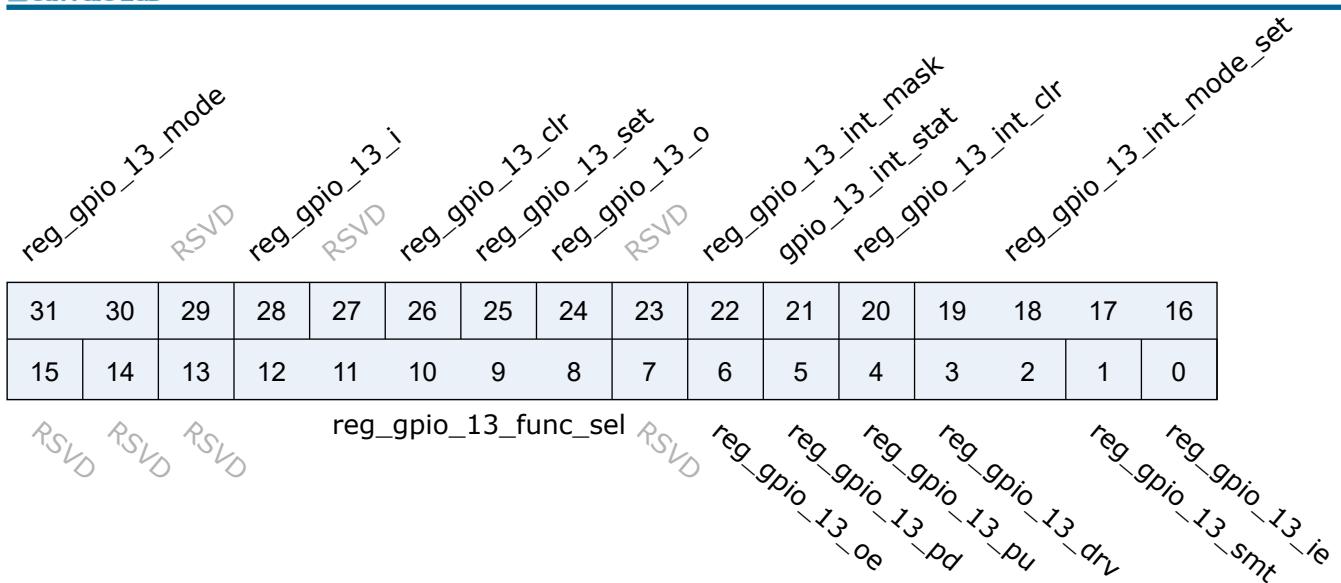Address: 0x2000008f8




Bits	Name	Type	Reset	Description
31:30	reg_gpio_13_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_13_i	r	0	
27	RSVD			
26	reg_gpio_13_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_13_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_13_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_13_int_mask	r/w	1	mask interrupt (1)
21	gpio_13_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_13_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_13_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_13_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_13_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_13_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_13_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_13_drv	r/w	0	GPIO Driving Control
1	reg_gpio_13_smt	r/w	1	GPIO SMT Control
0	reg_gpio_13_ie	r/w	0	GPIO Input Enable

4.8.15 gpio_cfg14

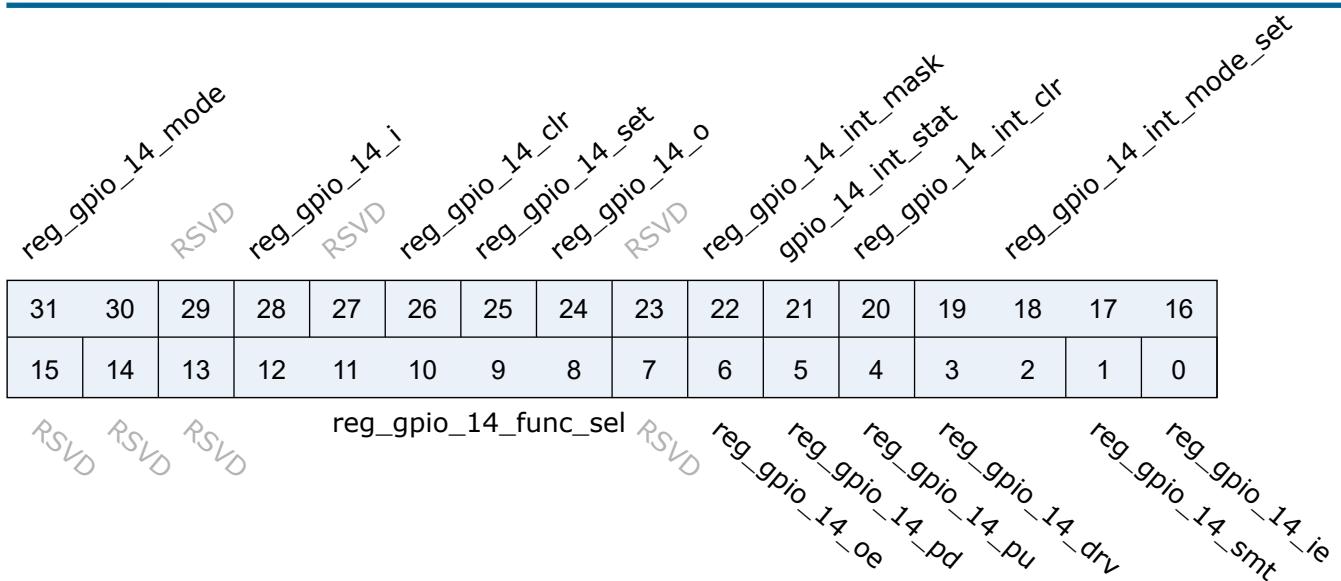Address: 0x2000008fc




Bits	Name	Type	Reset	Description
31:30	reg_gpio_14_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_14_i	r	0	
27	RSVD			
26	reg_gpio_14_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_14_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_14_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_14_int_mask	r/w	1	mask interrupt (1)
21	gpio_14_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_14_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_14_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_14_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_14_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_14_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_14_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_14_drv	r/w	0	GPIO Driving Control
1	reg_gpio_14_smt	r/w	1	GPIO SMT Control
0	reg_gpio_14_ie	r/w	0	GPIO Input Enable

4.8.16 gpio_cfg15

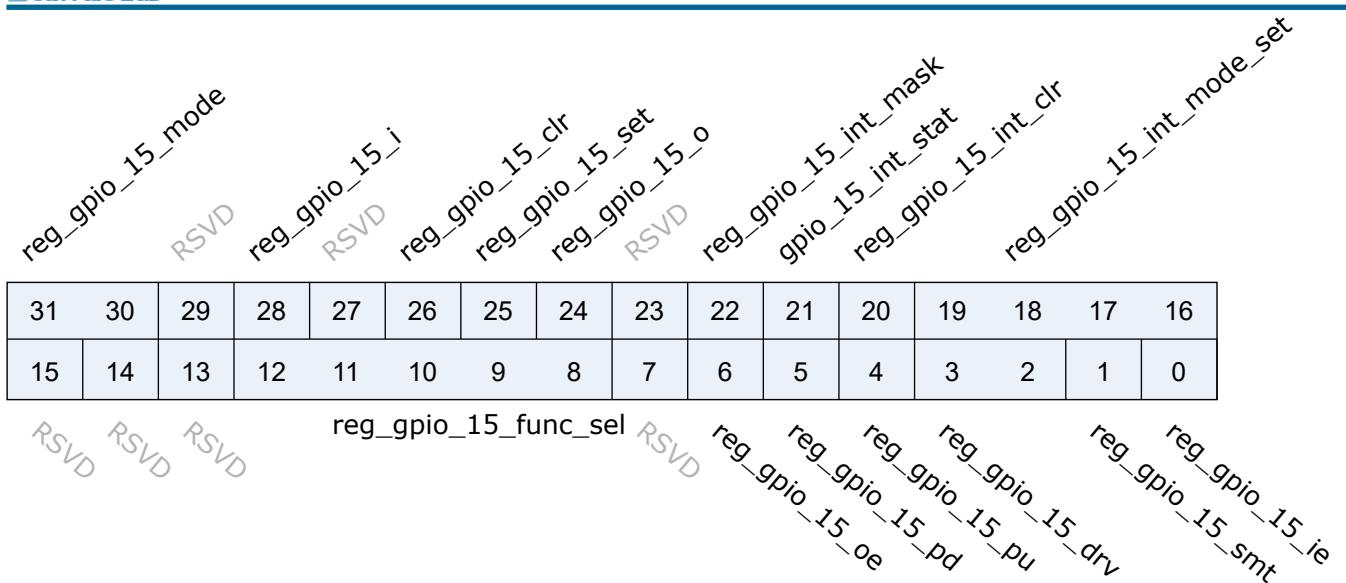Address: 0x20000900




Bits	Name	Type	Reset	Description
31:30	reg_gpio_15_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_15_i	r	0	
27	RSVD			
26	reg_gpio_15_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_15_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_15_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_15_int_mask	r/w	1	mask interrupt (1)
21	gpio_15_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_15_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_15_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_15_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_15_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_15_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_15_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_15_drv	r/w	0	GPIO Driving Control
1	reg_gpio_15_smt	r/w	1	GPIO SMT Control
0	reg_gpio_15_ie	r/w	0	GPIO Input Enable

4.8.17 gpio_cfg16

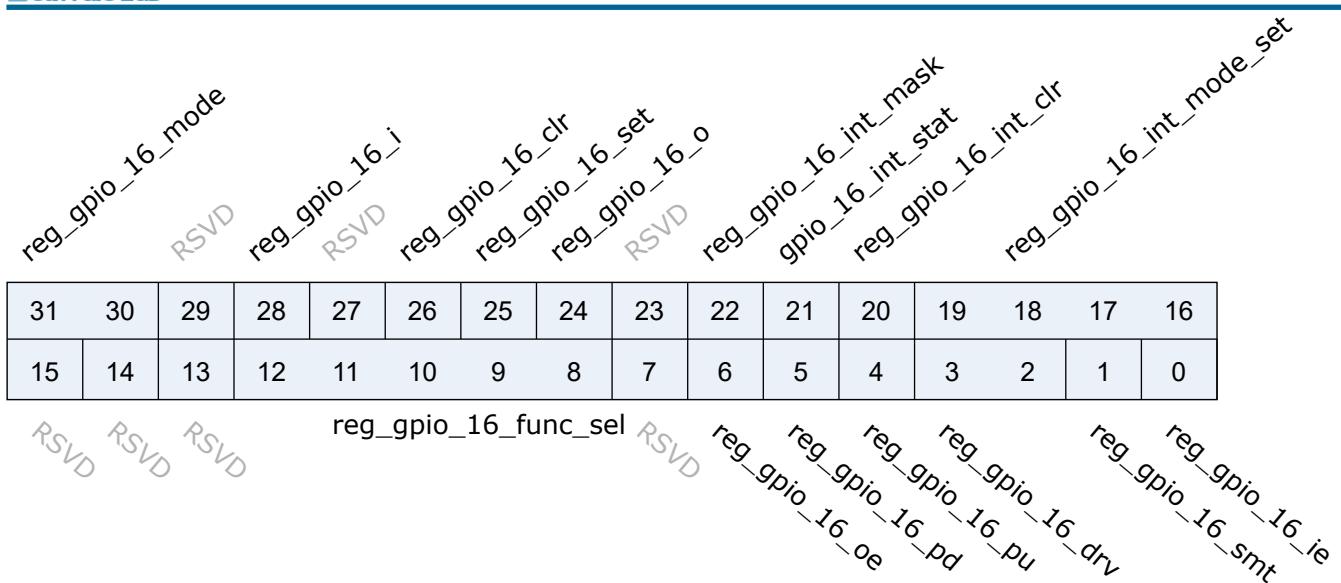Address: 0x20000904




Bits	Name	Type	Reset	Description
31:30	reg_gpio_16_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_16_i	r	0	
27	RSVD			
26	reg_gpio_16_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_16_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_16_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_16_int_mask	r/w	1	mask interrupt (1)
21	gpio_16_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_16_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_16_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_16_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_16_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_16_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_16_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_16_drv	r/w	0	GPIO Driving Control
1	reg_gpio_16_smt	r/w	1	GPIO SMT Control
0	reg_gpio_16_ie	r/w	0	GPIO Input Enable

4.8.18 gpio_cfg17

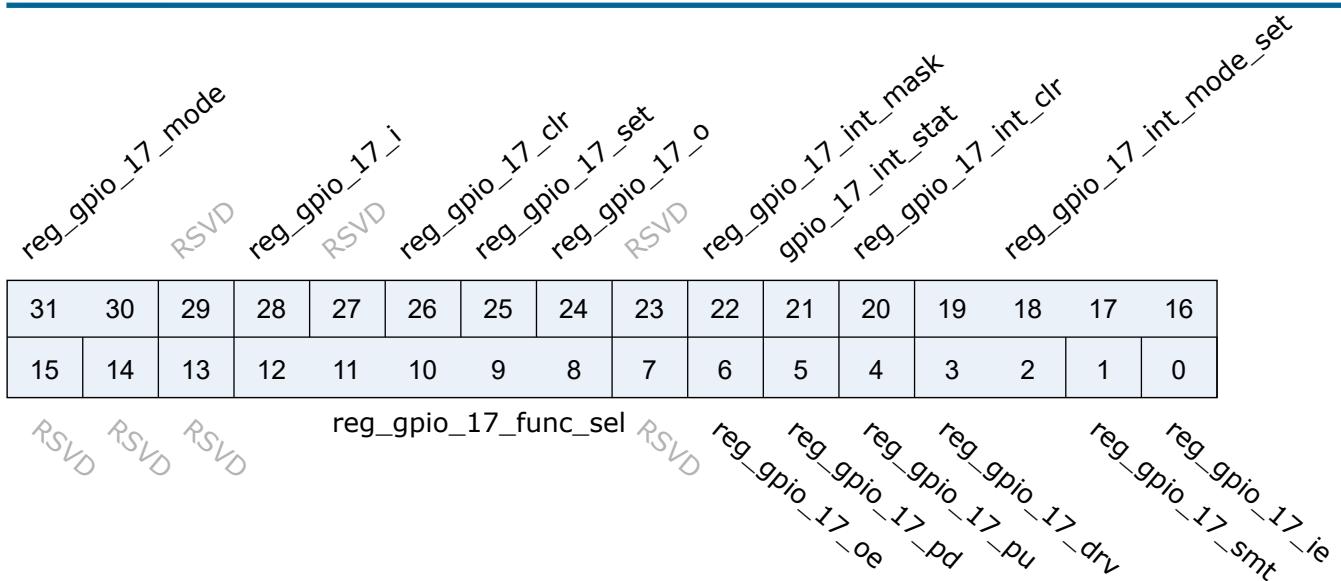Address: 0x20000908




Bits	Name	Type	Reset	Description
31:30	reg_gpio_17_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_17_i	r	0	
27	RSVD			
26	reg_gpio_17_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_17_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_17_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_17_int_mask	r/w	1	mask interrupt (1)
21	gpio_17_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_17_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_17_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_17_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_17_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_17_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_17_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_17_drv	r/w	0	GPIO Driving Control
1	reg_gpio_17_smt	r/w	1	GPIO SMT Control
0	reg_gpio_17_ie	r/w	0	GPIO Input Enable

4.8.19 gpio_cfg18

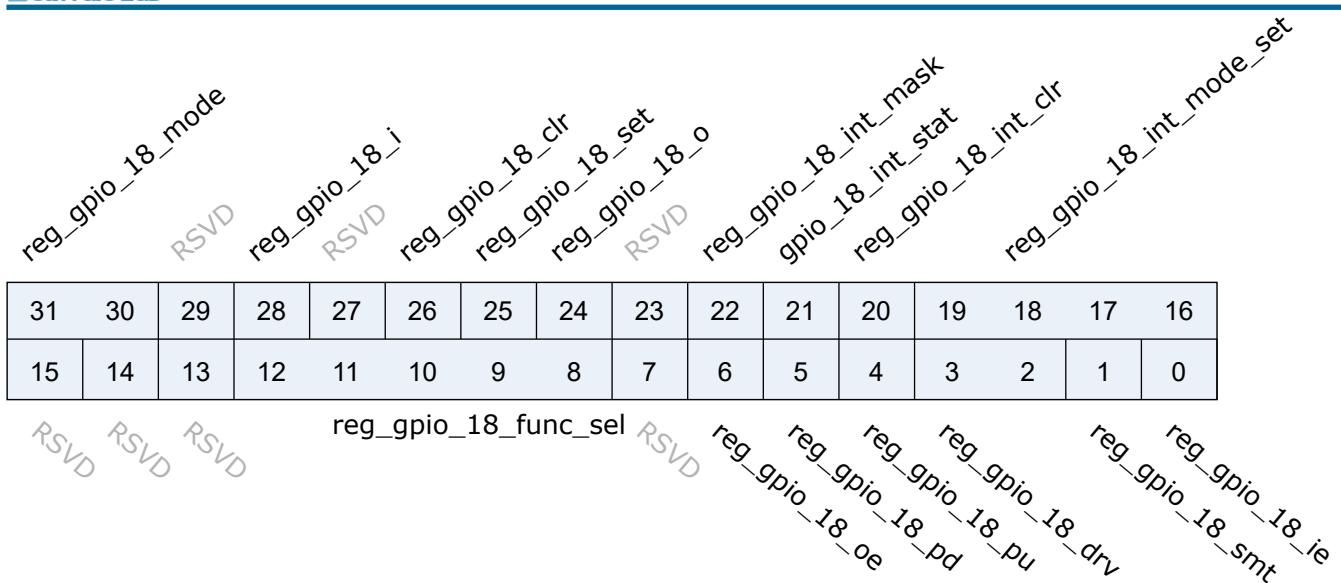Address: 0x2000090c




Bits	Name	Type	Reset	Description
31:30	reg_gpio_18_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_18_i	r	0	
27	RSVD			
26	reg_gpio_18_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_18_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_18_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_18_int_mask	r/w	1	mask interrupt (1)
21	gpio_18_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_18_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_18_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_18_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_18_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_18_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_18_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_18_drv	r/w	0	GPIO Driving Control
1	reg_gpio_18_smt	r/w	1	GPIO SMT Control
0	reg_gpio_18_ie	r/w	0	GPIO Input Enable

4.8.20 gpio_cfg19

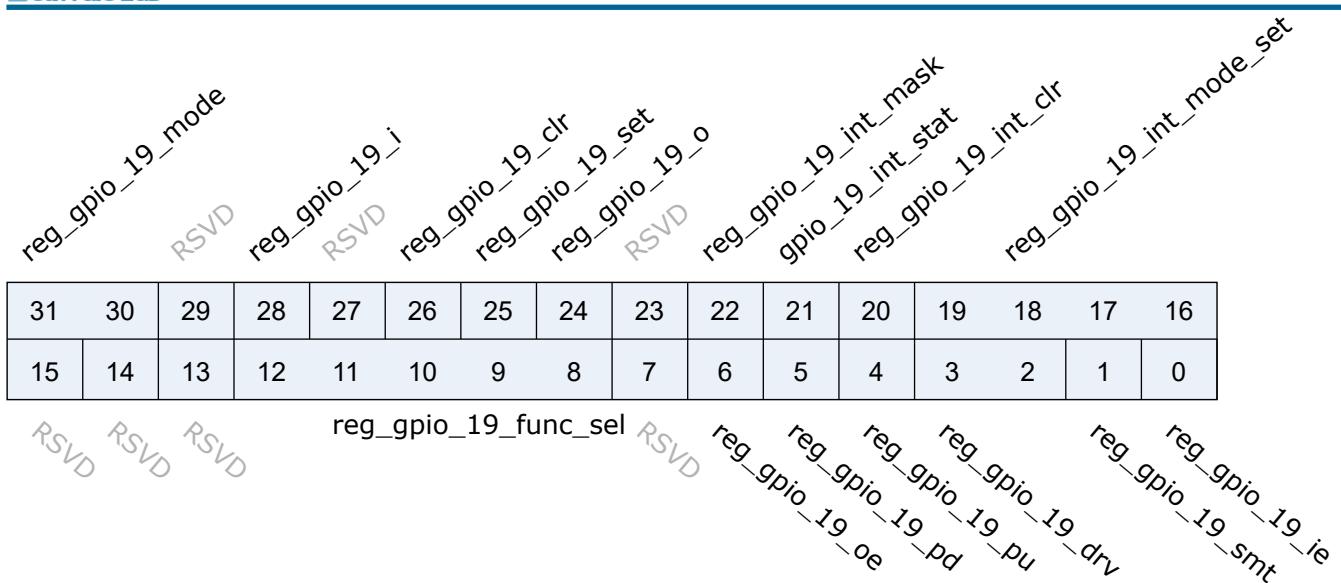Address: 0x20000910




Bits	Name	Type	Reset	Description
31:30	reg_gpio_19_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_19_i	r	0	
27	RSVD			
26	reg_gpio_19_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_19_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_19_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_19_int_mask	r/w	1	mask interrupt (1)
21	gpio_19_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_19_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_19_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_19_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_19_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_19_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_19_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_19_drv	r/w	0	GPIO Driving Control
1	reg_gpio_19_smt	r/w	1	GPIO SMT Control
0	reg_gpio_19_ie	r/w	0	GPIO Input Enable

4.8.21 gpio_cfg20

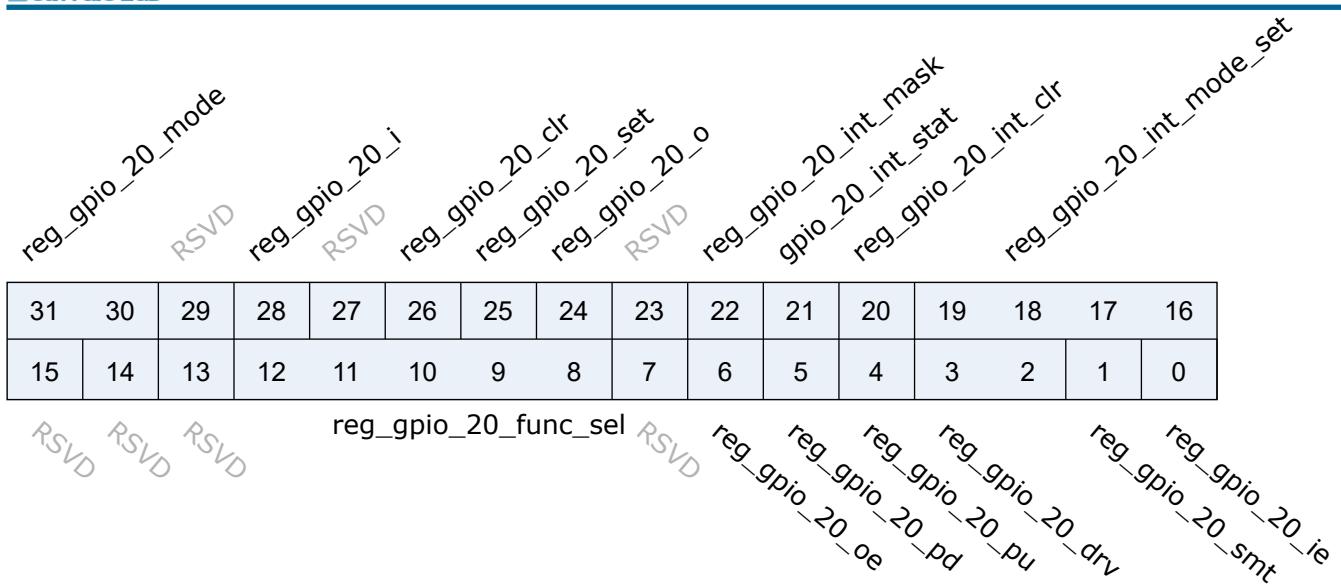Address: 0x20000914




Bits	Name	Type	Reset	Description
31:30	reg_gpio_20_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_20_i	r	0	
27	RSVD			
26	reg_gpio_20_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_20_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_20_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_20_int_mask	r/w	1	mask interrupt (1)
21	gpio_20_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_20_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_20_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_20_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_20_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_20_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_20_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_20_drv	r/w	0	GPIO Driving Control
1	reg_gpio_20_smt	r/w	1	GPIO SMT Control
0	reg_gpio_20_ie	r/w	0	GPIO Input Enable

4.8.22 gpio_cfg21

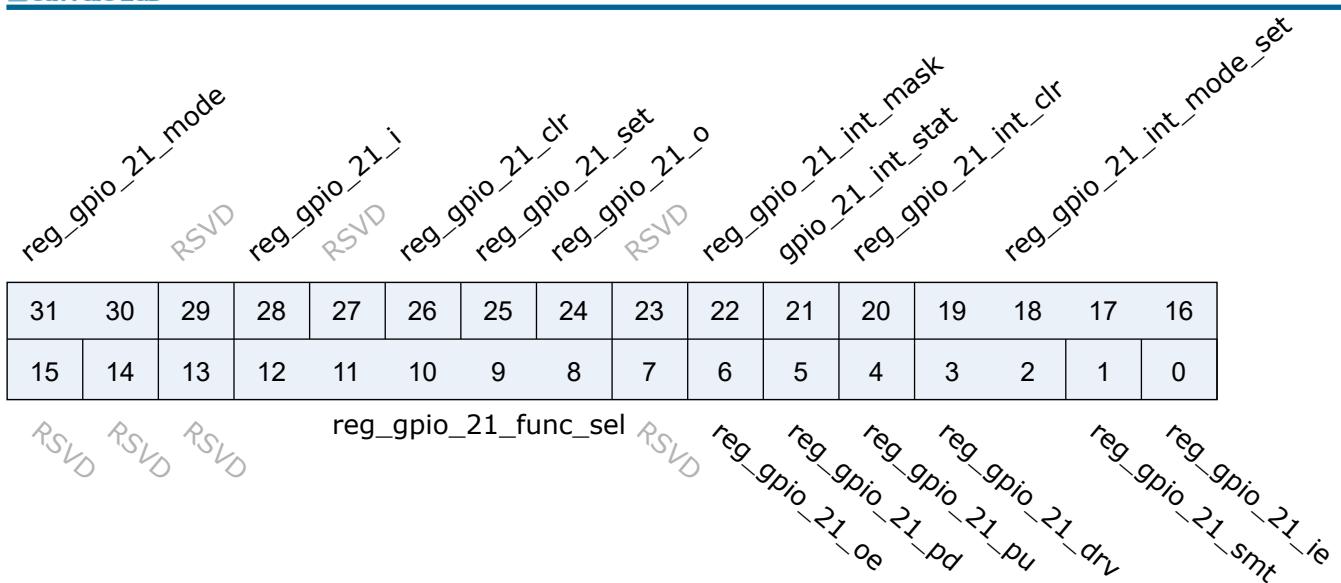Address: 0x20000918




Bits	Name	Type	Reset	Description
31:30	reg_gpio_21_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_21_i	r	0	
27	RSVD			
26	reg_gpio_21_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_21_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_21_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_21_int_mask	r/w	1	mask interrupt (1)
21	gpio_21_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_21_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_21_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_21_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_21_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_21_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_21_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_21_drv	r/w	0	GPIO Driving Control
1	reg_gpio_21_smt	r/w	1	GPIO SMT Control
0	reg_gpio_21_ie	r/w	0	GPIO Input Enable

4.8.23 gpio_cfg22

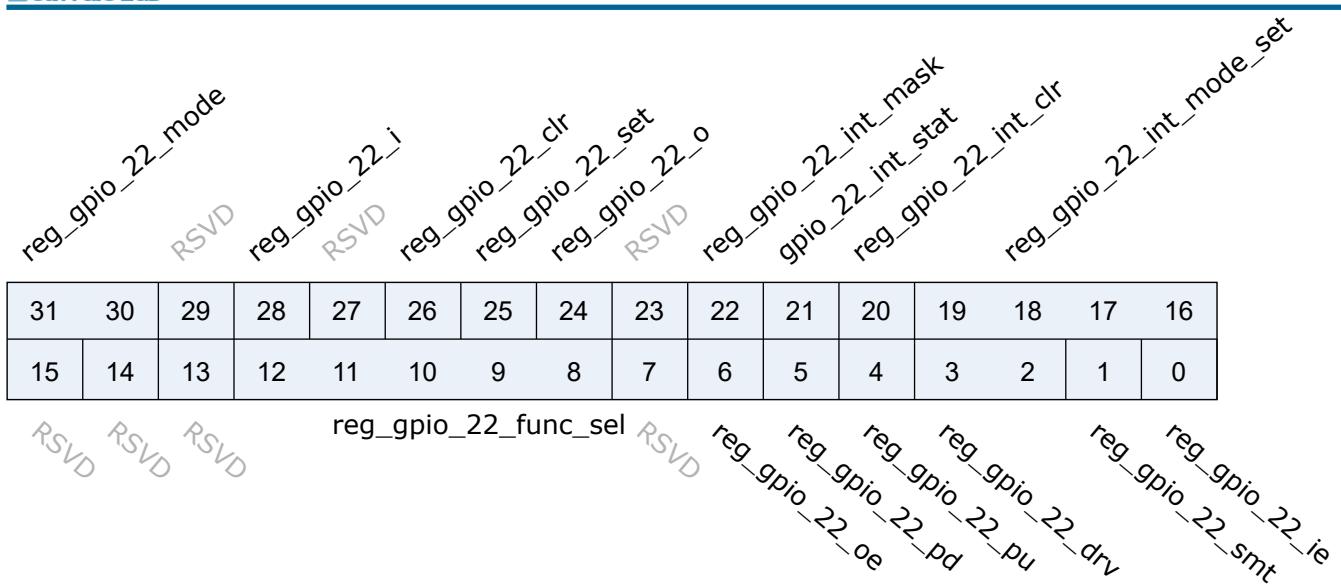Address: 0x2000091c




Bits	Name	Type	Reset	Description
31:30	reg_gpio_22_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_22_i	r	0	
27	RSVD			
26	reg_gpio_22_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_22_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_22_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_22_int_mask	r/w	1	mask interrupt (1)
21	gpio_22_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_22_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_22_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_22_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_22_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_22_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_22_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_22_drv	r/w	0	GPIO Driving Control
1	reg_gpio_22_smt	r/w	1	GPIO SMT Control
0	reg_gpio_22_ie	r/w	0	GPIO Input Enable

4.8.24 gpio_cfg23

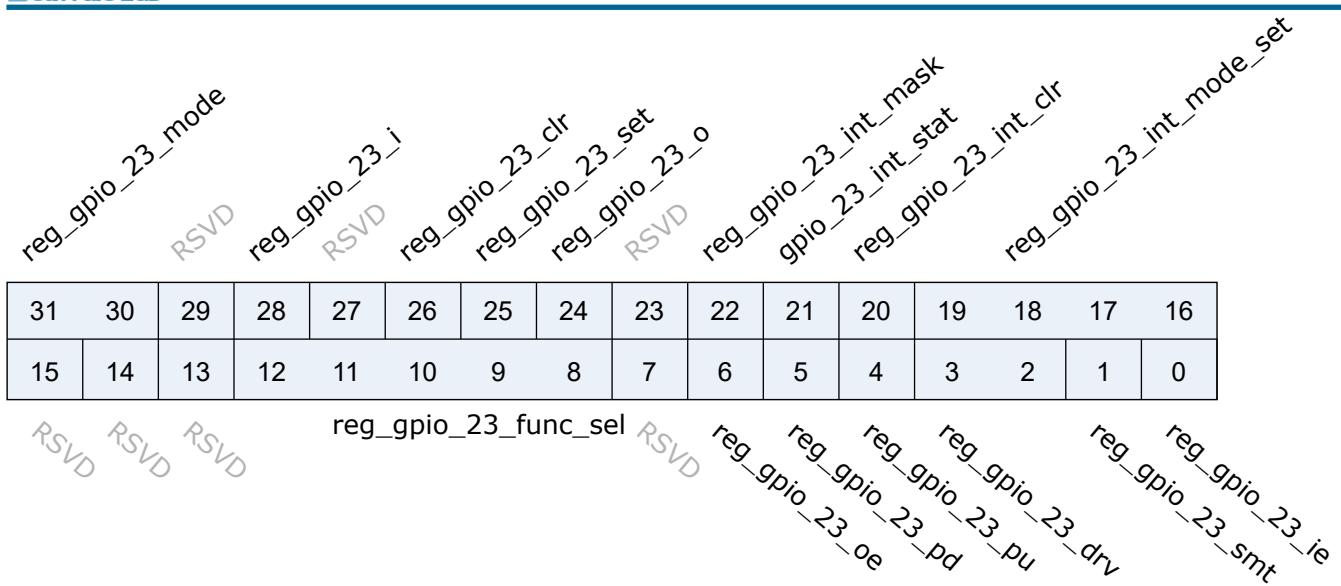Address: 0x20000920




Bits	Name	Type	Reset	Description
31:30	reg_gpio_23_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_23_i	r	0	
27	RSVD			
26	reg_gpio_23_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_23_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_23_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_23_int_mask	r/w	1	mask interrupt (1)
21	gpio_23_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_23_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_23_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_23_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_23_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_23_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_23_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_23_drv	r/w	0	GPIO Driving Control
1	reg_gpio_23_smt	r/w	1	GPIO SMT Control
0	reg_gpio_23_ie	r/w	0	GPIO Input Enable

4.8.25 gpio_cfg24

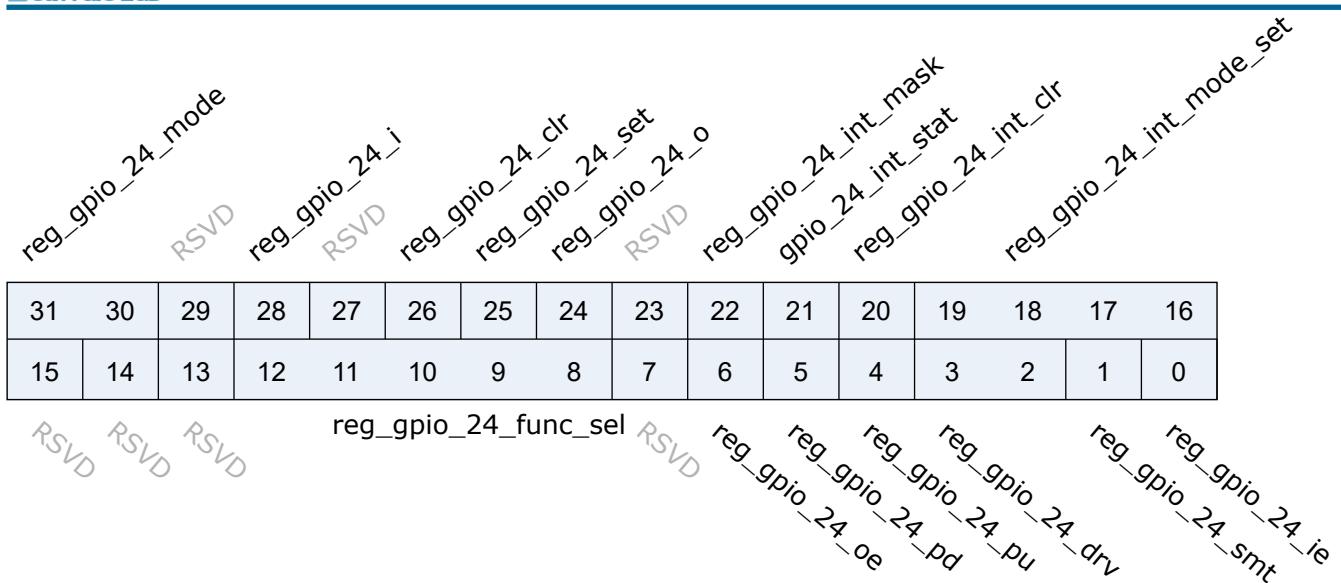Address: 0x20000924




Bits	Name	Type	Reset	Description
31:30	reg_gpio_24_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_24_i	r	0	
27	RSVD			
26	reg_gpio_24_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_24_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_24_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_24_int_mask	r/w	1	mask interrupt (1)
21	gpio_24_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_24_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_24_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_24_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_24_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_24_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_24_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_24_drv	r/w	0	GPIO Driving Control
1	reg_gpio_24_smt	r/w	1	GPIO SMT Control
0	reg_gpio_24_ie	r/w	0	GPIO Input Enable

4.8.26 gpio_cfg25

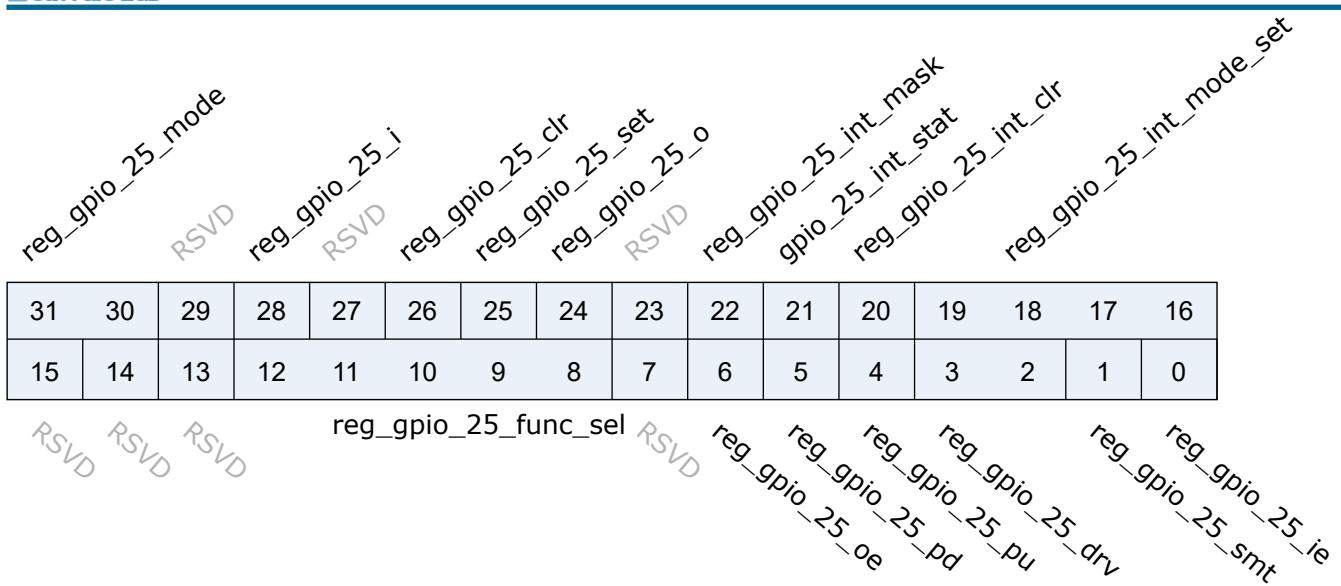Address: 0x20000928




Bits	Name	Type	Reset	Description
31:30	reg_gpio_25_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_25_i	r	0	
27	RSVD			
26	reg_gpio_25_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_25_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_25_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_25_int_mask	r/w	1	mask interrupt (1)
21	gpio_25_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_25_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_25_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_25_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_25_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_25_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_25_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_25_drv	r/w	0	GPIO Driving Control
1	reg_gpio_25_smt	r/w	1	GPIO SMT Control
0	reg_gpio_25_ie	r/w	0	GPIO Input Enable

4.8.27 gpio_cfg26

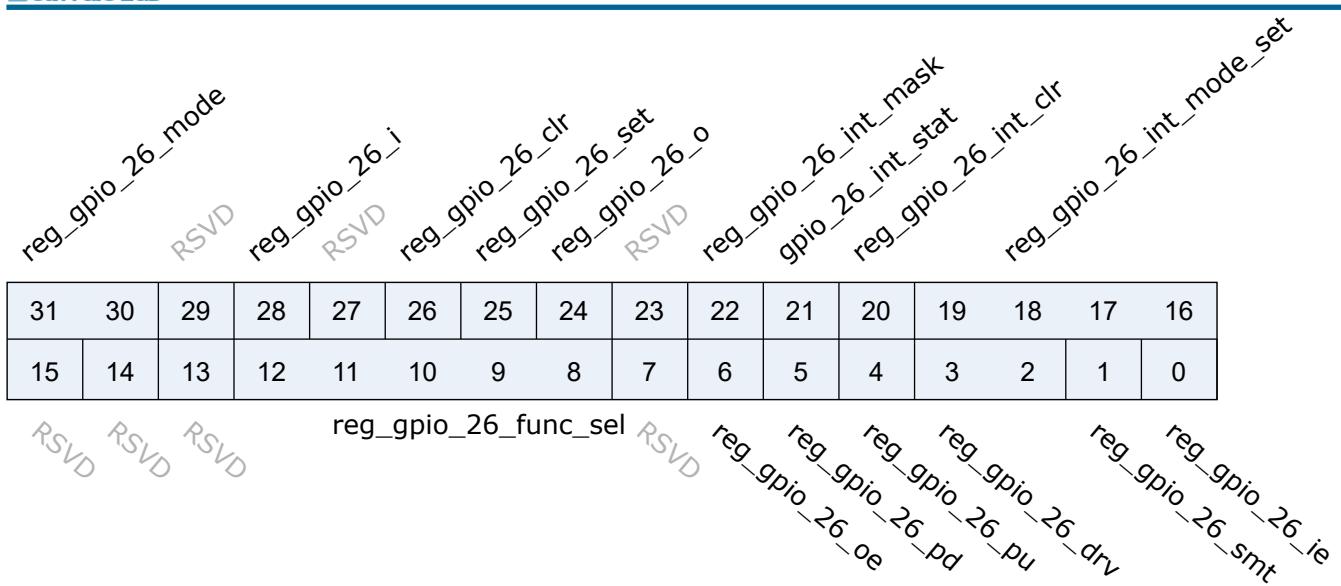Address: 0x2000092c




Bits	Name	Type	Reset	Description
31:30	reg_gpio_26_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_26_i	r	0	
27	RSVD			
26	reg_gpio_26_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_26_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_26_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_26_int_mask	r/w	1	mask interrupt (1)
21	gpio_26_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_26_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_26_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_26_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_26_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_26_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_26_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_26_drv	r/w	0	GPIO Driving Control
1	reg_gpio_26_smt	r/w	1	GPIO SMT Control
0	reg_gpio_26_ie	r/w	0	GPIO Input Enable

4.8.28 gpio_cfg27

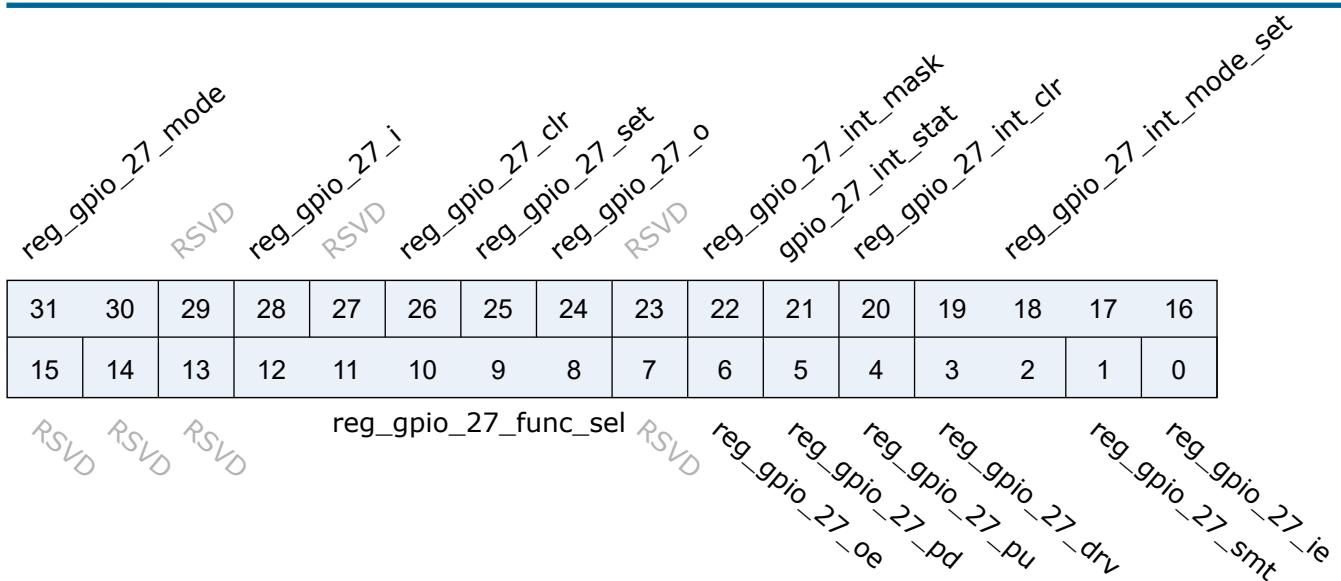Address: 0x20000930




Bits	Name	Type	Reset	Description
31:30	reg_gpio_27_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_27_i	r	0	
27	RSVD			
26	reg_gpio_27_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_27_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_27_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_27_int_mask	r/w	1	mask interrupt (1)
21	gpio_27_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_27_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_27_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_27_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_27_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_27_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_27_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_27_drv	r/w	0	GPIO Driving Control
1	reg_gpio_27_smt	r/w	1	GPIO SMT Control
0	reg_gpio_27_ie	r/w	0	GPIO Input Enable

4.8.29 gpio_cfg28

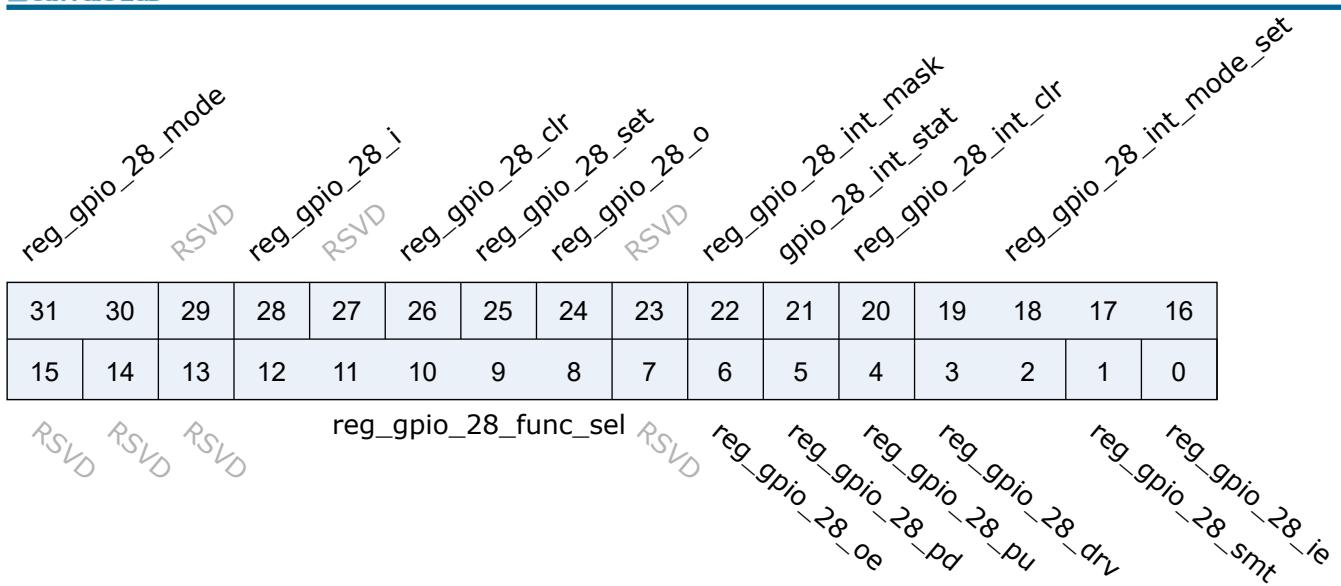Address: 0x20000934




Bits	Name	Type	Reset	Description
31:30	reg_gpio_28_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_28_i	r	0	
27	RSVD			
26	reg_gpio_28_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_28_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_28_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_28_int_mask	r/w	1	mask interrupt (1)
21	gpio_28_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_28_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_28_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_28_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_28_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_28_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_28_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_28_drv	r/w	0	GPIO Driving Control
1	reg_gpio_28_smt	r/w	1	GPIO SMT Control
0	reg_gpio_28_ie	r/w	0	GPIO Input Enable

4.8.30 gpio_cfg29

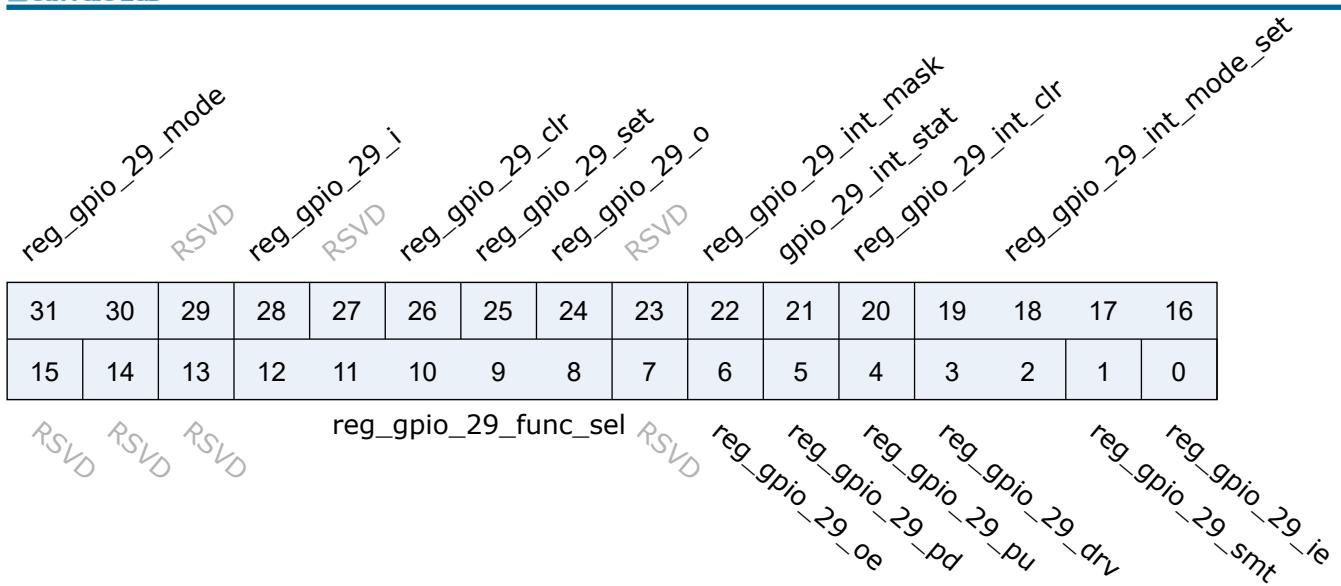Address: 0x20000938




Bits	Name	Type	Reset	Description
31:30	reg_gpio_29_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_29_i	r	0	
27	RSVD			
26	reg_gpio_29_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_29_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_29_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_29_int_mask	r/w	1	mask interrupt (1)
21	gpio_29_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_29_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_29_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_29_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_29_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_29_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_29_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_29_drv	r/w	0	GPIO Driving Control
1	reg_gpio_29_smt	r/w	1	GPIO SMT Control
0	reg_gpio_29_ie	r/w	0	GPIO Input Enable

4.8.31 gpio_cfg30

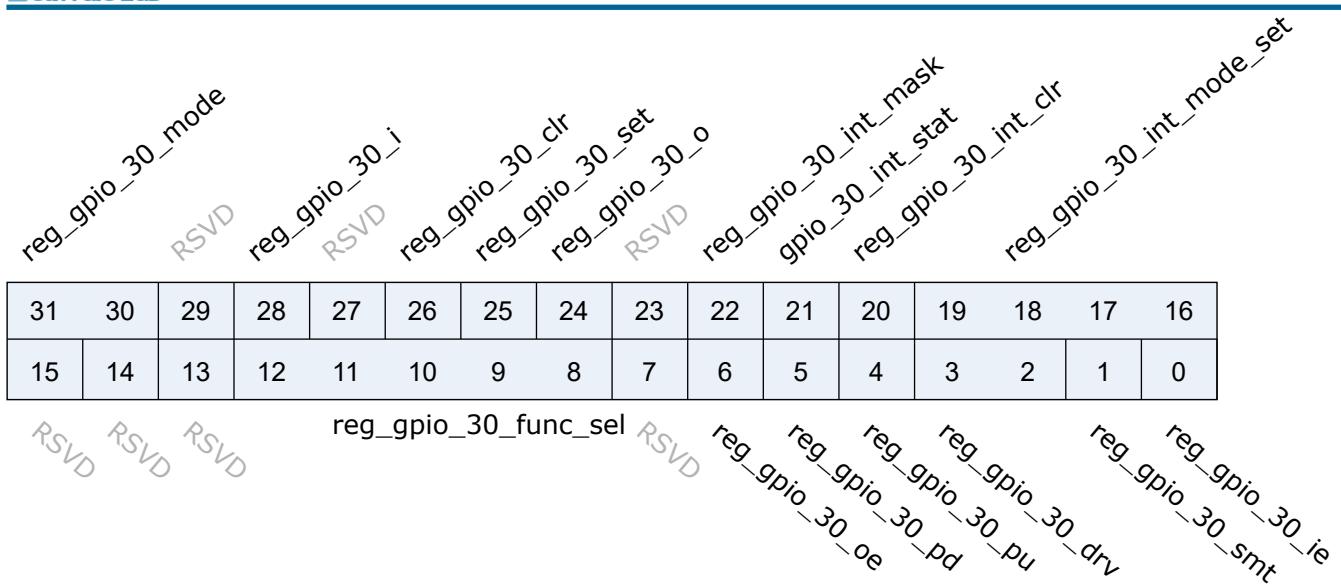Address: 0x2000093c




Bits	Name	Type	Reset	Description
31:30	reg_gpio_30_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_30_i	r	0	
27	RSVD			
26	reg_gpio_30_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_30_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_30_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_30_int_mask	r/w	1	mask interrupt (1)
21	gpio_30_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_30_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_30_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_30_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_30_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_30_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_30_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_30_drv	r/w	0	GPIO Driving Control
1	reg_gpio_30_smt	r/w	1	GPIO SMT Control
0	reg_gpio_30_ie	r/w	0	GPIO Input Enable

4.8.32 gpio_cfg31

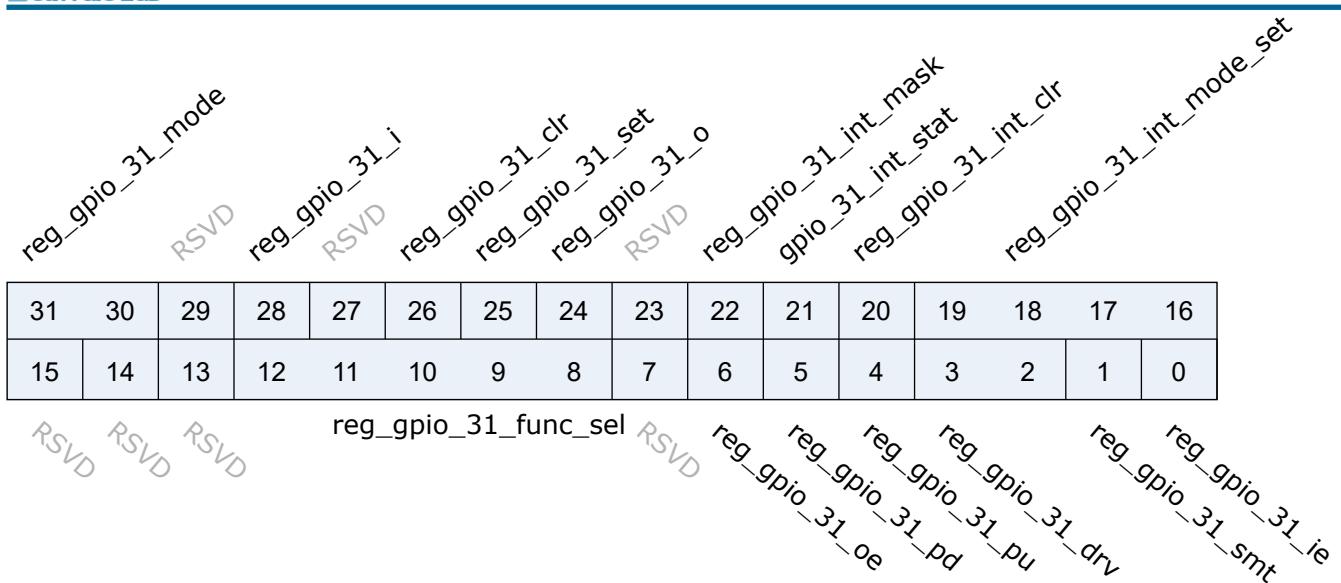Address: 0x20000940




Bits	Name	Type	Reset	Description
31:30	reg_gpio_31_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_31_i	r	0	
27	RSVD			
26	reg_gpio_31_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_31_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_31_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_31_int_mask	r/w	1	mask interrupt (1)
21	gpio_31_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_31_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_31_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_31_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_31_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_31_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_31_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_31_drv	r/w	0	GPIO Driving Control
1	reg_gpio_31_smt	r/w	1	GPIO SMT Control
0	reg_gpio_31_ie	r/w	0	GPIO Input Enable

4.8.33 gpio_cfg32

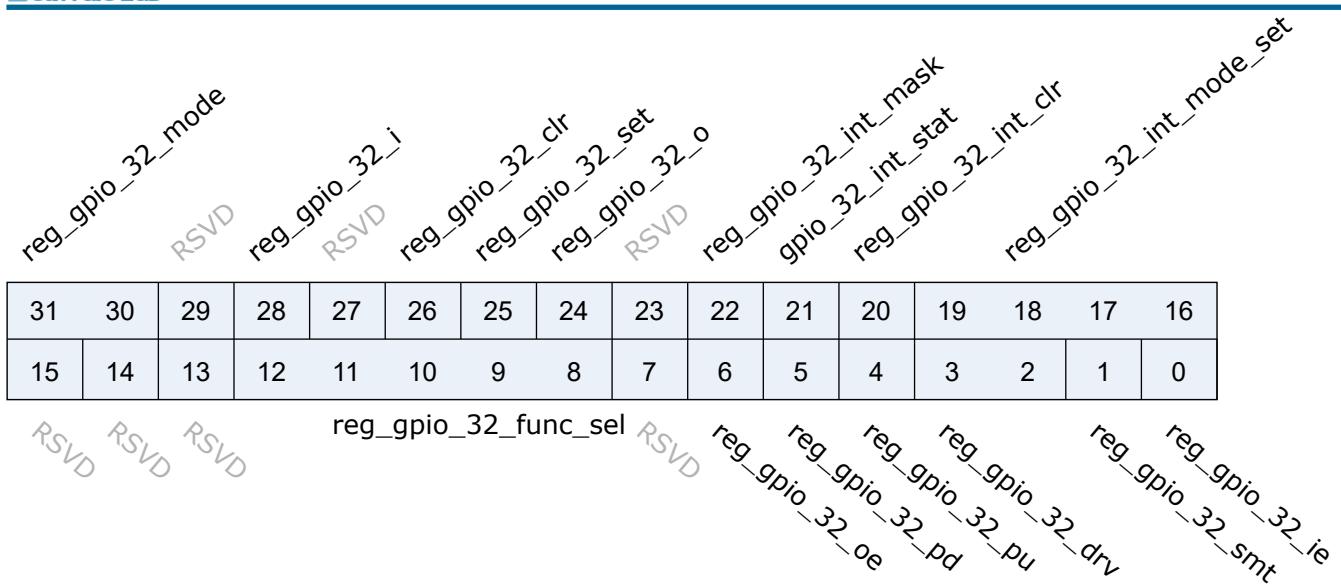Address: 0x20000944




Bits	Name	Type	Reset	Description
31:30	reg_gpio_32_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_32_i	r	0	
27	RSVD			
26	reg_gpio_32_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_32_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_32_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_32_int_mask	r/w	1	mask interrupt (1)
21	gpio_32_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_32_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_32_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_32_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_32_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_32_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_32_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_32_drv	r/w	0	GPIO Driving Control
1	reg_gpio_32_smt	r/w	1	GPIO SMT Control
0	reg_gpio_32_ie	r/w	0	GPIO Input Enable

4.8.34 gpio_cfg33

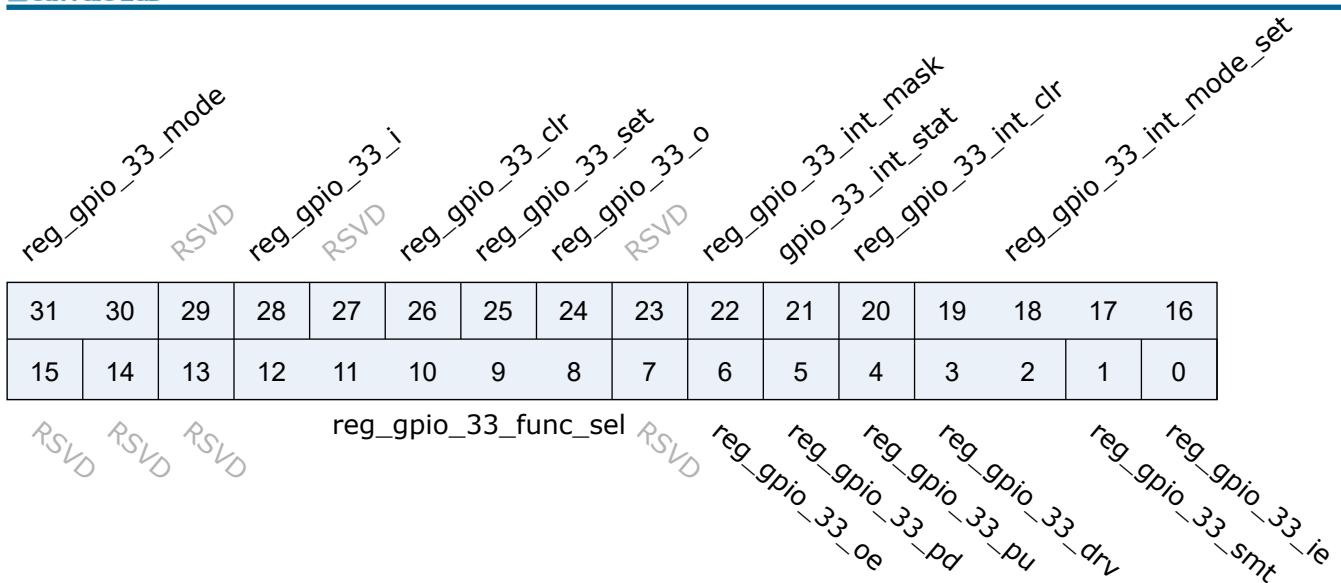Address: 0x20000948




Bits	Name	Type	Reset	Description
31:30	reg_gpio_33_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_33_i	r	0	
27	RSVD			
26	reg_gpio_33_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_33_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_33_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_33_int_mask	r/w	1	mask interrupt (1)
21	gpio_33_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_33_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_33_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_33_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_33_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_33_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_33_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_33_drv	r/w	0	GPIO Driving Control
1	reg_gpio_33_smt	r/w	1	GPIO SMT Control
0	reg_gpio_33_ie	r/w	0	GPIO Input Enable

4.8.35 gpio_cfg34

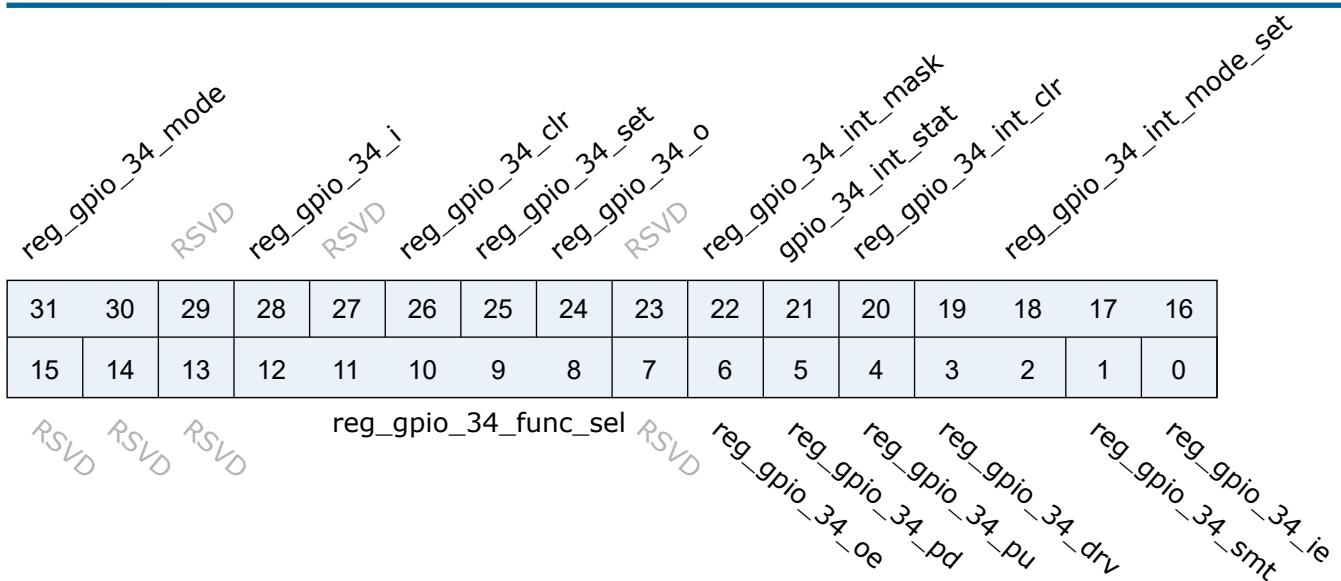Address: 0x2000094c




Bits	Name	Type	Reset	Description
31:30	reg_gpio_34_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_34_i	r	0	
27	RSVD			
26	reg_gpio_34_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_34_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_34_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_34_int_mask	r/w	1	mask interrupt (1)
21	gpio_34_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_34_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_34_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_34_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_34_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_34_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_34_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_34_drv	r/w	0	GPIO Driving Control
1	reg_gpio_34_smt	r/w	1	GPIO SMT Control
0	reg_gpio_34_ie	r/w	0	GPIO Input Enable

4.8.36 gpio_cfg35

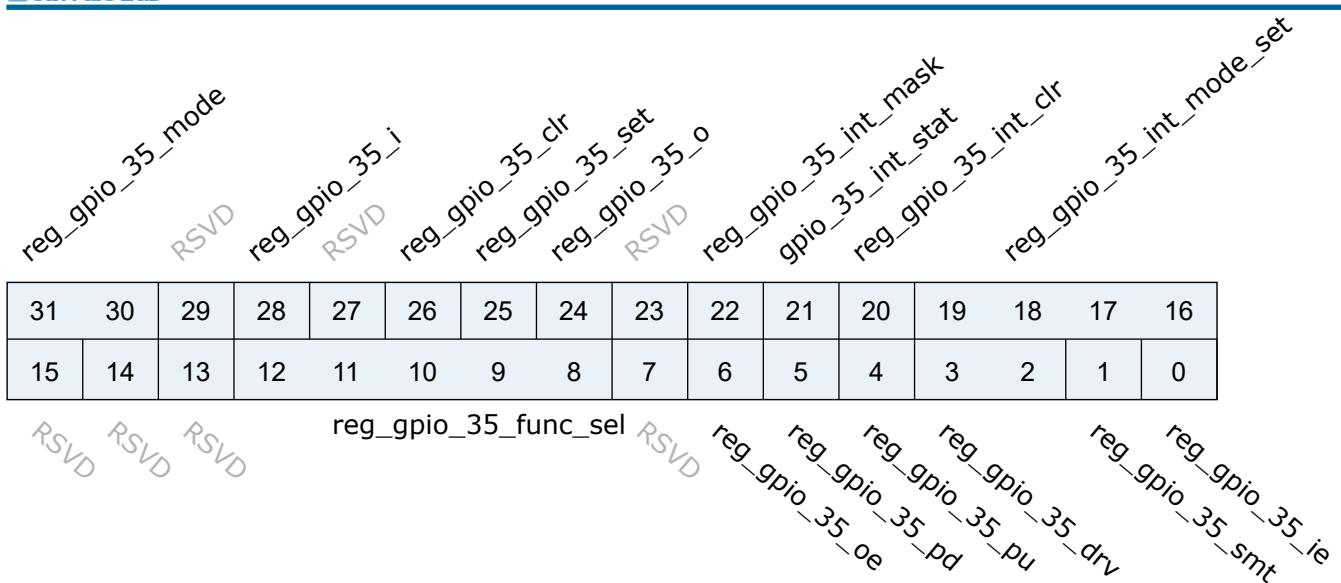Address: 0x20000950




Bits	Name	Type	Reset	Description
31:30	reg_gpio_35_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_35_i	r	0	
27	RSVD			
26	reg_gpio_35_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_35_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_35_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_35_int_mask	r/w	1	mask interrupt (1)
21	gpio_35_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_35_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_35_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_35_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_35_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_35_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_35_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_35_drv	r/w	0	GPIO Driving Control
1	reg_gpio_35_smt	r/w	1	GPIO SMT Control
0	reg_gpio_35_ie	r/w	0	GPIO Input Enable

4.8.37 gpio_cfg36

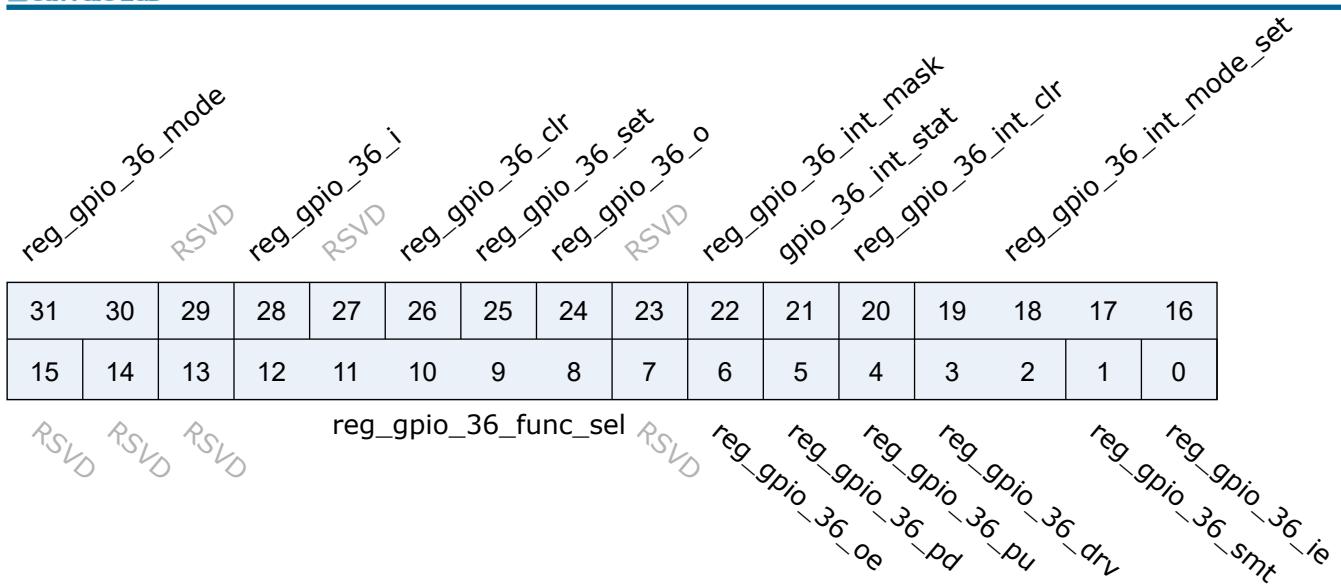Address: 0x20000954




Bits	Name	Type	Reset	Description
31:30	reg_gpio_36_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_36_i	r	0	
27	RSVD			
26	reg_gpio_36_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_36_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_36_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_36_int_mask	r/w	1	mask interrupt (1)
21	gpio_36_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_36_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_36_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_36_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_36_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_36_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_36_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_36_drv	r/w	0	GPIO Driving Control
1	reg_gpio_36_smt	r/w	1	GPIO SMT Control
0	reg_gpio_36_ie	r/w	0	GPIO Input Enable

4.8.38 gpio_cfg37

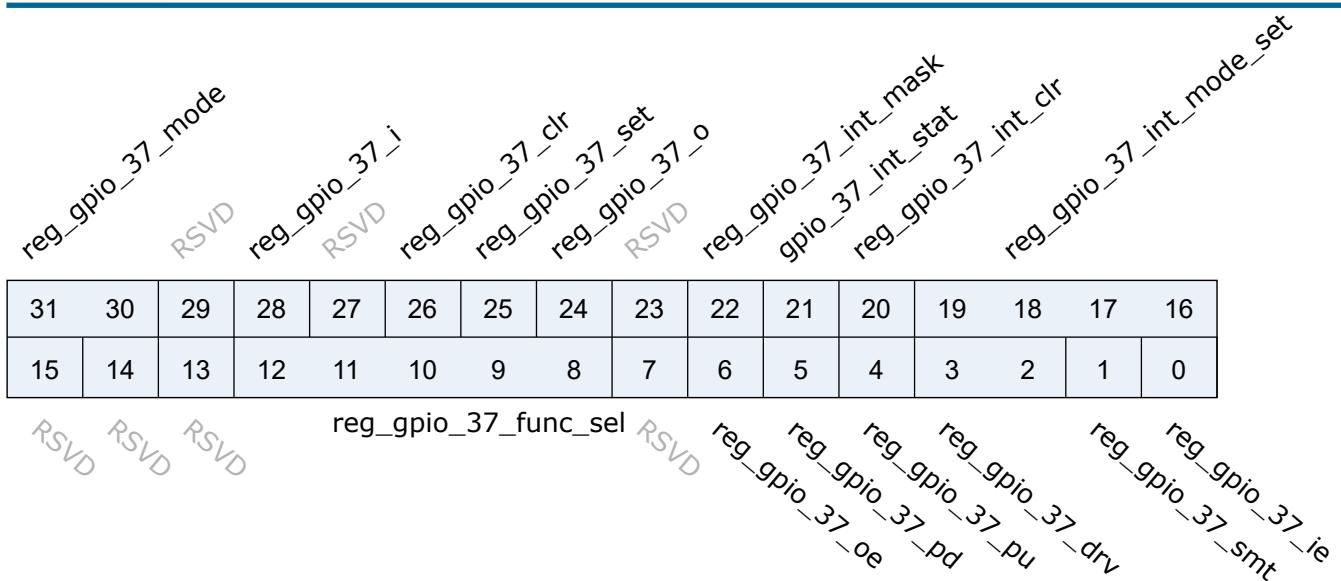Address: 0x20000958




Bits	Name	Type	Reset	Description
31:30	reg_gpio_37_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_37_i	r	0	
27	RSVD			
26	reg_gpio_37_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_37_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_37_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_37_int_mask	r/w	1	mask interrupt (1)
21	gpio_37_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_37_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_37_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_37_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_37_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_37_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_37_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_37_drv	r/w	0	GPIO Driving Control
1	reg_gpio_37_smt	r/w	1	GPIO SMT Control
0	reg_gpio_37_ie	r/w	0	GPIO Input Enable

4.8.39 gpio_cfg38

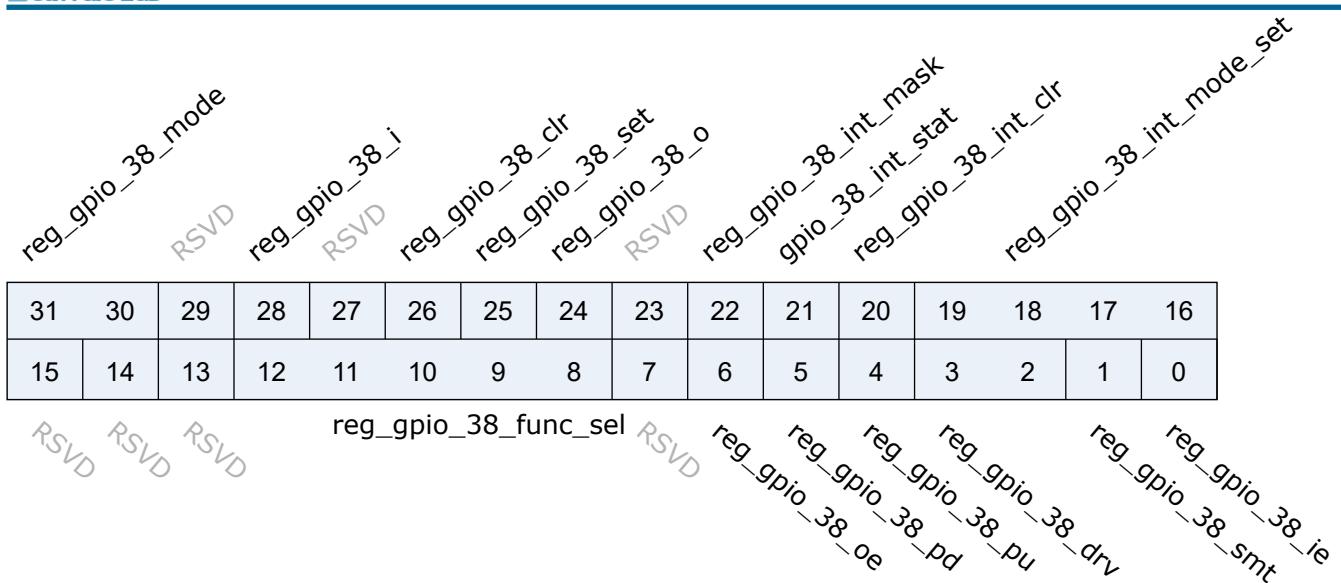Address: 0x2000095c




Bits	Name	Type	Reset	Description
31:30	reg_gpio_38_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_38_i	r	0	
27	RSVD			
26	reg_gpio_38_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_38_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_38_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_38_int_mask	r/w	1	mask interrupt (1)
21	gpio_38_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_38_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_38_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_38_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_38_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_38_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_38_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_38_drv	r/w	0	GPIO Driving Control
1	reg_gpio_38_smt	r/w	1	GPIO SMT Control
0	reg_gpio_38_ie	r/w	0	GPIO Input Enable

4.8.40 gpio_cfg39

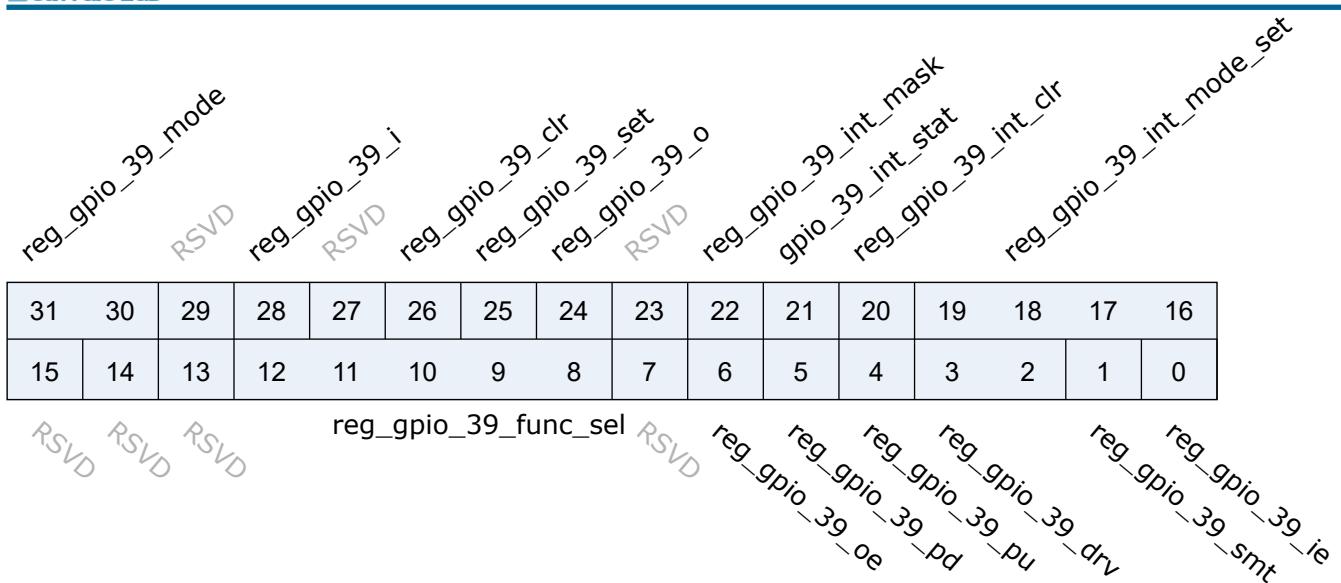Address: 0x20000960




Bits	Name	Type	Reset	Description
31:30	reg_gpio_39_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_39_i	r	0	
27	RSVD			
26	reg_gpio_39_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_39_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_39_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_39_int_mask	r/w	1	mask interrupt (1)
21	gpio_39_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_39_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_39_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_39_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_39_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_39_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_39_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_39_drv	r/w	0	GPIO Driving Control
1	reg_gpio_39_smt	r/w	1	GPIO SMT Control
0	reg_gpio_39_ie	r/w	0	GPIO Input Enable

4.8.41 gpio_cfg40

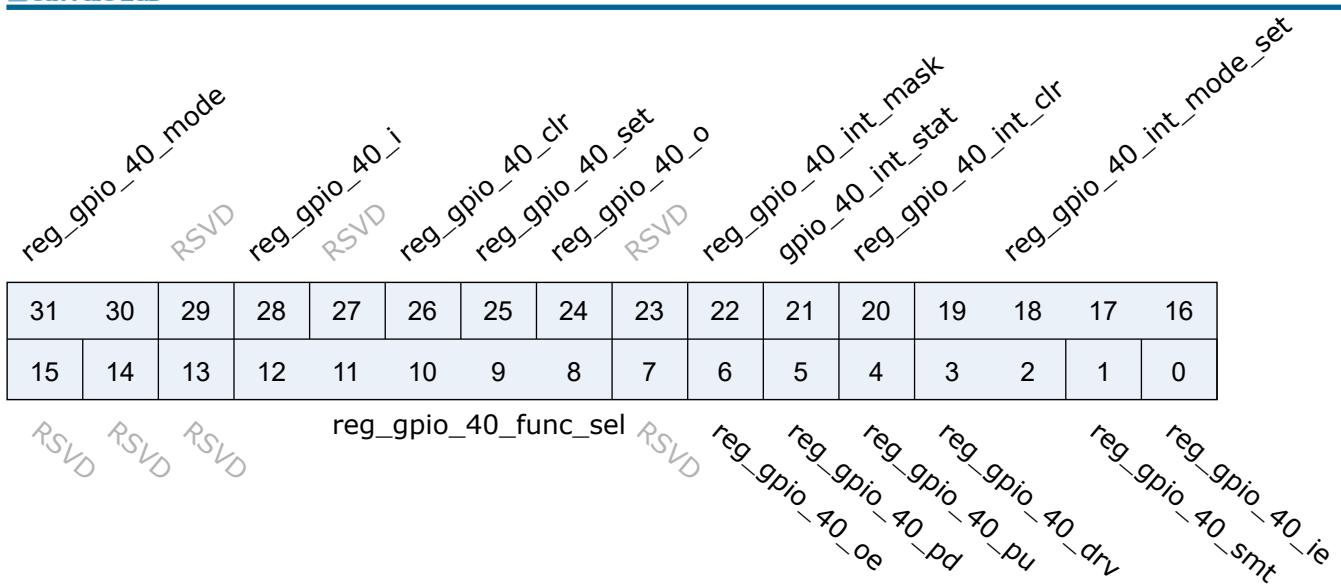Address: 0x20000964




Bits	Name	Type	Reset	Description
31:30	reg_gpio_40_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_40_i	r	0	
27	RSVD			
26	reg_gpio_40_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_40_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_40_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_40_int_mask	r/w	1	mask interrupt (1)
21	gpio_40_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_40_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_40_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_40_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_40_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_40_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_40_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_40_drv	r/w	0	GPIO Driving Control
1	reg_gpio_40_smt	r/w	1	GPIO SMT Control
0	reg_gpio_40_ie	r/w	0	GPIO Input Enable

4.8.42 gpio_cfg41

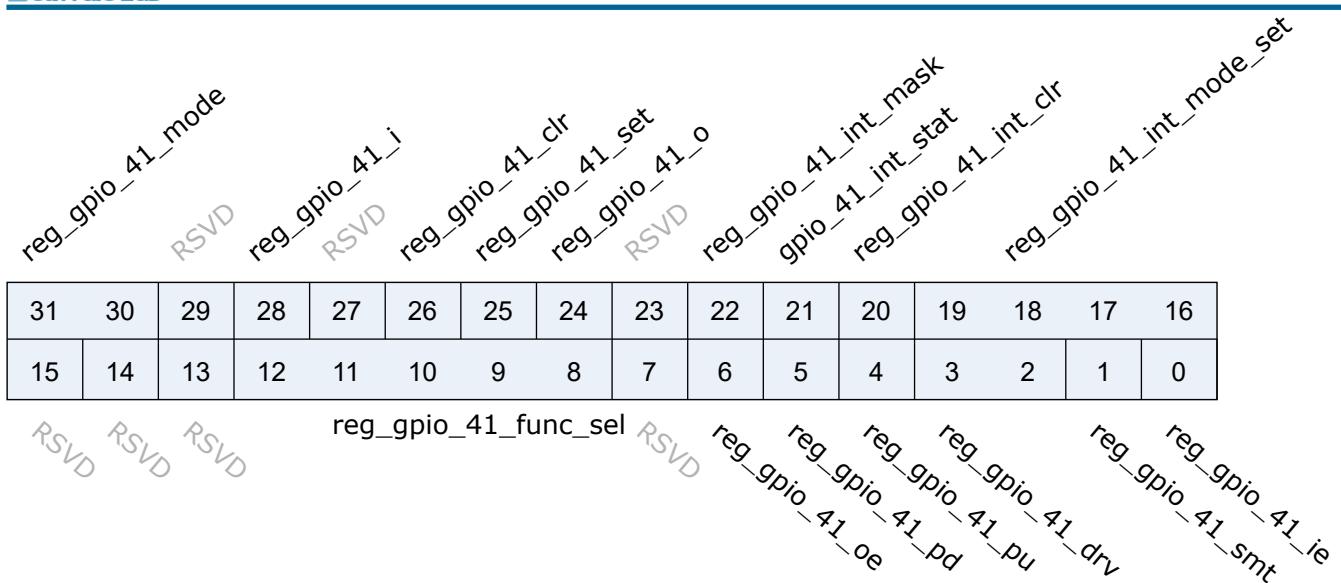Address: 0x20000968




Bits	Name	Type	Reset	Description
31:30	reg_gpio_41_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_41_i	r	0	
27	RSVD			
26	reg_gpio_41_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_41_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_41_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_41_int_mask	r/w	1	mask interrupt (1)
21	gpio_41_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_41_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_41_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_41_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_41_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_41_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_41_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_41_drv	r/w	0	GPIO Driving Control
1	reg_gpio_41_smt	r/w	1	GPIO SMT Control
0	reg_gpio_41_ie	r/w	0	GPIO Input Enable

4.8.43 gpio_cfg42

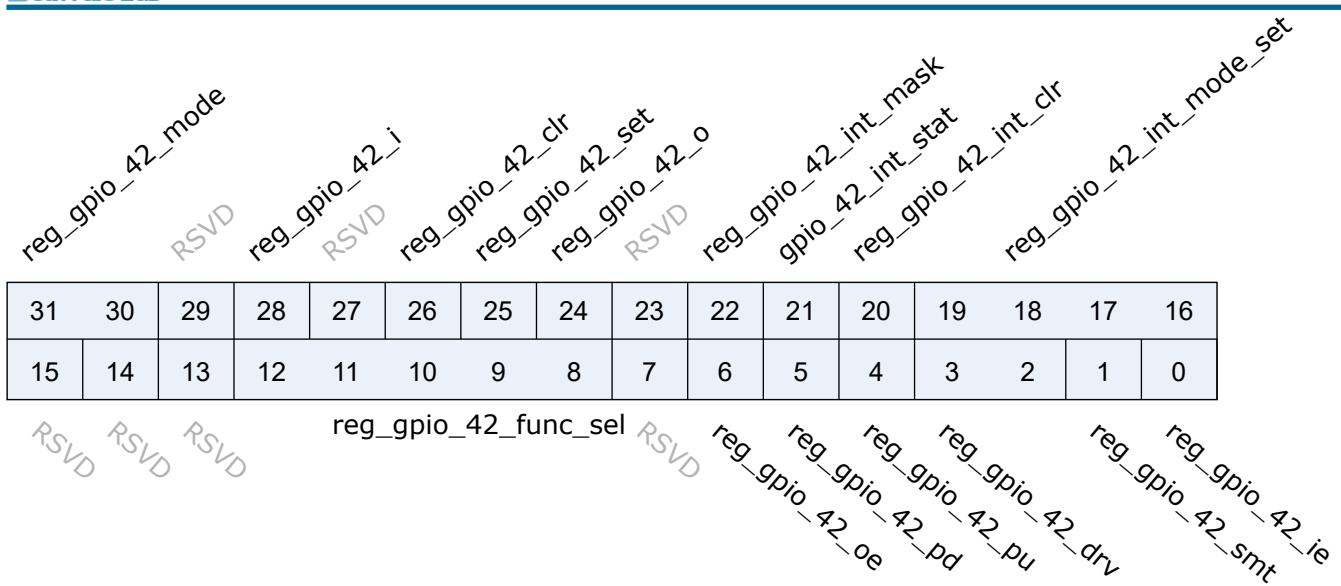Address: 0x2000096c




Bits	Name	Type	Reset	Description
31:30	reg_gpio_42_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_42_i	r	0	
27	RSVD			
26	reg_gpio_42_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_42_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_42_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_42_int_mask	r/w	1	mask interrupt (1)
21	gpio_42_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_42_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_42_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_42_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_42_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_42_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_42_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_42_drv	r/w	0	GPIO Driving Control
1	reg_gpio_42_smt	r/w	1	GPIO SMT Control
0	reg_gpio_42_ie	r/w	0	GPIO Input Enable

4.8.44 gpio_cfg43

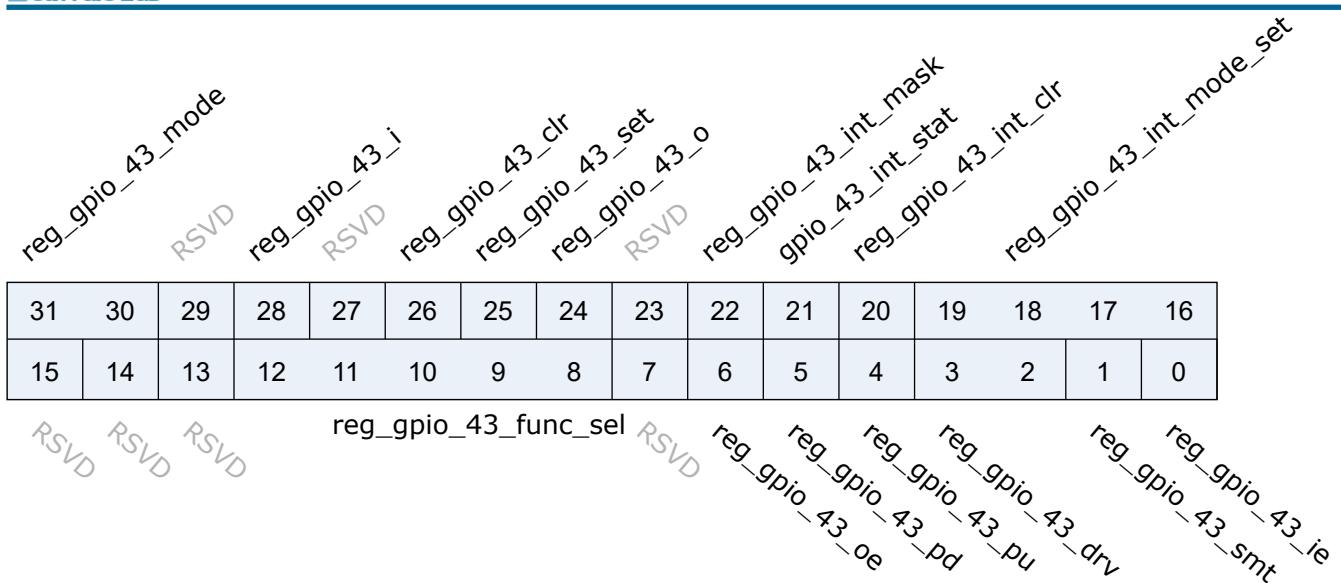Address: 0x20000970




Bits	Name	Type	Reset	Description
31:30	reg_gpio_43_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_43_i	r	0	
27	RSVD			
26	reg_gpio_43_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_43_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_43_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_43_int_mask	r/w	1	mask interrupt (1)
21	gpio_43_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_43_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_43_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_43_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_43_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_43_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_43_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_43_drv	r/w	0	GPIO Driving Control
1	reg_gpio_43_smt	r/w	1	GPIO SMT Control
0	reg_gpio_43_ie	r/w	0	GPIO Input Enable

4.8.45 gpio_cfg44

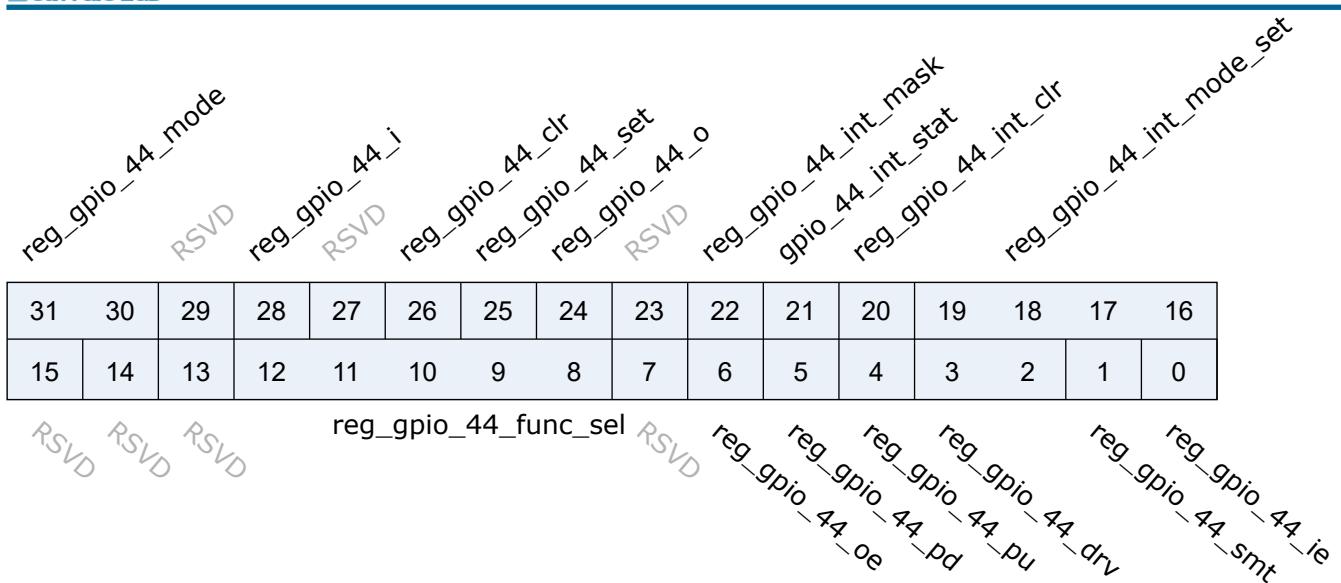Address: 0x20000974




Bits	Name	Type	Reset	Description
31:30	reg_gpio_44_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_44_i	r	0	
27	RSVD			
26	reg_gpio_44_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_44_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_44_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_44_int_mask	r/w	1	mask interrupt (1)
21	gpio_44_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_44_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_44_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_44_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_44_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_44_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_44_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_44_drv	r/w	0	GPIO Driving Control
1	reg_gpio_44_smt	r/w	1	GPIO SMT Control
0	reg_gpio_44_ie	r/w	0	GPIO Input Enable

4.8.46 gpio_cfg45

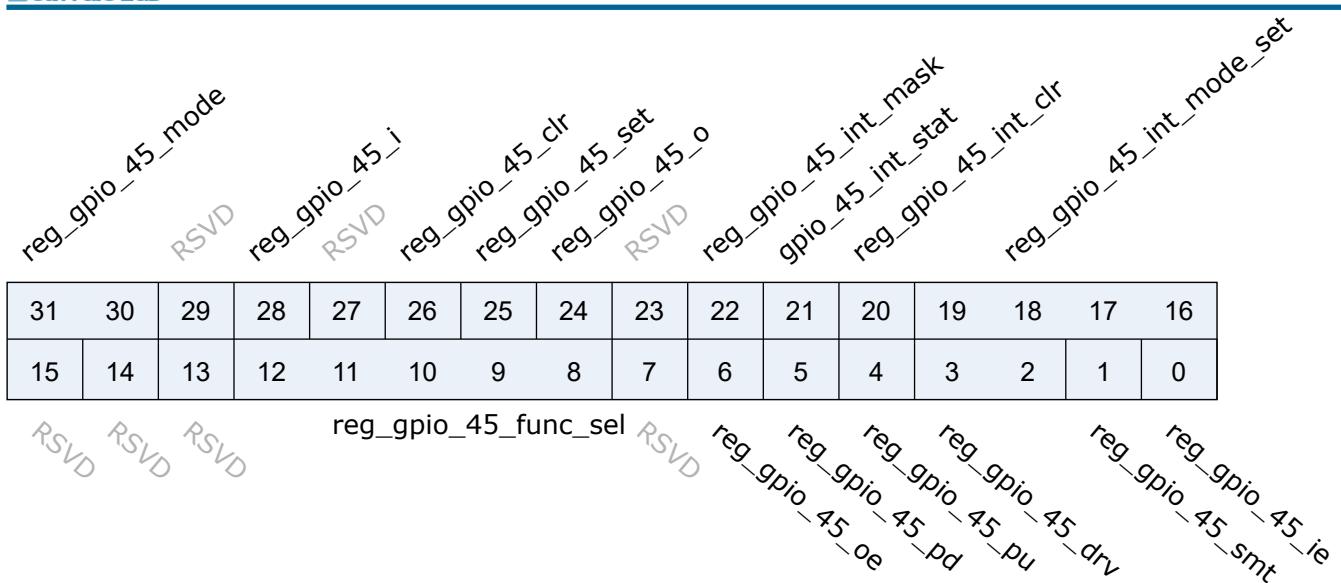Address: 0x20000978



Bits	Name	Type	Reset	Description
31:30	reg_gpio_45_mode	r/w	0	When GPIO Function Selected to SWGPIO 00 (Output Value Mode): GPIO Output by reg_gpio_x_o Value 01 (Set/Clear Mode) :GPIO Output set by reg_gpio_x_set and clear by reg_gpio_x_clr 10 : SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Output value by gpio_dma_o 11: SWGPIO Source comes from GPIO DMA (GPIO DMA Mode), GPIO Outout value by gpio_dma_set/gpio_dma_clr
29	RSVD			
28	reg_gpio_45_i	r	0	
27	RSVD			
26	reg_gpio_45_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg_gpio_45_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg_gpio_45_o	r/w	0	When SWGPIO @ Output Value Mode 00 : GPIO Value changes according to this value 01 : GPIO Value Set by this register and clr by clr_reg
23	RSVD			
22	reg_gpio_45_int_mask	r/w	1	mask interrupt (1)
21	gpio_45_int_stat	r	0	interrupt status

Bits	Name	Type	Reset	Description
20	reg_gpio_45_int_clr	r/w	0	clear interrupt
19:16	reg_gpio_45_int_mode_set	r/w	0	0000 : sync falling edge trigger 0001 : sync rising edge trigger 0010 : sync low level trigger 0011 : sync high level trigger 01xx : sync rising & falling edge trigger 1000 : async falling edge trigger 1001 : async rising edge trigger 1010 : async low level trigger 1011 : async high level trigger
15:13	RSVD			
12:8	reg_gpio_45_func_sel	r/w	5'hB	GPIO Function Select (Default : SW-GPIO)
7	RSVD			
6	reg_gpio_45_oe	r/w	0	Register Controlled GPIO Output Enable (Used when GPIO Function select to Register Control GPIO)
5	reg_gpio_45_pd	r/w	0	GPIO Pull Down Control
4	reg_gpio_45_pu	r/w	0	GPIO Pull Up Control
3:2	reg_gpio_45_drv	r/w	0	GPIO Driving Control
1	reg_gpio_45_smt	r/w	1	GPIO SMT Control
0	reg_gpio_45_ie	r/w	0	GPIO Input Enable

4.8.47 gpio_cfg128

Address: 0x20000ac4

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
<i>reg2_gpio_31_i</i>	<i>reg2_gpio_30_i</i>	<i>reg2_gpio_29_i</i>	<i>reg2_gpio_28_i</i>	<i>reg2_gpio_27_i</i>	<i>reg2_gpio_26_i</i>	<i>reg2_gpio_25_i</i>	<i>reg2_gpio_24_i</i>	<i>reg2_gpio_23_i</i>	<i>reg2_gpio_22_i</i>	<i>reg2_gpio_21_i</i>	<i>reg2_gpio_20_i</i>	<i>reg2_gpio_19_i</i>	<i>reg2_gpio_18_i</i>	<i>reg2_gpio_17_i</i>	<i>reg2_gpio_16_i</i>
<i>reg2_gpio_15_i</i>	<i>reg2_gpio_14_i</i>	<i>reg2_gpio_13_i</i>	<i>reg2_gpio_12_i</i>	<i>reg2_gpio_11_i</i>	<i>reg2_gpio_10_i</i>	<i>reg2_gpio_9_i</i>	<i>reg2_gpio_8_i</i>	<i>reg2_gpio_7_i</i>	<i>reg2_gpio_6_i</i>	<i>reg2_gpio_5_i</i>	<i>reg2_gpio_4_i</i>	<i>reg2_gpio_3_i</i>	<i>reg2_gpio_2_i</i>	<i>reg2_gpio_1_i</i>	<i>reg2_gpio_0_i</i>

Bits	Name	Type	Reset	Description
31	reg2_gpio_31_i	r	0	Register Controlled GPIO Input value
30	reg2_gpio_30_i	r	0	Register Controlled GPIO Input value
29	reg2_gpio_29_i	r	0	Register Controlled GPIO Input value
28	reg2_gpio_28_i	r	0	Register Controlled GPIO Input value
27	reg2_gpio_27_i	r	0	Register Controlled GPIO Input value
26	reg2_gpio_26_i	r	0	Register Controlled GPIO Input value
25	reg2_gpio_25_i	r	0	Register Controlled GPIO Input value
24	reg2_gpio_24_i	r	0	Register Controlled GPIO Input value
23	reg2_gpio_23_i	r	0	Register Controlled GPIO Input value
22	reg2_gpio_22_i	r	0	Register Controlled GPIO Input value
21	reg2_gpio_21_i	r	0	Register Controlled GPIO Input value
20	reg2_gpio_20_i	r	0	Register Controlled GPIO Input value
19	reg2_gpio_19_i	r	0	Register Controlled GPIO Input value
18	reg2_gpio_18_i	r	0	Register Controlled GPIO Input value
17	reg2_gpio_17_i	r	0	Register Controlled GPIO Input value
16	reg2_gpio_16_i	r	0	Register Controlled GPIO Input value
15	reg2_gpio_15_i	r	0	Register Controlled GPIO Input value
14	reg2_gpio_14_i	r	0	Register Controlled GPIO Input value
13	reg2_gpio_13_i	r	0	Register Controlled GPIO Input value
12	reg2_gpio_12_i	r	0	Register Controlled GPIO Input value
11	reg2_gpio_11_i	r	0	Register Controlled GPIO Input value
10	reg2_gpio_10_i	r	0	Register Controlled GPIO Input value
9	reg2_gpio_9_i	r	0	Register Controlled GPIO Input value
8	reg2_gpio_8_i	r	0	Register Controlled GPIO Input value
7	reg2_gpio_7_i	r	0	Register Controlled GPIO Input value
6	reg2_gpio_6_i	r	0	Register Controlled GPIO Input value
5	reg2_gpio_5_i	r	0	Register Controlled GPIO Input value
4	reg2_gpio_4_i	r	0	Register Controlled GPIO Input value
3	reg2_gpio_3_i	r	0	Register Controlled GPIO Input value
2	reg2_gpio_2_i	r	0	Register Controlled GPIO Input value
1	reg2_gpio_1_i	r	0	Register Controlled GPIO Input value

Bits	Name	Type	Reset	Description
0	reg2_gpio_0_i	r	0	Register Controlled GPIO Input value

4.8.48 gpio_cfg129

Address: 0x20000ac8


| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |

RSVD *RSVD* *reg2_gpio_45_i* *reg2_gpio_44_i* *reg2_gpio_43_i* *reg2_gpio_42_i* *reg2_gpio_41_i* *reg2_gpio_40_i* *reg2_gpio_39_i* *reg2_gpio_38_i* *reg2_gpio_37_i* *reg2_gpio_36_i* *reg2_gpio_35_i* *reg2_gpio_34_i* *reg2_gpio_33_i* *reg2_gpio_32_i*

Bits	Name	Type	Reset	Description
31:14	RSVD			
13	reg2_gpio_45_i	r	0	Register Controlled GPIO Input value
12	reg2_gpio_44_i	r	0	Register Controlled GPIO Input value
11	reg2_gpio_43_i	r	0	Register Controlled GPIO Input value
10	reg2_gpio_42_i	r	0	Register Controlled GPIO Input value
9	reg2_gpio_41_i	r	0	Register Controlled GPIO Input value
8	reg2_gpio_40_i	r	0	Register Controlled GPIO Input value
7	reg2_gpio_39_i	r	0	Register Controlled GPIO Input value
6	reg2_gpio_38_i	r	0	Register Controlled GPIO Input value
5	reg2_gpio_37_i	r	0	Register Controlled GPIO Input value
4	reg2_gpio_36_i	r	0	Register Controlled GPIO Input value
3	reg2_gpio_35_i	r	0	Register Controlled GPIO Input value
2	reg2_gpio_34_i	r	0	Register Controlled GPIO Input value
1	reg2_gpio_33_i	r	0	Register Controlled GPIO Input value
0	reg2_gpio_32_i	r	0	Register Controlled GPIO Input value

4.8.49 gpio_cfg136

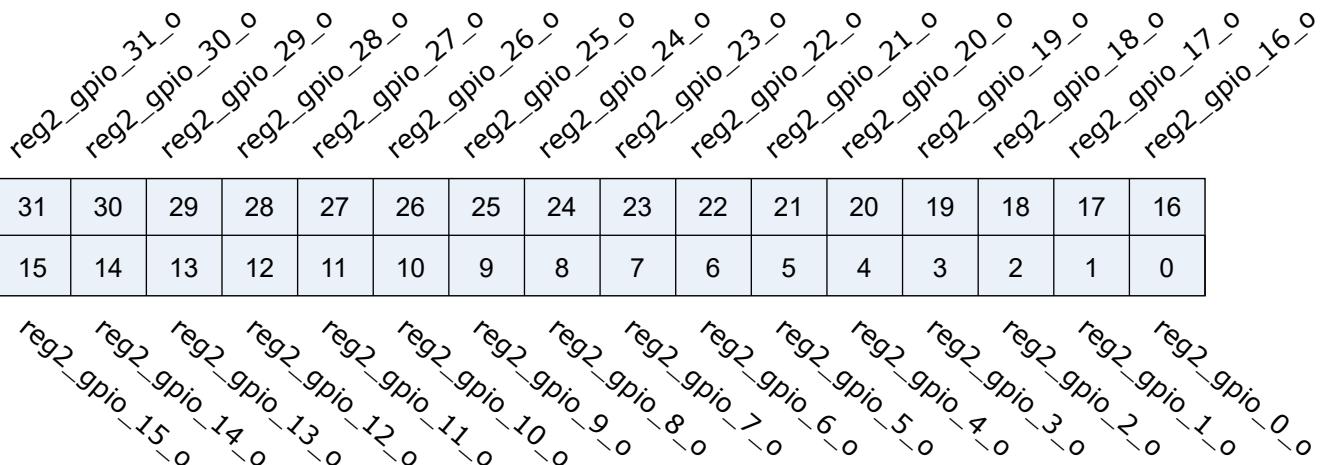Address: 0x20000ae4



Bits	Name	Type	Reset	Description
31	reg2_gpio_31_o	r/w	0	Register Controlled GPIO Output Value
30	reg2_gpio_30_o	r/w	0	Register Controlled GPIO Output Value
29	reg2_gpio_29_o	r/w	0	Register Controlled GPIO Output Value
28	reg2_gpio_28_o	r/w	0	Register Controlled GPIO Output Value
27	reg2_gpio_27_o	r/w	0	Register Controlled GPIO Output Value
26	reg2_gpio_26_o	r/w	0	Register Controlled GPIO Output Value
25	reg2_gpio_25_o	r/w	0	Register Controlled GPIO Output Value
24	reg2_gpio_24_o	r/w	0	Register Controlled GPIO Output Value
23	reg2_gpio_23_o	r/w	0	Register Controlled GPIO Output Value
22	reg2_gpio_22_o	r/w	0	Register Controlled GPIO Output Value
21	reg2_gpio_21_o	r/w	0	Register Controlled GPIO Output Value
20	reg2_gpio_20_o	r/w	0	Register Controlled GPIO Output Value
19	reg2_gpio_19_o	r/w	0	Register Controlled GPIO Output Value
18	reg2_gpio_18_o	r/w	0	Register Controlled GPIO Output Value
17	reg2_gpio_17_o	r/w	0	Register Controlled GPIO Output Value
16	reg2_gpio_16_o	r/w	0	Register Controlled GPIO Output Value
15	reg2_gpio_15_o	r/w	0	Register Controlled GPIO Output Value
14	reg2_gpio_14_o	r/w	0	Register Controlled GPIO Output Value
13	reg2_gpio_13_o	r/w	0	Register Controlled GPIO Output Value
12	reg2_gpio_12_o	r/w	0	Register Controlled GPIO Output Value

Bits	Name	Type	Reset	Description
11	reg2_gpio_11_o	r/w	0	Register Controlled GPIO Output Value
10	reg2_gpio_10_o	r/w	0	Register Controlled GPIO Output Value
9	reg2_gpio_9_o	r/w	0	Register Controlled GPIO Output Value
8	reg2_gpio_8_o	r/w	0	Register Controlled GPIO Output Value
7	reg2_gpio_7_o	r/w	0	Register Controlled GPIO Output Value
6	reg2_gpio_6_o	r/w	0	Register Controlled GPIO Output Value
5	reg2_gpio_5_o	r/w	0	Register Controlled GPIO Output Value
4	reg2_gpio_4_o	r/w	0	Register Controlled GPIO Output Value
3	reg2_gpio_3_o	r/w	0	Register Controlled GPIO Output Value
2	reg2_gpio_2_o	r/w	0	Register Controlled GPIO Output Value
1	reg2_gpio_1_o	r/w	0	Register Controlled GPIO Output Value
0	reg2_gpio_0_o	r/w	0	Register Controlled GPIO Output Value

4.8.50 gpio_cfg137

Address: 0x20000ae8


RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
RSVD	RSVD	reg2_gpio_45_o	reg2_gpio_44_o	reg2_gpio_43_o	reg2_gpio_42_o	reg2_gpio_41_o	reg2_gpio_40_o	reg2_gpio_39_o	reg2_gpio_38_o	reg2_gpio_37_o	reg2_gpio_36_o	reg2_gpio_35_o	reg2_gpio_34_o	reg2_gpio_33_o	reg2_gpio_32_o	

Bits	Name	Type	Reset	Description
31:14	RSVD			
13	reg2_gpio_45_o	r/w	0	Register Controlled GPIO Output Value
12	reg2_gpio_44_o	r/w	0	Register Controlled GPIO Output Value
11	reg2_gpio_43_o	r/w	0	Register Controlled GPIO Output Value
10	reg2_gpio_42_o	r/w	0	Register Controlled GPIO Output Value
9	reg2_gpio_41_o	r/w	0	Register Controlled GPIO Output Value

Bits	Name	Type	Reset	Description
8	reg2_gpio_40_o	r/w	0	Register Controlled GPIO Output Value
7	reg2_gpio_39_o	r/w	0	Register Controlled GPIO Output Value
6	reg2_gpio_38_o	r/w	0	Register Controlled GPIO Output Value
5	reg2_gpio_37_o	r/w	0	Register Controlled GPIO Output Value
4	reg2_gpio_36_o	r/w	0	Register Controlled GPIO Output Value
3	reg2_gpio_35_o	r/w	0	Register Controlled GPIO Output Value
2	reg2_gpio_34_o	r/w	0	Register Controlled GPIO Output Value
1	reg2_gpio_33_o	r/w	0	Register Controlled GPIO Output Value
0	reg2_gpio_32_o	r/w	0	Register Controlled GPIO Output Value

4.8.51 gpio_cfg138

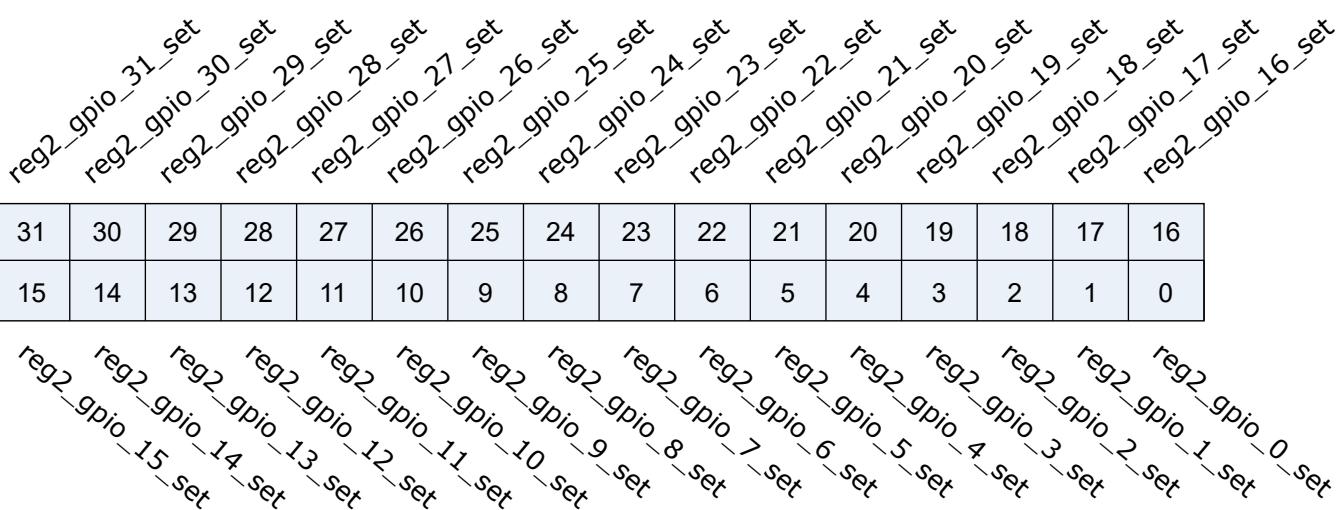Address: 0x20000aec



Bits	Name	Type	Reset	Description
31	reg2_gpio_31_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
30	reg2_gpio_30_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
29	reg2_gpio_29_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect

Bits	Name	Type	Reset	Description
28	reg2_gpio_28_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
27	reg2_gpio_27_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
26	reg2_gpio_26_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
25	reg2_gpio_25_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
24	reg2_gpio_24_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
23	reg2_gpio_23_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
22	reg2_gpio_22_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
21	reg2_gpio_21_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
20	reg2_gpio_20_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
19	reg2_gpio_19_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
18	reg2_gpio_18_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
17	reg2_gpio_17_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect

Bits	Name	Type	Reset	Description
16	reg2_gpio_16_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
15	reg2_gpio_15_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
14	reg2_gpio_14_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
13	reg2_gpio_13_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
12	reg2_gpio_12_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
11	reg2_gpio_11_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
10	reg2_gpio_10_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
9	reg2_gpio_9_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
8	reg2_gpio_8_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
7	reg2_gpio_7_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
6	reg2_gpio_6_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
5	reg2_gpio_5_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect

Bits	Name	Type	Reset	Description
4	reg2_gpio_4_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
3	reg2_gpio_3_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
2	reg2_gpio_2_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
1	reg2_gpio_1_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
0	reg2_gpio_0_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect

4.8.52 gpio_cfg139

Address: 0x20000af0

RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RSVD	RSVD	reg2_gpio_45_set	reg2_gpio_44_set	reg2_gpio_43_set	reg2_gpio_42_set	reg2_gpio_41_set	reg2_gpio_40_set	reg2_gpio_39_set	reg2_gpio_38_set	reg2_gpio_37_set	reg2_gpio_36_set	reg2_gpio_35_set	reg2_gpio_34_set	reg2_gpio_33_set	reg2_gpio_32_set

Bits	Name	Type	Reset	Description
31:14	RSVD			
13	reg2_gpio_45_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
12	reg2_gpio_44_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect

Bits	Name	Type	Reset	Description
11	reg2_gpio_43_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
10	reg2_gpio_42_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
9	reg2_gpio_41_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
8	reg2_gpio_40_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
7	reg2_gpio_39_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
6	reg2_gpio_38_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
5	reg2_gpio_37_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
4	reg2_gpio_36_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
3	reg2_gpio_35_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
2	reg2_gpio_34_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
1	reg2_gpio_33_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
0	reg2_gpio_32_set	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will set GPIO output value to 1,when set/clr at the same time, only set take effect
-1:32	RSVD			

Bits	Name	Type	Reset	Description
31	reg2_gpio_31_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
30	reg2_gpio_30_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
29	reg2_gpio_29_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
28	reg2_gpio_28_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
27	reg2_gpio_27_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
26	reg2_gpio_26_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
25	reg2_gpio_25_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
24	reg2_gpio_24_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
23	reg2_gpio_23_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
22	reg2_gpio_22_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
21	reg2_gpio_21_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
20	reg2_gpio_20_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect

Bits	Name	Type	Reset	Description
19	reg2_gpio_19_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
18	reg2_gpio_18_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
17	reg2_gpio_17_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
16	reg2_gpio_16_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
15	reg2_gpio_15_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
14	reg2_gpio_14_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
13	reg2_gpio_13_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
12	reg2_gpio_12_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
11	reg2_gpio_11_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
10	reg2_gpio_10_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
9	reg2_gpio_9_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
8	reg2_gpio_8_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect

Bits	Name	Type	Reset	Description
7	reg2_gpio_7_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
6	reg2_gpio_6_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
5	reg2_gpio_5_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
4	reg2_gpio_4_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
3	reg2_gpio_3_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
2	reg2_gpio_2_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
1	reg2_gpio_1_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
0	reg2_gpio_0_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect

4.8.53 gpio_cfg141

Address: 0x20000af8

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

RSVD *RSVD* *reg2_gpio_45_clr* *reg2_gpio_44_clr* *reg2_gpio_43_clr* *reg2_gpio_42_clr* *reg2_gpio_41_clr* *reg2_gpio_40_clr* *reg2_gpio_39_clr* *reg2_gpio_38_clr* *reg2_gpio_37_clr* *reg2_gpio_36_clr* *reg2_gpio_35_clr* *reg2_gpio_34_clr* *reg2_gpio_33_clr* *reg2_gpio_32_clr*

Bits	Name	Type	Reset	Description
31:14	RSVD			
13	reg2_gpio_45_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
12	reg2_gpio_44_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
11	reg2_gpio_43_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
10	reg2_gpio_42_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
9	reg2_gpio_41_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
8	reg2_gpio_40_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
7	reg2_gpio_39_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
6	reg2_gpio_38_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
5	reg2_gpio_37_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
4	reg2_gpio_36_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
3	reg2_gpio_35_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
2	reg2_gpio_34_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect

Bits	Name	Type	Reset	Description
1	reg2_gpio_33_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
0	reg2_gpio_32_clr	w1p	0	When SWGPIO @ Set/Clear Mode Set this bit will clear GPIO output value to 0,when set/clr at the same time, only set take effect
-1:32	RSVD			
31:24	cr_code1_high_time	r/w	8'd200	Used to generate Code 1 Duty Cycle Waveform (in units of xclk (XTAL or RC32M) clock cycle) waveform keep high during cr_code1_high_time waveform keep low during cr_code1_low_time (cr_code_total_time - cr_code1_high_time)
23:16	cr_code0_high_time	r/w	8'd200	Used to generate Code 0 Duty Cycle Waveform (in units of xclk (XTAL or RC32M) clock cycle) waveform keep high during cr_code0_high_time waveform keep low during cr_code0_low_time (cr_code_total_time - cr_code0_high_time)
15:7	cr_code_total_time	r/w	9'd400	Used to define Code0/Code1 total waveform time
6:3	RSVD			
2	cr_invert_code1_high	r/w	1'b0	1: cr_code1_high_time -> cr_code1_low_time
1	cr_invert_code0_high	r/w	1'b0	1: cr_code0_high_time -> cr_code0_low_time
0	cr_gpio_tx_en	r/w	1'b0	Enable GPIO DMA OUT/GPIO DMA Latch
-1:32	RSVD			
31	cr_gpio_tx_fer_en	r/w	1'b1	Interrupt enable of gpio_tx_fer_int (GPIO DMA FIFO Underflow or Overflow)
30	cr_gpio_tx_fifo_en	r/w	1'b1	Interrupt enable of gpio_tx_fifo_int
29	cr_gpio_tx_end_en	r/w	1'b1	Interrupt enable of gpio_tx_end_int
28	r_gpio_tx_fer_int	r	1'b0	GPIO TX FIFO error interrupt, auto-cleared when FIFO overflow/underflow error flag is cleared
27	r_gpio_tx_fifo_int	r	1'b0	GPIO TX FIFO ready (tx_fifo_cnt > tx_fifo_th) interrupt, auto-cleared when data is pushed
26	r_gpio_tx_end_int	r	1'b0	GPIO TX END Interrupt (GPIO DMA FIFO Empty)
25	cr_gpio_tx_fer_mask	r/w	1'b1	Interrupt mask of gpio_tx_fer_int
24	cr_gpio_tx_fifo_mask	r/w	1'b1	Interrupt mask of gpio_tx_fifo_int
23	cr_gpio_tx_end_mask	r/w	1'b1	Interrupt mask of gpio_tx_end_int

Bits	Name	Type	Reset	Description
22:16	cr_gpio_tx_fifo_th	r/w	7'd0	TX FIFO threshold, dma_tx_req will not be asserted if tx_fifo_cnt is less than this value
15:8	gpio_tx_fifo_cnt	r	8'd128	TX FIFO available count
7	cr_gpio_dma_park_value	r/w	1'b0	1: park at high level when TX FIFO empty 0: park at low level when TX FIFO empty
6	RSVD			
5	gpio_tx_fifo_underflow	r	1'b0	Underflow flag of TX FIFO, can be cleared by tx_fifo_clr
4	gpio_tx_fifo_overflow	r	1'b0	Overflow flag of TX FIFO, can be cleared by tx_fifo_clr
3	gpio_tx_end_clr	w1c	1'b0	Interrupt clear of gpio_tx_end_int
2	gpio_tx_fifo_clr	w1c	1'b0	Clear signal of TX FIFO
1	cr_gpio_dma_out_sel_latch	r/w	1'b0	1 : select latch format (8bit set/8bit clr) , 0 : select 16bit output value
0	cr_gpio_dma_tx_en	r/w	1'b0	Enable signal of dma_tx_req/ack interface
-1:16	RSVD			
15:0	gpio_tx_data_to_fifo	w	x	

5.1 Overview

The chip integrates one 12-bit SAR ADC, which supports 12 external analog input signals and several internal analog signals. ADC can work in single conversion mode and multi-channel scanning mode, and the conversion result is 12/14/16-bit LeftJustified mode. ADC has a FIFO with a depth of 32, which supports multiple interrupts and DMA. In addition to measuring ordinary analog signals, ADC can also measure power supply voltage, and detect temperature by measuring the internal/external diode voltage.

5.2 Features

- High performance
 - Optional 12-bit/14-bit/16-bit conversion result for output
 - Single channel continuous conversion mode up to 2M samples
 - Other conversion modes up to 500K sample rate
 - Optional reference voltage of 2.0V/3.2V
 - Transfer of conversion result to memory through DMA
 - Supports single-channel single conversion, single-channel continuous conversion, multi-channel single conversion, multi-channel continuous conversion
 - Single-ended and differential input modes
 - Jitter compensation
 - User-defined offset value of conversion result
- Number of analog channels
 - Twelve external analog channels

- Two internal DAC channels
- One VBAT/2 channel
- One TSEN channel

5.3 Functional Description

The block diagram of ADC module is shown as follows.

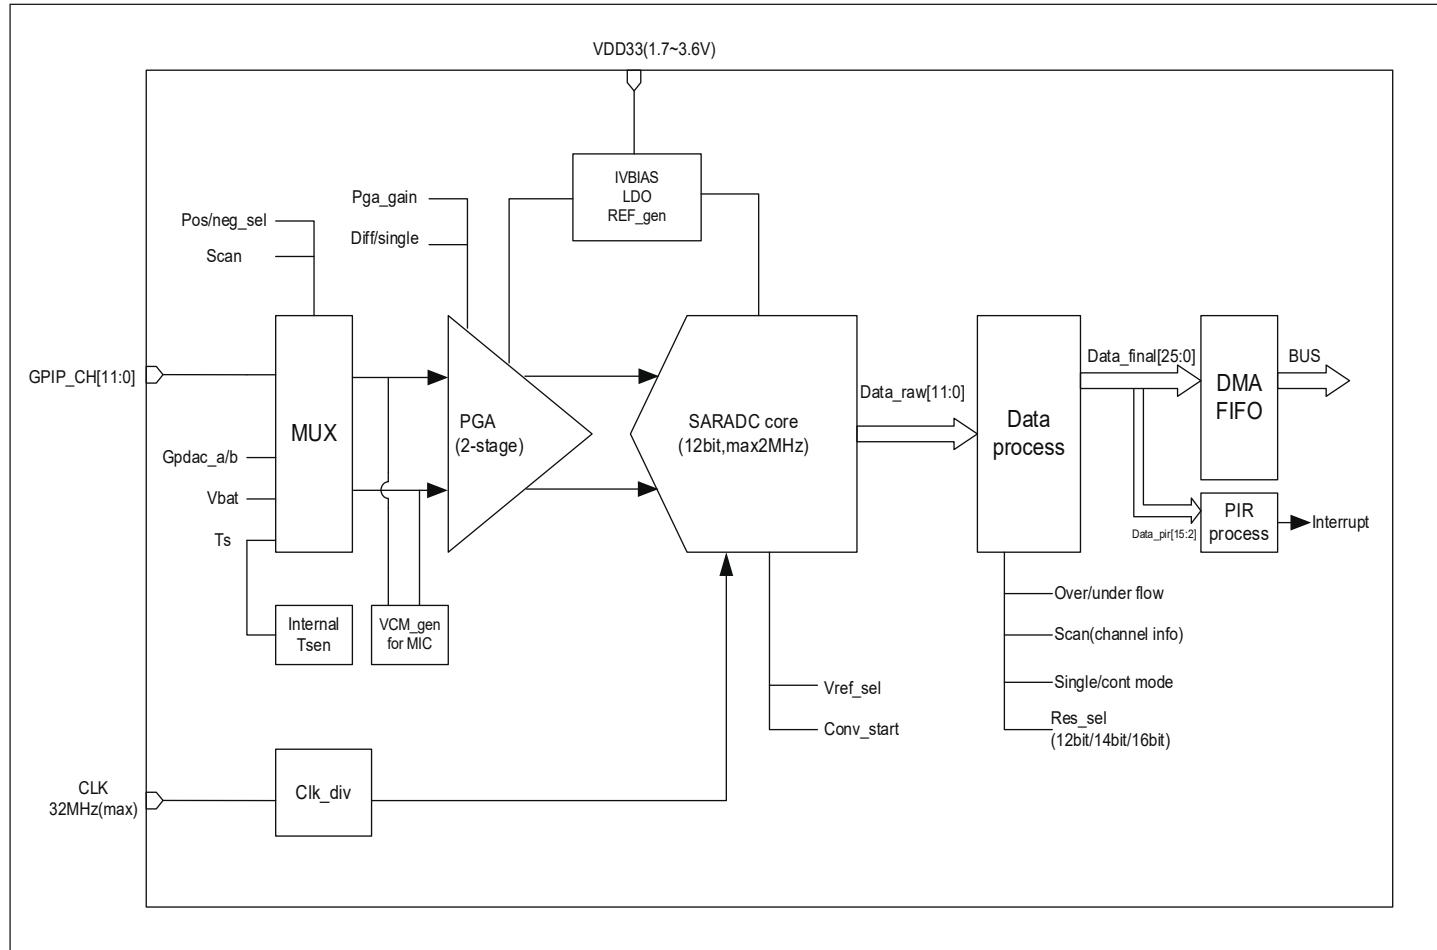


Fig. 5.1: Block Diagram of ADC

The ADC module consists of front-end input channel selector, programmable amplifier, ADC sampling module, data processing module, and FIFO.

The input channel selector is used to select the channel to be sampled, including internal and external analog signals.

The programmable amplifier is used to further process the input signal, and it is set based on the characteristics of the input signal (DC/AC) to get a more accurate conversion value.

The ADC sampling module is the most important functional module, which gets the result of conversion from analog signal to digital signal by successive comparison.

The result of the conversion is 12/14/16 bit, and the data processing module further processes the conversion result, including adding channel information, etc.

The final data will be pushed to the back-end FIFO.

5.3.1 ADC Pins and Internal Signals

Table 5.1: ADC internal signal

Internal Signal	Type	Description
VBAT/2	Input	Voltage signal divided from the power supply pin
TSEN	Input	Output voltage of internal temperature sensor
VREF	Input	Reference voltage of internal analog module
DACOUTA	Input	DAC module output
DACOUTB	Input	DAC module output

Table 5.2: ADC external pin

External Pin	Signal Type	Signal Description
VDDA	Input	Positive supply voltage of analog module
VSSA	Input	Analog module ground
ADC_CHX	Input	Analog input pins, 12 channels

5.3.2 ADC Channels

The selectable channels of ADC sampling include the input signals of external analog pins and the selectable signals inside the chip:

- ADC CH0
- ADC CH1
- ADC CH2
- ADC CH3
- ADC CH4
- ADC CH5
- ADC CH6
- ADC CH7

- ADC CH8
- ADC CH9
- ADC CH10
- ADC CH11
- DAC OUTA
- DAC OUTB
- VBAT/2
- TSEN
- VREF
- GND

It is worth noting that if VBAT/2 or TSEN is selected as the input signal to be sampled, gpadc_vbat_en or gpadc_ts_en shall be set. The ADC module supports single-ended input or differential input. For the former, GND shall be selected as the negative input channel.

5.3.3 ADC Clocks

The following figure illustrates the working clock source of the ADC module.

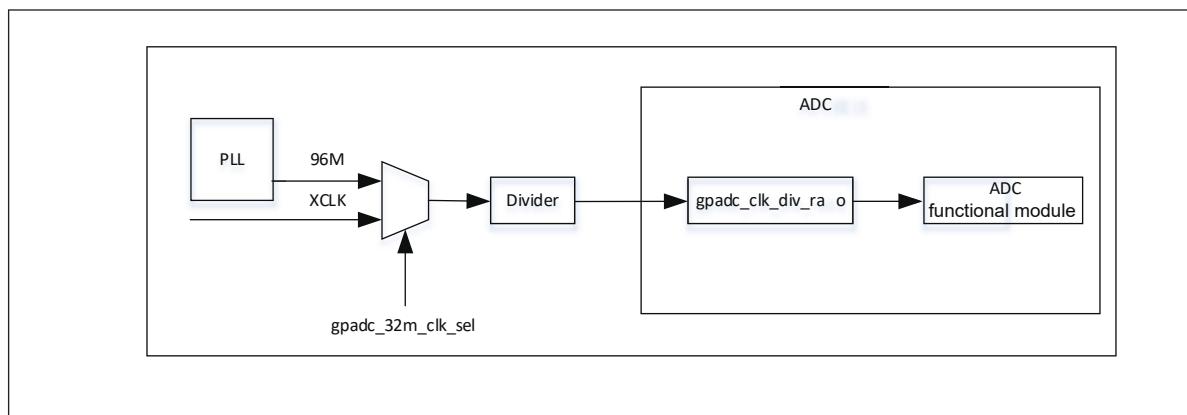


Fig. 5.2: ADC Clocks

The clock source of ADC can be the 96M from PLL, XTAL or internal RC32M. The GLB module controls the setting of clock source selection and provides clock frequency division. By default, the clock source of ADC is 96M and the clock frequency division is 2. The clock reaching the ADC module is 32M.

Inside the ADC module, clock frequency division (div=16 by default) is provided, so the default clock is 2M. Users can adjust the clock source and division factor of ADC according to the actual sampling needs.

The gpadc_32m_clk_div frequency division register is 6 bits wide (max div=64). The frequency division formula is

`fout=fsource/(gpadc_32m_clk_div+1)`. The `gpadc_clk_div_ratio` frequency division register of 3 bits width is located inside the ADC module. Its frequency division values are defined as follows:

- 3' b000: div=1
- 3' b001: div=4
- 3' b010: div=8
- 3' b011: div=12
- 3' b100: div=16
- 3' b101: div=20
- 3' b110: div=24
- 3' b111: div=32

5.3.4 ADC Conversion Mode

ADC supports single channel conversion and scanning conversion modes.

In single channel conversion mode, select the positive input channel via `gpadc_pos_sel` and the negative input channel via `gpadc_neg_sel`, set the `gpadc_cont_conv_en` control bit to 0 to indicate single channel conversion and then set the `gpadc_conv_start` control bit to start the conversion.

In the scanning conversion mode, the `gpadc_cont_conv_en` control bit is set to 1. ADC performs conversion one by one according to the number of conversion channels set by the `gpadc_scan_length` control bit and the channel sequence set by `gpadc_reg_scn_posX` ($X = 1, 2$) and `gpadc_reg_scn_negX` ($X = 1, 2$) register sets. The conversion result is automatically pushed into the ADC FIFO. The channels set by the `gpadc_reg_scn_posX` ($X = 1, 2$) and `gpadc_reg_scn_negX` ($X = 1, 2$) register sets can be the same, which means that the user can sample a channel multiple times for conversion.

The conversion result of ADC is usually pushed into FIFO. Users need to set the FIFO data receiving threshold interrupt according to the actual number of conversion channels, and this threshold interrupt is used as the ADC Conversion Complete Interrupt.

5.3.5 ADC Result

The register `gpadc_raw_data` stores the original result of ADC. In the single-ended mode, the valid bit of data is 12 bits, without sign bit. In the differential mode, the most significant bit (MSB) is the sign bit, and the remaining 11 bits represent the conversion result.

The register `gpadc_data_out` stores the ADC result, which contains the ADC result, sign bit, and channel information. The data format is as follows:

Table 5.3: Meaning of ADC Conversion Result

BitS	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
meaning	Positive channel number					Negative channel number					Conversion result															

In the above table, bit21-bit25 indicates the positive channel number, and bit16-bit20 indicates the negative channel number, while bit0-bit15 indicates the converted value.

The gpadc_res_sel control bit can set the bits of the conversion result to 12 bits, 14 bits, and 16 bits, of which 14 bits and 16 bits are the result of multiple sampling. The optional setting values are as follows:

- 3' b000 12bit 2MS/s, OSR=1
- 3' b001 14bit 125kS/s, OSR=16
- 3' b010 14bit 31.25kS/s, OSR=64
- 3' b011 16bit 15.625KS/s, OSR=128
- 3' b100 16bit 7.8125KS/s, OSR=256

In the left-justified ADC conversion result, when 12 bits are selected, bit15-bit4 of the conversion result is valid; when 14 bits are selected, bit15-bit2 is valid; and when 16 bits are selected, bit15-bit0 is valid. Similarly, in the differential mode, the MSB is the sign bit. Namely, when 14 bits are selected, bit15 is the sign bit and bit14 is the MSB, while bit14-bit2 is the conversion result. In the single-ended mode, there is no sign bit. Namely, when 12 bits are selected, bit15-bit4 is the conversion result and bit15 is the MSB.

In practice, ADC results are generally pushed into FIFO, which is especially important in the multi-channel scanning mode. Therefore, users usually obtain conversion results from ADC FIFO. The data format of ADC FIFO is the same as that in the register gpadc_data_out.

5.3.6 ADC Interrupt

- ADC conversion completion interrupt
 - When the ADC conversion is complete and the result is stored in the FIFO, the interrupt switch is set via gpadc_rdy_mask to select whether to trigger the ADC conversion completion interrupt.
- ADC positive (negative) sampling over-range interrupt
 - When the ADC is over-ranged for positive and negative sampling, set the interrupt switch via gpadc_pos_satur_mask, gpadc_neg_satur_mask to select whether to trigger an interrupt or not, and when an interrupt is generated, query the interrupt status via the gpadc_pos_satur and gpadc_neg_satur registers. The interrupt status can be cleared by setting gpadc_pos_satur_clr and gpadc_neg_satur_clr. This function can be used to determine if the input voltage is abnormal.

5.3.7 ADC FIFO

The ADC module has a FIFO with a depth of 32 and its data width is 26 bits. When the ADC completes conversion, the result will be automatically pushed into the FIFO. ADC FIFO has the following statuses and interrupt management functions:

- FIFO: full
- FIFO: non-empty
- FIFO Overrun interrupt
- FIFO Underrun interrupt

When an interrupt is generated, the interrupt flag can be cleared by the corresponding clear bit.

ADC FIFO enables users to obtain data through query, interrupt, and DMA modes.

Query mode

CPU polls the gpadc_rdy bit: When the control bit is set, it indicates that there are valid data in FIFO. CPU can get the amount of FIFO data through gpadc_fifo_data_count and read out these data from FIFO.

Interrupt mode

If gpadc_rdy_mask is set to 0 in CPU, ADC will generate an interrupt when data is pushed into FIFO. In the interrupt function, the user can get the amount of FIFO data through gpadc_fifo_data_count and read out these data from FIFO, and then set gpadc_rdy_clr to clear the interrupt.

DMA mode

If the user sets the gpadc_dma_en control bit, DMA can transfer the conversion data to the memory. In the DMA mode, after the data volume threshold is set for ADC FIFO to send DMA requests through gpadc_fifo_thl, when receiving a request, DMA will automatically transfer the specified number of results from FIFO to the corresponding memory according to the user defined parameters.

5.3.8 ADC Setup Process

Set ADC clock

According to the required ADC conversion speed, determine the working clock of ADC, set the ADC clock source and frequency division of the GLB module, and determine the final working clock frequency of the ADC module based on the gpadc_clk_div_ratio.

Set GPIO according to the channel used

According to the analog pin used, determine the channel number used, and initialize the corresponding GPIO to analog function. But note that when setting GPIO as analog input, set it as floating input instead of pull-up or pull-down.

Set the channel to convert

According to the used analog channel and conversion mode, set the corresponding channel register. For single channel conversion, set the conversion channel information in the registers gpadc_pos_sel and gpadc_neg_sel. In the multi-channel scanning mode, set gpadc_scan_length, gpadc_reg_scn_posX, and gpadc_reg_scn_negX according to the number of channels to be scanned and the scanning sequence.

Set the data read method

Based on the data reading mode introduced by ADC FIFO, select the mode used and set the register. If DMA is used, configure one channel of DMA, and assist ADC FIFO in transferring data.

Start conversion

Finally, set gpadc_res_sel to select the precision of data conversion result, and then set gpadc_global_en=1 and gpadc_conv_start=1 to start ADC conversion. When conversion is completed, to convert again, it is necessary to set gpadc_conv_start to 0 first and then to 1 to trigger the conversion again.

5.3.9 VBAT Measurement

The VBAT/2 here measures the voltage of the chip VDD33, not the external lithium battery voltage. If you need to measure the voltage of power supply sources like lithium battery, you can divide the voltage and input it into the GPIO analog channel of ADC. Measuring the voltage of VDD33 can reduce the use of GPIO.

The VBAT/2 voltage measured by the ADC module is divided, and the actual voltage input to the ADC module is half of that of VDD33, namely $VBAT/2=VDD33/2$. As the voltage is divided, to ensure a high accuracy, it is suggested to select 2.0 V reference voltage for ADC, and enable the single-ended mode. The positive input voltage is set to VBAT/2 and the negative input voltage is set to GND. Gpadc_vbat_en is set to 1. After conversion starts, the corresponding conversion result can be multiplied by 2 to get the voltage of VDD33.

5.3.10 TSEN Measurement

ADC can measure the voltage of internal or external diode. As the voltage difference of diode is related to temperature, the ambient temperature can be calculated from the measured voltage of diode. So it is called temperature sensor (TSEN).

The measurement principle of TSEN is the curve fitted by the voltage difference (ΔV) with the change of temperature, where ΔV is produced by measuring two different currents on a diode. No matter an external or internal diode is measured, the final output value is related to temperature and can be expressed as $\Delta(ADC_{out})=7.753T+X$. As long as we know the voltage, we know the temperature T. X indicates an offset value, which can be used as a standard value. Before actual use, X shall be determined first. The chip manufacturer will measure $\Delta(ADC_{out})$ at a standard temperature, such as 25°C room temperature, before the chip leaves the factory, to obtain X. In actual use, the user can get the temperature T according to the formula $T=[\Delta(ADC_{out})X]/7.753$.

When TSEN is used, it is recommended to set ADC to the 16bits mode, reduce error through multiple sampling, select 2.0 V reference voltage to improve accuracy, and set gpadc_ts_en to 1 to enable the TSEN function.

If internal diode is selected, gpadc_tsext_sel=0. If external diode is selected, gpadc_tsext_sel=1.

The positive input channel is selected according to actual needs, namely TSEN channel for the internal diode or the analog GPIO channel for the external diode. The negative input channel is set to GND.


After finishing the above settings, set gpadc_tsvbe_low=0 to start measurement, and get the measurement result V0. Then set gpadc_tsvbe_low=1 to start measurement, and get the measurement result V1, $\Delta(\text{ADC_out})=V1-V0$. The temperature T is calculated based on the formula $T=[\Delta(\text{ADC_out})X]/7.753$.

5.4 Register description

Name	Description
gpadc_config	
gpadc_dma_rdata	
gpadc_pir_train	

5.4.1 gpadc_config

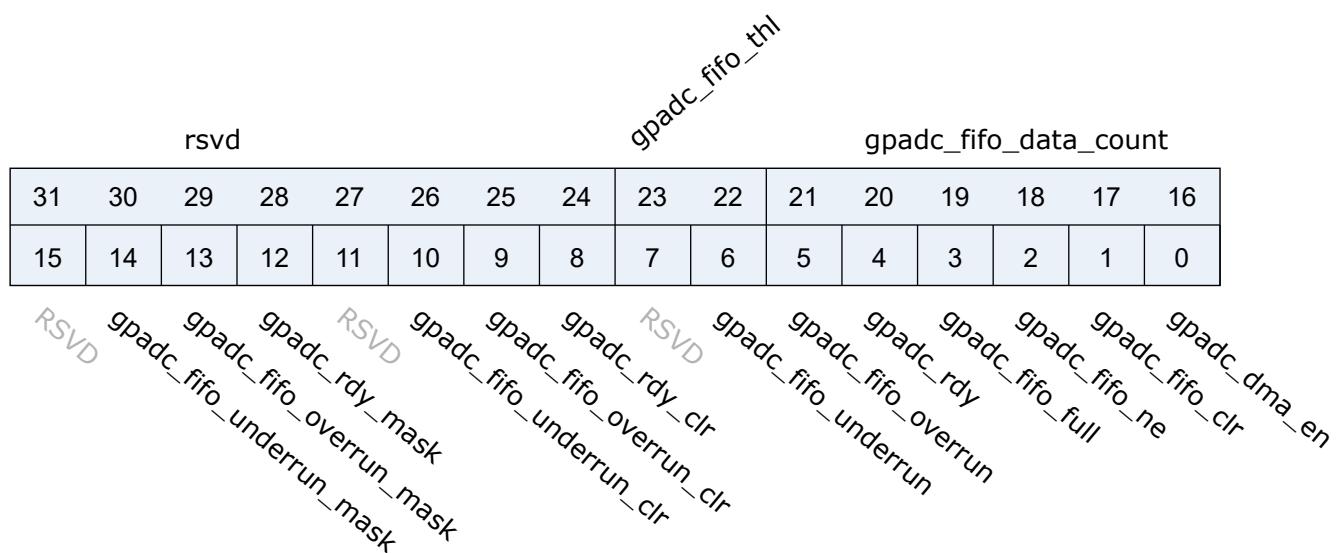Address: 0x20002000



Bits	Name	Type	Reset	Description
31:24	rsvd	rsvd	8'd0	

Bits	Name	Type	Reset	Description
23:22	gpadc_fifo_thl	r/w	2'd0	fifo threshold 2'b00: 1 data 2'b01: 4 data 2'b10: 8 data 2'b11: 16 data
21:16	gpadc_fifo_data_count	r	6'd0	fifo data number
15	RSVD			
14	gpadc_fifo_underrun_mask	r/w	1'b0	write 1 mask
13	gpadc_fifo_overrun_mask	r/w	1'b0	write 1 mask
12	gpadc_rdy_mask	r/w	1'b0	write 1 mask
11	RSVD			
10	gpadc_fifo_underrun_clr	r/w	1'b0	Write 1 to clear flag
9	gpadc_fifo_overrun_clr	r/w	1'b0	Write 1 to clear flag
8	gpadc_rdy_clr	r/w	1'b0	Write 1 to clear flag
7	RSVD			
6	gpadc_fifo_underrun	r	1'b0	FIFO underrun interrupt flag
5	gpadc_fifo_overrun	r	1'b0	FIFO overrun interrupt flag
4	gpadc_rdy	r	1'b0	Conversion data ready interrupt flag
3	gpadc_fifo_full	r	1'b0	FIFO full flag
2	gpadc_fifo_ne	r	1'b0	FIFO not empty flag
1	gpadc_fifo_clr	w1c	1'b0	FIFO clear signal
0	gpadc_dma_en	r/w	1'b0	GPADC DMA enable

5.4.2 gpadc_dma_rdata


Address: 0x20002004

rsvd								gpadc_dma_rdata							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
gpadc_dma_rdata															

Bits	Name	Type	Reset	Description
31:26	rsvd	rsvd	6'd0	
25:0	gpadc_dma_rdata	r	26'd0	GPADC final conversion result stored in the FIFO

5.4.3 gpadc_pir_train

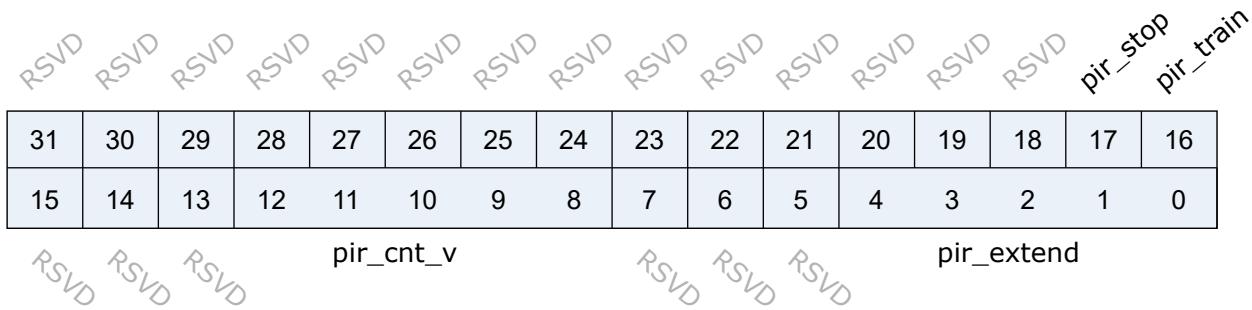Address: 0x20002020



Bits	Name	Type	Reset	Description
31:18	RSVD			
17	pir_stop	r	0	PIR Training End
16	pir_train	r/w	0	PIR Training Mode
15:13	RSVD			
12:8	pir_cnt_v	r	0	GPADC Record Extension Counter Value
7:5	RSVD			
4:0	pir_extend	r/w	5'd15	GPADC Record Extension after PIR interrupt

6.1 Overview

The DAC module is a 10-bit voltage output digital-to-analog converter that works with a DMA controller. The built-in DAC module of the chip has two output channels, and each channel has an independent converter, which can perform digital-to-analog conversion independently of each other.

6.2 Features

- DAC modulation accuracy is 10-bits
- DAC input clock can be selected as 32MHz, xclk or audio pll
- Each channel has DMA function and supports 10 data transfer formats
- Support DAC dual-channel simultaneous conversion
- The output pin of DAC is fixed as ChannelA is GPIO11, ChannelB is GPIO4
- Supports internal and external input reference voltages

6.3 Functional Description

The block diagram of DAC is shown as follows.

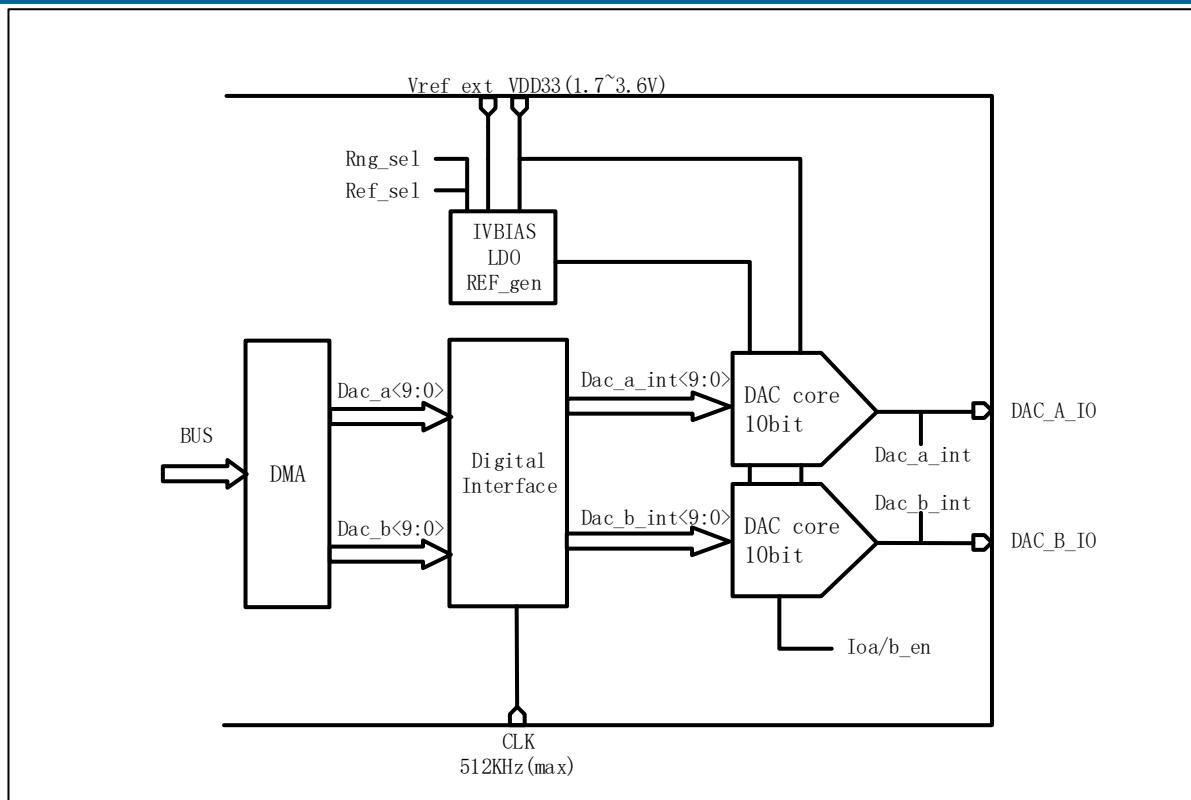


Fig. 6.1: Block Diagram of DAC

The DAC module contains two DAC analog-to-digital conversion circuits and the power circuit related to the modulated analog signal. The user can select whether the reference voltage of the DAC is external or internal through Ref_Sel, and select the output voltage range through Rng_Sel.

When the DAC is in operation, the DAC modulation registers (`gpdac_a_data`, `gpdac_b_data` in the register `dac_cfg3`) can be directly written by the CPU, or transferred to the `gpdac_dma_wdata` register by the DMA.

6.3.1 DAC channel enable

Taking channel A as an example, the configuration process is as follows:

1. Set the corresponding `gpdac_en` bit in register `gpdac_config` to 1 to enable the DAC
2. Set the corresponding `gpdac_a_en` bit in register `dac_cfg1` to 1 to enable DAC A channel conversion
3. Set the corresponding `gpdac_ioa_en` bit in the register `dac_cfg1` to 1, and enable channel A conversion result to GPIO port

6.3.2 DAC data format

When using DMA to convert data, there are a total of 10 data transmission formats, which can be configured by setting the corresponding gpdac_dma_format bit value in the register gpdac_dma_config. The data transmission format stored in the gpdac_dma_wdata register (with a width of 32-bit), the corresponding relationship is as follows:

Table 6.1: Data transfer format

Value of gpdac_dma_format	gpdac_dma_wdata(Corresponding to the data transmission format of A and B channels)
0	[9:0]: {A0}, {A1}, {A2} ...
1	[25:16][9:0]: {B0,A0}, {B1,A1}, {B2,A2} ...
2	[25:16][9:0]: {A1,A0}, {A3,A2}, {A5,A4} ...
4	[15:6]: {A0}, {A1}, {A2} ...
5	[31:22][15:6]: {B0,A0}, {B1,A1}, {B2,A2} ...
6	[31:22][15:6]: {A1,A0}, {A3,A2}, {A5,A4} ...
8	[31:24][23:16][15:8][7:0]: {A3,A2,A1,A0}, {A7,A6,A5,A4} ...
9	[31:24][23:16][15:8][7:0]: {B1,B0,A1,A0}, {B3,B2,A3,A2} ...
10	[31:24][23:16][15:8][7:0]: {B1,A1,B0,A0}, {B3,A3,B2,A2} ...
11	[15:8][7:0]: {B0,A0}, {B1,A1}, {B2,A2} ...

6.3.3 DAC output voltage

The user can choose to use the external reference voltage or the internal reference voltage by setting the corresponding gpdac_ref_sel bit value in the dac_cfg0 register.

If the internal reference voltage is selected, the configuration and output voltage are shown in the table below. If external reference voltage is selected, connect the external voltage to fixed GPIO12.

Table 6.2: Internal reference voltage output voltage

gpdac_a_rng	gpdac_ref_sel	Output range (V)
00	0	0.2-1
01/10	0	0.225-1.425
11	0	0.2-1.8

6.3.4 DAC conversion

6.3.4.1 CPU mode

Using the CPU handling data for conversion, take the simultaneous conversion of channel A and channel B as an example, the configuration process is as follows:

1. Set the DAC clock: write 1 to the corresponding bit value of `dig_clk_src_sel` in the register `dig_clk_cfg0`, that is, select `xclk` as the DAC clock source
2. Set the clock frequency division factor: the user sets the value of the `dig_512k_div` bit corresponding to the register `dig_clk_cfg0` and the `gpdac_mode` bit corresponding to the register `gpdac_config` according to the needs
3. Initialize the GPIO pins of A and B channels
4. Initialize and enable DAC A channel and B channel
5. Write the data to be converted into the corresponding `gpdac_a_data` and `gpdac_b_data` bits in the register `dac_cfg3` to complete the data conversion

6.3.4.2 DMA mode

Each DAC channel has DMA capability. Taking channel A as an example for data conversion using DMA, the configuration process is as follows:


1. Set the DAC clock: write 1 to the corresponding bit value of `dig_clk_src_sel` in the register `dig_clk_cfg0`, that is, select `xclk` as the DAC clock source
2. Set the clock frequency division factor: the user sets the value of the `dig_512k_div` bit corresponding to the register `dig_clk_cfg0` and the `gpdac_mode` bit corresponding to the register `gpdac_config` according to the needs
3. Initialize the GPIO pin of channel A as analog multiplexing
4. Initialize and enable DAC A channel
5. Initialize and enable the DMA channel: set the DMA transfer data width, source address, destination address and data transfer length, etc.
6. Enable DAC DMA mode: write 1 to the corresponding `gpdac_dma_tx_en` bit value in register `gpdac_dma_config`
7. Write the data to be converted into the register `gpdac_dma_wdata`, and act on the A or B channel according to different data formats to complete the data conversion

6.4 Register description

Name	Description
gpdac_config	
gpdac_dma_config	
gpdac_dma_wdata	
gpdac_tx_fifo_status	

6.4.1 gpdac_config

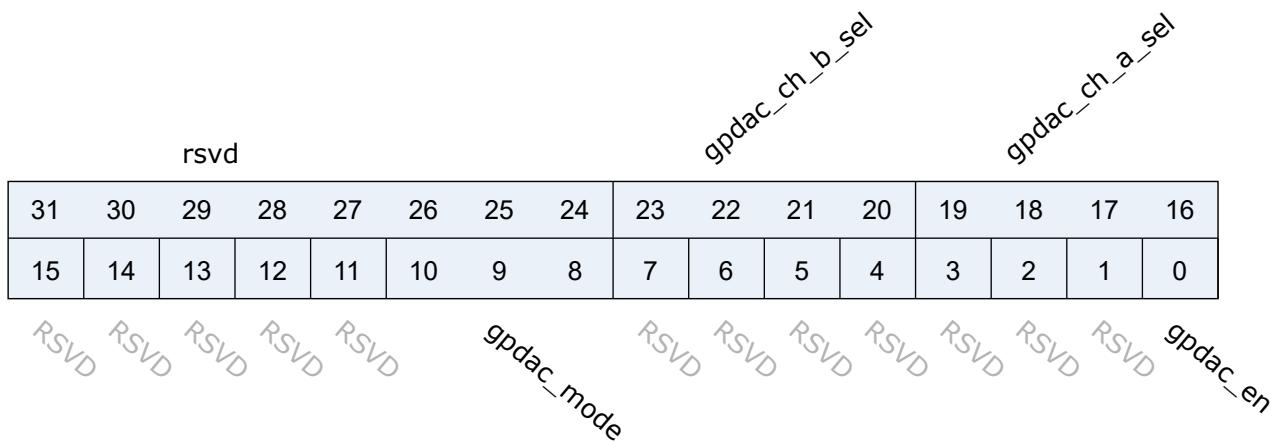Address: 0x20002040




Bits	Name	Type	Reset	Description
31:24	rsvd	rsvd	8'h0d	
23:20	gpdac_ch_b_sel	r/w	0	Channel B Source Select 0: Reg 1: DMA 2: DMA + Filter 3: Sin Gen 4: A (The same as channel A) 5: A (Inverse of channel A)
19:16	gpdac_ch_a_sel	r/w	0	Channel A Source Select 0: Reg 1: DMA 2: DMA + Filter 3: Sin Gen

Bits	Name	Type	Reset	Description
15:11	RSVD			
10:8	gpdac_mode	r/w	0	0:32k, 1:16k, 3:8k, 4:512k(for DMA only)
7:1	RSVD			
0	gpdac_en	r/w	0	GPDAC enable

6.4.2 gpdac_dma_config

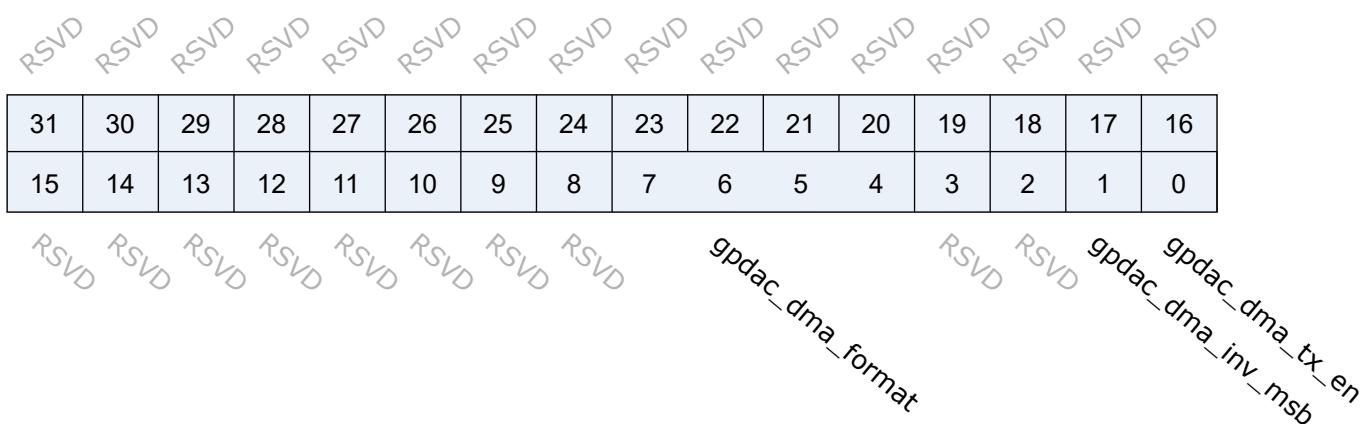Address: 0x20002044



Bits	Name	Type	Reset	Description
31:8	RSVD			
7:4	gpdac_dma_format	r/w	0	DMA TX format (Data 10-bit) 0: ([9:0]) A0, A1, A2... 1: ([25:16][9:0]) B0,A0, B1,A1, B2,A2... 2: ([25:16][9:0]) A1,A0, A3,A2, A5,A4... 4: ([15:6]) A0, A1, A2... 5: ([31:22][15:6]) B0,A0, B1,A1, B2,A2... 6: ([31:22][15:6]) A1,A0, A3,A2, A5,A4... 8: ([31:24][23:16][15:8][7:0]) A3,A2,A1,A0, A7,A6,A5,A4... 9: ([31:24][23:16][15:8][7:0]) B1,B0,A1,A0, B3,B2,A3,A2... 10: ([31:24][23:16][15:8][7:0]) B1,A1,B0,A0, B3,A3,B2,A2... ... 11: ([15:8][7:0]) B0,A0, B1,A1, B2,A2...
3:2	RSVD			
1	gpdac_dma_inv_msb	r/w	0	GPDAC DMA Data Inverse MSB
0	gpdac_dma_tx_en	r/w	0	GPDAC DMA TX enable

6.4.3 gpdac_dma_wdata

Address: 0x20002048

gpdac_dma_wdata

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

gpdac_dma_wdata

Bits	Name	Type	Reset	Description
31:0	gpdac_dma_wdata	w	x	GPDAC DMA TX data

6.4.4 gpdac_tx_fifo_status

Address: 0x2000204c

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

RSVD *RSVD* *RSVD* *RSVD* *RSVD* *RSVD* *TxFifoWrPtr* *TxFifoRdPtr* *tx_cs* *tx_fifo_full* *tx_fifo_empty*

Bits	Name	Type	Reset	Description
31:10	RSVD			
9:8	TxFifoWrPtr	r	0	
7:4	TxFifoRdPtr	r	4'd8	
3:2	tx_cs	r	0	
1	tx_fifo_full	r	0	
0	tx_fifo_empty	r	0	

7.1 Overview

Direct Memory Access (DMA), a kind of memory access technique, can directly read and write system memory independently without relying on processor. Under the same processor load, DMA is a fast way to transfer data.

It is provided with 3 independent DMA controllers, of which DMA0 and DMA2 have 8 independent dedicated channels, and DMA1 has 4 such channels, managing data transmission between peripherals and memory to enhance bus efficiency. DMA supports the transfer from memory to memory, memory to peripherals, and peripheral to memory, and provides the LLI linked list function. The software configures the data transfer size, data source address, and destination address.

7.2 Features

- Three DMA controllers: DMA0, DMA1, and DMA2
- DMA0 and DMA2 have 8 independent dedicated channels, and DMA1 has 4 such channels
- Independent control source and destination access width (single byte, double bytes, and four bytes)
- Each channel acts as a read-write cache independently
- Each channel can be triggered by independent peripheral hardware or software
- Peripherals supported by DMA0 and DMA1: UART, I2C, SPI, ADC, IR, GPIO, Audio, I2S, and PDM
- Peripherals supported by DMA2: UART, I2C, SPI, DBI, and DSI
- Four kinds of process control
 - DMA process control, source memory, destination memory
 - DMA process control, source memory, destination peripherals
 - DMA process control, source peripherals, destination memory

- DMA process control, source peripherals, destination peripherals
- Supports the LLI linked list function to improve DMA efficiency

7.3 Functional Description

7.3.1 Operating Principle

When a device tries to directly transfer data to another device through the bus, it will first send a DMA request signal to CPU. The peripheral submits a request through DMA to take over control of the bus from CPU. After receiving this signal, CPU will respond to the DMA signal according to the priority of signal and the order of the DMA request after the current bus cycle is over. When CPU responds to a DMA request for a device interface, it will give up control of the bus.

Under the control of DMA controllers, peripherals and memory exchange data directly without CPU intervention. After data is transferred, the device will send a DMA end signal to CPU and return the control of the bus.

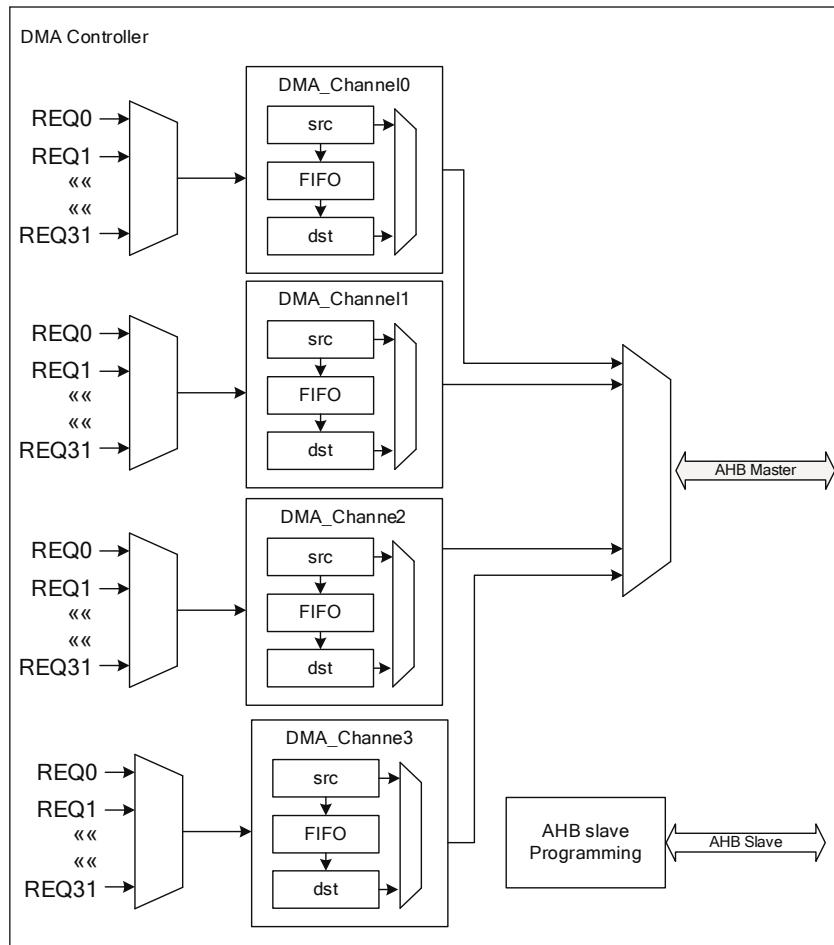


Fig. 7.1: Block Diagram of DMA

DMA has one AHB Master interfaces and one AHB Slave interface. Based on the current configuration requirements, the AHB Master interface actively accesses the memory or peripherals through system bus, and serves as a data

transfer port. The AHB Slave interface for configuring DMA only supports 32bit access.

7.3.2 DMA Channel Configuration

DMA0 and DMA2 support 8 channels, and DMA1 supports 4 channels. All channels can run simultaneously without interference. Here is the configuration process of DMA channel x:

1. Set the 32-bit source address in the register DMA_C0SrcAddr.
2. Set the 32-bit destination address in the register DMA_C0DstAddr.
3. Automatic address accumulation: You can set to enable/disable the automatic address accumulation mode by configuring the SI (source) and DI (destination) in the register DMA_C0Control. When it is set to 1, this mode is enabled.
4. You can set the width of transferred data by configuring the SWidth (source) and DWidth (destination) bits in the register DMA_C0Control, including single byte, double bytes, four bytes, and eight bytes (for DMA2 only) options.
5. You can set the Burst type by configuring the SBSIZE (source) and DBSIZE (destination) bits in the register DMA_C0Control, including INCR1, INCR4, INCR8, and INCR16 options.
6. It is worth noting that in the configured combination, the single burst of DMA0 and DMA1 must not exceed 16 bytes, and that of DMA2 must not exceed 128 bytes.
7. Range of data transfer length:0-4095

7.3.3 Supported Peripherals

You can determine the peripherals supported by the current DMA by configuring the SrcPeripheral (source) and DstPeripheral (destination). The relationship between peripheral types and configuration values is shown as follows:

Value	DMA0	DMA1	DMA2
0	UART0_RX	UART0_RX	UART3_RX
1	UART0_TX	UART0_TX	UART3_TX
2	UART1_RX	UART1_RX	SPI1_RX
3	UART1_TX	UART1_TX	SPI1_TX
4	UART2_RX	UART2_RX	-
5	UART2_TX	UART2_TX	-
6	I2C0_RX	I2C0_RX	I2C2_RX
7	I2C0_TX	I2C0_TX	I2C2_TX
8	IR_TX	IR_TX	I2C3_RX
9	GPIO_TX	GPIO_TX	I2C3_TX
10	SPI0_RX	SPI0_RX	DSI_RX
11	SPI0_TX	SPI0_TX	DSI_TX
12	AUDIO_RX	AUDIO_RX	-
13	AUDIO_TX	AUDIO_TX	-
14	I2C1_RX	I2C1_RX	-
15	I2C1_TX	I2C1_TX	-
16	I2S_RX	I2S_RX	-
17	I2S_TX	I2S_TX	-
18	PDM_RX	PDM_RX	-
22	GPADC	GPADC	DBI_TX
23	GPDAC	GPDAC	-

Fig. 7.2: Peripheral Type Selection

Partial peripheral configuration examples:

UART uses DMA to transfer data

When UART sends data packets, DMA can greatly shorten the CPU's processing time, so that CPU resources will not be highly wasted, especially when UART sends and receives a large number of data packets (such as sending and receiving instructions frequently).

For example, the UART0 transfer is configured as follows:

1. Set the value of the SrcPeripheral bit in the register DMA_C0Config to 1. That is, set Source peripheral to UART0_TX
2. Set the value of the DstPeripheral in the register DMA_C0Config to 0. That is, set Destination peripheral to UART0_RX

I2C uses DMA to transfer data

Configuration process:

1. Set the value of the SrcPeripheral bit in the register DMA_C0Config to 7. That is, set Source peripheral to I2C0_TX
2. Set the value of the DstPeripheral in the register DMA_C0Config to 6. That is, set Destination peripheral to I2C0_RX

SPI uses DMA to transfer data

Configuration process:

1. Set the value of the SrcPeripheral bit in the register DMA_C0Config to 11. That is, set Source peripheral to SPI0_TX
2. Set the value of the DstPeripheral in the register DMA_C0Config to 10. That is, set Destination peripheral to SPI0_RX

ADC use DMA to transfer data

Configuration process:

1. Set the value of the SrcPeripheral bit in the register DMA_C0Config to 22. That is, set Source peripheral to GPADC.

7.3.4 Linked List Mode

DMA supports the linked list working mode. During a DMA read or write operation, data can be filled in the next linked list. After the data transfer of the current linked list is completed, the start address of the next linked list can be obtained by reading the value of the register DMA_C0LLI, to directly transfer the data of the next linked list. This ensures continuous and uninterrupted work during DMA transfer, and improves the efficiency of CPU and DMA.

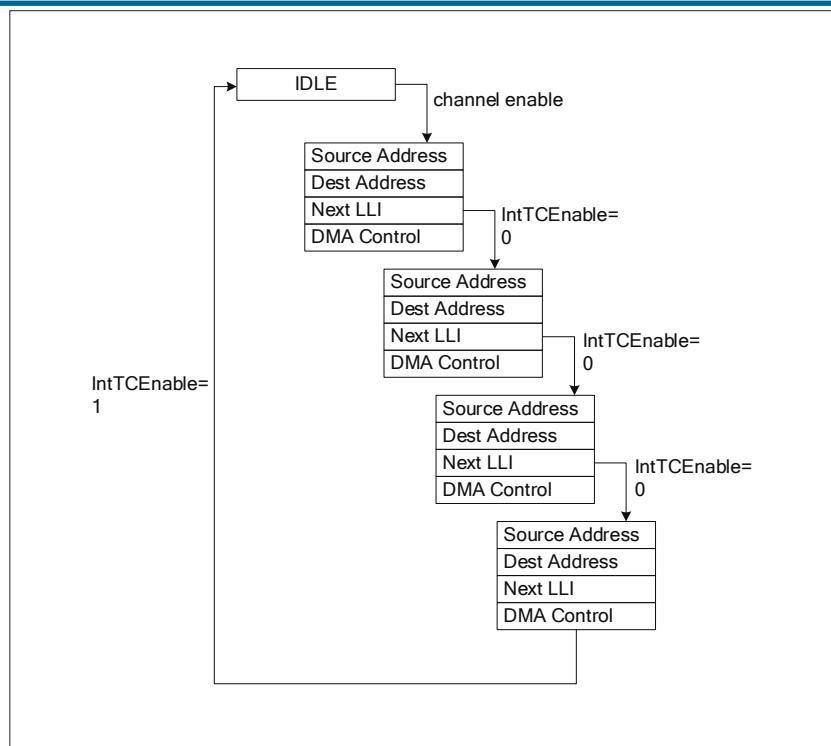


Fig. 7.3: LLI Framework

7.3.5 DMA Interrupt

- DMA_INT_TCOMPLETED
 - Data transfer complete interrupt: This interrupt will be generated when a data transfer is completed
- DMA_INT_ERR
 - Data transfer error interrupt: This interrupt will be generated when an error occurs during data transfer

7.4 Transfer Mode

7.4.1 Memory to Memory

After this mode is enabled, DMA will transfer the data from the source address to the destination address based on the preset TransferSize. Upon transfer completed, the DMA controller will automatically return to the idle state and wait for the next transfer.

Configuration process:

1. Set the DMA_C0SrcAddr value of the register to the source memory address
2. Set the DMA_C0DstAddr value of the register to the destination memory address
3. Select a transfer mode, and set the value of the FlowCntrl bit in the register DMA_C0Config to 0, namely selecting the memorytomemory mode

4. Set the values of the corresponding bits in the register DMA_C0Control: the SI bit is set to 1, the DI bit is set to 0, the source address automatic accumulation mode is enabled; set the transfer width of the source and destination through SWidth and DWidth respectively; and set the burst type of the source and the destination through SBSIZE and DBSize respectively
5. Select a proper channel, enable DMA, and complete data transfer

7.4.2 Memory to Peripherals

In this mode, DMA will transfer the data from the source to the internal cache according to the preset TransferSize. The transfer will automatically pause when the cache space is insufficient and continue when there is enough cache space until the preset TransferSize is met.

Moreover, when the destination peripheral request is triggered, the target configuration will be burst to the destination address, and it will automatically return to the idle state until the preset TransferSize is met and wait for the next transfer.

Configuration process:

1. Set the DMA_C0SrcAddr value of the register to the source memory address
2. Set the DMA_C0DstAddr value of the register to the destination peripheral address
3. Select a transfer mode, and set the value of the FlowCntrl bit in the register DMA_C0Config to 1, namely selecting the MemorytoPeripheral mode
4. Set the values of the corresponding bits in the register DMA_C0Control: the SI bit is set to 1, the DI bit is set to 0, the source address automatic accumulation mode is enabled; set the transfer width of the source and destination through SWidth and DWidth respectively; and set the burst type of the source and the destination through SBSIZE and DBSize respectively
5. Select a proper channel, enable DMA, and complete data transfer

7.4.3 Peripheral to Memory

In this mode, when the source peripheral request is triggered, the source configuration will be burst into the cache until the preset TransferSize is met. Moreover, when the internal cache is enough for one burst to the destination, DMA will automatically transfer the cached content to the destination address, automatically return to the idle state until the preset TransferSize is met, and wait for the next transfer.

Configuration process:

1. Set the DMA_C0SrcAddr value of the register to the source peripheral address
2. Set the DMA_C0DstAddr value of the register to the destination memory address
3. Select a transfer mode, and set the value of the FlowCntrl bit in the register DMA_C0Config to 2, namely selecting the PeripheraltoMemory mode

4. Set the values of the corresponding bits in the register DMA_C0Control: Set the DI and SI bits to 1 to enable the automatic address accumulation mode; set the transfer width of the source and destination through SWidth and DWidth respectively; and set the burst type of the source and the destination through SBSIZE and DBSSize respectively
5. Select a proper channel, enable DMA, and complete data transfer

7.5 Register description


Name	Description
DMA_IntStatus	
DMA_IntTCStatus	
DMA_IntTCClear	
DMA_IntErrorStatus	
DMA_IntErrClr	
DMA_RawIntTCStatus	
DMA_RawIntErrorStatus	
DMA_EnbldChns	
DMA_SoftBReq	
DMA_SoftSReq	
DMA_SoftLBReq	
DMA_SoftLSReq	
DMA_Config	
DMA_Sync	
DMA_C0SrcAddr	
DMA_C0DstAddr	
DMA_COLLI	
DMA_C0Control	
DMA_C0Config	
DMA_C0RSVD	
DMA_C1SrcAddr	
DMA_C1DstAddr	
DMA_C1LLI	

Name	Description
DMA_C1Control	
DMA_C1Config	
DMA_C1RSVD	
DMA_C2SrcAddr	
DMA_C2DstAddr	
DMA_C2LLI	
DMA_C2Control	
DMA_C2Config	
DMA_C2RSVD	
DMA_C3SrcAddr	
DMA_C3DstAddr	
DMA_C3LLI	
DMA_C3Control	
DMA_C3Config	
DMA_C3RSVD	
DMA_C4SrcAddr	
DMA_C4DstAddr	
DMA_C4LLI	
DMA_C4Control	
DMA_C4Config	
DMA_C4RSVD	
DMA_C5SrcAddr	
DMA_C5DstAddr	
DMA_C5LLI	
DMA_C5Control	
DMA_C5Config	
DMA_C5RSVD	
DMA_C6SrcAddr	
DMA_C6DstAddr	

Name	Description
DMA_C6LLI	
DMA_C6Control	
DMA_C6Config	
DMA_C6RSVD	
DMA_C7SrcAddr	
DMA_C7DstAddr	
DMA_C7LLI	
DMA_C7Control	
DMA_C7Config	
DMA_C7RSVD	

7.5.1 DMA_IntStatus

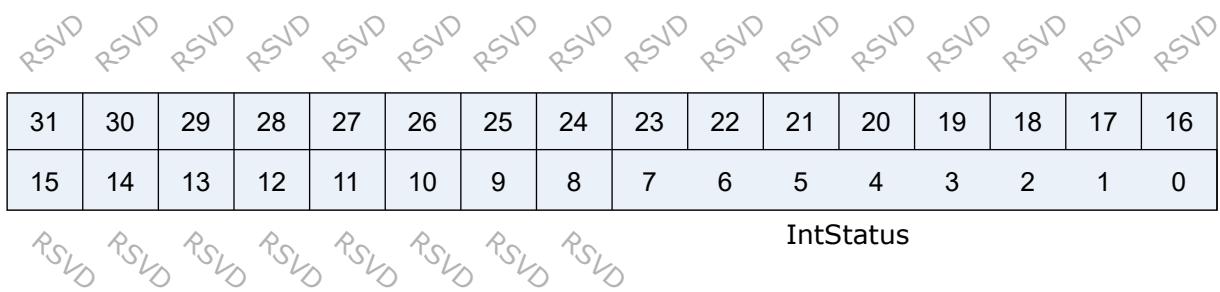Address: 0x2000c000



Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	IntStatus	r	0	Status of the DMA interrupts after masking

7.5.2 DMA_IntTCStatus

Address: 0x2000c004

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | |

IntTCStatus

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	IntTCStatus	r	0	Interrupt terminal count request status

7.5.3 DMA_IntTCClear

Address: 0x2000c008

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | |

IntTCClear

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	IntTCClear	w	0	Terminal count request clear

7.5.4 DMA_IntErrorStatus

Address: 0x2000c00c

RSVD															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

RSVD RSVD RSVD RSVD RSVD RSVD RSVD RSVD IntErrorStatus

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	IntErrorStatus	r	0	Interrupt error status

7.5.5 DMA_IntErrClr

Address: 0x2000c010

RSVD															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

RSVD RSVD RSVD RSVD RSVD RSVD RSVD RSVD IntErrClr

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	IntErrClr	w	0	Interrupt error clear

7.5.6 DMA_RawIntTCStatus

Address: 0x2000c014

RSVD															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

RSVD RSVD RSVD RSVD RSVD RSVD RSVD RSVD RawIntTCStatus

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	RawIntTCStatus	r	0	Status of the terminal count interrupt prior to masking

7.5.7 DMA_RawIntErrorStatus

Address: 0x2000c018

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

RawIntErrorStatus

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	RawIntErrorStatus	r	0	Status of the error interrupt prior to masking

7.5.8 DMA_EnbldChns

Address: 0x2000c01c

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

EnabledChannels

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	EnabledChannels	r	0	Channel enable status

7.5.9 DMA_SoftBReq

Address: 0x2000c020

SoftBReq

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SoftBReq

Bits	Name	Type	Reset	Description
31:0	SoftBReq	r/w	0	Software burst request

7.5.10 DMA_SoftSReq

Address: 0x2000c024

SoftSReq

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SoftSReq

Bits	Name	Type	Reset	Description
31:0	SoftSReq	r/w	0	Software single request

7.5.11 DMA_SoftLBReq

Address: 0x2000c028

SoftLBReq

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SoftLBReq

Bits	Name	Type	Reset	Description
31:0	SoftLBReq	r/w	0	Software last burst request

7.5.12 DMA_SoftLSReq

Address: 0x2000c02c

SoftLSReq

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SoftLSReq

Bits	Name	Type	Reset	Description
31:0	SoftLSReq	r/w	0	Software last single request

7.5.13 DMA_Config

Address: 0x2000c030

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

Bits	Name	Type	Reset	Description
31:2	RSVD			
1	M	r/w	0	AHB Master endianness configuration: 0 = little-endian, 1 = big-endian
0	E	r/w	0	SMDMA Enable.

7.5.14 DMA_Sync

Address: 0x2000c034

DMA_Sync

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

DMA_Sync

Bits	Name	Type	Reset	Description
31:0	DMA_Sync	r/w	0	DMA synchronization logic for DMA request signals: 0 = enable, 1 = disable

7.5.15 DMA_C0SrcAddr

Address: 0x2000c100

SrcAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SrcAddr

Bits	Name	Type	Reset	Description
31:0	SrcAddr	r/w	0	DMA source address

7.5.16 DMA_C0DstAddr

Address: 0x2000c104

DstAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

DstAddr

Bits	Name	Type	Reset	Description
31:0	DstAddr	r/w	0	DMA Destination address

7.5.17 DMA_C0LLI

Address: 0x2000c108

LLI


31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

LLI

Bits	Name	Type	Reset	Description
31:0	LLI	r/w	0	First linked list item. Bits [1:0] must be 0.

7.5.18 DMA_C0Control

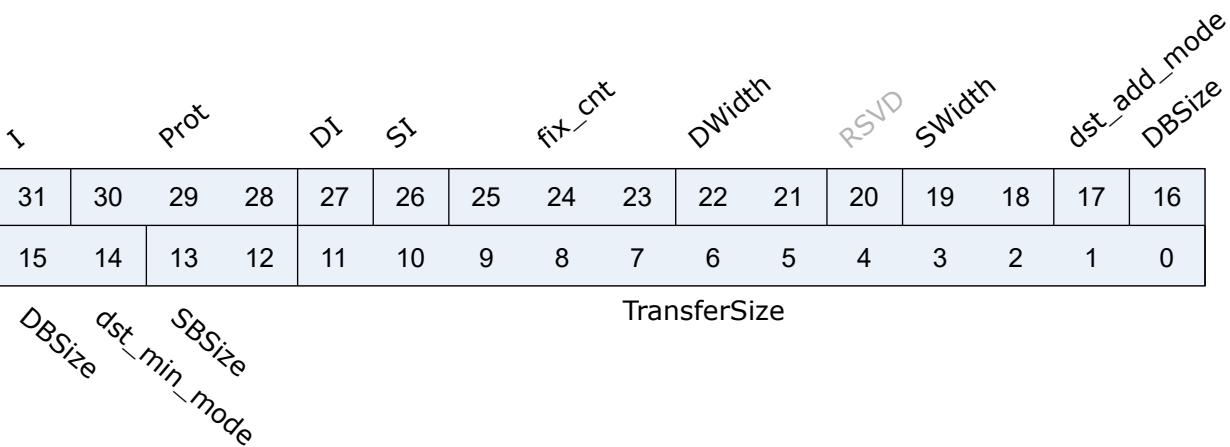Address: 0x2000c10c




Bits	Name	Type	Reset	Description
31	I	r/w	0	Terminal count interrupt enable bit. It controls whether the current LLI is expected to trigger the terminal count interrupt.
30:28	Prot	r/w	0	No use for currently
27	DI	r/w	1	Destination increment. When set, the Destination address is incremented after each transfer.
26	SI	r/w	1	Source increment. When set, the source address is incremented after each transfer.
25:23	fix_cnt	r/w	3'd0	Only effect when dst_min_mode = 1 Destination transfer cnt = (total src byte cnt - (fix_cnt«DWidth))«DWidth
22:21	DWidth	r/w	2'b10	Destination transfer width: 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
20	RSVD			

Bits	Name	Type	Reset	Description
19:18	SWidth	r/w	2'b10	Source transfer width 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
17	dst_add_mode	r/w	1'b0	Add mode : issue remain destination traffic
16:15	DBSize	r/w	2'b01	Destination burst size 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
14	dst_min_mode	r/w	1'b0	Minus mode : Not issue all destination traffic
13:12	SBSIZE	r/w	2'b01	Source burst size: 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
11:0	TransferSize	r/w	0	Transfer size: 0 4095. Number of data transfers left to complete when the SMDMA is the flow controller.

7.5.19 DMA_C0Config

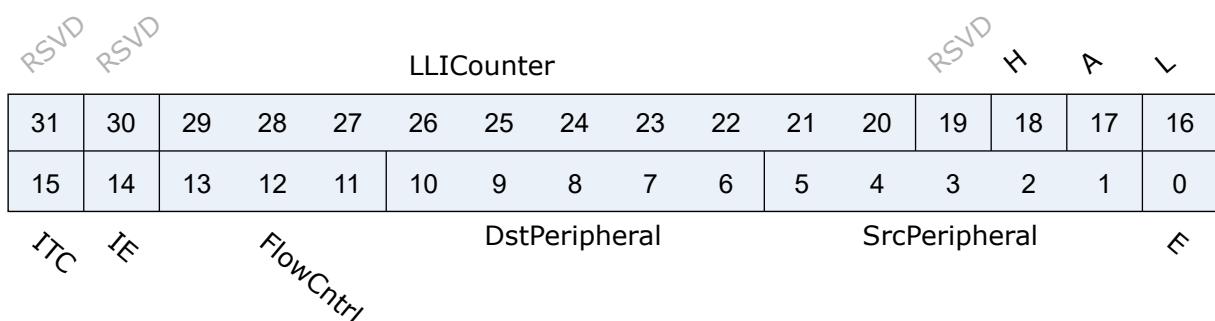Address: 0x2000c110



Bits	Name	Type	Reset	Description
31:30	RSVD			

Bits	Name	Type	Reset	Description
29:20	LLICounter	r	0	LLI counter. Increased 1 each LLI run. Cleared 0 when config Control.
19	RSVD			
18	H	r/w	0	Halt: 0 = enable DMA requests, 1 = ignore subsequent source DMA requests.
17	A	r	0	Active: 0 = no data in FIFO of the channel, 1 = FIFO of the channel has data.
16	L	r/w	0	Lock.
15	ITC	r/w	0	Terminal count interrupt mask.
14	IE	r/w	0	Interrupt error mask.
13:11	FlowCntrl	r/w	0	000: Memory-to-memory (DMA) 001: Memory-to-peripheral (DMA) 010: Peripheral-to-memory (DMA) 011: Source peripheral-to-Destination peripheral (DMA) 100: Source peripheral-to-Destination peripheral (Destination peripheral) 101: Memory-to-peripheral (peripheral) 110: Peripheral-to-memory (peripheral) 111: Source peripheral-to-Destination peripheral (Source peripheral)
10:6	DstPeripheral	r/w	0	Destination peripheral.
5:1	SrcPeripheral	r/w	0	Source peripheral.
0	E	r/w	0	Channel enable.

7.5.20 DMA_C0RSVD

Address: 0x2000c11c

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD
RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD
SrcRemnSgle	DstRemnSgle															

Bits	Name	Type	Reset	Description
31:5	RSVD			
4	SrcRemnSgle	r/w	0	Source remain single issue mode
3	DstRemnSgle	r/w	0	Destination remain single issue mode
2:0	RSVD			

7.5.21 DMA_C1SrcAddr

Address: 0x2000c200

SrcAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SrcAddr

Bits	Name	Type	Reset	Description
31:0	SrcAddr	r/w	0	

7.5.22 DMA_C1DstAddr

Address: 0x2000c204

DstAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

DstAddr

Bits	Name	Type	Reset	Description
31:0	DstAddr	r/w	0	

7.5.23 DMA_C1LLI

Address: 0x2000c208

LLI

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

LLI

Bits	Name	Type	Reset	Description
31:0	LLI	r/w	0	

7.5.24 DMA_C1Control

Address: 0x2000c20c


1	Prot	DI	SI	fix_cnt	DWidth	RSVD	SWidth	dst_add_mode	DBSize
31	30	29	28	27	26	25	24	23	22
15	14	13	12	11	10	9	8	7	6
									TransferSize
									DBSize
									dst_min_mode

Bits	Name	Type	Reset	Description
31	I	r/w	0	Terminal count interrupt enable bit. It controls whether the current LLI is expected to trigger the terminal count interrupt.
30:28	Prot	r/w	0	No use for currently
27	DI	r/w	1	Destination increment. When set, the Destination address is incremented after each transfer.
26	SI	r/w	1	Source increment. When set, the source address is incremented after each transfer.
25:23	fix_cnt	r/w	3'd0	Only effect when dst_min_mode = 1 Destination transfer cnt = (total src byte cnt - (fix_cnt«DWidth))«DWidth

Bits	Name	Type	Reset	Description
22:21	DWidth	r/w	2'b10	Destination transfer width: 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
20	RSVD			
19:18	SWidth	r/w	2'b10	Source transfer width 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
17	dst_add_mode	r/w	1'b0	Add mode : issue remain destination traffic
16:15	DBSize	r/w	2'b01	Destination burst size 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
14	dst_min_mode	r/w	1'b0	Minus mode : Not issue all destination traffic
13:12	SBSIZE	r/w	2'b01	Source burst size: 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
11:0	TransferSize	r/w	0	Transfer size: 0 4095. Number of data transfers left to complete when the SMDMA is the flow controller.

7.5.25 DMA_C1Config

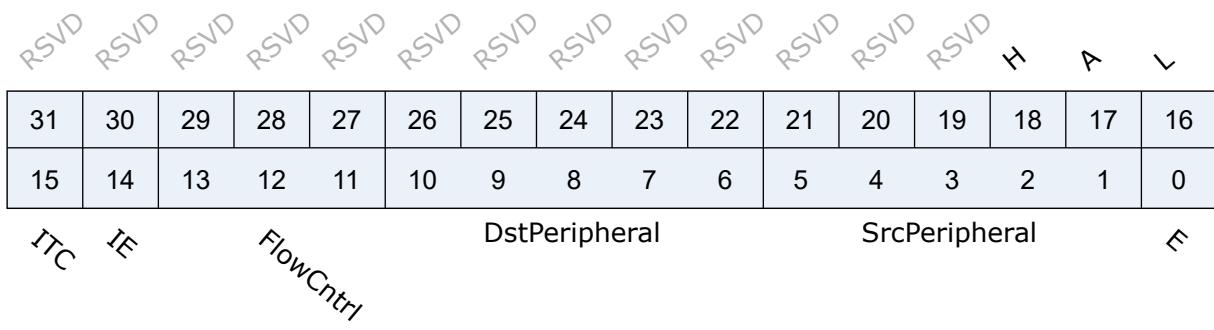Address: 0x2000c210



Bits	Name	Type	Reset	Description
31:19	RSVD			
18	H	r/w	0	
17	A	r	0	
16	L	r/w	0	
15	ITC	r/w	0	
14	IE	r/w	0	
13:11	FlowCntrl	r/w	0	
10:6	DstPeripheral	r/w	0	
5:1	SrcPeripheral	r/w	0	
0	E	r/w	0	

7.5.26 DMA_C1RSVD

Address: 0x2000c21c

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

RSVD RSVD

SrcRemnSgle *DstRemnSgle*

Bits	Name	Type	Reset	Description
31:5	RSVD			
4	SrcRemnSgle	r/w	0	Source remain single issue mode
3	DstRemnSgle	r/w	0	Destination remain single issue mode
2:0	RSVD			

7.5.27 DMA_C2SrcAddr

Address: 0x2000c300

SrcAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SrcAddr

Bits	Name	Type	Reset	Description
31:0	SrcAddr	r/w	0	

7.5.28 DMA_C2DstAddr

Address: 0x2000c304

DstAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

DstAddr

Bits	Name	Type	Reset	Description
31:0	DstAddr	r/w	0	

7.5.29 DMA_C2LLI

Address: 0x2000c308

LLI


31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

LLI

Bits	Name	Type	Reset	Description
31:0	LLI	r/w	0	

7.5.30 DMA_C2Control

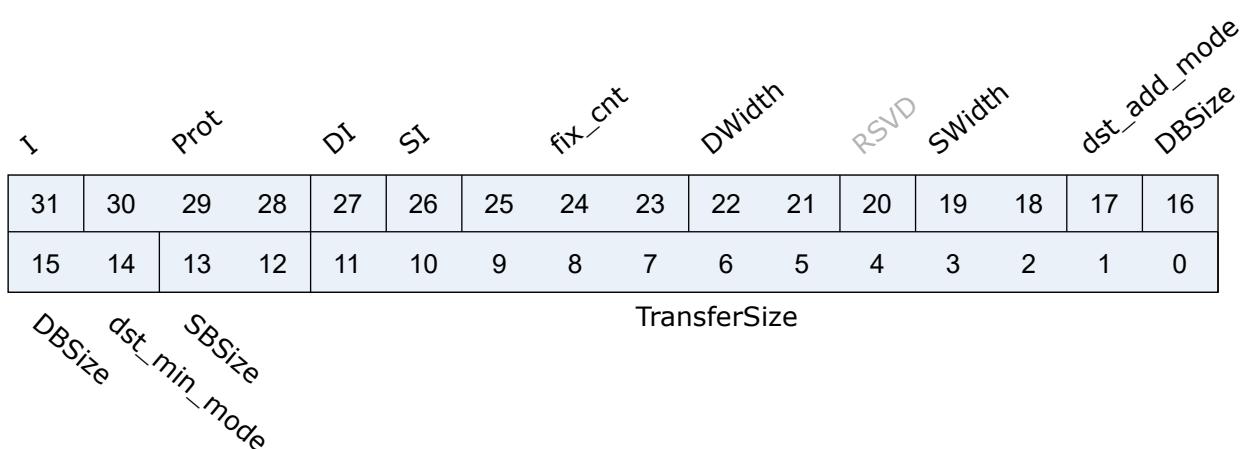Address: 0x2000c30c




Bits	Name	Type	Reset	Description
31	I	r/w	0	Terminal count interrupt enable bit. It controls whether the current LLI is expected to trigger the terminal count interrupt.
30:28	Prot	r/w	0	No use for currently
27	DI	r/w	1	Destination increment. When set, the Destination address is incremented after each transfer.
26	SI	r/w	1	Source increment. When set, the source address is incremented after each transfer.
25:23	fix_cnt	r/w	3'd0	Only effect when dst_min_mode = 1 Destination transfer cnt = (total src byte cnt - (fix_cnt«DWidth))«DWidth
22:21	DWidth	r/w	2'b10	Destination transfer width: 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
20	RSVD			
19:18	SWidth	r/w	2'b10	Source transfer width 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
17	dst_add_mode	r/w	1'b0	Add mode : issue remain destination traffic

Bits	Name	Type	Reset	Description
16:15	DBSize	r/w	2'b01	Destination burst size 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
14	dst_min_mode	r/w	1'b0	Minus mode : Not issue all destination traffic
13:12	SBSIZE	r/w	2'b01	Source burst size: 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
11:0	TransferSize	r/w	0	Transfer size: 0 4095. Number of data transfers left to complete when the SMDMA is the flow controller.

7.5.31 DMA_C2Config

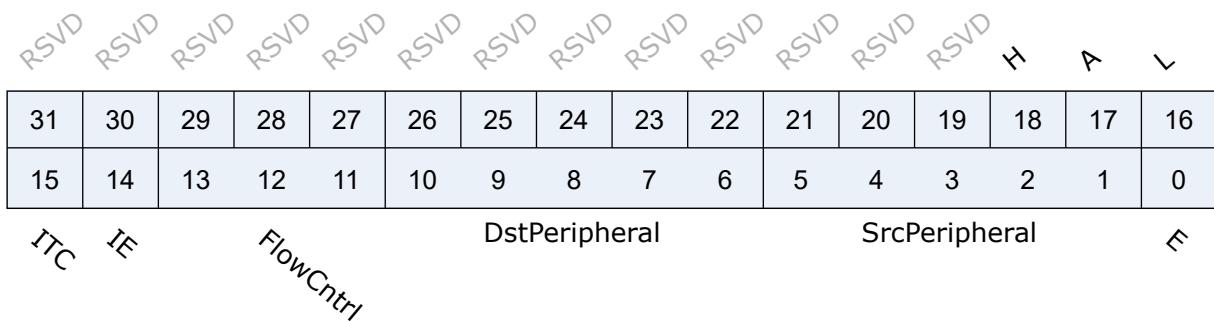Address: 0x2000c310




Bits	Name	Type	Reset	Description
31:19	RSVD			
18	H	r/w	0	
17	A	r	0	
16	L	r/w	0	
15	ITC	r/w	0	
14	IE	r/w	0	
13:11	FlowCntrl	r/w	0	

Bits	Name	Type	Reset	Description
10:6	DstPeripheral	r/w	0	
5:1	SrcPeripheral	r/w	0	
0	E	r/w	0	

7.5.32 DMA_C2RSVD

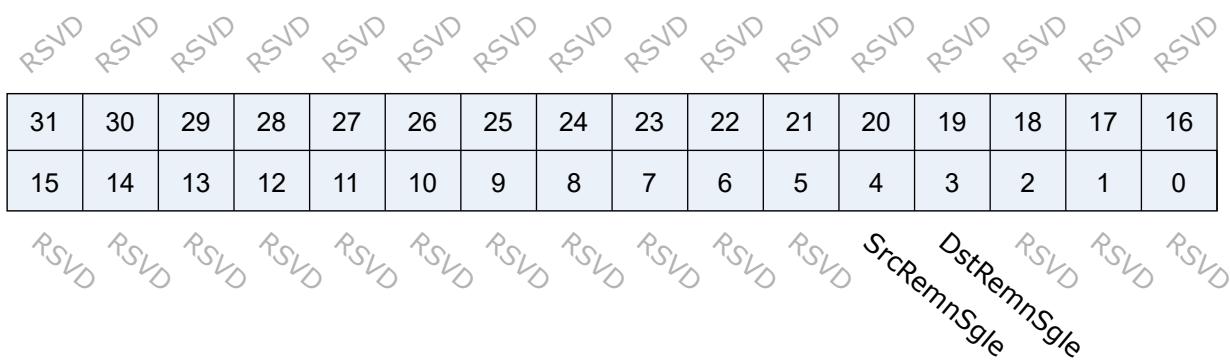
Address: 0x2000c31c



Bits	Name	Type	Reset	Description
31:5	RSVD			
4	SrcRemnSgle	r/w	0	Source remain single issue mode
3	DstRemnSgle	r/w	0	Destination remain single issue mode
2:0	RSVD			

7.5.33 DMA_C3SrcAddr

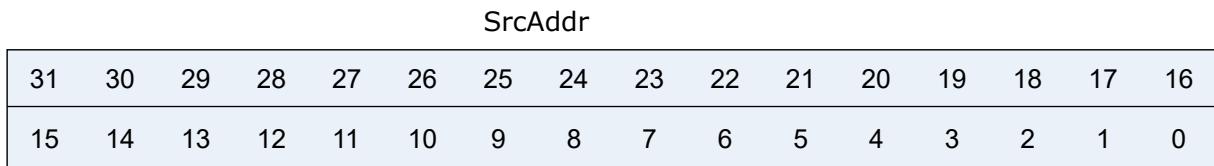Address: 0x2000c400



SrcAddr

Bits	Name	Type	Reset	Description
31:0	SrcAddr	r/w	0	

7.5.34 DMA_C3DstAddr

Address: 0x2000c404

DstAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

DstAddr

Bits	Name	Type	Reset	Description
31:0	DstAddr	r/w	0	

7.5.35 DMA_C3LLI

Address: 0x2000c408

LLI

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

LLI

Bits	Name	Type	Reset	Description
31:0	LLI	r/w	0	

7.5.36 DMA_C3Control

Address: 0x2000c40c

1	Prot		DI	SI	fix_cnt		DWidth		RSVD		SWidth		dst_add_mode		DBSize
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0


TransferSize

DBSize dst_min_mode SBSIZE

Bits	Name	Type	Reset	Description
31	I	r/w	0	Terminal count interrupt enable bit. It controls whether the current LLI is expected to trigger the terminal count interrupt.
30:28	Prot	r/w	0	No use for currently
27	DI	r/w	1	Destination increment. When set, the Destination address is incremented after each transfer.
26	SI	r/w	1	Source increment. When set, the source address is incremented after each transfer.
25:23	fix_cnt	r/w	3'd0	Only effect when dst_min_mode = 1 Destination transfer cnt = (total src byte cnt - (fix_-cnt«DWidth))«DWidth
22:21	DWidth	r/w	2'b10	Destination transfer width: 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
20	RSVD			
19:18	SWidth	r/w	2'b10	Source transfer width 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
17	dst_add_mode	r/w	1'b0	Add mode : issue remain destination traffic
16:15	DBSize	r/w	2'b01	Destination burst size 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
14	dst_min_mode	r/w	1'b0	Minus mode : Not issue all destination traffic
13:12	SBSIZE	r/w	2'b01	Source burst size: 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
11:0	TransferSize	r/w	0	Transfer size: 0 4095. Number of data transfers left to complete when the SMDMA is the flow controller.

7.5.37 DMA_C3Config

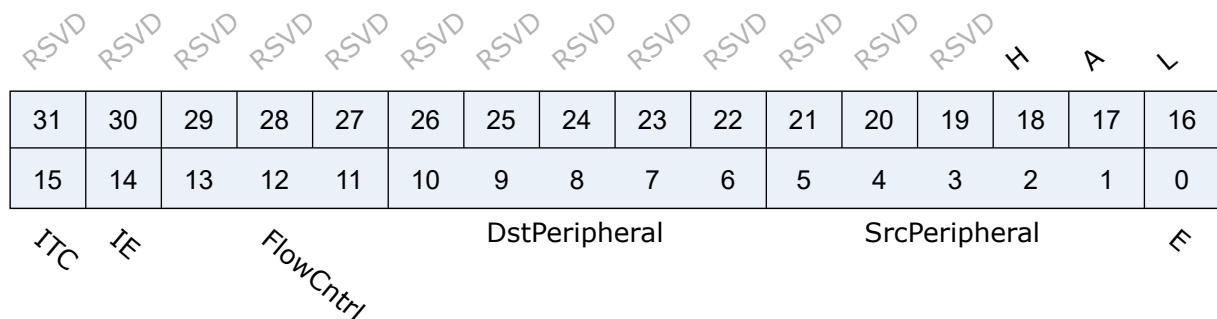
Address: 0x2000c310



Bits	Name	Type	Reset	Description
31:19	RSVD			
18	H	r/w	0	
17	A	r	0	
16	L	r/w	0	
15	ITC	r/w	0	
14	IE	r/w	0	
13:11	FlowCntrl	r/w	0	
10:6	DstPeripheral	r/w	0	
5:1	SrcPeripheral	r/w	0	
0	E	r/w	0	

7.5.38 DMA_C3RSVD

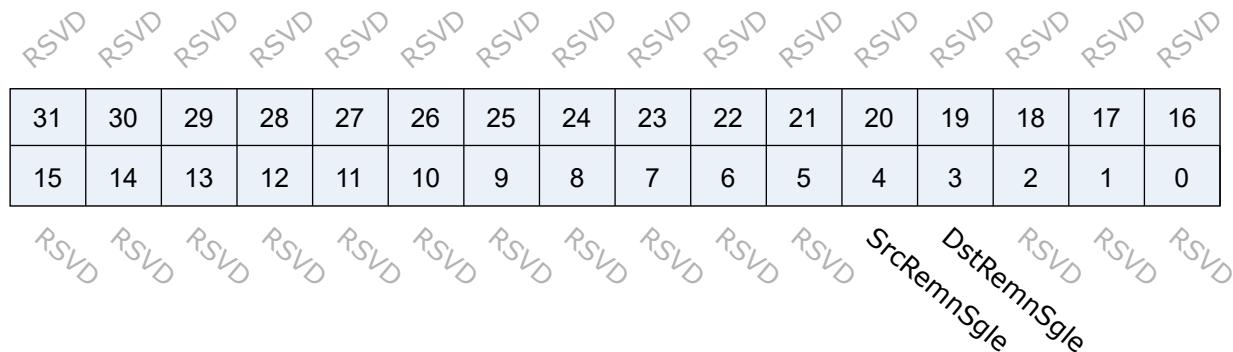Address: 0x2000c31c



Bits	Name	Type	Reset	Description
31:5	RSVD			
4	SrcRemnSgle	r/w	0	Source remain single issue mode
3	DstRemnSgle	r/w	0	Destination remain single issue mode
2:0	RSVD			

7.5.39 DMA_C4SrcAddr

Address: 0x2000c500

SrcAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SrcAddr

Bits	Name	Type	Reset	Description
31:0	SrcAddr	r/w	0	

7.5.40 DMA_C4DstAddr

Address: 0x2000c504

DstAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

DstAddr

Bits	Name	Type	Reset	Description
31:0	DstAddr	r/w	0	

7.5.41 DMA_C4LLI

Address: 0x2000c508

LLI

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

LLI

Bits	Name	Type	Reset	Description
31:0	LLI	r/w	0	

7.5.42 DMA_C4Control

Address: 0x2000c50c


1	Prot	DI	SI	fix_cnt	DWidth	RSVD	SWidth	dst_add_mode	DBSize
31	30	29	28	27	26	25	24	23	22
15	14	13	12	11	10	9	8	7	6
									TransferSize
									DBSize
									dst_min_mode

Bits	Name	Type	Reset	Description
31	I	r/w	0	Terminal count interrupt enable bit. It controls whether the current LLI is expected to trigger the terminal count interrupt.
30:28	Prot	r/w	0	No use for currently
27	DI	r/w	1	Destination increment. When set, the Destination address is incremented after each transfer.
26	SI	r/w	1	Source increment. When set, the source address is incremented after each transfer.
25:23	fix_cnt	r/w	3'd0	Only effect when dst_min_mode = 1 Destination transfer cnt = (total src byte cnt - (fix_cnt«DWidth))«DWidth

Bits	Name	Type	Reset	Description
22:21	DWidth	r/w	2'b10	Destination transfer width: 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
20	RSVD			
19:18	SWidth	r/w	2'b10	Source transfer width 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
17	dst_add_mode	r/w	1'b0	Add mode : issue remain destination traffic
16:15	DBSize	r/w	2'b01	Destination burst size 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
14	dst_min_mode	r/w	1'b0	Minus mode : Not issue all destination traffic
13:12	SBSIZE	r/w	2'b01	Source burst size: 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
11:0	TransferSize	r/w	0	Transfer size: 0 4095. Number of data transfers left to complete when the SMDMA is the flow controller.

7.5.43 DMA_C4Config

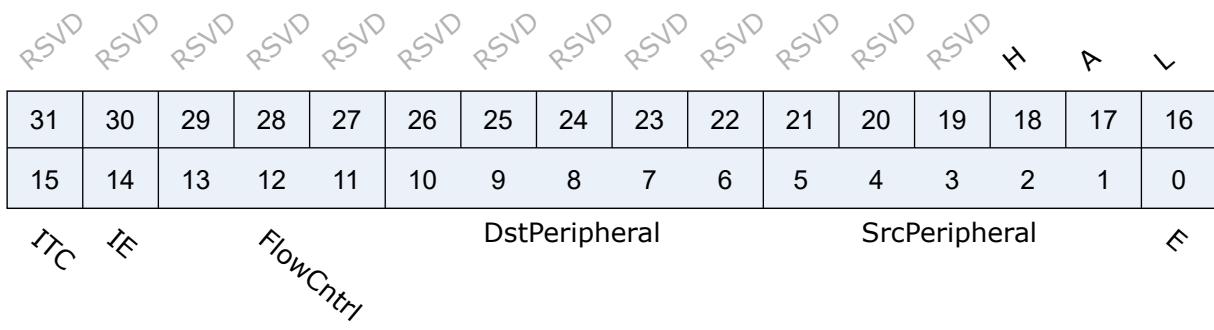Address: 0x2000c510



Bits	Name	Type	Reset	Description
31:19	RSVD			
18	H	r/w	0	
17	A	r	0	
16	L	r/w	0	
15	ITC	r/w	0	
14	IE	r/w	0	
13:11	FlowCntrl	r/w	0	
10:6	DstPeripheral	r/w	0	
5:1	SrcPeripheral	r/w	0	
0	E	r/w	0	

7.5.44 DMA_C4RSVD

Address: 0x2000c51c

RSVD																	
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16		
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		

RSVD DstRemnSgle SrcRemnSgle

Bits	Name	Type	Reset	Description
31:5	RSVD			
4	SrcRemnSgle	r/w	0	Source remain single issue mode
3	DstRemnSgle	r/w	0	Destination remain single issue mode
2:0	RSVD			

7.5.45 DMA_C5SrcAddr

Address: 0x2000c600

SrcAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SrcAddr

Bits	Name	Type	Reset	Description
31:0	SrcAddr	r/w	0	

7.5.46 DMA_C5DstAddr

Address: 0x2000c604

DstAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

DstAddr

Bits	Name	Type	Reset	Description
31:0	DstAddr	r/w	0	

7.5.47 DMA_C5LLI

Address: 0x2000c608

LLI


31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

LLI

Bits	Name	Type	Reset	Description
31:0	LLI	r/w	0	

7.5.48 DMA_C5Control

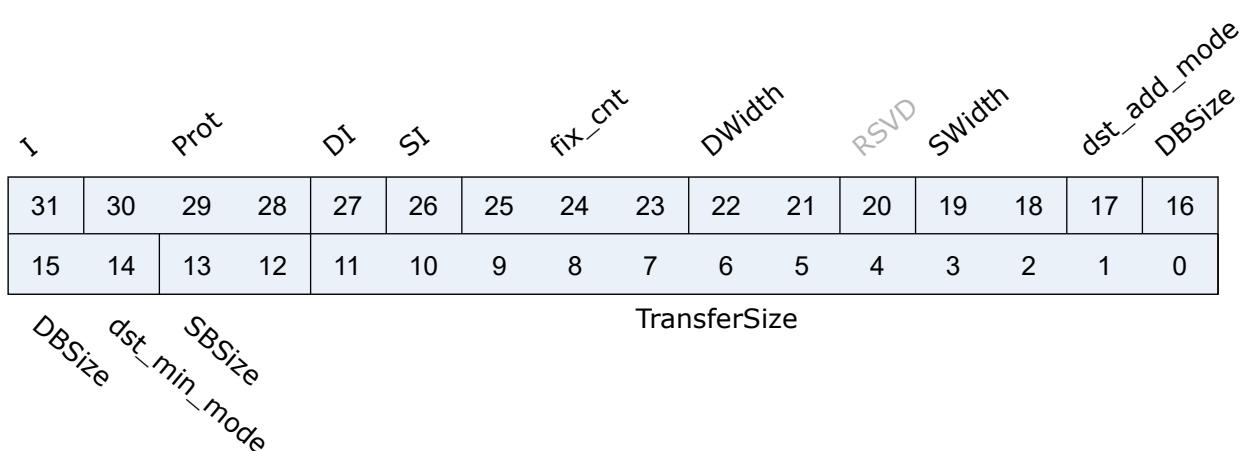Address: 0x2000c60c




Bits	Name	Type	Reset	Description
31	I	r/w	0	Terminal count interrupt enable bit. It controls whether the current LLI is expected to trigger the terminal count interrupt.
30:28	Prot	r/w	0	No use for currently
27	DI	r/w	1	Destination increment. When set, the Destination address is incremented after each transfer.
26	SI	r/w	1	Source increment. When set, the source address is incremented after each transfer.
25:23	fix_cnt	r/w	3'd0	Only effect when dst_min_mode = 1 Destination transfer cnt = (total src byte cnt - (fix_cnt«DWidth))«DWidth
22:21	DWidth	r/w	2'b10	Destination transfer width: 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
20	RSVD			
19:18	SWidth	r/w	2'b10	Source transfer width 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
17	dst_add_mode	r/w	1'b0	Add mode : issue remain destination traffic

Bits	Name	Type	Reset	Description
16:15	DBSize	r/w	2'b01	Destination burst size 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
14	dst_min_mode	r/w	1'b0	Minus mode : Not issue all destination traffic
13:12	SBSIZE	r/w	2'b01	Source burst size: 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
11:0	TransferSize	r/w	0	Transfer size: 0 4095. Number of data transfers left to complete when the SMDMA is the flow controller.

7.5.49 DMA_C5Config

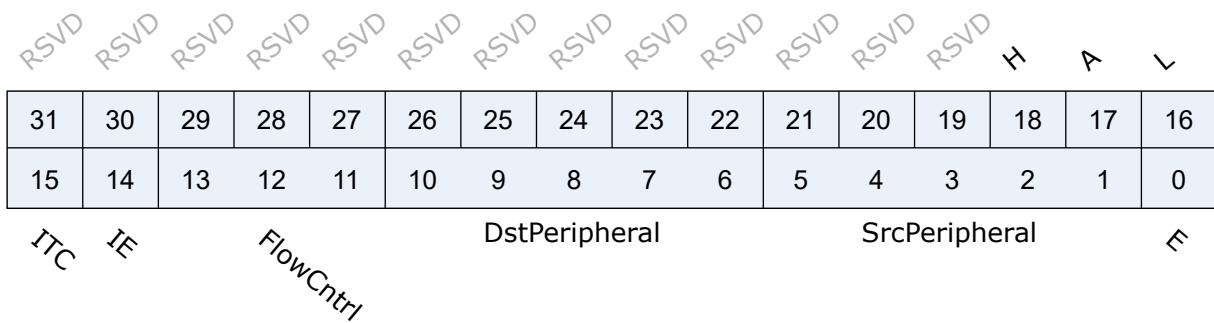Address: 0x2000c610




Bits	Name	Type	Reset	Description
31:19	RSVD			
18	H	r/w	0	
17	A	r	0	
16	L	r/w	0	
15	ITC	r/w	0	
14	IE	r/w	0	
13:11	FlowCntrl	r/w	0	

Bits	Name	Type	Reset	Description
10:6	DstPeripheral	r/w	0	
5:1	SrcPeripheral	r/w	0	
0	E	r/w	0	

7.5.50 DMA_C5RSVD

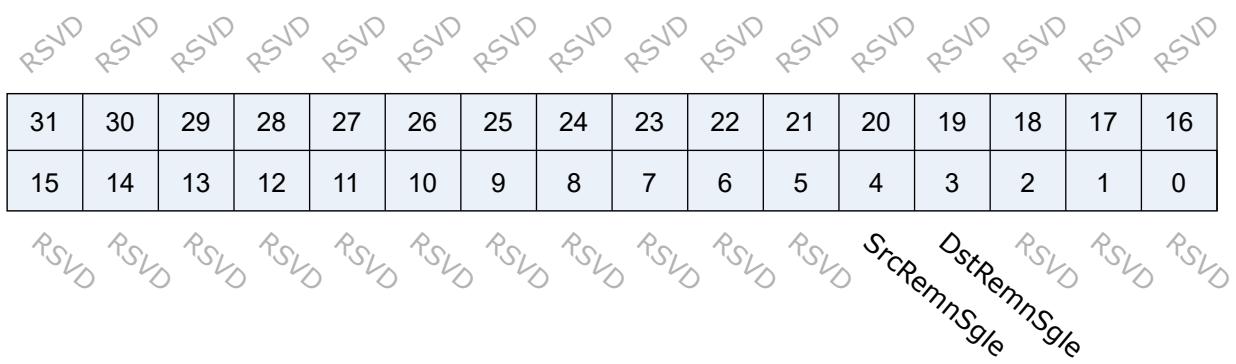
Address: 0x2000c61c



Bits	Name	Type	Reset	Description
31:5	RSVD			
4	SrcRemnSgle	r/w	0	Source remain single issue mode
3	DstRemnSgle	r/w	0	Destination remain single issue mode
2:0	RSVD			

7.5.51 DMA_C6SrcAddr

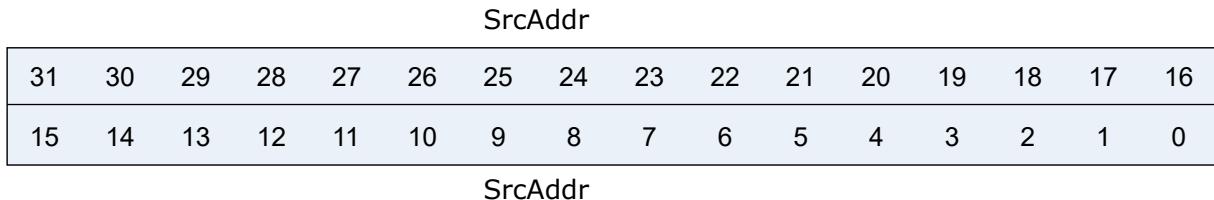Address: 0x2000c700



Bits	Name	Type	Reset	Description
31:0	SrcAddr	r/w	0	

7.5.52 DMA_C6DstAddr

Address: 0x2000c704

DstAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

DstAddr

Bits	Name	Type	Reset	Description
31:0	DstAddr	r/w	0	

7.5.53 DMA_C6LLI

Address: 0x2000c708

LLI

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

LLI

Bits	Name	Type	Reset	Description
31:0	LLI	r/w	0	

7.5.54 DMA_C6Control

Address: 0x2000c70c

1	Prot		DI	SI	fix_cnt		DWidth		RSVD		SWidth		dst_add_mode		DBSize
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0


TransferSize

DBSize dst_min_mode SBSIZE

Bits	Name	Type	Reset	Description
31	I	r/w	0	Terminal count interrupt enable bit. It controls whether the current LLI is expected to trigger the terminal count interrupt.
30:28	Prot	r/w	0	No use for currently
27	DI	r/w	1	Destination increment. When set, the Destination address is incremented after each transfer.
26	SI	r/w	1	Source increment. When set, the source address is incremented after each transfer.
25:23	fix_cnt	r/w	3'd0	Only effect when dst_min_mode = 1 Destination transfer cnt = (total src byte cnt - (fix_-cnt«DWidth))«DWidth
22:21	DWidth	r/w	2'b10	Destination transfer width: 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
20	RSVD			
19:18	SWidth	r/w	2'b10	Source transfer width 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
17	dst_add_mode	r/w	1'b0	Add mode : issue remain destination traffic
16:15	DBSize	r/w	2'b01	Destination burst size 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
14	dst_min_mode	r/w	1'b0	Minus mode : Not issue all destination traffic
13:12	SBSIZE	r/w	2'b01	Source burst size: 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
11:0	TransferSize	r/w	0	Transfer size: 0 4095. Number of data transfers left to complete when the SMDMA is the flow controller.

7.5.55 DMA_C6Config

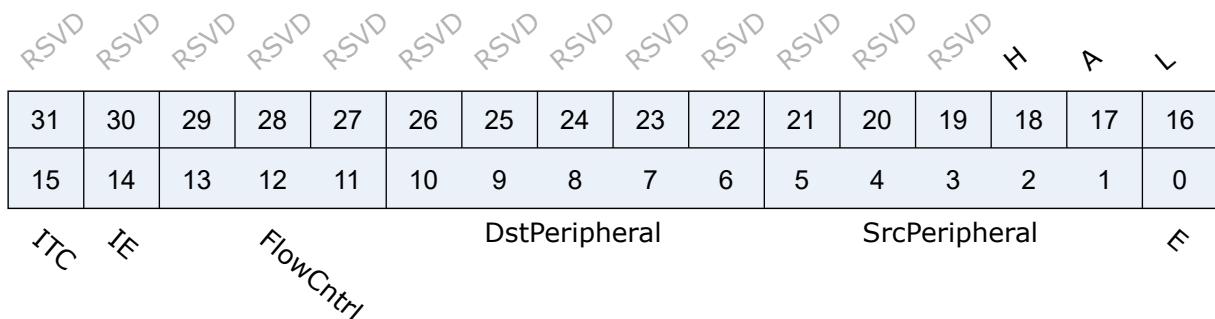
Address: 0x2000c710



Bits	Name	Type	Reset	Description
31:19	RSVD			
18	H	r/w	0	
17	A	r	0	
16	L	r/w	0	
15	ITC	r/w	0	
14	IE	r/w	0	
13:11	FlowCntrl	r/w	0	
10:6	DstPeripheral	r/w	0	
5:1	SrcPeripheral	r/w	0	
0	E	r/w	0	

7.5.56 DMA_C6RSVD

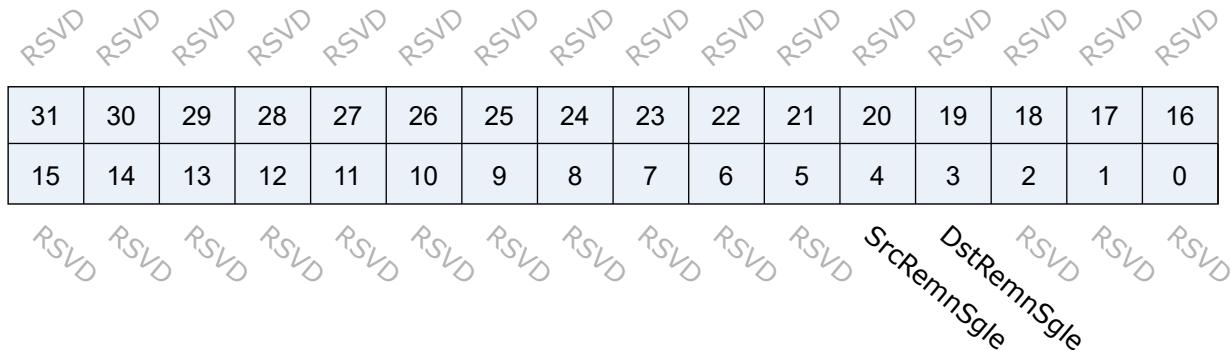Address: 0x2000c71c



Bits	Name	Type	Reset	Description
31:5	RSVD			
4	SrcRemnSgle	r/w	0	Source remain single issue mode
3	DstRemnSgle	r/w	0	Destination remain single issue mode
2:0	RSVD			

7.5.57 DMA_C7SrcAddr

Address: 0x2000c800

SrcAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SrcAddr

Bits	Name	Type	Reset	Description
31:0	SrcAddr	r/w	0	

7.5.58 DMA_C7DstAddr

Address: 0x2000c804

DstAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

DstAddr

Bits	Name	Type	Reset	Description
31:0	DstAddr	r/w	0	

7.5.59 DMA_C7LLI

Address: 0x2000c808

LLI

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

LLI

Bits	Name	Type	Reset	Description
31:0	LLI	r/w	0	

7.5.60 DMA_C7Control

Address: 0x2000c80c

1	Prot	DI	SI	fix_cnt	DWidth	RSVD	SWidth	dst_add_mode	DBSize
31	30	29	28	27	26	25	24	23	22
15	14	13	12	11	10	9	8	7	6
									TransferSize
									DBSize
									dst_min_mode

Bits	Name	Type	Reset	Description
31	I	r/w	0	Terminal count interrupt enable bit. It controls whether the current LLI is expected to trigger the terminal count interrupt.
30:28	Prot	r/w	0	No use for currently
27	DI	r/w	1	Destination increment. When set, the Destination address is incremented after each transfer.
26	SI	r/w	1	Source increment. When set, the source address is incremented after each transfer.
25:23	fix_cnt	r/w	3'd0	Only effect when dst_min_mode = 1 Destination transfer cnt = (total src byte cnt - (fix_cnt«DWidth))«DWidth

Bits	Name	Type	Reset	Description
22:21	DWidth	r/w	2'b10	Destination transfer width: 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
20	RSVD			
19:18	SWidth	r/w	2'b10	Source transfer width 2'b00 : byte 2'b01 : half-word 2'b10 : word 2'b11 : double-word
17	dst_add_mode	r/w	1'b0	Add mode : issue remain destination traffic
16:15	DBSize	r/w	2'b01	Destination burst size 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
14	dst_min_mode	r/w	1'b0	Minus mode : Not issue all destination traffic
13:12	SBSIZE	r/w	2'b01	Source burst size: 2'b00 : INCR1 2'b01 : INCR4 2'b10 : INCR8 2'b11 : INCR16 Note : SBSIZE*Swidth should <= CH FIFO Size
11:0	TransferSize	r/w	0	Transfer size: 0 4095. Number of data transfers left to complete when the SMDMA is the flow controller.

7.5.61 DMA_C7Config

Address: 0x2000c810

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

ITC IF FlowCntrl DstPeripheral SrcPeripheral E

Bits	Name	Type	Reset	Description
31:19	RSVD			
18	H	r/w	0	
17	A	r	0	
16	L	r/w	0	
15	ITC	r/w	0	
14	IE	r/w	0	
13:11	FlowCntrl	r/w	0	
10:6	DstPeripheral	r/w	0	
5:1	SrcPeripheral	r/w	0	
0	E	r/w	0	

7.5.62 DMA_C7RSVD

Address: 0x2000c81c

RSVD																	
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16		
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		

RSVD DstRemnSgle SrcRemnSgle

Bits	Name	Type	Reset	Description
31:5	RSVD			
4	SrcRemnSgle	r/w	0	Source remain single issue mode
3	DstRemnSgle	r/w	0	Destination remain single issue mode
2:0	RSVD			

8.1 Overview

The 2 Dimensional Direct Memory Access (DMA2D or 2D DMA) is a technique extended from 1D DMA that allows a 2D DMA controller to transfer data in the set strides (see the DMA section for details about 1D DMA). The memory address of data can be non-contiguous, incremented or decremented at a certain interval, or unchanged. The 2D DMA controller has 2 independent dedicated lanes, managing data transmission between peripherals and memory to enhance bus efficiency. It supports the transfer from memory to memory, memory to peripherals, and peripheral to memory, and provides the LLI linked list function.

8.2 Features

- Two dedicated independent lanes
- Configurable as 1D DMA or 2D DMA
- Independent control source and destination access width (single byte, double bytes, and four bytes)
- Each lane acts as a read-write cache independently
- Each lane can be triggered by independent peripheral hardware or software
- Supported peripherals: UART, I2C, SPI, DBI, and DSI
- Eight kinds of process control
 - DMA process control, source memory, destination memory
 - DMA process control, source memory, destination peripherals
 - DMA process control, source peripherals, destination memory
 - DMA process control, source peripherals, destination peripherals
 - Destination peripheral process control, source peripherals, destination peripherals

- Destination peripheral process control, source memory, destination peripherals
 - Source peripheral process control, source peripherals, destination memory
 - Source peripheral process control, source peripherals, destination peripherals
- Supports the LLI linked list function to improve DMA efficiency, and configures whether to trigger interrupt for each node separately
 - Exclusive features of 2D DMA:
 - Supports translation of 8/16/32-bit images in any direction
 - Supports rotation of 8/16/32-bit images at 90°/180°/270°
 - Supports horizontal/vertical folding of 8/16/32-bit images
 - Supports filling by 8/16/32-bit images
 - Supports 8/16/24/32-bit Color Key

8.3 Functional Description

8.3.1 Operating Principle

On the basis of 1D DMA, 2D DMA adds the SRC XINCR, SRC XCOUNT, SRC YINCR, and SRC YCOUNT; and adds the DEST XINCR, DEST XCOUNT, and DEST YINCR. DEST YCOUNT will not be configured, as it will be derived from other values. Here the stride value can be negative. The 2D DMA transfer can be viewed as a nested loop, where the outer loop is specified by YCOUNT and each time the loop address increments by YINCR bytes (decrements when YINCR is negative); the inner loop is specified by XCOUNT and each time the loop address increments XINCR bytes (decrements when XINCR is negative). The working principle is illustrated as follows:

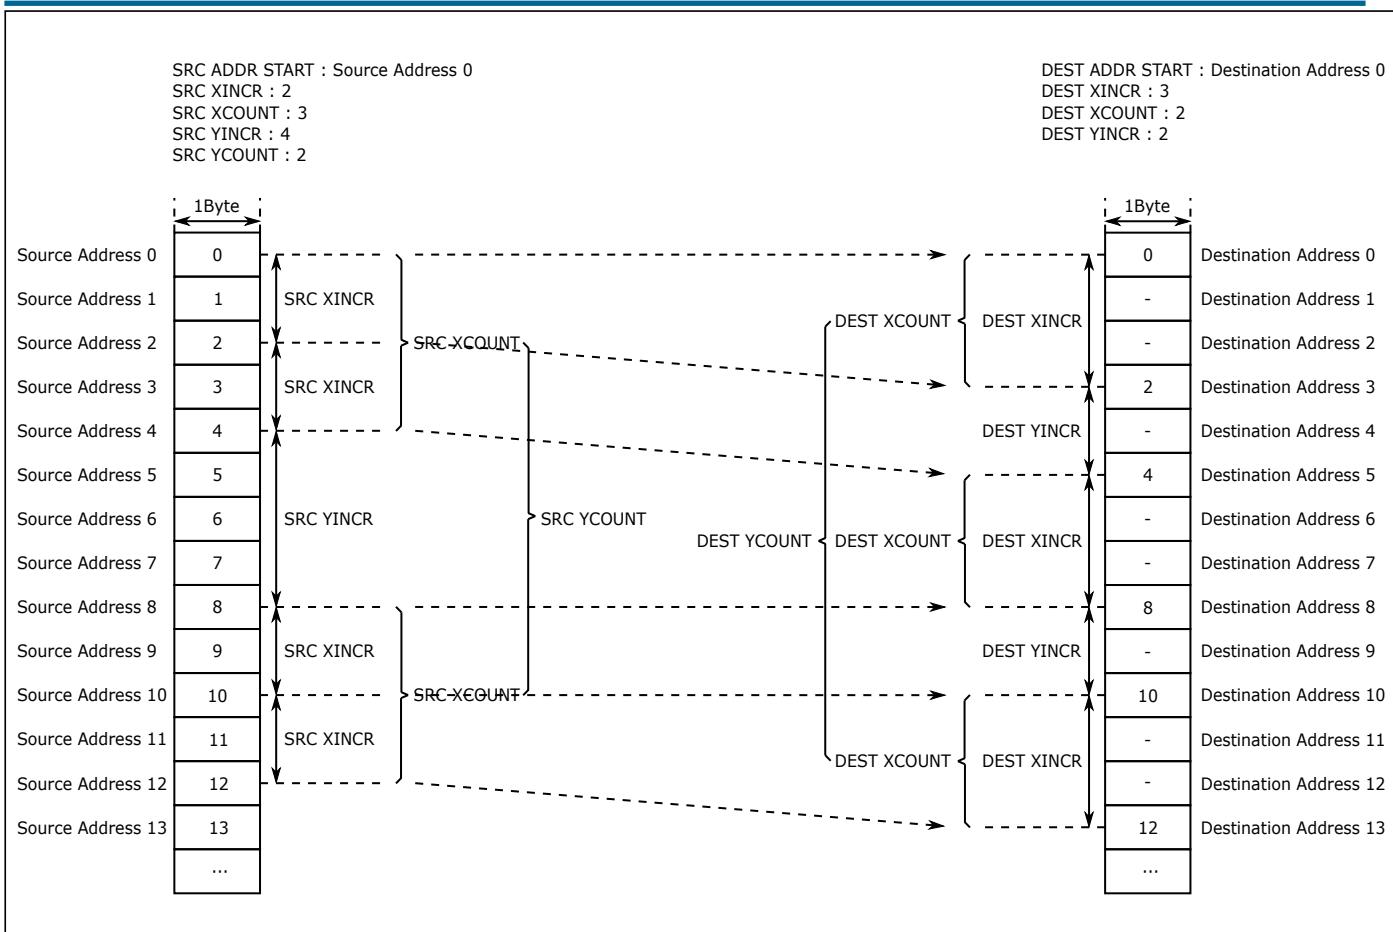


Fig. 8.1: Operating Principle

8.3.2 Image Translation

If the memory data is considered as a rectangular image, the image can be translated by setting the stride and loop values, as shown below:

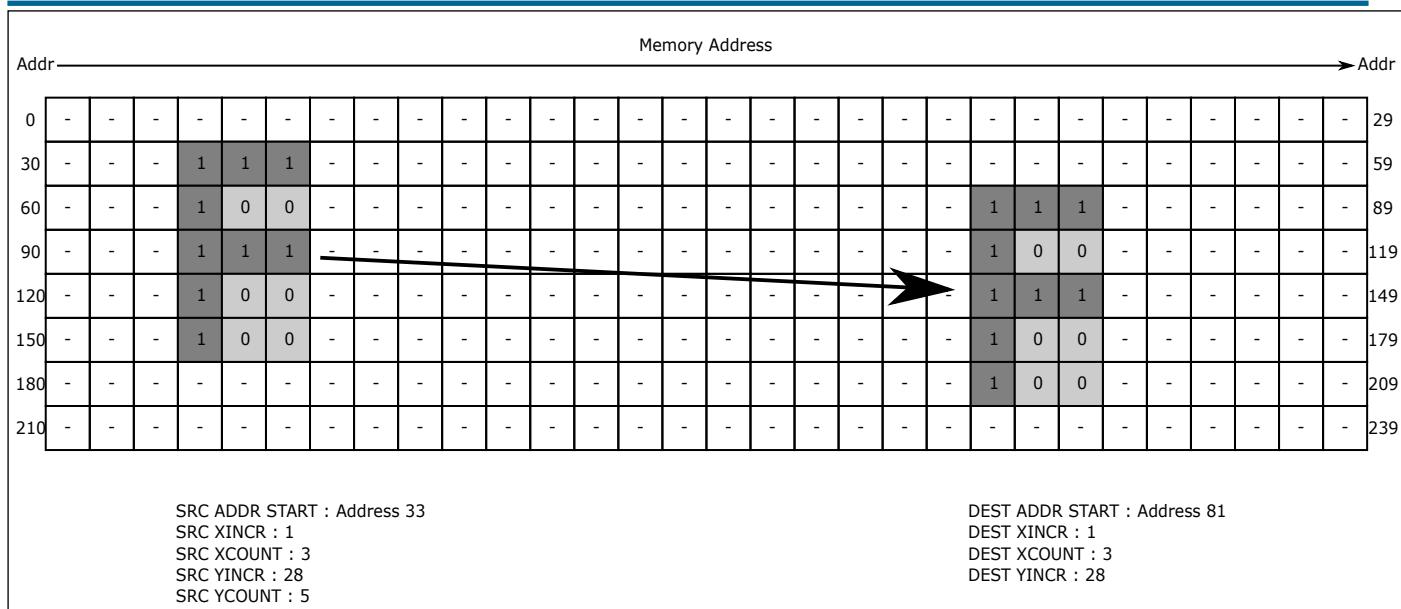


Fig. 8.2: Image Translation

As shown in the figure, it is assumed that a pixel width (P) is 8 bit, and the transfer width of 2D DMA is set to 8 bit. In an $M \times N$ image (30×8 in the figure), a rectangular area of $W \times H$ (3×5 in the figure) is translated from the coordinate (x_1, y_1) [(3, 1) in the figure] to the coordinate (x_2, y_2) [(21, 2) in the figure]. The start address of image data starts from addr0 (0 in the figure). Relevant parameters of 2D DMA are calculated as follows:

- SRC ADDR START = $\text{addr0} + (M \cdot y_1 + x_1) \cdot P = 0 + (30 \cdot 1 + 3) \cdot 1 = 33$
- SRC XINCR = $P = 1$
- SRC XCOUNT = $W = 3$
- SRC YINCR = $(M - (W - 1)) \cdot P = (30 - (3 - 1)) \cdot 1 = 28$
- SRC YCOUNT = $H = 5$
- DEST ADDR START = $\text{addr0} + (M \cdot y_2 + x_2) \cdot P = 0 + (30 \cdot 2 + 21) \cdot 1 = 81$
- DEST XINCR = $P = 1$
- DEST XCOUNT = $W = 3$
- DEST YINCR = $(M - (W - 1)) \cdot P = (30 - (3 - 1)) \cdot 1 = 28$

8.3.3 Image Rotation

If the memory data is considered as a rectangular image, the image can be rotated at 90°/180°/270° by setting the stride and loop values, as shown below:

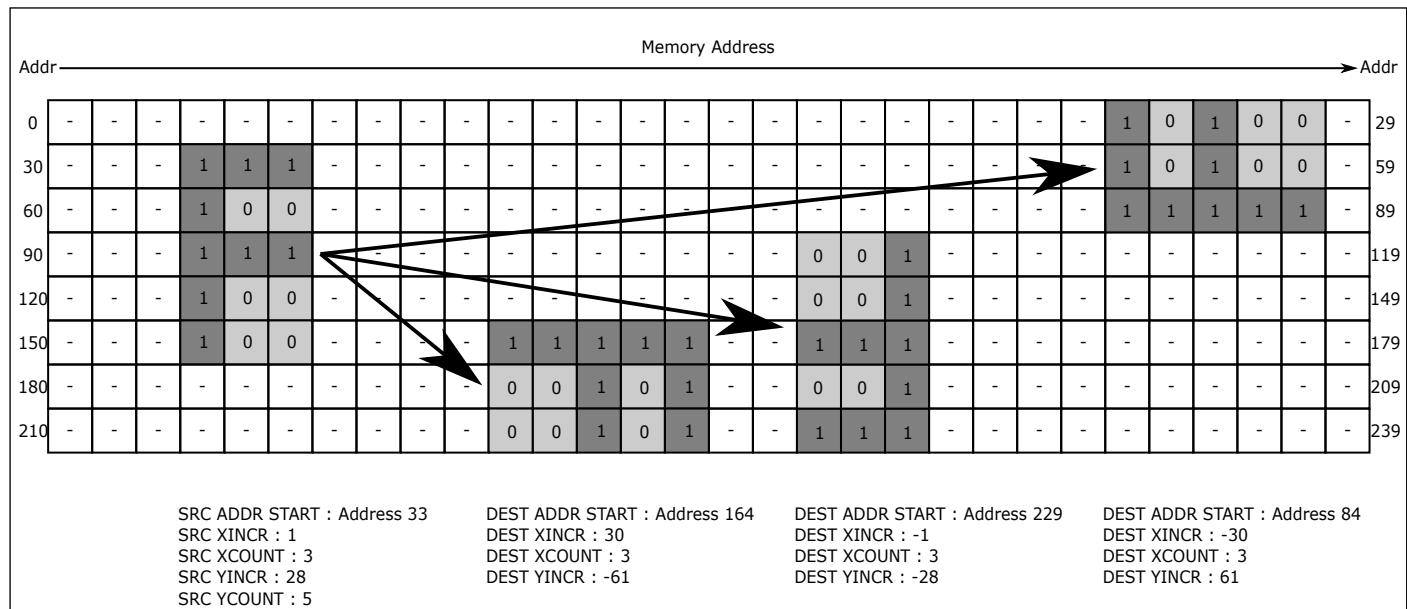


Fig. 8.3: Image Rotation

As shown in the figure, it is assumed that a pixel width (P) is 8 bit, and the transfer width of 2D DMA is set to 8 bit. In an M × N image (30 × 8 in the figure), a rectangular area of W × H (3 × 5 in the figure) is rotated clockwise at 90° from the coordinate (x1, y1) [(3, 1) in the figure] to the coordinate (x2, y2) [(14, 5) in the figure]. The start address of image data starts from addr0 (0 in the figure). Relevant parameters of 2D DMA are calculated as follows:

- SRC ADDR START = addr0+(M*y1+x1)*P = 0+(30*1+3)*1 = 33
- SRC XINCR = P = 1
- SRC XCOUNT = W = 3
- SRC YINCR = (M-(W-1))*P = (30-(3-1))*1 = 28
- SRC YCOUNT = H = 5
- DEST ADDR START = addr0+(M*y2+x2)*P = 0+(30*5+14)*1 = 164
- DEST XINCR = M*P = 30*1 = 30
- DEST XCOUNT = W = 3
- DEST YINCR = -(M*(W-1)+1)*P = -(30*(3-1)+1)*1 = -61

For the clockwise rotation of the rectangular area at 180° from the coordinate (x1, y1) [(3, 1) in the figure] to the coordinate (x3, y3) [(19, 7) in the figure], relevant parameters are calculated as follows:

- SRC ADDR START = $addr0 + (M * y1 + x1) * P = 0 + (30 * 1 + 3) * 1 = 33$
- SRC XINCR = $P = 1$
- SRC XCOUNT = $W = 3$
- SRC YINCR = $(M - (W - 1)) * P = (30 - (3 - 1)) * 1 = 28$
- SRC YCOUNT = $H = 5$
- DEST ADDR START = $addr0 + (M * y3 + x3) * P = 0 + (30 * 7 + 19) * 1 = 229$
- DEST XINCR = $-P = -1$
- DEST XCOUNT = $W = 3$
- DEST YINCR = $-(M - (W - 1)) * P = -(30 - (3 - 1)) * 1 = -28$

For the clockwise rotation of the rectangular area at 270° from the coordinate $(x1, y1)$ [(3, 1) in the figure] to the coordinate $(x4, y4)$ [(24, 2) in the figure], relevant parameters are calculated as follows:

- SRC ADDR START = $addr0 + (M * y1 + x1) * P = 0 + (30 * 1 + 3) * 1 = 33$
- SRC XINCR = $P = 1$
- SRC XCOUNT = $W = 3$
- SRC YINCR = $(M * (W - 1)) * P = (30 * (3 - 1)) * 1 = 28$
- SRC YCOUNT = $H = 5$
- DEST ADDR START = $addr0 + (M * y4 + x4) * P = 0 + (30 * 2 + 24) * 1 = 84$
- DEST XINCR = $-M * P = -30 * 1 = -30$
- DEST XCOUNT = $W = 3$
- DEST YINCR = $(M * (W - 1) + 1) * P = (30 * (3 - 1) + 1) * 1 = 61$

8.3.4 Image Folding

If the memory data is considered as a rectangular image, the image can be folded horizontally or vertically by setting the stride and loop values, as shown below:

		Memory Address			
Addr					Addr
0	-	-	-	-	29
30	-	-	1	1	59
60	-	-	1	0	89
90	-	-	1	1	119
120	-	-	1	0	149
150	-	-	1	0	179
180	-	-	-	-	209
210	-	-	-	-	239

SRC ADDR START : Address 33
 SRC XINCR : 1
 SRC XCOUNT : 3
 SRC YINCR : 28
 SRC YCOUNT : 5

DEST ADDR START : Address 105
 DEST XINCR : -1
 DEST XCOUNT : 3
 DEST YINCR : 32

DEST ADDR START : Address 142
 DEST XINCR : 1
 DEST XCOUNT : 3
 DEST YINCR : -32

Fig. 8.4: Image Folding

As shown in the figure, it is assumed that a pixel width (P) is 8 bit, and the transfer width of 2D DMA is set to 8 bit. In an $M \times N$ image (30×8 in the figure), a rectangular area of $W \times H$ (3×5 in the figure) is folded horizontally from the coordinate (x_1, y_1) [(3, 1) in the figure] to the coordinate (x_2, y_2) [(15, 3) in the figure]. The start address of image data starts from addr0 (0 in the figure). Relevant parameters of 2D DMA are calculated as follows:

- SRC ADDR START = $\text{addr0} + (M \cdot y_1 + x_1) \cdot P = 0 + (30 \cdot 1 + 3) \cdot 1 = 33$
- SRC XINCR = $P = 1$
- SRC XCOUNT = $W = 3$
- SRC YINCR = $(M - (W - 1)) \cdot P = (30 - (3 - 1)) \cdot 1 = 28$
- SRC YCOUNT = $H = 5$
- DEST ADDR START = $\text{addr0} + (M \cdot y_2 + x_2) \cdot P = 0 + (30 \cdot 3 + 15) \cdot 1 = 105$
- DEST XINCR = $-P = -1$
- DEST XCOUNT = $W = 3$
- DEST YINCR = $(M + (W - 1)) \cdot P = (30 + (3 - 1)) \cdot 1 = 32$

For vertical folding of the rectangular area from the coordinate (x_1, y_1) [(3, 1) in the figure] to the coordinate (x_3, y_3) [(22, 4) in the figure], relevant parameters are calculated as follows:

- SRC ADDR START = $\text{addr0} + (M \cdot y_1 + x_1) \cdot P = 0 + (30 \cdot 1 + 3) \cdot 1 = 33$
- SRC XINCR = $P = 1$
- SRC XCOUNT = $W = 3$

- SRC YINCR = $(M-(W-1)) \times P = (30-(3-1)) \times 1 = 28$
- SRC YCOUNT = H = 5
- DEST ADDR START = $addr0 + (M \times y3 + x3) \times P = 0 + (30 \times 4 + 22) \times 1 = 142$
- DEST XINCR = P = 1
- DEST XCOUNT = W = 3
- DEST YINCR = $-(M+(W-1)) \times P = -(30+(3-1)) \times 1 = -32$

8.3.5 Image Filling

If the memory data is considered as a rectangular image, the image can be filled by setting the stride and loop values, as shown below:

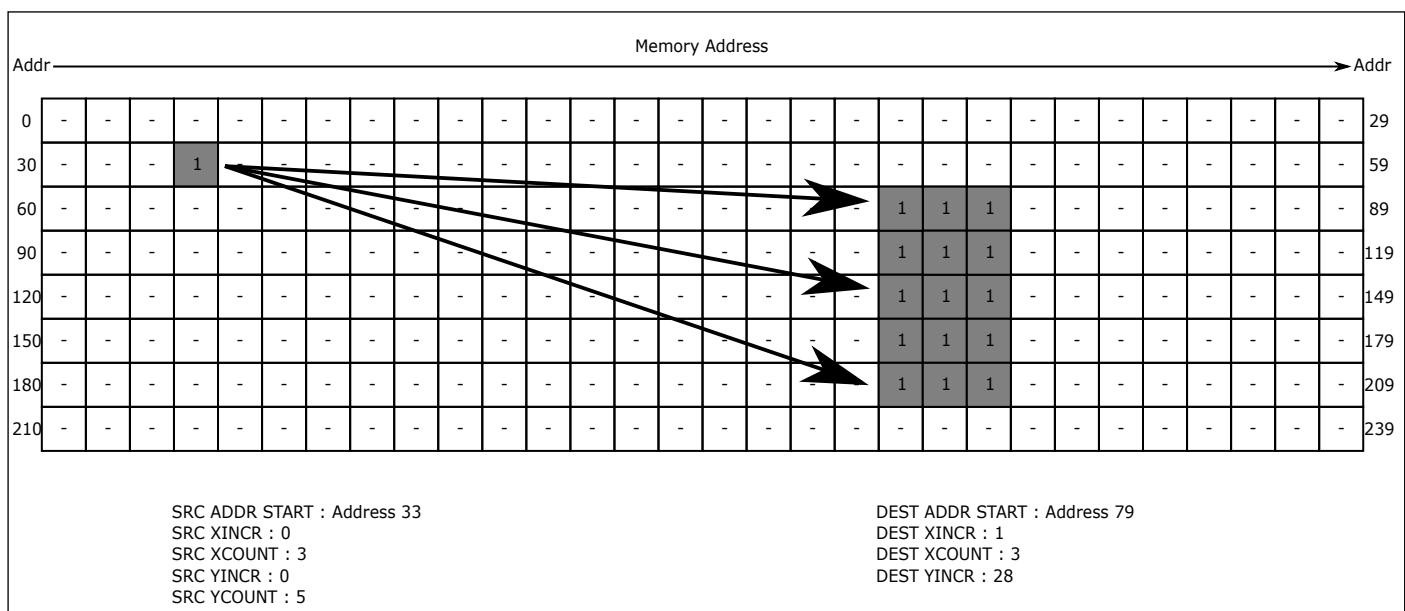


Fig. 8.5: Image Filling

As shown in the figure, it is assumed that a pixel width (P) is 8 bit, and the transfer width of 2D DMA is set to 8 bit. In an $M \times N$ image (30×8 in the figure), a rectangular area of $W \times H$ (3×5 in the figure) with starting coordinate $(x2, y2)$ [$(19, 2)$ in the figure] is filled by the value of the coordinate $(x1, y1)$ [$(3, 1)$ in the figure]. The start address of image data starts from $addr0$ (0 in the figure). Relevant parameters of 2D DMA are calculated as follows:

- SRC ADDR START = $addr0 + (M \times y1 + x1) \times P = 0 + (30 \times 1 + 3) \times 1 = 33$
- SRC XINCR = 0
- SRC XCOUNT = W = 3
- SRC YINCR = 0
- SRC YCOUNT = H = 5

- DEST ADDR START = $addr0 + (M * y2 + x2) * P = 0 + (30 * 2 + 19) * 1 = 79$
 - DEST XINCR = $P = 1$
 - DEST XCOUNT = $W = 3$
 - DEST YINCR = $(M - (W - 1)) * P = (30 - (3 - 1)) * 1 = 28$

8.3.6 Color Key

When Color Key is enabled, if 2D DMA encounters a value equal to the preset Color Key value during data transfer, it skips the value and the original value is still stored in the skipped address. The width of Color Key can be set to 8/16/24/32-bit. The working principle is shown below:

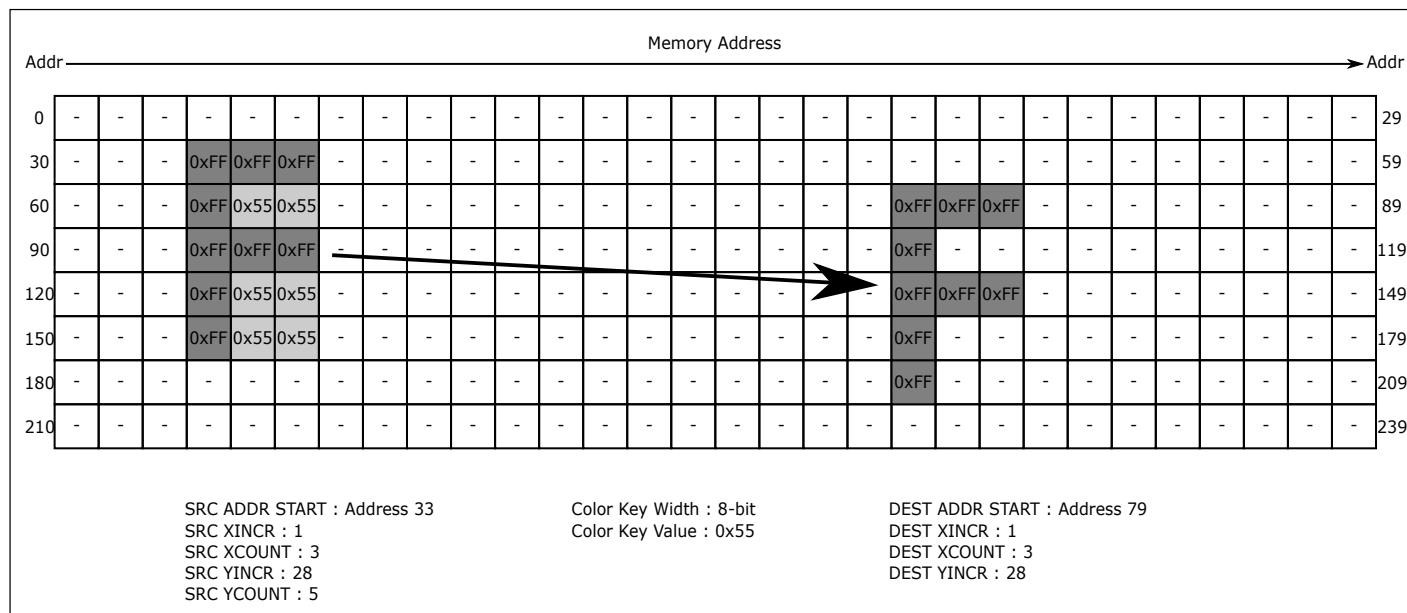


Fig. 8.6: Color Key

As shown in the above figure, the width of Color Key is set to 8 bit and the Key value is set to 0x55. When transferring the F-shaped rectangular area, 2D DMA skips the 0x55 value. So it can be seen from the right side that only the F-shaped rectangular area is transferred and the area that contains the 0x55 value is not transferred.

8.4 Register description

Name	Description
DMA2D_IntStatus	
DMA2D_IntTCStatus	
DMA2D_IntTCClear	

Name	Description
DMA2D_EnbldChns	
DMA2D_Config	
DMA2D_Sync	
DMA2D_SoftBReq	
DMA2D_SoftLBReq	
DMA2D_SoftSReq	
DMA2D_SoftLSReq	
DMA2D_C0SrcAddr	
DMA2D_C0DstAddr	
DMA2D_C0LLI	
DMA2D_C0_BUS	
DMA2D_C0_SRC_CNT	
DMA2D_C0_SRC_XIC	
DMA2D_C0_SRC_YIC	
DMA2D_C0_DST_CNT	
DMA2D_C0_DST_XIC	
DMA2D_C0_DST_YIC	
DMA2D_C0_KEY	
DMA2D_C0_KEY_EN	
DMA2D_C0_CFG	

8.4.1 DMA2D_IntStatus

Address: 0x30006000

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |

IntStatus

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	IntStatus	r	0	Status of the DMA interrupts after masking

8.4.2 DMA2D_IntTCStatus

Address: 0x30006004

RSVD																	
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16		
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		

IntTCStatus

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	IntTCStatus	r	0	Interrupt terminal count request status

8.4.3 DMA2D_IntTCClear

Address: 0x30006008

RSVD																	
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16		
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		

IntTCClear

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	IntTCClear	w1p	0	Terminal count request clear

8.4.4 DMA2D_EnBldChns

Address: 0x3000600c

RSVD																							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16								
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								

EnabledChannels

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	EnabledChannels	r	0	Channel enable status

8.4.5 DMA2D_Config

Address: 0x30006010

RSVD	E																						
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16								
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								

Bits	Name	Type	Reset	Description
31:24	RSVD			
23:16	ChClkCG	r/w	8'hff	Channel Clock cg enable
15:1	RSVD			
0	E	r/w	0	SMDMA Enable.

8.4.6 DMA2D_Sync

Address: 0x30006014

DMA_Sync

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

DMA_Sync

Bits	Name	Type	Reset	Description
31:0	DMA_Sync	r/w	0	DMA synchronization logic for DMA request signals: 0 = enable, 1 = disable

8.4.7 DMA2D_SoftBReq

Address: 0x30006018

SoftBReq

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SoftBReq

Bits	Name	Type	Reset	Description
31:0	SoftBReq	r/w	0	Software burst request

8.4.8 DMA2D_SoftLBReq

Address: 0x3000601c

SoftLBReq

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SoftLBReq

Bits	Name	Type	Reset	Description
31:0	SoftLBReq	r/w	0	Software last burst request

8.4.9 DMA2D_SoftSReq

Address: 0x30006020

SoftSReq

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SoftSReq

Bits	Name	Type	Reset	Description
31:0	SoftSReq	r/w	0	Software signle request

8.4.10 DMA2D_SoftLSReq

Address: 0x30006024

SoftLSReq

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SoftLSReq

Bits	Name	Type	Reset	Description
31:0	SoftLSReq	r/w	0	Software last signle request

8.4.11 DMA2D_C0SrcAddr

Address: 0x30006100

SrcAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SrcAddr

Bits	Name	Type	Reset	Description
31:0	SrcAddr	r/w	0	DMA source address

8.4.12 DMA2D_C0DstAddr

Address: 0x30006104

DstAddr

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

DstAddr

Bits	Name	Type	Reset	Description
31:0	DstAddr	r/w	0	DMA Destination address

8.4.13 DMA2D_C0LLI

Address: 0x30006108

LLI_ADDR

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0


LLI_ADDR

RSVD LLI_EN

Bits	Name	Type	Reset	Description
31:2	LLI_ADDR	r/w	0	Next linked list address
1	RSVD			
0	LLI_EN	r/w	0	Next LLI enable

8.4.14 DMA2D_C0_BUS

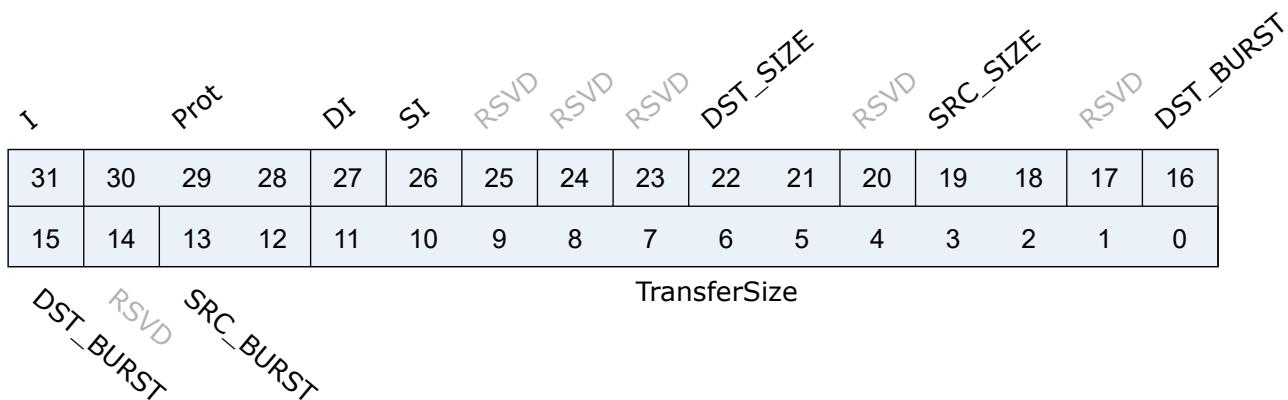Address: 0x3000610c



Bits	Name	Type	Reset	Description
31	I	r/w	0	Terminal count interrupt enable bit. It controls whether the current LLI is expected to trigger the terminal count interrupt.
30:28	Prot	r/w	0	Hprot Setting
27	DI	r/w	1	Only work when reg_dma_2d_en = 0 Destination increment. When set, the Destination address is incremented after each transfer.
26	SI	r/w	1	Only work when reg_dma_2d_en = 0 Source increment. When set, the source address is incremented after each transfer.
25:23	RSVD			
22:21	DST_SIZE	r/w	2'd2	Destination transfer width: 8/16/32
20	RSVD			
19:18	SRC_SIZE	r/w	2'd2	Source transfer width: 8/16/32
17	RSVD			
16:15	DST_BURST	r/w	2'd1	Destination burst size: 1/4/8/16
14	RSVD			
13:12	SRC_BURST	r/w	2'd1	
11:0	TransferSize	r/w	0	Only work when reg_dma_2d_en = 0 Transfer size: 0 4095. Number of data transfers left to complete when the SMDMA is the flow controller.

8.4.15 DMA2D_C0_SRC_CNT

Address: 0x30006110

SRC_Y_CNT

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SRC_X_CNT

Bits	Name	Type	Reset	Description
31:16	SRC_Y_CNT	r/w	16'd0	Only work when reg_dma_2d_en = 1 Source Y-direction Count
15:0	SRC_X_CNT	r/w	16'd0	Only work when reg_dma_2d_en = 1 Source X-direction Count

8.4.16 DMA2D_C0_SRC_XIC

Address: 0x30006114

SRC_X_INCR

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SRC_X_INCR

Bits	Name	Type	Reset	Description
31:0	SRC_X_INCR	r/w	32'd0	Only work when reg_dma_2d_en = 1 Source Y-direction address increment Must align "SWidth" setting [16] sign-bit

8.4.17 DMA2D_C0_SRC_YIC

Address: 0x30006118

SRC_Y_INCR

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SRC_Y_INCR

Bits	Name	Type	Reset	Description
31:0	SRC_Y_INCR	r/w	32'd0	Only work when reg_dma_2d_en = 1 Source Y-direction address increment Must align "SWidth" setting [16] sign-bit

8.4.18 DMA2D_C0_DST_CNT

Address: 0x3000611c

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |

DST_X_CNT

Bits	Name	Type	Reset	Description
31:16	RSVD			
15:0	DST_X_CNT	r/w	16'd0	Only work when reg_dma_2d_en = 1 Source X-direction Count

8.4.19 DMA2D_C0_DST_XIC

Address: 0x30006120

DST_X_INCR																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

DST_X_INCR

Bits	Name	Type	Reset	Description
31:0	DST_X_INCR	r/w	32'd0	Only work when reg_dma_2d_en = 1 Source Y-direction address increment Must align "SWidth" setting [16] sign-bit

8.4.20 DMA2D_C0_DST_YIC

Address: 0x30006124

DST_Y_INCR

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

DST_Y_INCR

Bits	Name	Type	Reset	Description
31:0	DST_Y_INCR	r/w	32'd0	Only work when reg_dma_2d_en = 1 Desitination Y-direction address increment Must align "DWidth" setting [16] sign-bit

8.4.21 DMA2D_C0_KEY

Address: 0x30006174

KEY3

KEY2

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

KEY1

KEY0

Bits	Name	Type	Reset	Description
31:24	KEY3	r/w	0	Key value
23:16	KEY2	r/w	0	Key value
15:8	KEY1	r/w	0	Key value
7:0	KEY0	r/w	0	Key value

8.4.22 DMA2D_C0_KEY_EN

Address: 0x30006178

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |

RSVD RSVD

KEY_STRB RSVD KEY_MODE KEY_EN

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:4	KEY_STRB	r/w	4'h0	According Key mode set Key STRB Key mode : Key STRB 2'd0 : 4'h1 2'd1 : 4'h3 2'd2 : 4'h7 2'd3 : 4'hf
3	RSVD			
2:1	KEY_MODE	r/w	0	Key Mode 2'd0 : 8-bit mode 2'd1 : 16-bit mode 2'd2 : 24-bit mode 2'd3 : 32-bit mode
0	KEY_EN	r/w	0	Key enable

8.4.23 DMA2D_C0_CFG

Address: 0x3000617c

reg_dma_2d_en	RSVD	LLICounter	RSVD	RSVD	RSVD	FIFO_Empty
31	30	29 28 27 26 25 24 23 22 21 20	19	18	17	16
15	14	13 12 11 10 9 8 7 6	5	4	3	2 1 0

RSVD AHB_B2B FlowCntrl DstPeripheral SrcPeripheral CH_EN

Bits	Name	Type	Reset	Description
31	reg_dma_2d_en	r/w	0	DMA 2d enable
30	RSVD			
29:20	LLICounter	r	0	LLI counter. Increased 1 each LLI run. Cleared 0 when config Control.
19:17	RSVD			
16	FIFO_Empty	r	0	Active: 0 = no data in FIFO of the channel, 1 = FIFO of the channel has data.
15	RSVD			
14	AHB_B2B	r/w	0	AHB back to back enable
13:11	FlowCntrl	r/w	0	000: Memory-to-memory (DMA) 001: Memory-to-peripheral (DMA) 010: Peripheral-to-memory (DMA) 011: Source peripheral-to-Destination peripheral (DMA) The following only work when reg_dma_2d_en=0 : 100: Source peripheral-to-Destination peripheral (Destination peripheral) 101: Memory-to-peripheral (peripheral) 110: Peripheral-to-memory (peripheral) 111: Source peripheral-to-Destination peripheral (Source peripheral)
10:6	DstPeripheral	r/w	0	Destination peripheral.
5:1	SrcPeripheral	r/w	0	Source peripheral.
0	CH_EN	r/w	0	Channel enable.

9.1 Overview

LZ4 is a lossless data compression algorithm that features extremely fast decompression speed and average compression ratio. LZ4D is a functional module for decompression of data blocks compressed using LZ4. LZ4D contains a status and control register set used to set the start address of the input compressed data, the output address of the decompressed data, and the decompression status and optional interrupt configuration.

9.2 Features

- Supports data blocks compressed using LZ4
- Supports decompression of data blocks compressed at different levels
- Supports decompression of multiple compressed data blocks
- Event flags for decompression completion and errors
- Generates a corresponding interrupt when an event occurs

9.3 Functional Description

The module gets the compressed data blocks from the source address through bus access, decompresses them using the internal algorithm, and writes the decompressed data to the specified destination address. During decompression, the module updates relevant registers and sets flags for events including successful decompression and decompression errors. In turn, under these event statuses, the module can request interrupts from the CPU.

9.4 Clock

LZ4D Module requires one work clock.

9.5 Programming Flow

9.5.1 Data Decompression


- Turn on the module’s clock
- Disable the module, write the address of the raw data to be decompressed (excluding compressed file header) to the start address register for source data
- Prepare a sufficient contiguous memory to hold the decompressed data, with a recommended length aligned on 4-byte boundary. Write the address of this memory block to the start address register for destination data
- If interrupts are required, install an interrupt handler function and set the corresponding interrupt enable bit
- In the control register, the module will start decompression once enabled
- If a “complete interrupt” is enabled, then wait for the “complete interrupt”
- If no interrupt is enabled, read the status register and then wait for the completion of decompression

9.6 Register description

Name	Description
lz4_config	
lz4_src_fix	
lz4_dst_fix	
lz4_src_start	
lz4_src_end	
lz4_dst_start	
lz4_dst_end	
lz4_int_en	
lz4_int_sta	
lz4_monitor	

9.6.1 lz4_config

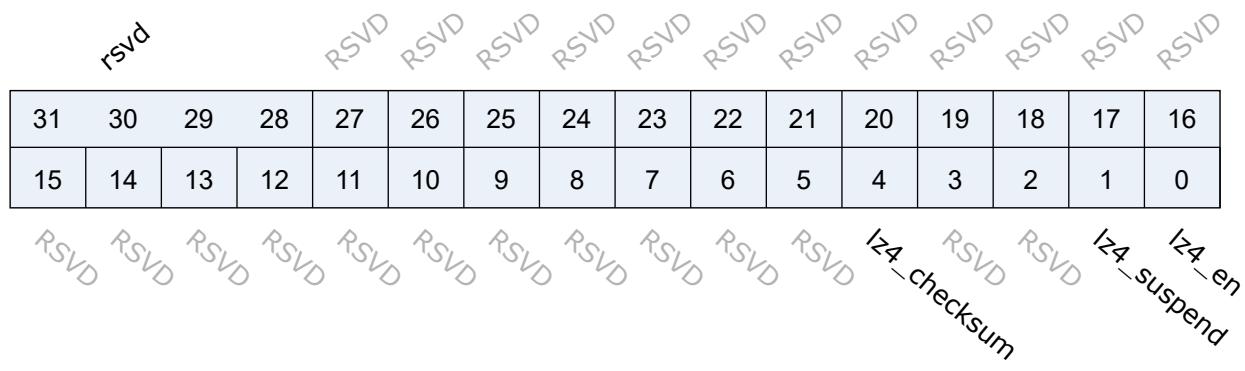
Address: 0x2000ad00



Bits	Name	Type	Reset	Description
31:28	rsvd	rsvd	0	
27:5	RSVD			
4	lz4_checksum	r/w	0	LZ4 block has checksum or not (info from frame header checksum flag)
3:2	RSVD			
1	lz4_suspend	r/w	0	LZ4 blocks decode suspend (FSM idle)
0	lz4_en	r/w	0	LZ4 blocks decode enable (each block has size/sequences/checksum)

9.6.2 lz4_src_fix

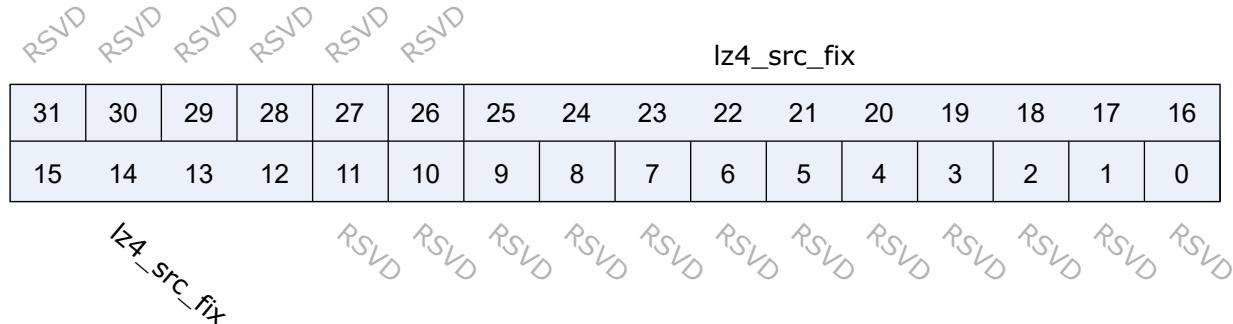Address: 0x2000ad04



Bits	Name	Type	Reset	Description
31:26	RSVD			
25:12	lz4_src_fix	r/w	0	LZ4 source address fix bits

Bits	Name	Type	Reset	Description
11:0	RSVD			

9.6.3 lz4_dst_fix

Address: 0x2000ad08

lz4_dst_fix															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
<i>lz4_dst_fix</i>															

Bits	Name	Type	Reset	Description
31:26	RSVD			
25:12	lz4_dst_fix	r/w	0	LZ4 destination address fix bits
11:0	RSVD			

9.6.4 lz4_src_start

Address: 0x2000ad10

lz4_src_base															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
<i>lz4_src_start</i>															

Bits	Name	Type	Reset	Description
31:26	lz4_src_base	r/w	0	LZ4 source address base (fix)
25:0	lz4_src_start	r/w	0	LZ4 source address start

9.6.5 lz4_src_end

Address: 0x2000ad14

lz4_src_end															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
lz4_src_end															

Bits	Name	Type	Reset	Description
31:26	RSVD			
25:0	lz4_src_end	r	0	LZ4 source address end (Max. 64MB)

9.6.6 lz4_dst_start

Address: 0x2000ad18

lz4_dst_base								lz4_dst_start							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
lz4_dst_start															

Bits	Name	Type	Reset	Description
31:26	lz4_dst_base	r/w	0	LZ4 destination address base (fix)
25:0	lz4_dst_start	r/w	0	LZ4 destination address start

9.6.7 lz4_dst_end


Address: 0x2000ad1c

lz4_dst_end															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
lz4_dst_end															

Bits	Name	Type	Reset	Description
31:26	RSVD			
25:0	lz4_dst_end	r	0	LZ4 destination address end (Max. 64MB)

9.6.8 lz4_int_en

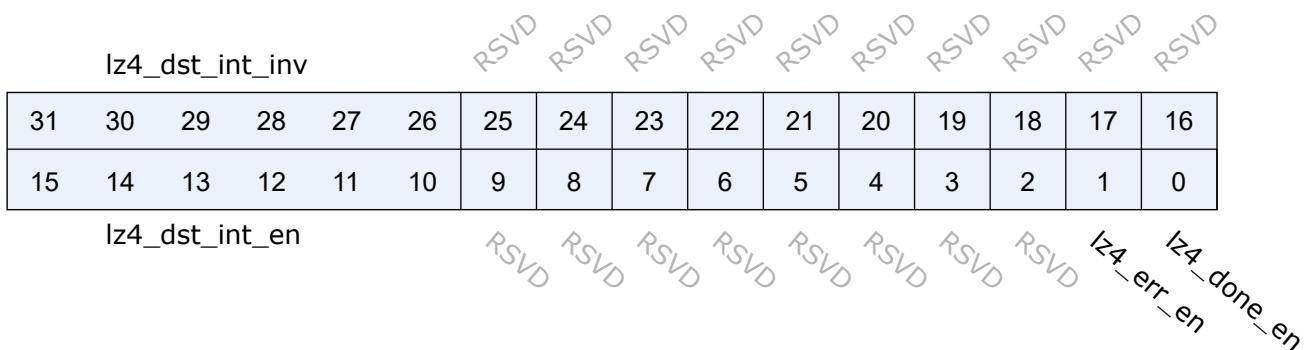
Address: 0x2000ad20



Bits	Name	Type	Reset	Description
31:26	lz4_dst_int_inv	r/w	0	0: high int 1: low int
25:16	RSVD			
15:10	lz4_dst_int_en	r/w	0	
9:2	RSVD			
1	lz4_err_en	r/w	1	
0	lz4_done_en	r/w	1	

9.6.9 lz4_int_sta

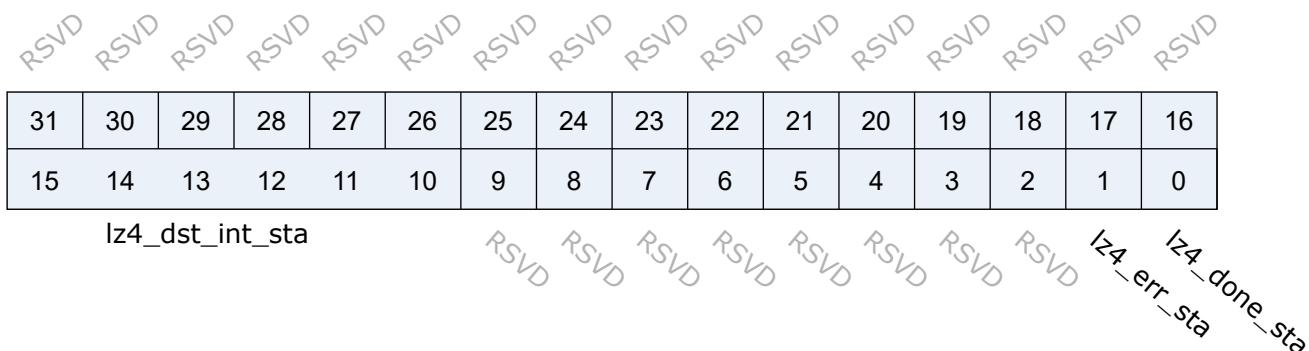Address: 0x2000ad24



Bits	Name	Type	Reset	Description
31:16	RSVD			
15:10	lz4_dst_int_sta	r	0	LZ4 destination address bit change
9:2	RSVD			
1	lz4_err_sta	r	0	
0	lz4_done_sta	r	0	LZ4 done status

9.6.10 lz4 monitor

Address: 0x2000ad28

Bits	Name	Type	Reset	Description
31:4	RSVD			
3:0	lz4_cs	r	0	

10

DBI

10.1 Overview

The Display Bus Interface (DBI), also known as MCU interface, is an interface protocol defined by MIPI Alliance for communicating with display screens. The data and control lines of the DBI protocol are multiplexed, and the driven display module must have GRAM.

DBI is subdivided into MIPI DBI Type A, MIPI DBI Type B, and MIPI DBI Type C modes. The hardware interfaces and data sampling in different modes are different. For example, MIPI DBI Type A uses falling edge sampling (based on Motorola 6800 bus), while MIPI DBI Type B uses the rising edge sampling (based on Intel 8080 bus).

10.2 Features

- Meets MIPI® Alliance standard
- Supports Type B and Type C modes
 - Type B is an 8-bit data interface
 - Type C supports 3Line and 4Line
- Supports 8 input pixel formats:
 - RGBA8888
 - BGRA8888
 - ARGB8888
 - ABGR8888
 - RGB888
 - BGR888
 - RGB565

– BGR565

- Supported output pixel formats: RGB565, RGB666 and RGB888
- Multiple interrupt control
- Supports DMA transfer mode

10.3 Functional Description

The block diagram of DBI module is shown as follows.

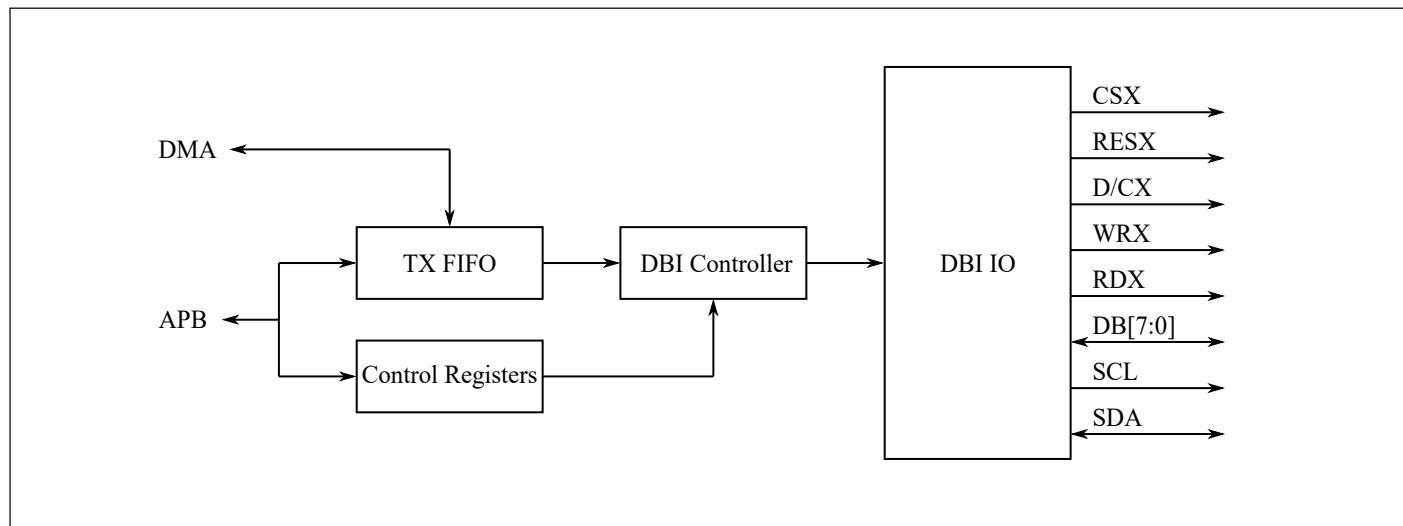


Fig. 10.1: Block Diagram of DBI

10.3.1 DBI Type B

10.3.1.1 Write Timing

The DBI Type B mode has 8-bit parallel data lines, and the timing of MCU writing data to the display module is shown as follows:

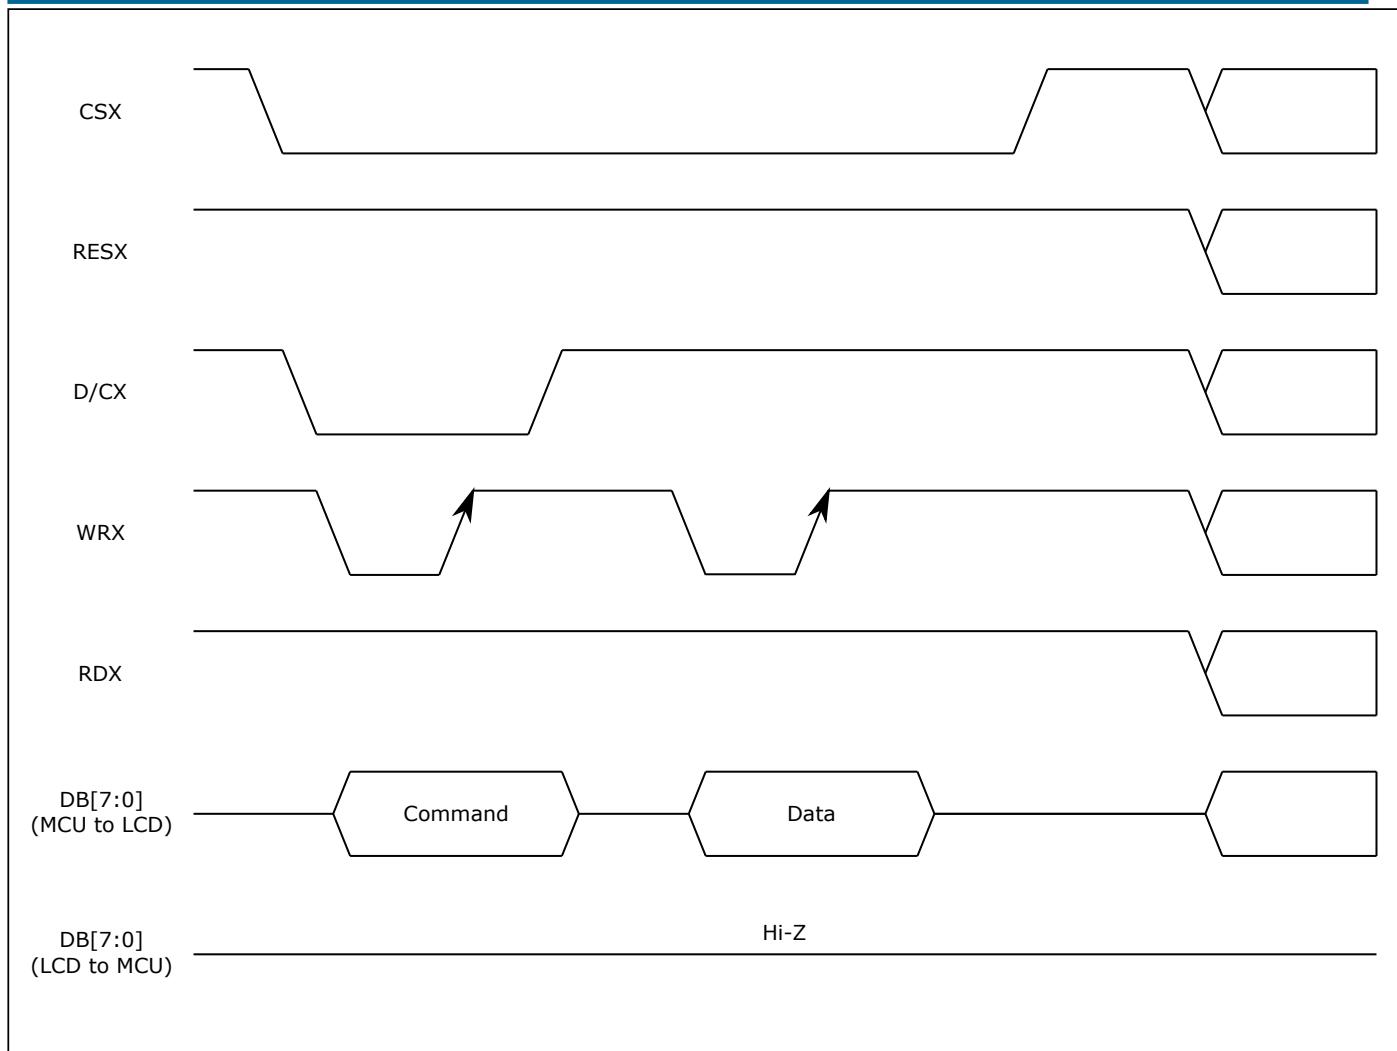


Fig. 10.2: Write Timing

- CSX: chip select signal. When the signal is Low, the display module will be selected; when it is High, the display module will ignore all other interface signals.
- RESX: external reset signal. When the signal is Low, the display module will be reset.
- D/CX: data/command signal. When the signal is 0, the DB[7:0] bit is a command; when the signal is 1, the DB[7:0] bit is the RAM data or command parameter.
- WRX: parallel data write strobe signal. The signal is driven from high to low in the write cycle and then pulled back to high. The display module reads the information transmitted by MCU at the rising edge of the signal. This is an asynchronous signal and can be terminated if not in use.
- RDX: parallel data read strobe signal. The signal is driven from high to low and then pulled back to high in the read cycle. MCU reads the information transmitted by the display module at the rising edge of the signal. This is an asynchronous signal and can be terminated if not in use.
- DB[7:0]: 8-bit data signal, used to transmit commands, command parameters or data

10.3.1.2 Read Timing

The timing of MCU reading data from the display module is shown as follows:

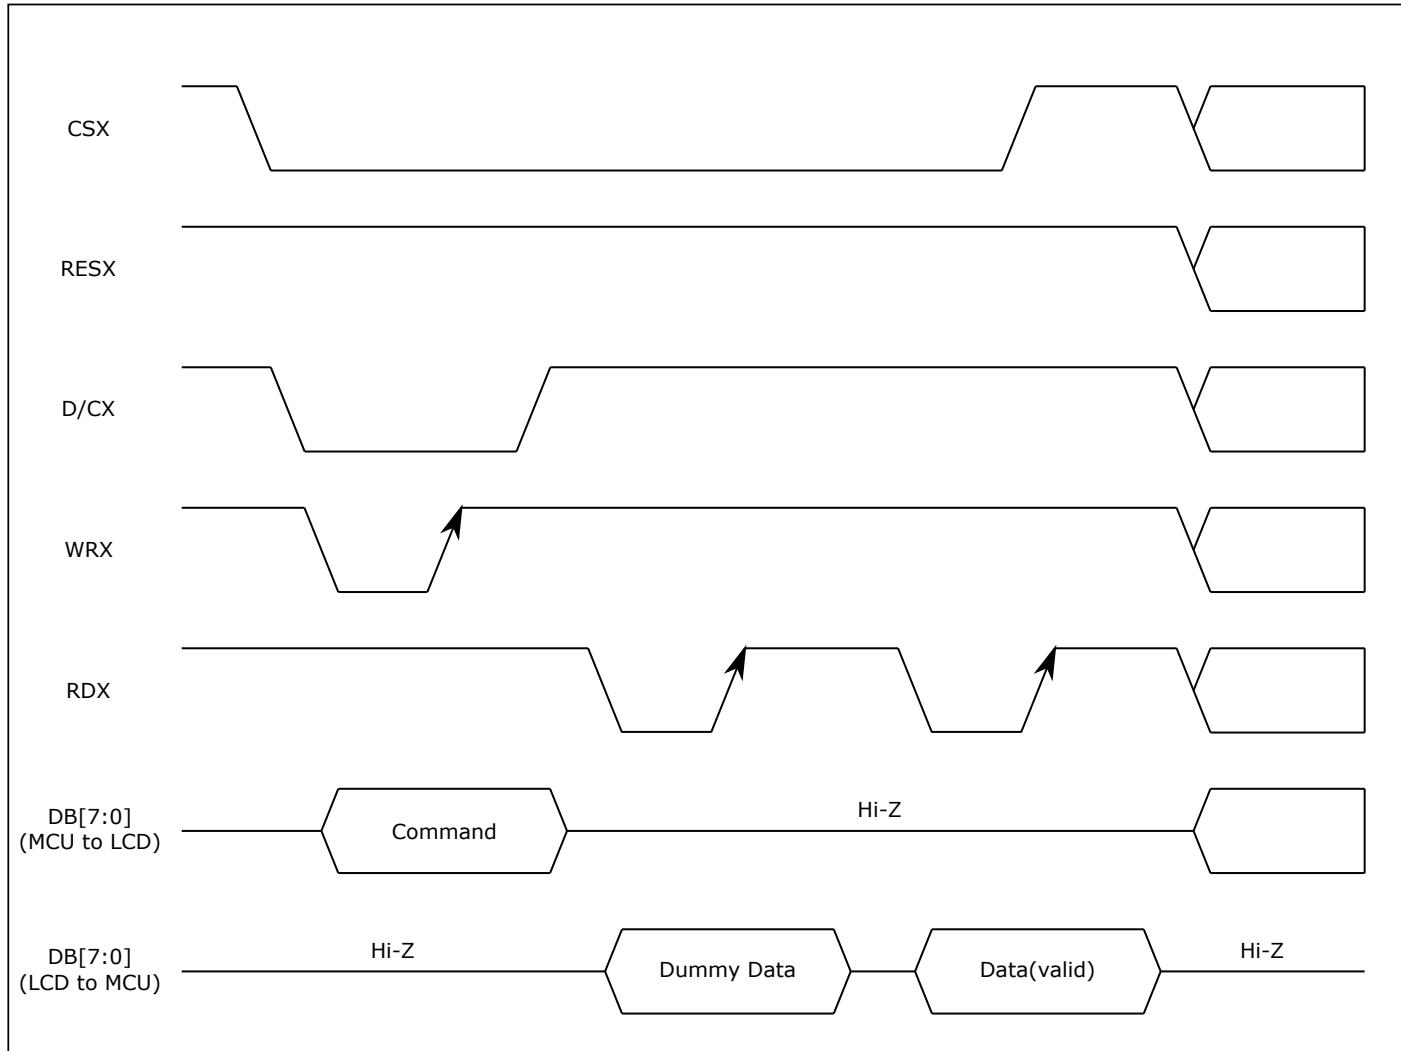


Fig. 10.3: Read Timing

10.3.1.3 Output RGB565

The data output in RGB565 format is shown as follows:

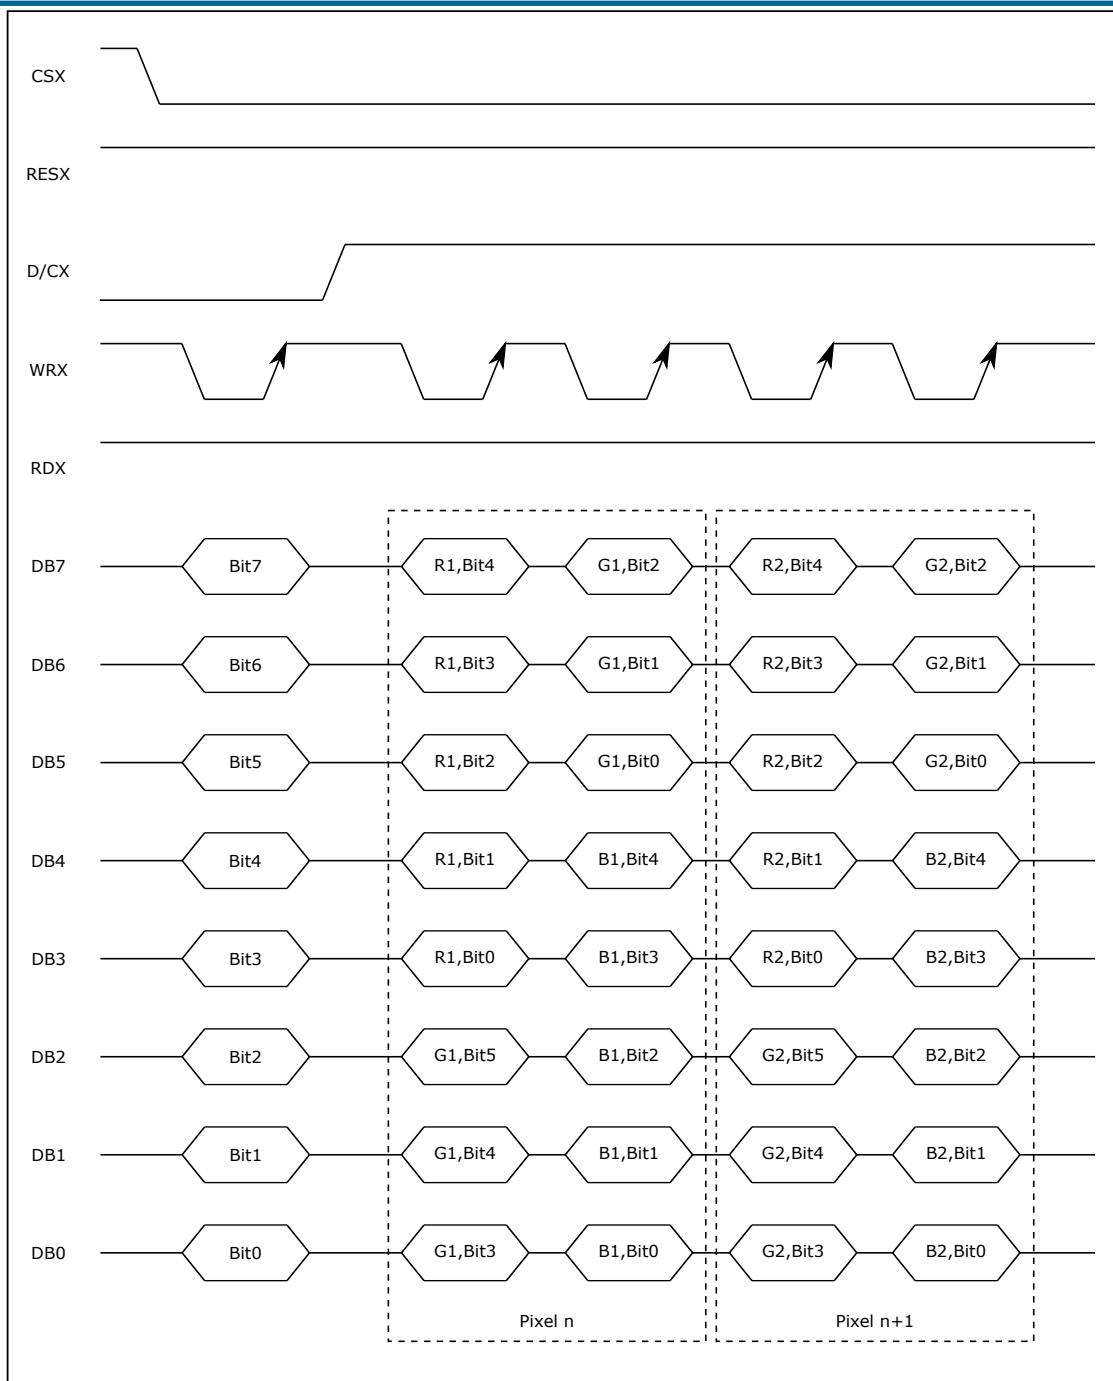


Fig. 10.4: RGB565 Output

10.3.1.4 Output RGB666

The data output in RGB666 format is shown as follows:

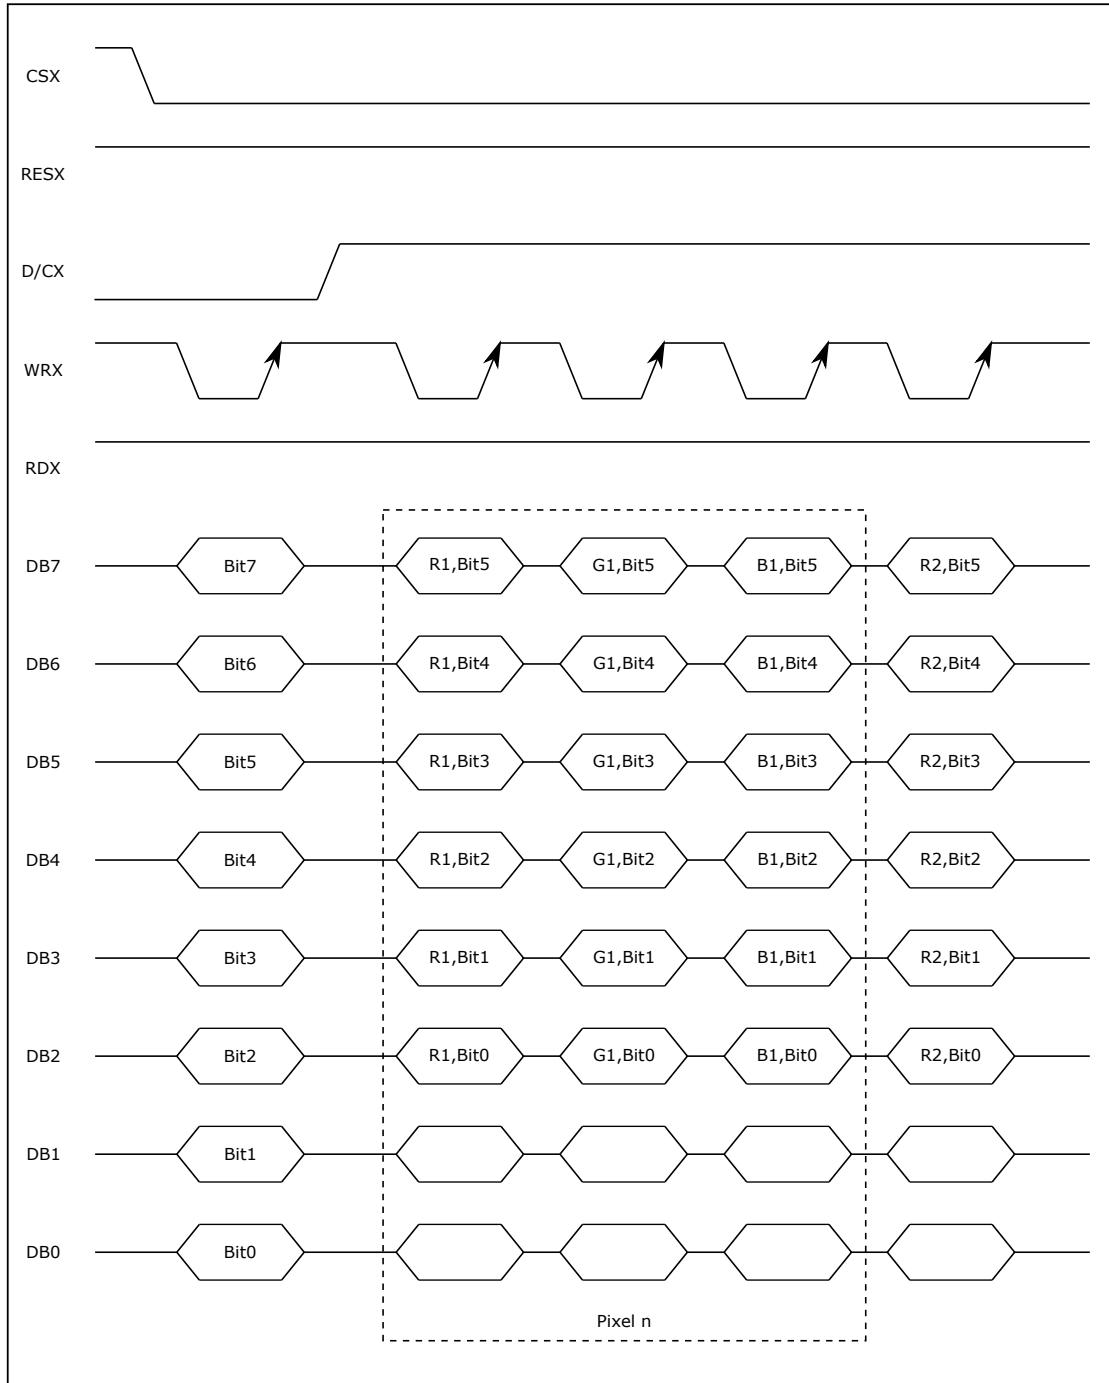


Fig. 10.5: RGB666 Output

10.3.1.5 Output RGB888

The data output in RGB888 format is shown as follows:

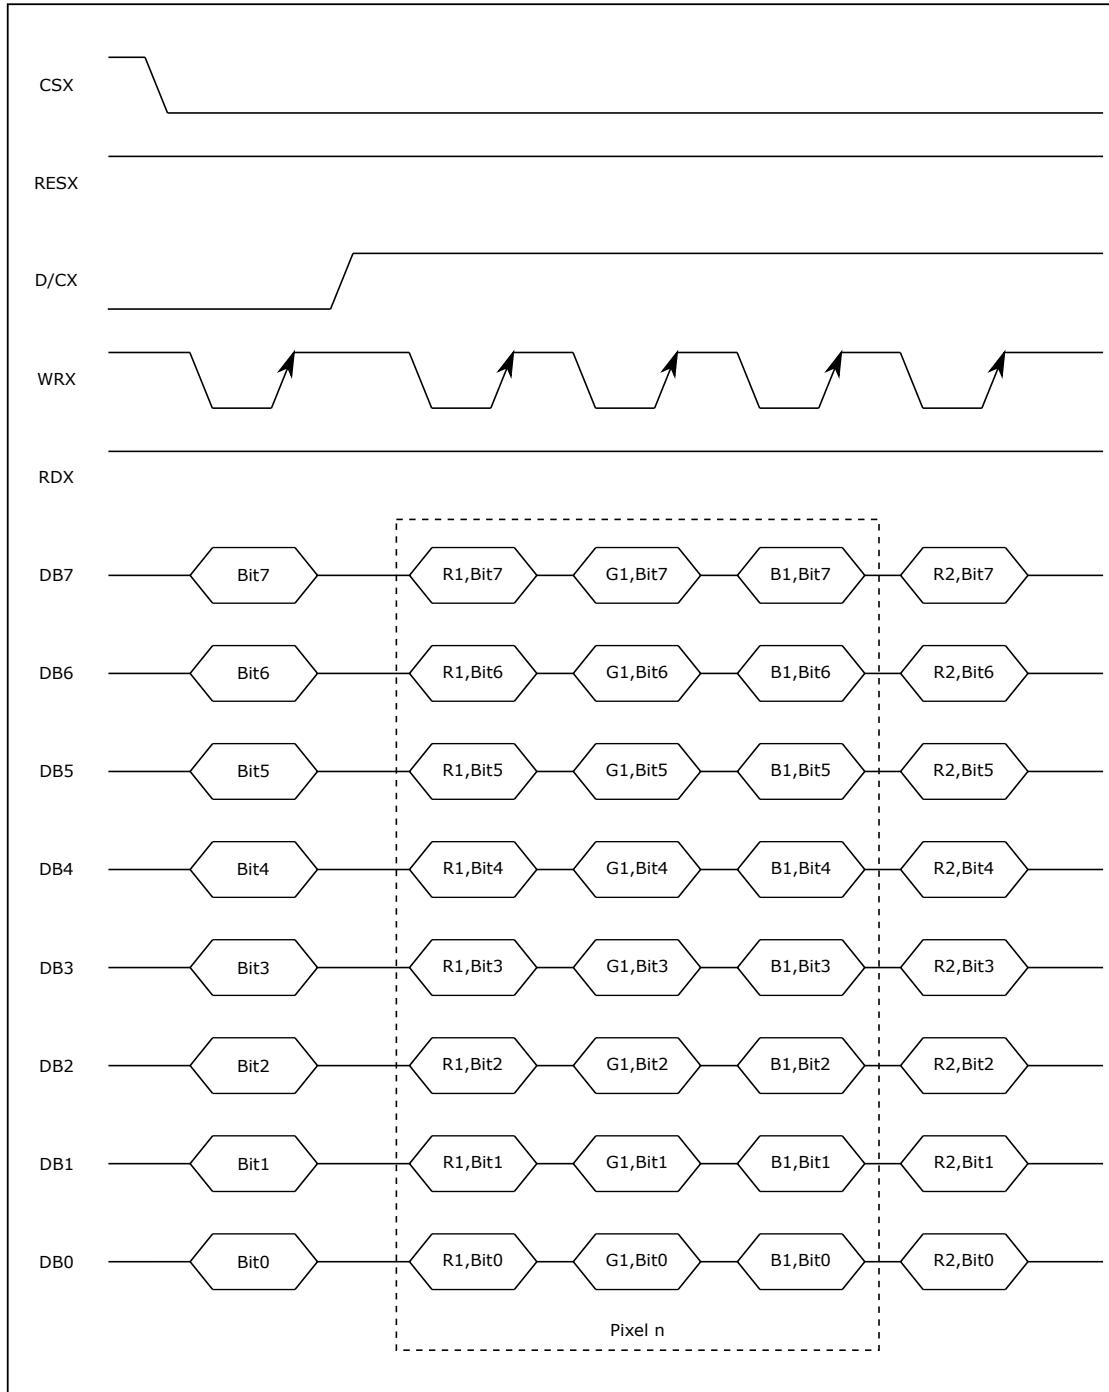


Fig. 10.6: RGB888 Output

10.3.2 DBI Type C 3-Line

10.3.2.1 Write Timing

The DBI Type C mode has 3-line 9-bit serial interface, and the timing of MCU writing data to the display module is shown as follows:

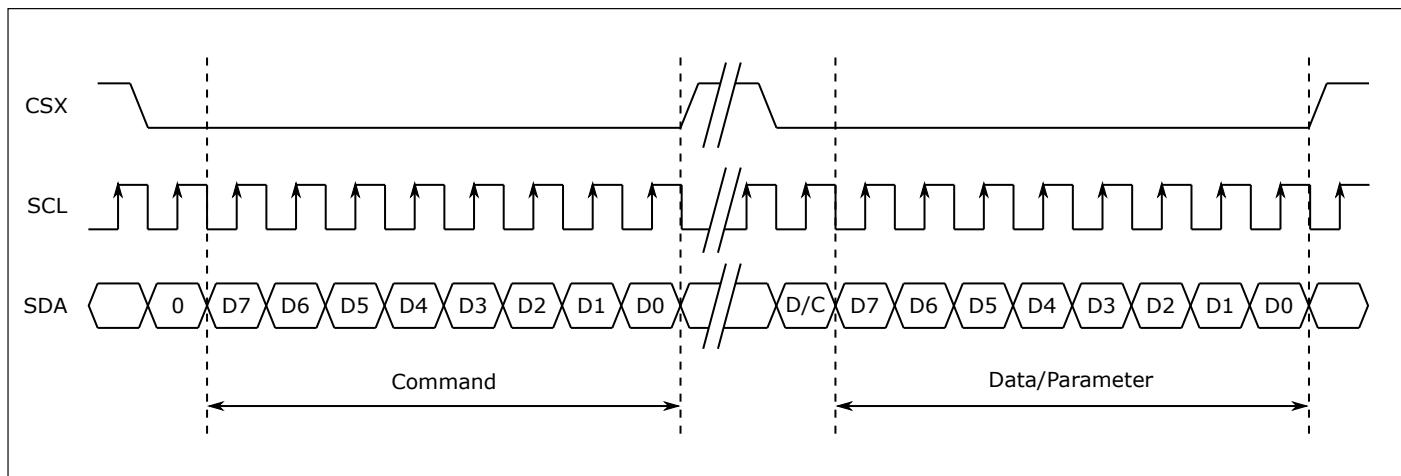


Fig. 10.7: Write Timing

- CSX: chip select signal. When the signal is Low, the display module will be selected; when it is High, the display module will ignore all other interface signals.
- SCL: serial clock line, which provides a clock signal for data transfer.
- SDA: serial data line. In a write operation, the serial data packet contains a D/CX (data/command) selection bit and a transfer byte. If the D/CX bit is Low, the transfer byte is a command. If the D/CX bit is High, that is the display data or command parameter.

10.3.2.2 Read Timing

The timing of MCU reading data from the display module is shown as follows:

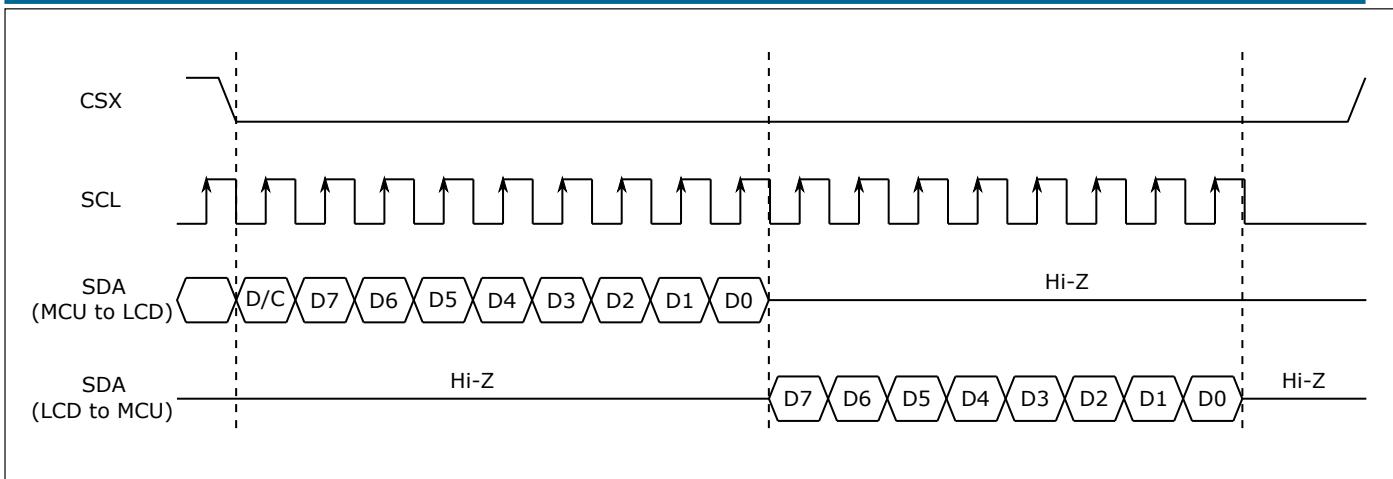


Fig. 10.8: Read Timing

10.3.2.3 Output RGB565

The data output in RGB565 format is shown as follows:

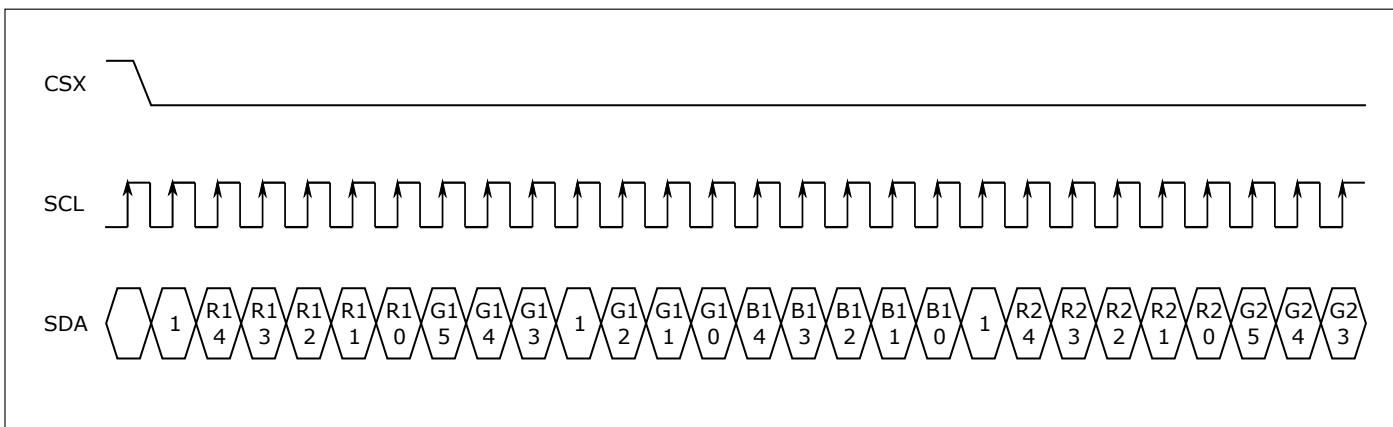


Fig. 10.9: RGB565 Output

10.3.2.4 Output RGB666

The data output in RGB666 format is shown as follows:

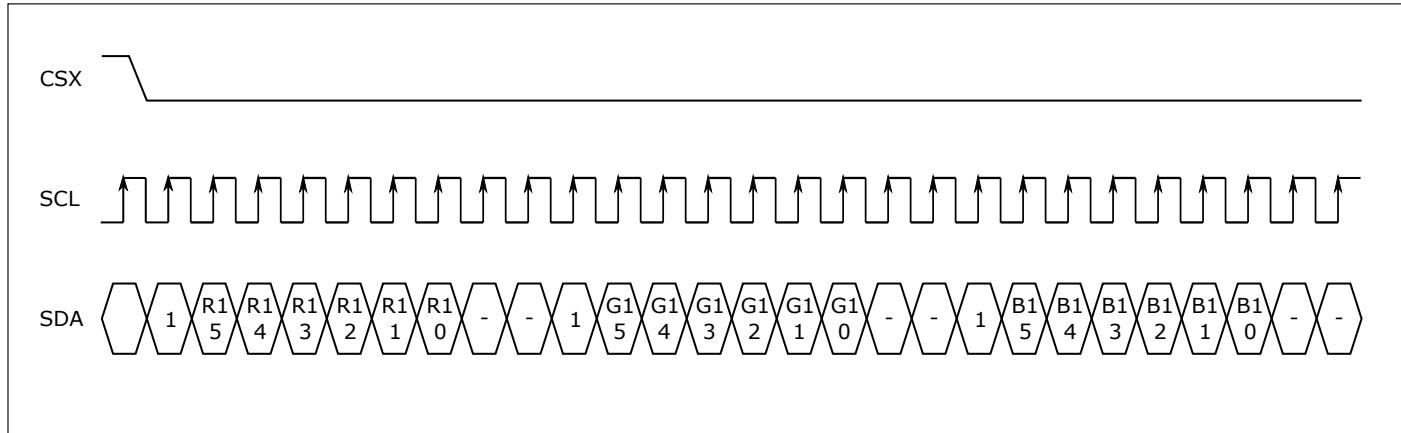


Fig. 10.10: RGB666 Output

10.3.2.5 Output RGB888

The data output in RGB888 format is shown as follows:

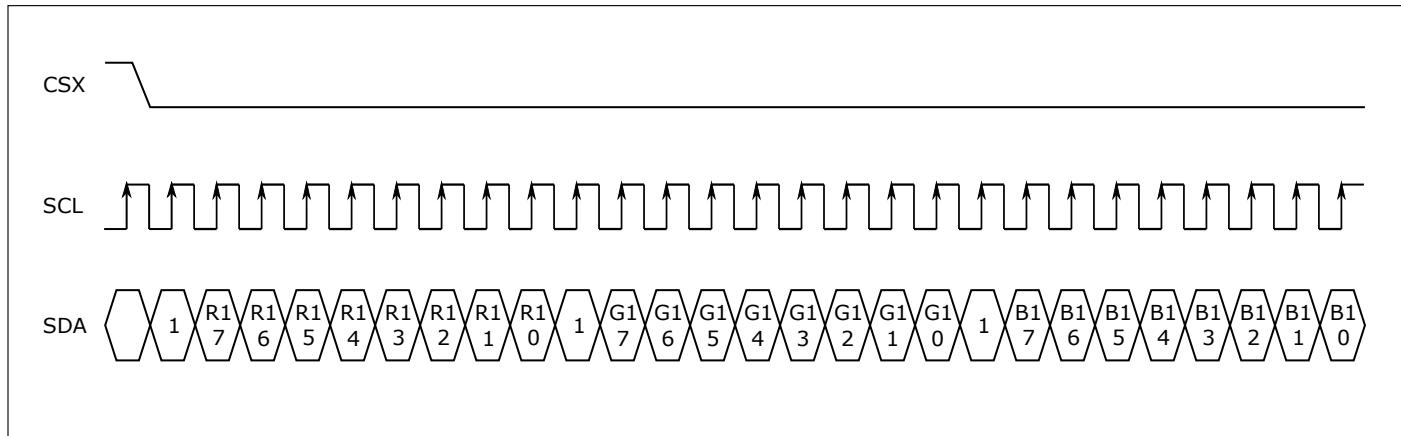


Fig. 10.11: RGB888 Output

10.3.3 DBI Type C 4-Line

10.3.3.1 Write Timing

The DBI Type C mode has 4-line 8-bit serial interface, and the timing of MCU writing data to the display module is shown as follows:

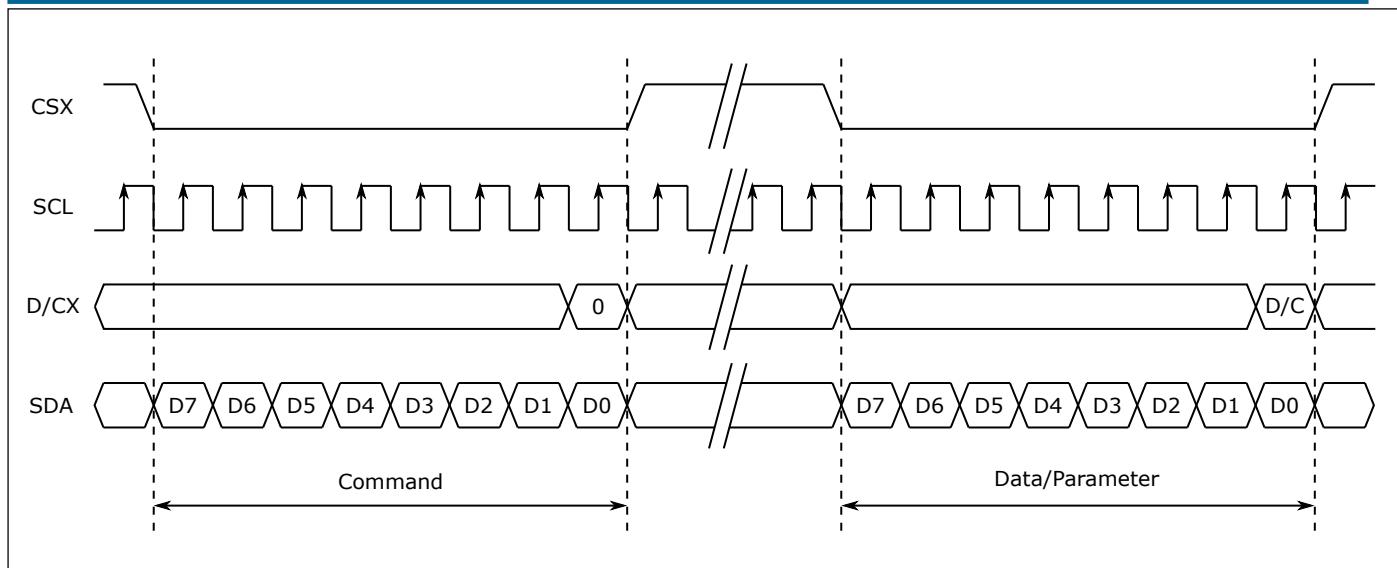


Fig. 10.12: Write Timing

- CSX: chip select signal. When the signal is Low, the display module will be selected; when it is High, the display module will ignore all other interface signals.
- D/CX: data/command signal. If the signal is Low, the information transferred by SDA is a command. If the signal is High, that is the display data or command parameter.
- SCL: serial clock line, which provides a clock signal for data transfer.
- SDA: serial data line. used to transmit commands, command parameters or data.

10.3.3.2 Read Timing

The timing of MCU reading data from the display module is shown as follows:

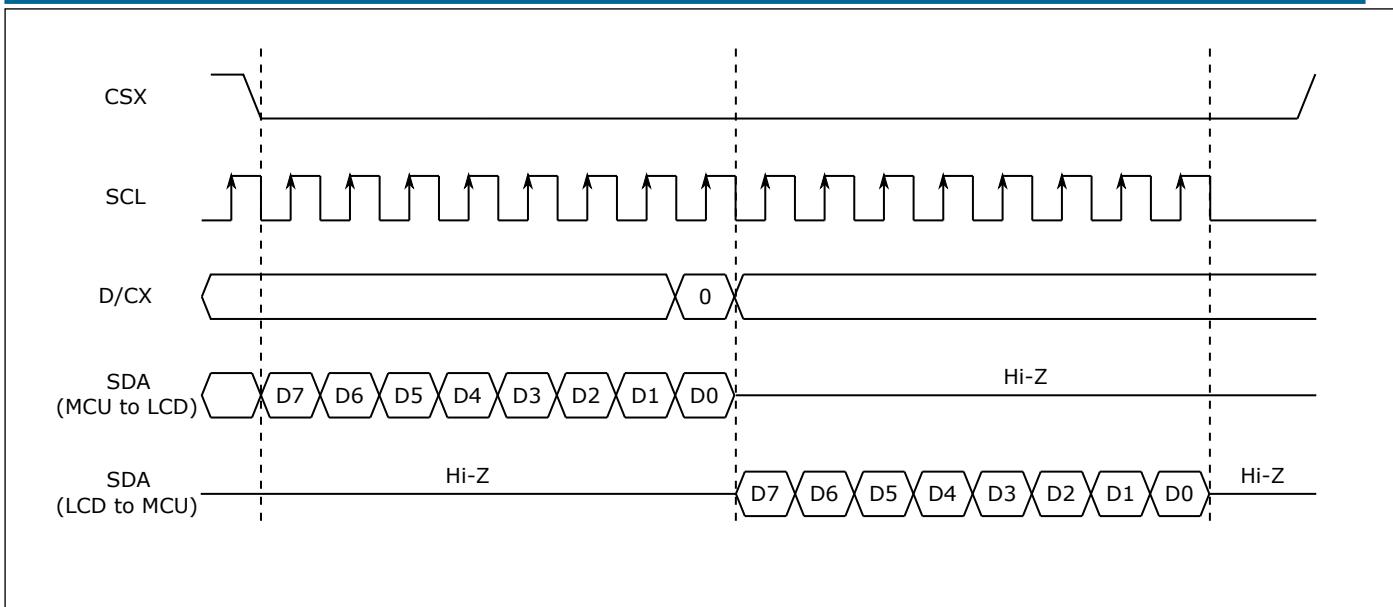


Fig. 10.13: Read Timing

10.3.3.3 Output RGB565

The data output in RGB565 format is shown as follows:

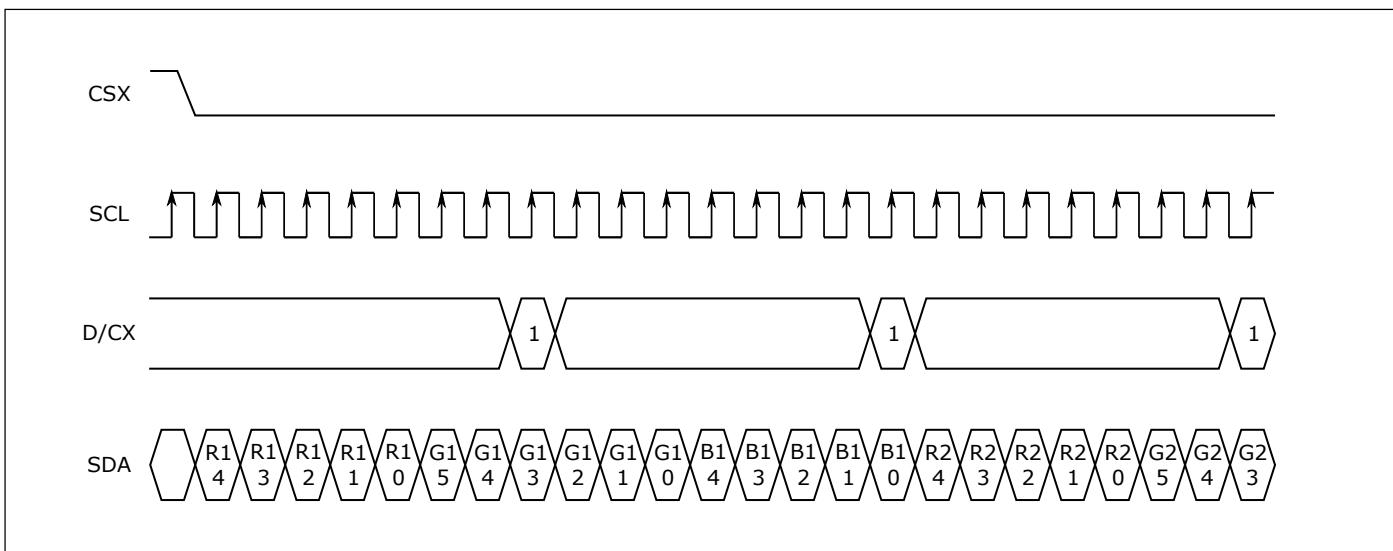


Fig. 10.14: RGB565 Output

10.3.3.4 Output RGB666

The data output in RGB666 format is shown as follows:

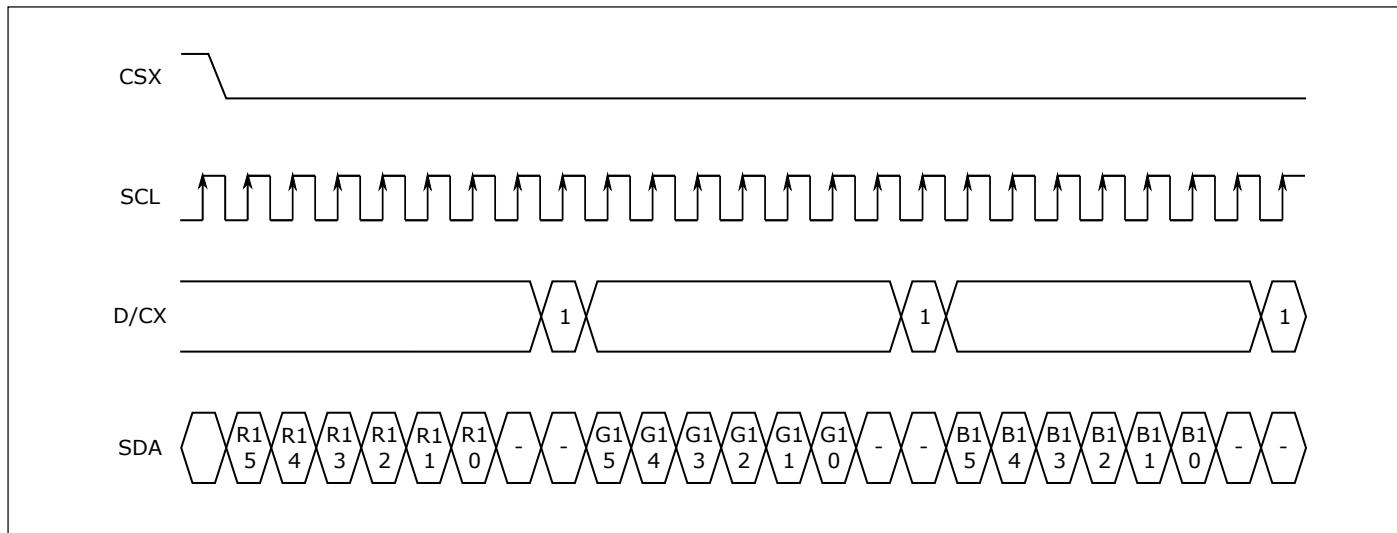


Fig. 10.15: RGB666 Output

10.3.3.5 Output RGB888

The data output in RGB888 format is shown as follows:

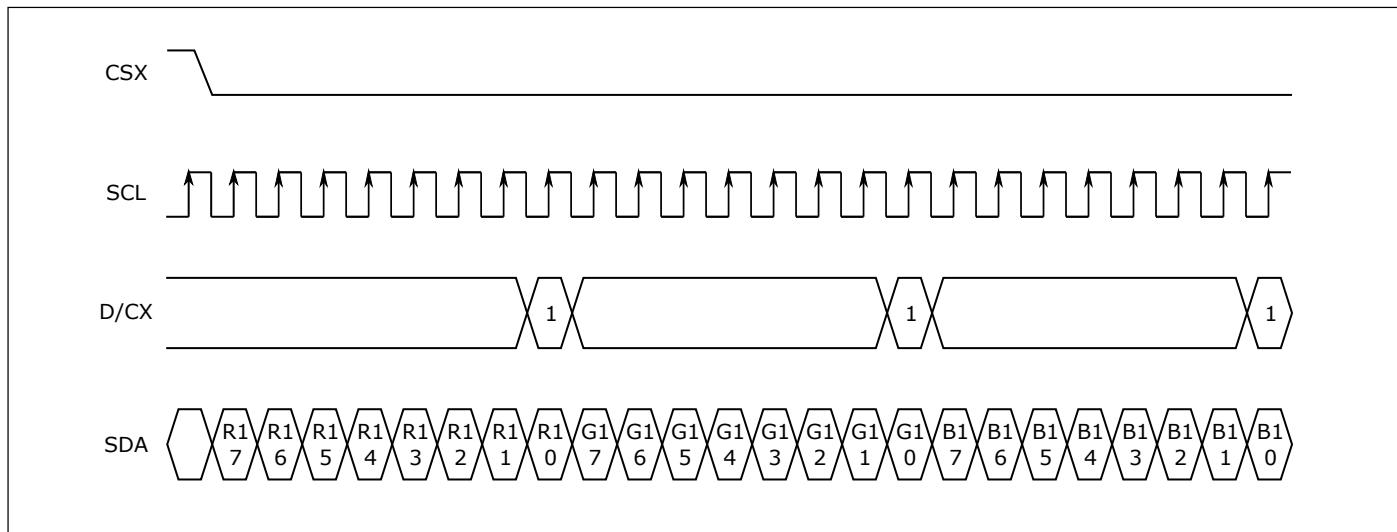


Fig. 10.16: RGB888 Output

10.3.4 Input Pixel Format

The DBI module supports 8 different input pixel formats, whose arrangement in the memory is shown as follows:

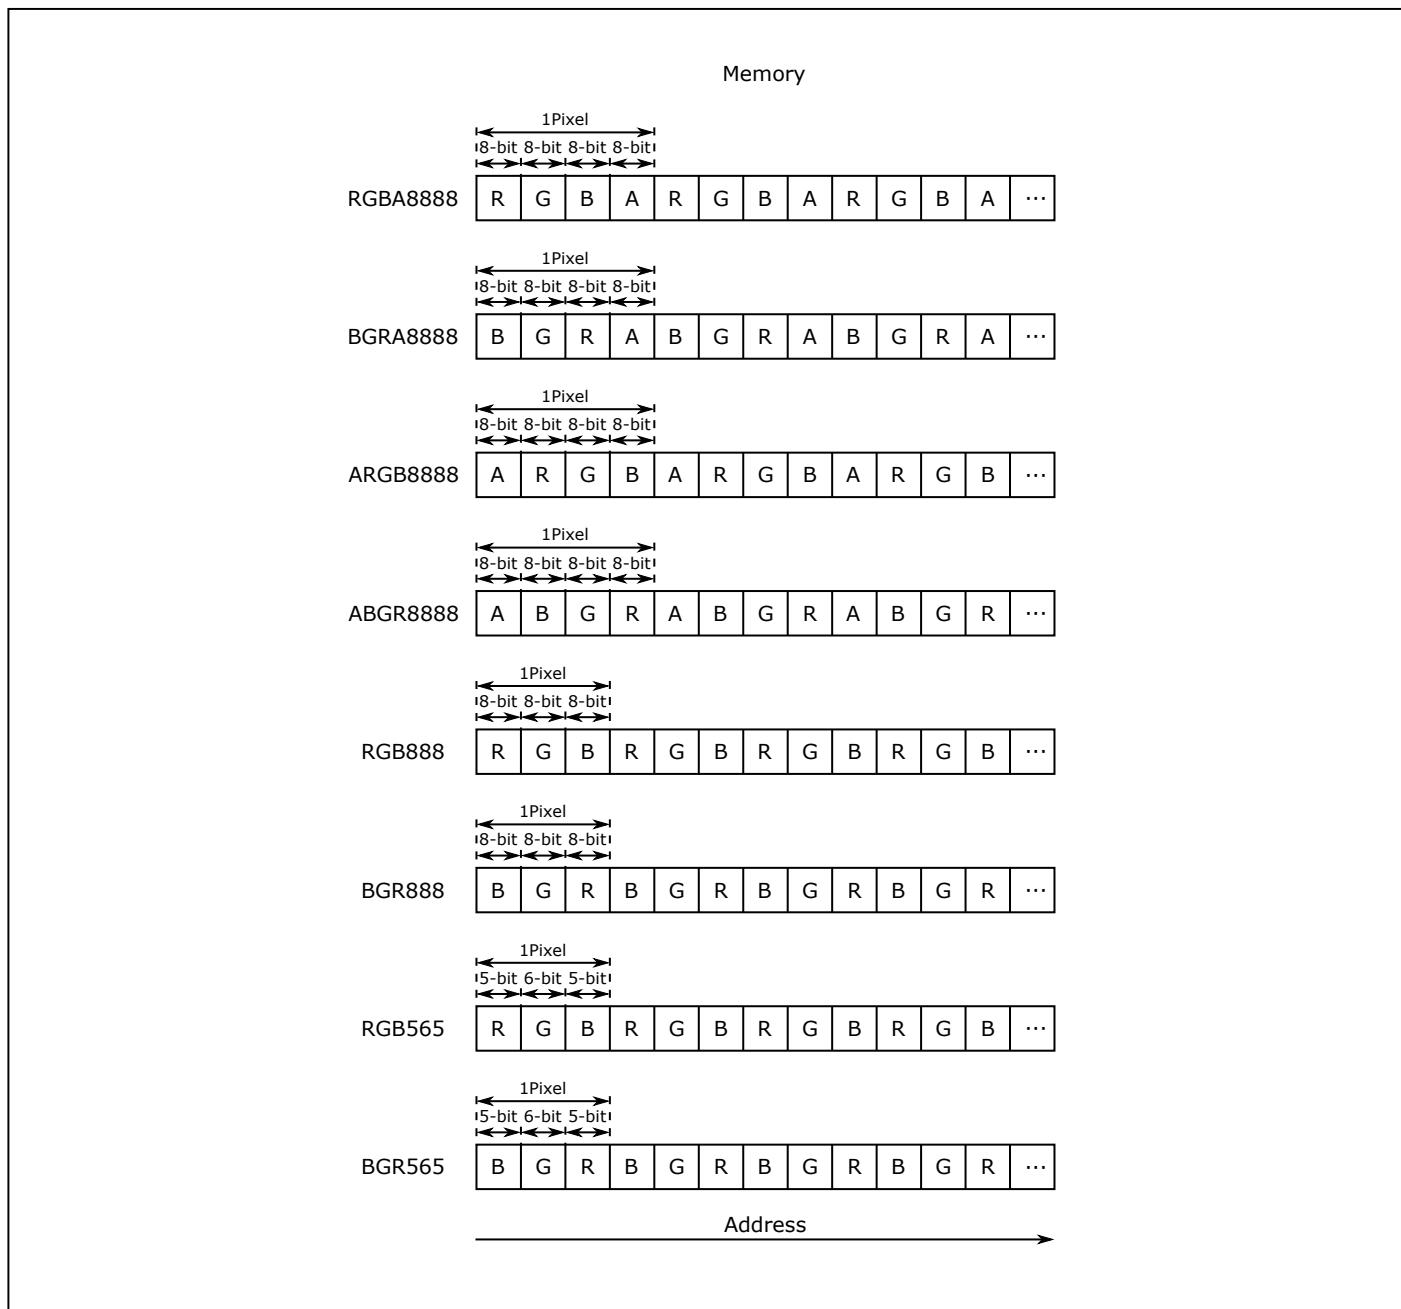


Fig. 10.17: Input Pixel Format

10.3.5 Interrupt

DBI has the following interrupts:

- End of transfer interrupt
- TX FIFO request interrupt
- FIFO overflow error interrupt

When a pixel count value is set, the end of transfer interrupt will be generated when the transferred pixel data reaches the count value, and both Type B and Type C will generate this interrupt.

When TFICNT in DBI_FIFO_CONFIG_1 is greater than TFITH, the TX FIFO request interrupt will be generated, and the interrupt flag will be automatically cleared when the condition is not met.

The FIFO overflow error interrupt will be generated in the case of Overflow or Underflow of TX.

10.3.6 DMA


DBI TX supports the DMA transfer mode, which requires to set the threshold of TX FIFO by configuring the <TFITH> bit in the register DBI_FIFO_CONFIG_1. When this mode is enabled, if TFICNT is greater than TFITH, the DMA TX request will be triggered. After DMA is configured, when receiving this request, DMA will transfer data from memory to TX FIFO as configured.

10.4 Register description

Name	Description
dbi_config	
dbi_int_sts	
dbi_bus_busy	
dbi_pix_cnt	
dbi_prd	
dbi_wdata	
dbi_rdata	
dbi_fifo_config_0	
dbi_fifo_config_1	
dbi_fifo_wdata	

10.4.1 dbi_config

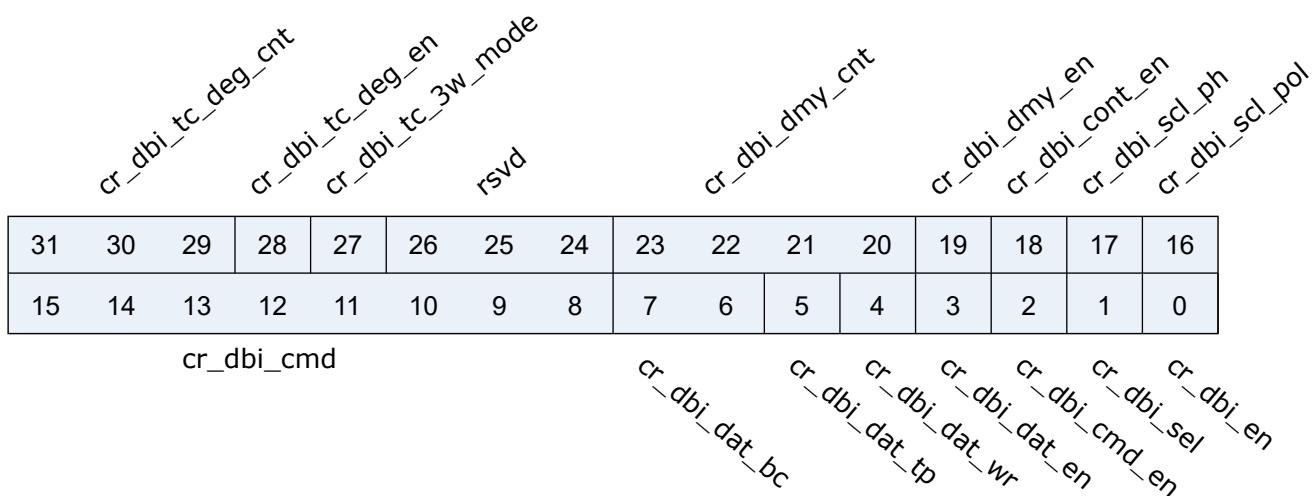Address: 0x3001b000



Bits	Name	Type	Reset	Description
31:29	cr_dbi_tc_deg_cnt	r/w	3'd0	De-glitch function cycle count
28	cr_dbi_tc_deg_en	r/w	1'b0	Enable signal of all input de-glitch function
27	cr_dbi_tc_3w_mode	r/w	1'b0	DBI Type C 3-wire mode enable 1'b0: 4-wire mode is enabled 1'b1: 3-wire mode is enabled
26:24	rsvd	rsvd	3'h0	
23:20	cr_dbi_dmy_cnt	r/w	4'd0	Dummy cycle count, unit: period defined by dbi_prd_d Effective only in Type C (Fixed to 1 dbi_prd_d period in Type B)
19	cr_dbi_dmy_en	r/w	1'b0	Enable signal of dummy cycle(s) 1'b0: Disabled, no dummy cycle(s) between command phase and data phase 1'b1: Enabled, dummy cycle(s) will be inserted between command phase and data phase
18	cr_dbi_cont_en	r/w	1'b1	Enable signal of pixel data continuous transfer mode 1'b0: Disabled, CS_n will de-assert between each pixel 1'b1: Enabled, CS_n will stay asserted between each consecutive pixel
17	cr_dbi_scl_ph	r/w	1'b0	SCL clock phase inverse signal
16	cr_dbi_scl_pol	r/w	1'b1	SCL clock polarity 0: SCL output LOW at IDLE state 1: SCL output HIGH at IDLE state
15:8	cr_dbi_cmd	r/w	8'h2C	DBI Command

Bits	Name	Type	Reset	Description
7:6	cr_dbi_dat_bc	r/w	2'd0	Data byte count of normal data (pixel data count is determined by cr_dbi_pix_cnt)
5	cr_dbi_dat_tp	r/w	1'b0	Data type select 1'b0: Normal data (parameter) 1'b1: Pixel data Note: Read command supports normal data only
4	cr_dbi_dat_wr	r/w	1'b1	Data phase Read/Write select 1'b0: Read data 1'b1: Write data
3	cr_dbi_dat_en	r/w	1'b1	Data enable signal 1'b0: Data phase disabled 1'b1: Data phase enabled
2	cr_dbi_cmd_en	r/w	1'b1	Command enable signal 1'b0: No command phase 1'b1: Command will be sent
1	cr_dbi_sel	r/w	1'b0	Select signal of DBI Type B or C 1'b0: DBI Type B 1'b1: DBI Type C
0	cr_dbi_en	r/w	1'b0	Enable signal of DBI function Asserting this bit will trigger the transaction, and should be de-asserted after finish

10.4.2 dbi_int_sts

Address: 0x3001b004

RSVD	RSVD	RSVD	RSVD	RSVD	cr_dbi_fer_en	cr_dbi_txf_en	cr_dbi_end_en	RSVD	RSVD	RSVD	RSVD	rsvd	rsvd	cr_dbi_end_clr	
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RSVD	RSVD	RSVD	RSVD	RSVD	cr_dbi_fer_mask	cr_dbi_txf_mask	cr_dbi_end_mask	RSVD	RSVD	RSVD	RSVD	dbi_fer_int	dbi_txf_int	dbi_end_int	

Bits	Name	Type	Reset	Description
31:27	RSVD			
26	cr_dbi_fer_en	r/w	1'b1	Interrupt enable of dbi_fer_int
25	cr_dbi_txf_en	r/w	1'b1	Interrupt enable of dbi_txe_int
24	cr_dbi_end_en	r/w	1'b1	Interrupt enable of dbi_end_int
23:19	RSVD			
18	rsvd	rsvd	1'b0	
17	rsvd	rsvd	1'b0	
16	cr_dbi_end_clr	w1c	1'b0	Interrupt clear of dbi_end_int
15:11	RSVD			
10	cr_dbi_fer_mask	r/w	1'b1	Interrupt mask of dbi_fer_int
9	cr_dbi_txf_mask	r/w	1'b1	Interrupt mask of dbi_txe_int
8	cr_dbi_end_mask	r/w	1'b1	Interrupt mask of dbi_end_int
7:3	RSVD			
2	dbi_fer_int	r	1'b0	TX/RX FIFO error interrupt, auto-cleared when FIFO overflow/underflow error flag is cleared
1	dbi_txf_int	r	1'b1	TX FIFO ready ($tx_fifo_cnt > tx_fifo_th$) interrupt, auto-cleared when data is pushed
0	dbi_end_int	r	1'b0	Transfer end interrupt, shared by both Type B and C mode

10.4.3 dbi_bus_busy

Address: 0x3001b008

RSVD	sts_dbi_bus_busy															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

Bits	Name	Type	Reset	Description
31:1	RSVD			
0	sts_dbi_bus_busy	r	1'b0	Indicator of dbi bus busy

10.4.4 dbi_pix_cnt

Address: 0x3001b00c

cr_dbi_pix_format																cr_dbi_pix_cnt															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
cr_dbi_pix_cnt																															

Bits	Name	Type	Reset	Description
31	cr_dbi_pix_format	r/w	1'b0	Pixel format 1'b0: RGB565 1'b1: RGB888/RGB666
30:24	RSVD			
23:0	cr_dbi_pix_cnt	r/w	24'h0	Pixel count

10.4.5 dbi_prd

Address: 0x3001b010

cr_dbi_prd_d_ph_1								cr_dbi_prd_d_ph_0							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
cr_dbi_prd_i								cr_dbi_prd_s							

Bits	Name	Type	Reset	Description
31:24	cr_dbi_prd_d_ph_1	r/w	8'd15	Length of DATA phase 1 (please refer to "Timing" tab)
23:16	cr_dbi_prd_d_ph_0	r/w	8'd15	Length of DATA phase 0 (please refer to "Timing" tab)

Bits	Name	Type	Reset	Description
15:8	cr_dbi_prd_i	r/w	8'd15	Length of INTERVAL between pixel data (please refer to "Timing" tab)
7:0	cr_dbi_prd_s	r/w	8'd15	Length of START/STOP condition (please refer to "Timing" tab)

10.4.6 dbi_wdata

Address: 0x3001b018

cr_dbi_wdata

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

cr_dbi_wdata

Bits	Name	Type	Reset	Description
31:0	cr_dbi_wdata	r/w	32'h0	Data to be written into display IC using write command

10.4.7 dbi_rdata

Address: 0x3001b01c

sts_dbi_rdata


31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

sts_dbi_rdata

Bits	Name	Type	Reset	Description
31:0	sts_dbi_rdata	r	32'h0	Data read from display IC using read command

10.4.8 dbi_fifo_config_0

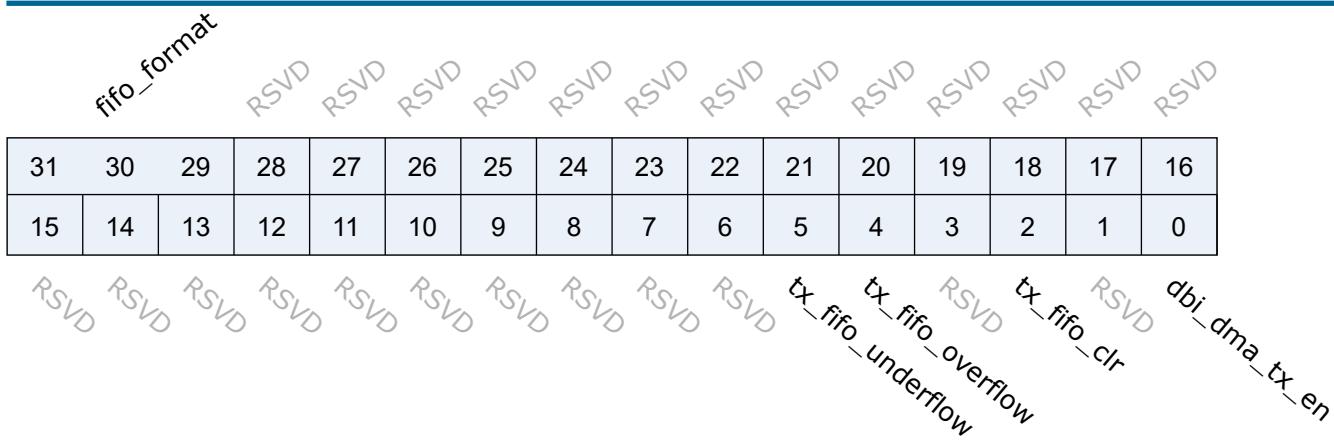Address: 0x3001b080



Bits	Name	Type	Reset	Description
31:29	fifo_format	r/w	3'd0	FIFO data format (see Tab 'FIFO Format' for details) 3'd0: 8'h0, B[7:0], G[7:0], R[7:0] 3'd1: 8'h0, R[7:0], G[7:0], B[7:0] 3'd2: B[7:0], G[7:0], R[7:0], 8'h0 3'd3: R[7:0], G[7:0], B[7:0], 8'h0 3'd4: R[7:0], B[7:0], G[7:0], R[7:0] 3'd5: B[7:0], R[7:0], G[7:0], B[7:0] 3'd6: 2B[7:3], G[7:2], R[7:3] 3'd7: 2R[7:3], G[7:2], B[7:3]
28:6	RSVD			
5	tx_fifo_underflow	r	1'b0	Underflow flag of TX FIFO, can be cleared by tx_fifo_clr
4	tx_fifo_overflow	r	1'b0	Overflow flag of TX FIFO, can be cleared by tx_fifo_clr
3	RSVD			
2	tx_fifo_clr	w1c	1'b0	Clear signal of TX FIFO
1	RSVD			
0	dbi_dma_tx_en	r/w	1'b0	Enable signal of dma_tx_req/ack interface

10.4.9 dbi_fifo_config_1

Address: 0x30001b084

RSVD	tx_fifo_th														
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0



Bits	Name	Type	Reset	Description
31:19	RSVD			
18:16	tx_fifo_th	r/w	3'd0	TX FIFO threshold, dma_tx_req will not be asserted if tx_fifo_cnt is less than this value
15:4	RSVD			
3:0	tx_fifo_cnt	r	4'd8	TX FIFO available count

10.4.10 dbi_fifo_wdata

Address: 0x30001b088

dbi_fifo_wdata															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

dbi_fifo_wdata

Bits	Name	Type	Reset	Description
31:0	dbi_fifo_wdata	w	x	Pixel data with 8 types of format (determined by fifo_format)

11.1 Overview

The Display Pixel Interface (DPI), also known as RGB interface, is an interface protocol defined by MIPI Alliance for communicating with display screens. This module has 16-bit parallel data lines, with the system memory acting as the display memory, and drives the display directly by continuously outputting data and synchronization signals.

11.2 Features

- Meets MIPI® Alliance standard
- Supports single buffer and ping-pong buffer serving as the display memory
- Supports hardware and software control for ping-pong operation
- Supports the Test Mode
- Programmable timing parameters
- Supported input pixel format (buffer data format):
 - YUV422 (interleaved)
 - RGB888
 - RGB565
 - RGBA8888
 - YUV420 (planar)
- Supports output pixel format of RGB565
- One programmable interrupt
- Use with OSD

11.3 Functional Description

The block diagram of DPI Module is shown as follows.

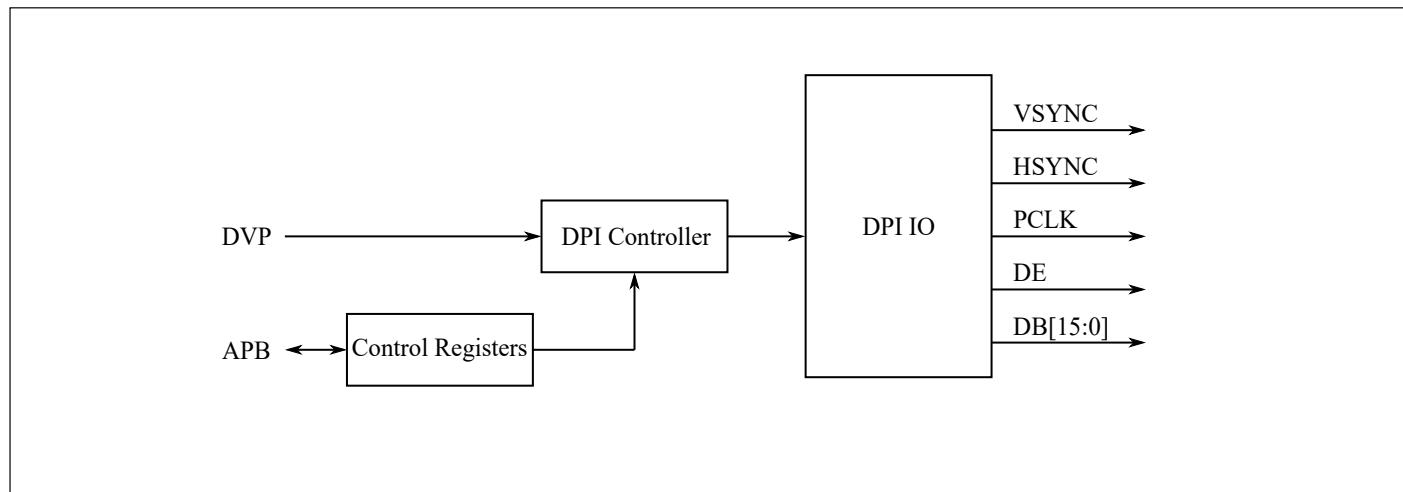


Fig. 11.1: Block Diagram of DPI

11.3.1 DPI Timing

The 16-bit DPI interface timing is shown as follows:

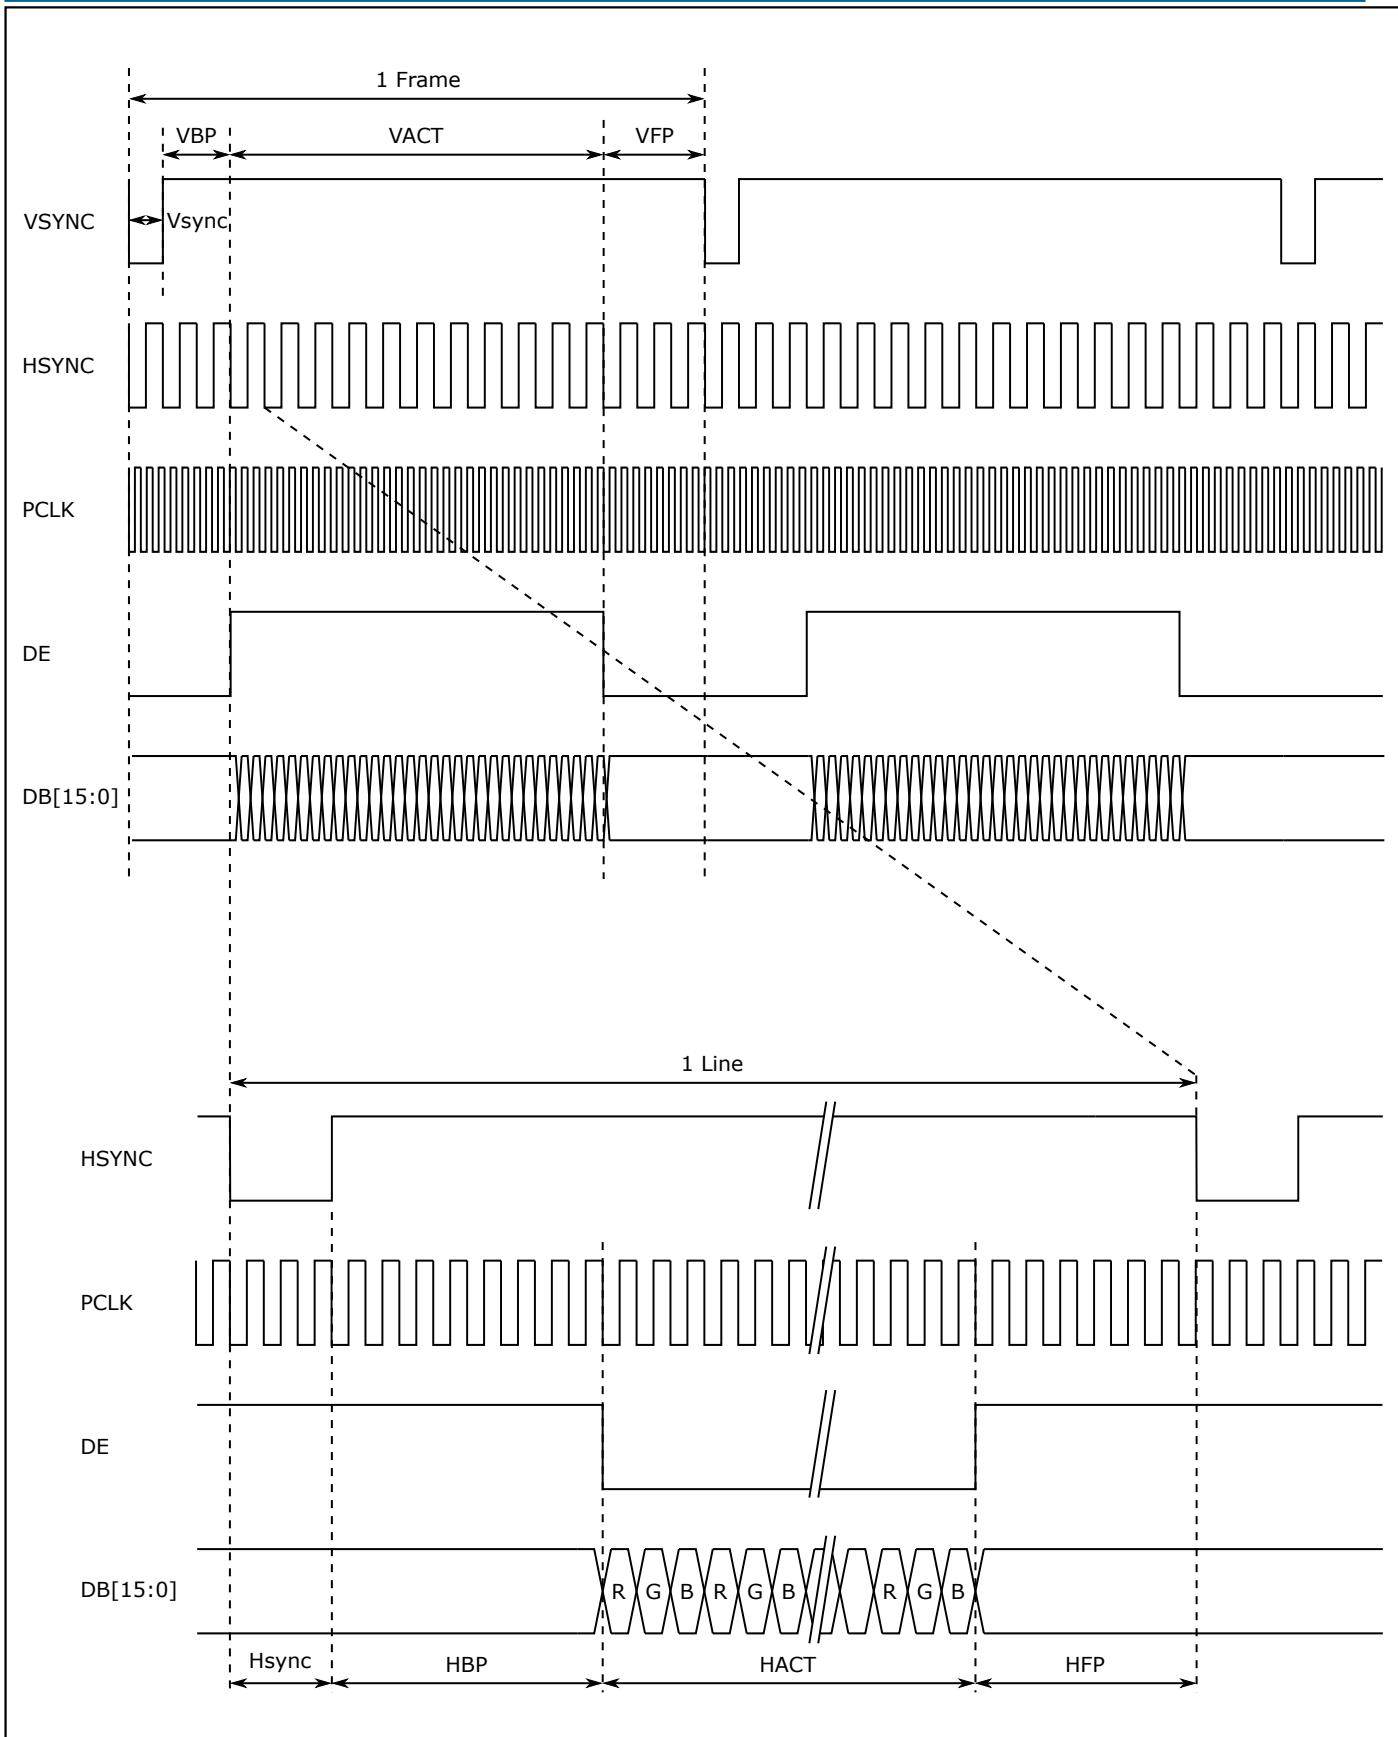


Fig. 11.2: DPI Timing

- Vertical Sync (VSYNC): Vertically synchronized timing signal, used to indicate the beginning of each displayed image frame
- Horizontal Sync (Hsync): Horizontally synchronized timing signal, used to indicate the beginning of each horizontal pixel line
- Pixel Clock (PCLK): Pixel clock, continuously generated; VSYNC, HSYNC, DE, and DB [15:0] will be sampled at the rising edge of PCLK
- Data Enable (DE): Data enable signal, used to indicate valid pixel data
- Data Bit (DB) [15:0]: Parallel data bits -16 bits in total, used to transfer pixel data.

11.3.2 Programmable timing parameters

The timing parameters of DPI are shown as follows:

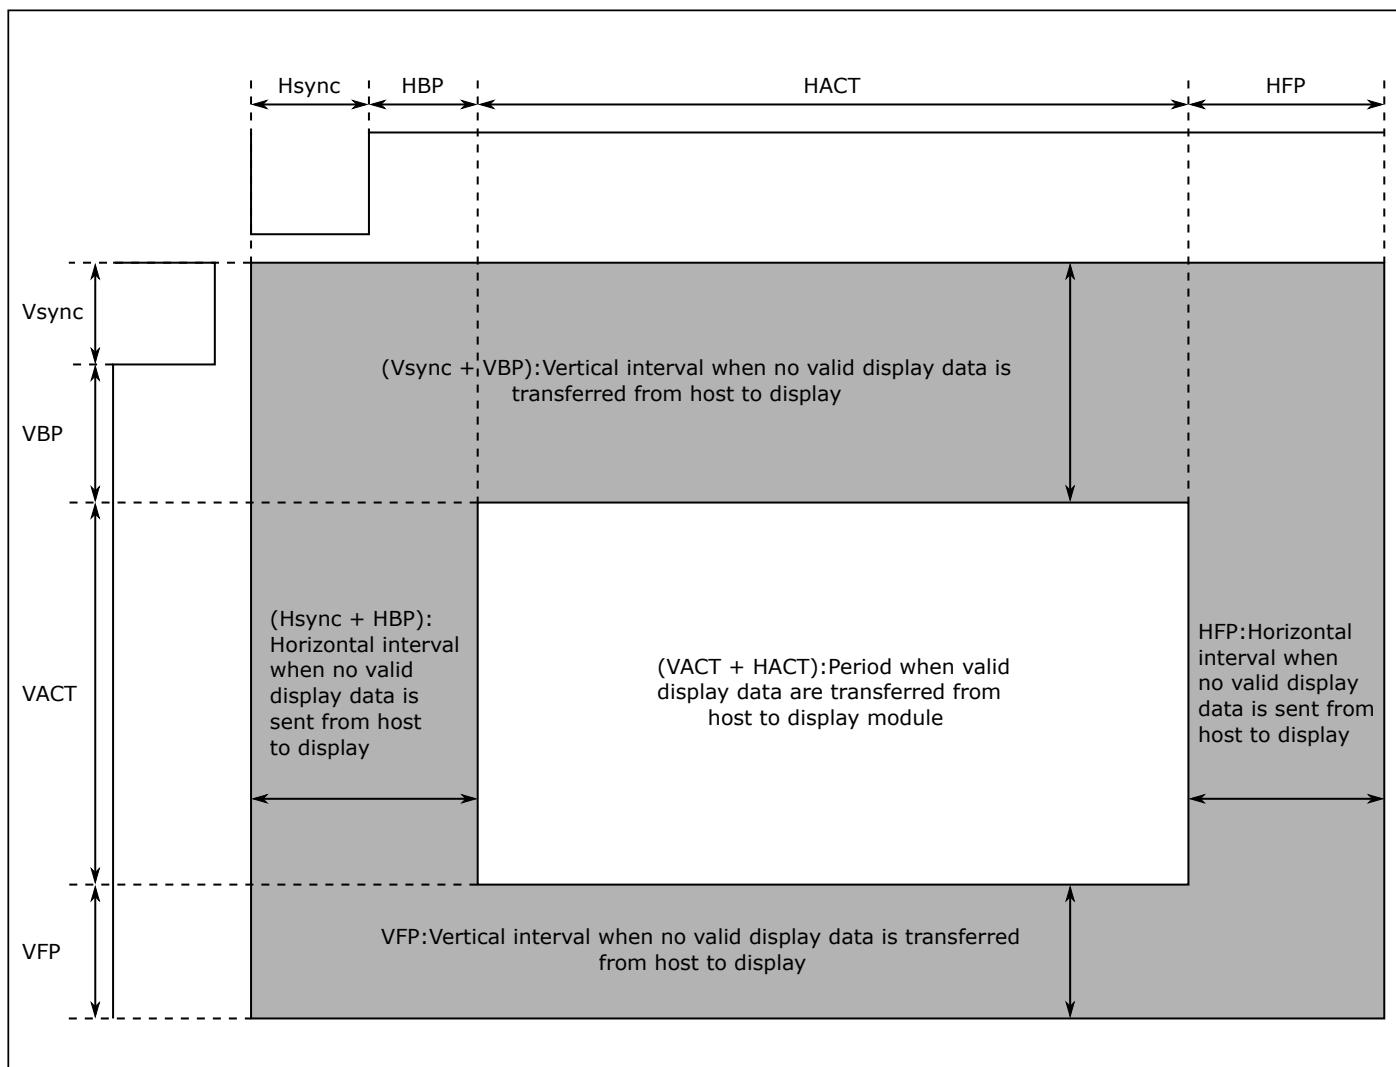


Fig. 11.3: Timing Parameters

The vertical period (one frame) is equal to the sum of Vsync, VBP, VACT, and VFP. The horizontal period (one line) is equal to the sum of Hsync, HBP, HACT, and HFP. The programmable ranges of the timing parameters are shown in the following table:

Parameters	Symbols	Min.	Step	Max.	Unit
Horizontal Synchronization	Hsync	1	1	255	PCLK Cycle
Horizontal Back Porch	HBP	1	1	-	PCLK Cycle
Horizontal Active	HACT	176	1	800	PCLK Cycle
Horizontal Front Porch	HFP	1	1	255	PCLK Cycle
Vertical Synchronization	Vsync	1	1	255	Line
Vertical Back Porch	VBP	1	1	-	Line
Vertical Active	VACT	208	1	480	Line
Vertical Front Porch	VFP	1	1	255	Line

Fig. 11.4: Ranges of Timing Parameters

11.3.3 Single Buffer

The DPI Module can use one memory with a size of “display resolution × number of bytes per pixel” as the display memory. When it starts working, DPI transfers the data in this memory to the Display Module repeatedly and continuously. If changes are made to the data in this memory, the changes may take effect on the current or next frame, depending on whether the changed data is located in memory after or before the location in memory of the data currently being transferred by the DPI.

11.3.4 Ping-Pong Buffer

The DPI Module can use two memories with each size of “display resolution × number of bytes per pixel” as the display memory. DPI transfers the data in one memory to the Display Module repeatedly and continuously. The control mode for switching the current memory for data transfer to the other memory can be set to hardware or software control. When it is set to hardware control, the data for DPI is provided by the Cam Module (see Cam Module section); DPI switches the current memory in use to another memory after the Cam Module has written a complete frame of data to the memory not involved in transfer, and the data in the current memory is completely transferred. When it is set to software control, the memory currently used by DPI for transfer is set by <SWAP_IDX_SWV>, with “0” and “1” corresponding to two memory blocks respectively.

11.3.5 Test Mode

In Test Mode, DPI can output images with the same pixel color in the same row and a gradient color between different rows. The Test Mode requires three parameters, namely the minimum value of pixel data VAL_MIN (16 bit), the maximum value of pixel data VAL_MAX (16 bit), and the step size STEP (8 bit). DPI uses VAL_MIN as the value of each pixel in the 1st row, (VAL_MIN+STEP) as the one in the 2nd row, and (VAL_MIN+STEP*2) as the one in the 3rd row...and so on, and returns to VAL_MIN when the pixel value of the Nth row (VAL_MIN+STEP*(N1)) is greater than VAL_MAX. This cycle repeats until the number of output rows reaches the set value. Taking VAL_MIN=0x00E0, VAL_MAX=0x012F, and STEP=0x10 as an example, the display in the Test Mode is shown as follows:

VAL_MIN=0x00E0, VAL_MAX=0x012F, STEP=0x10	
0x 00E0 00E0 00E0 00E0 00E0 ... 00E0 00E0	Line 1
0x 00F0 00F0 00F0 00F0 00F0 ... 00F0 00F0	Line 2
0x 0100 0100 0100 0100 0100 ... 0100 0100	Line 3
0x 0110 0110 0110 0110 0110 ... 0110 0110	Line 4
0x 0120 0120 0120 0120 0120 ... 0120 0120	Line 5
0x 00E0 00E0 00E0 00E0 00E0 ... 00E0 00E0	Line 6
0x 00F0 00F0 00F0 00F0 00F0 ... 00F0 00F0	Line 7
0x 0100 0100 0100 0100 0100 ... 0100 0100	Line 8
0x 0110 0110 0110 0110 0110 ... 0110 0110	Line 9
0x 0120 0120 0120 0120 0120 ... 0120 0120	Line 10
0x 00E0 00E0 00E0 00E0 00E0 ... 00E0 00E0	Line 11
0x 00F0 00F0 00F0 00F0 00F0 ... 00F0 00F0	Line 12
0x 0100 0100 0100 0100 0100 ... 0100 0100	Line 13
:	:
Display(RGB565)	

Fig. 11.5: Test Mode

11.3.6 Input Pixel Format

DPI supports input in multiple pixel formats. Internally, it will convert these formats to RGB888 uniformly and then convert RGB888 to RGB565 for sending out.

11.3.6.1 YUV422 (Interleaved)

The processing of input data in YUV422 (interleaved) format is shown as follows:

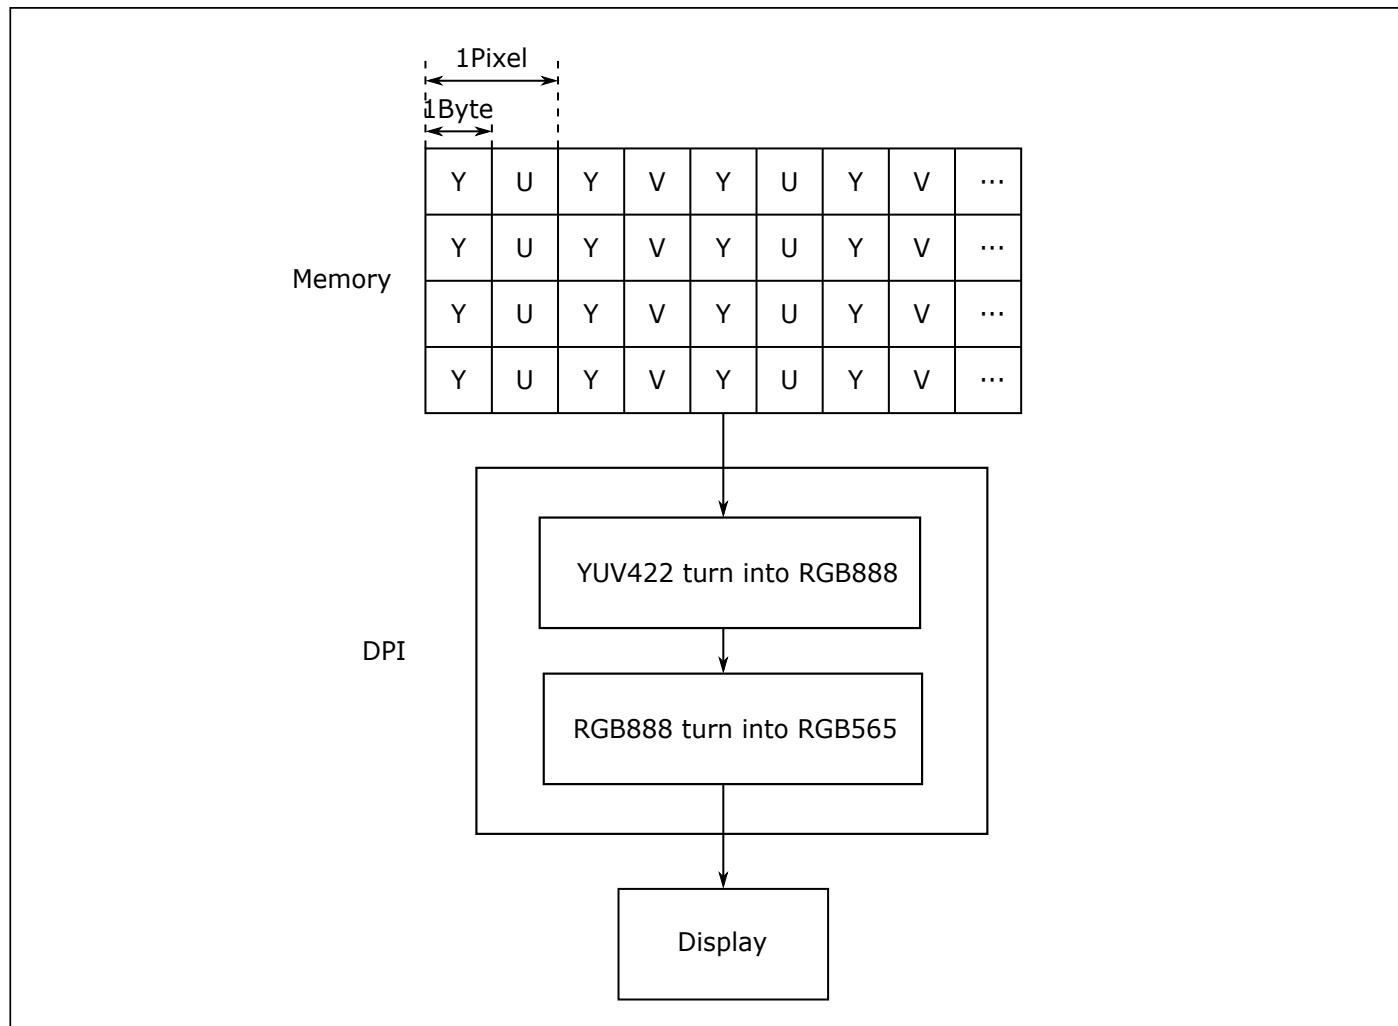


Fig. 11.6: YUV422 Processing Process

11.3.6.2 RGB888

The processing of input data in RGB888 format is shown as follows:

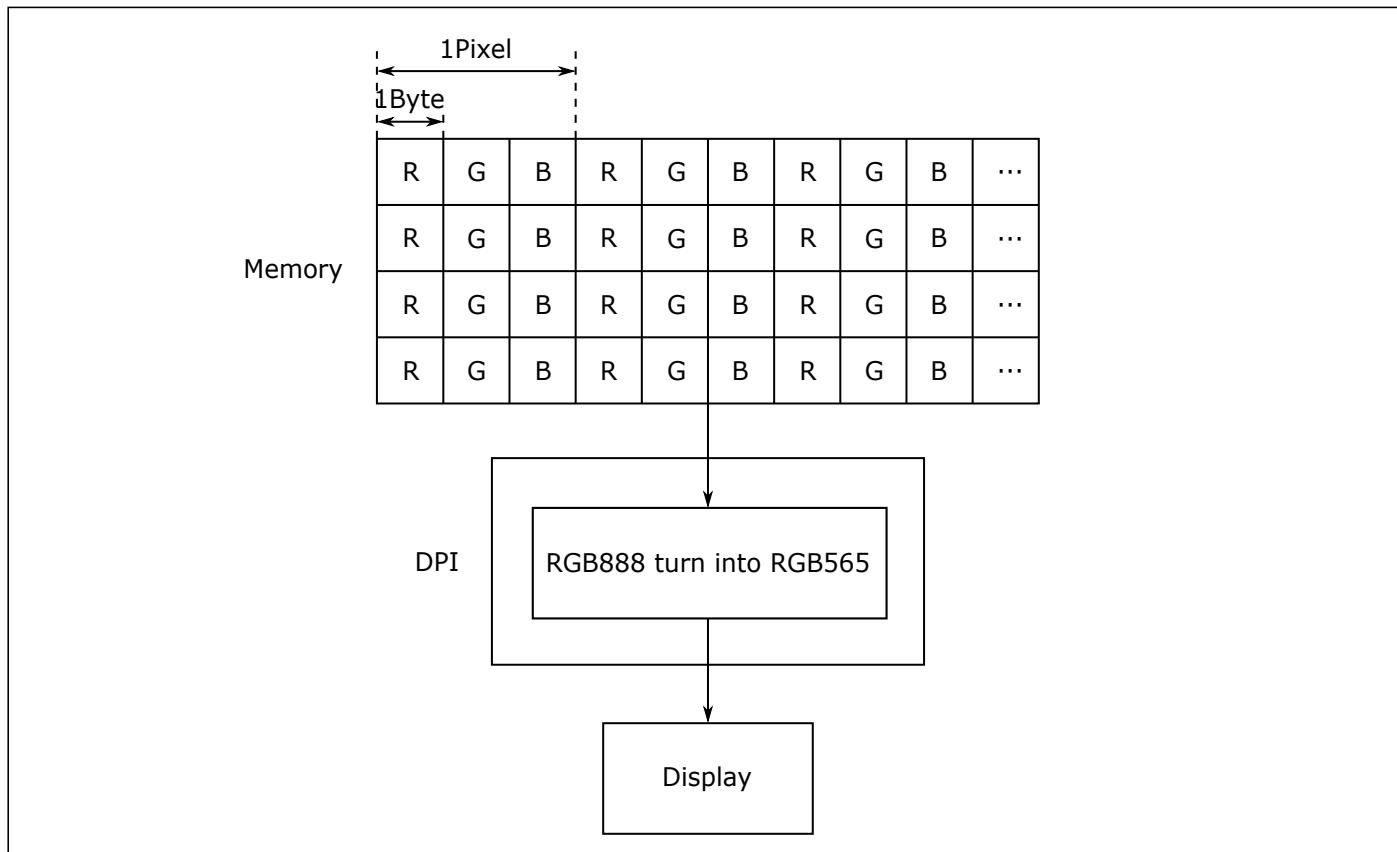


Fig. 11.7: RGB888 Processing Process

11.3.6.3 RGB565

The processing of input data in RGB565 format is shown as follows:

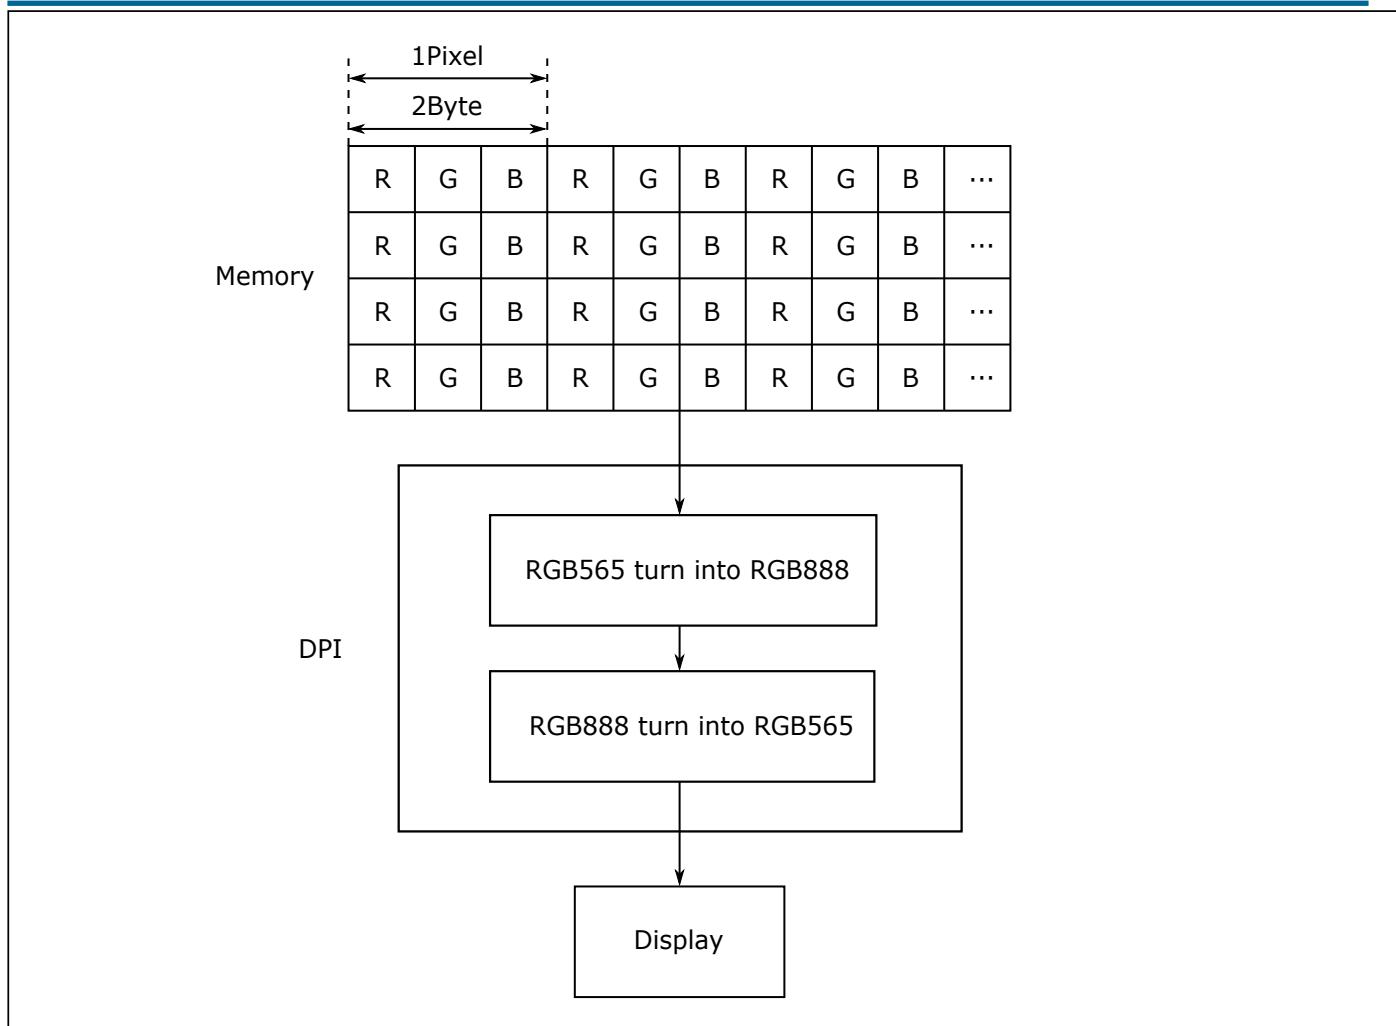


Fig. 11.8: RGB565 Processing Process

11.3.6.4 RGBA8888

The processing of input data in RGBA8888 format is shown as follows:

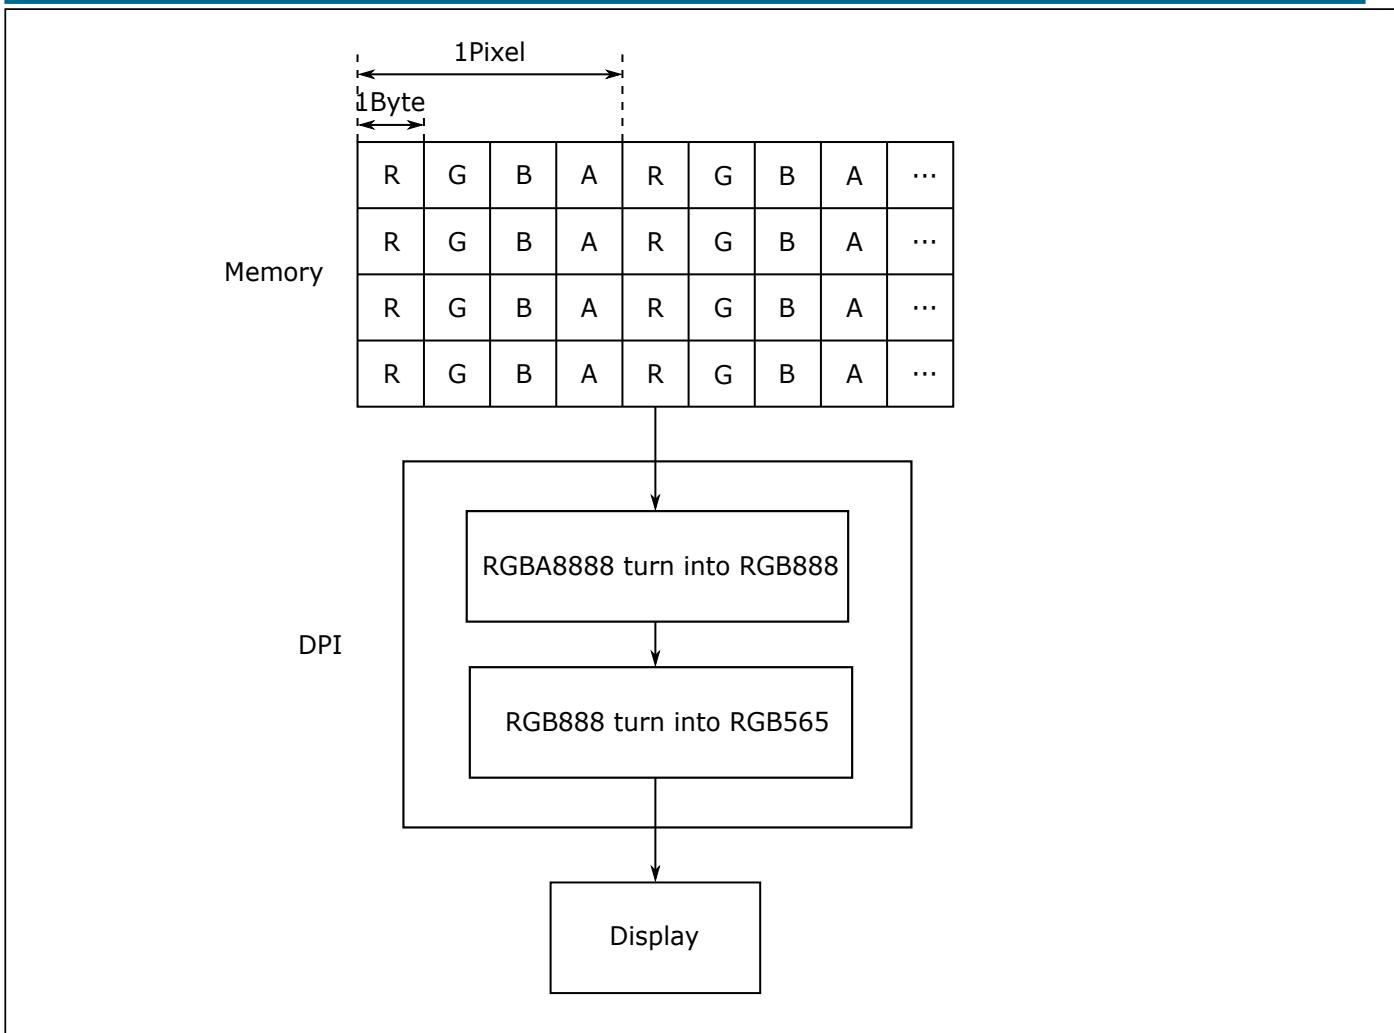


Fig. 11.9: RGBA8888 Processing Process

11.3.6.5 YUV420 (Planar)

The processing of input data in YUV420 (planar) format is shown as follows:

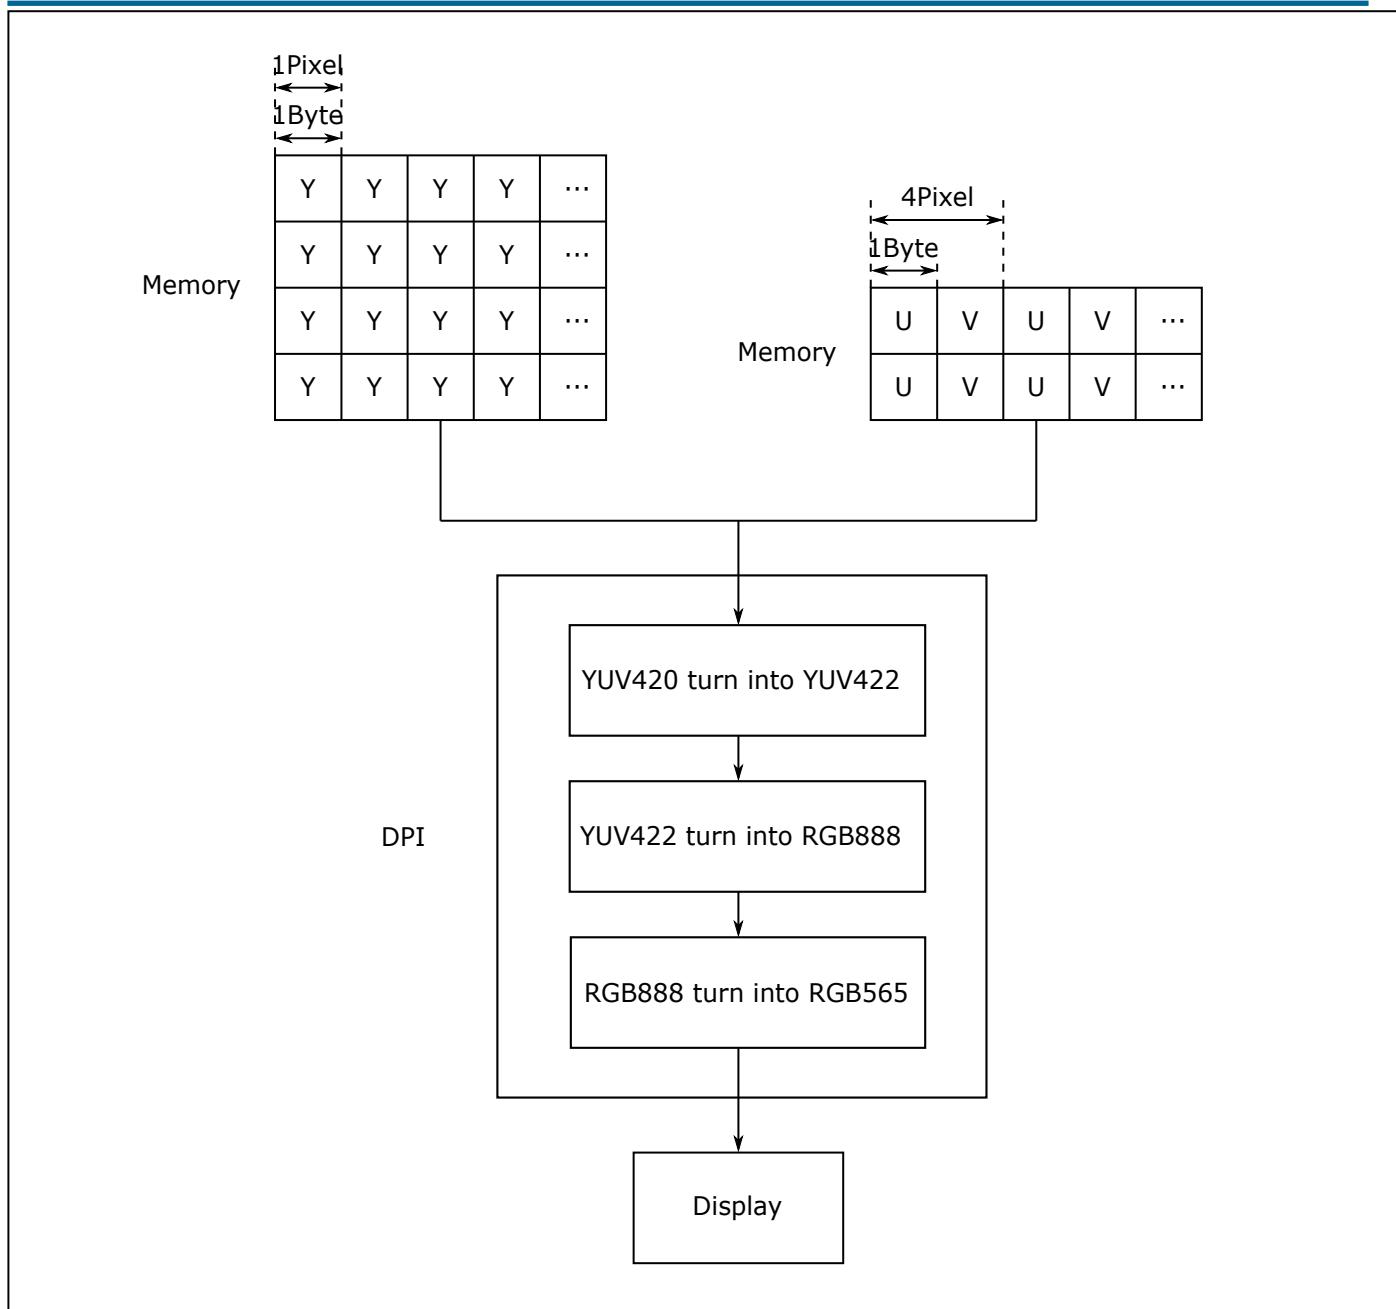


Fig. 11.10: YUV420 Processing Process

11.3.7 Programmable Interrupt

The DPI has a programmable interrupt. In configuration, the trigger source of the interrupt can be set to the input Vsync or output Vsync of the DPI, and the hopping edge can be the rising or falling edge. For example, if the interrupt is configured to be triggered on the rising edge of the input Vsync, DPI will generate an interrupt request on each Vsync rising edge of its input module. If that is configured to be triggered on the falling edge of the output Vsync, DPI generates an interrupt request on each Vsync falling edge of its output module.

11.3.8 Use with OSD

The input data of DSI can be configured to be processed by the OSD first. See the OSD Module section for functional description.

12.1 Overview

The Display Serial Interface (DSI) is an interface protocol defined by MIPI Alliance for communicating with display screens. It sends pixels or commands to peripherals and can read status or pixel information from peripherals. All data lanes of DSI are unidirectional in High-Speed Mode, while in Low-Speed Mode only the first data lane is bidirectional and other lanes are unidirectional. The clock lane is dedicated to transmitting synchronous clock signals during high-speed data transmission. In addition, one master side allows communication with multiple slave sides at the same time. This chip has a built-in DSI controller and DPHY, which enable communication with DSI-compatible displays so that data can be displayed on the screen.

12.2 Features

- Meets MIPI® Alliance standard
- MIPI® DPHY interface with maximum speed of 800 Mbps
- One Clock Lane, up to 4 Data Lanes
- Four sequences for Data Lanes
- Supports Ultra Low Power Mode and High Speed Mode
- Data Lane 0 supports bidirectional communication and Escape Mode
- Supports LPDT/ULPS/Trigger in the Escape Mode
- Supports short and long packet sending in the LPDT Mode
- Supports error correction code (ECC) and check function
- Supports data length error and data overflow error interrupt
- Supports Command Mode and Video Mode
- Supports Event and Pulse Modes in the Video Mode

- Data formats supported by the display interface:
 - YUV422, 8 bit
 - RGB565
 - RGB666, loosely packed
 - RGB888
- Rich and diverse interrupt mechanisms and status query
- Supports DMA transmission in the LPDT Mode
- Use with OSD

12.3 Functional Description

The block diagram of the DSI Module is shown as follows:

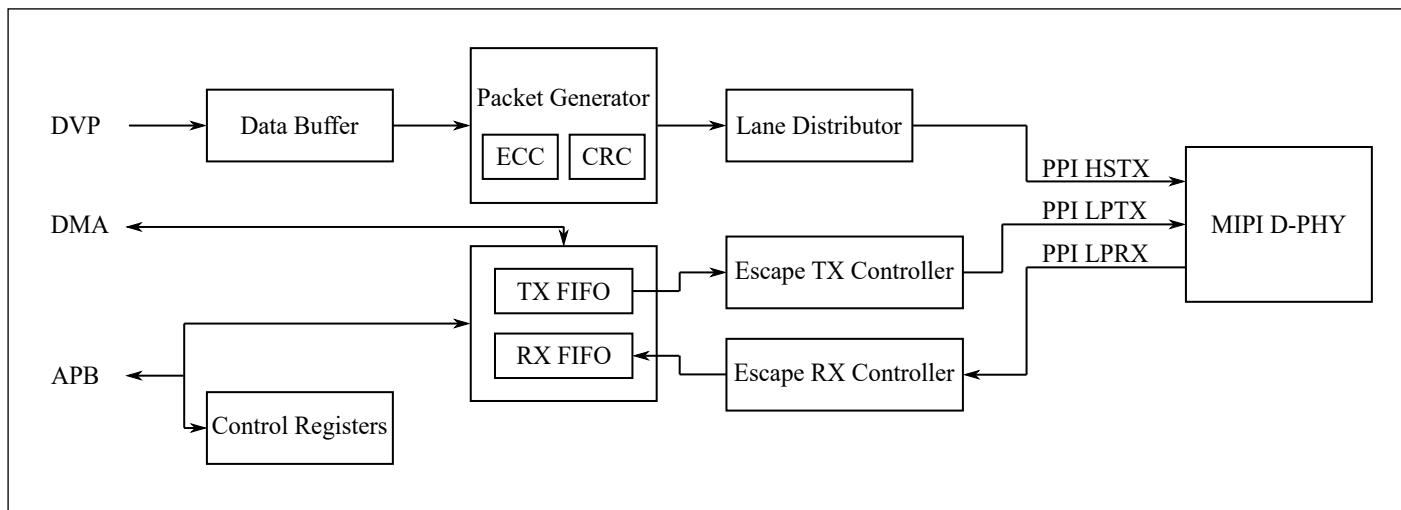


Fig. 12.1: Block Diagram of DSI

12.3.1 DSI Protocol Layering

The DSI protocol is divided into 4 layers from bottom to top, namely, physical layer, lane management layer, protocol layer, and application layer, as shown below:

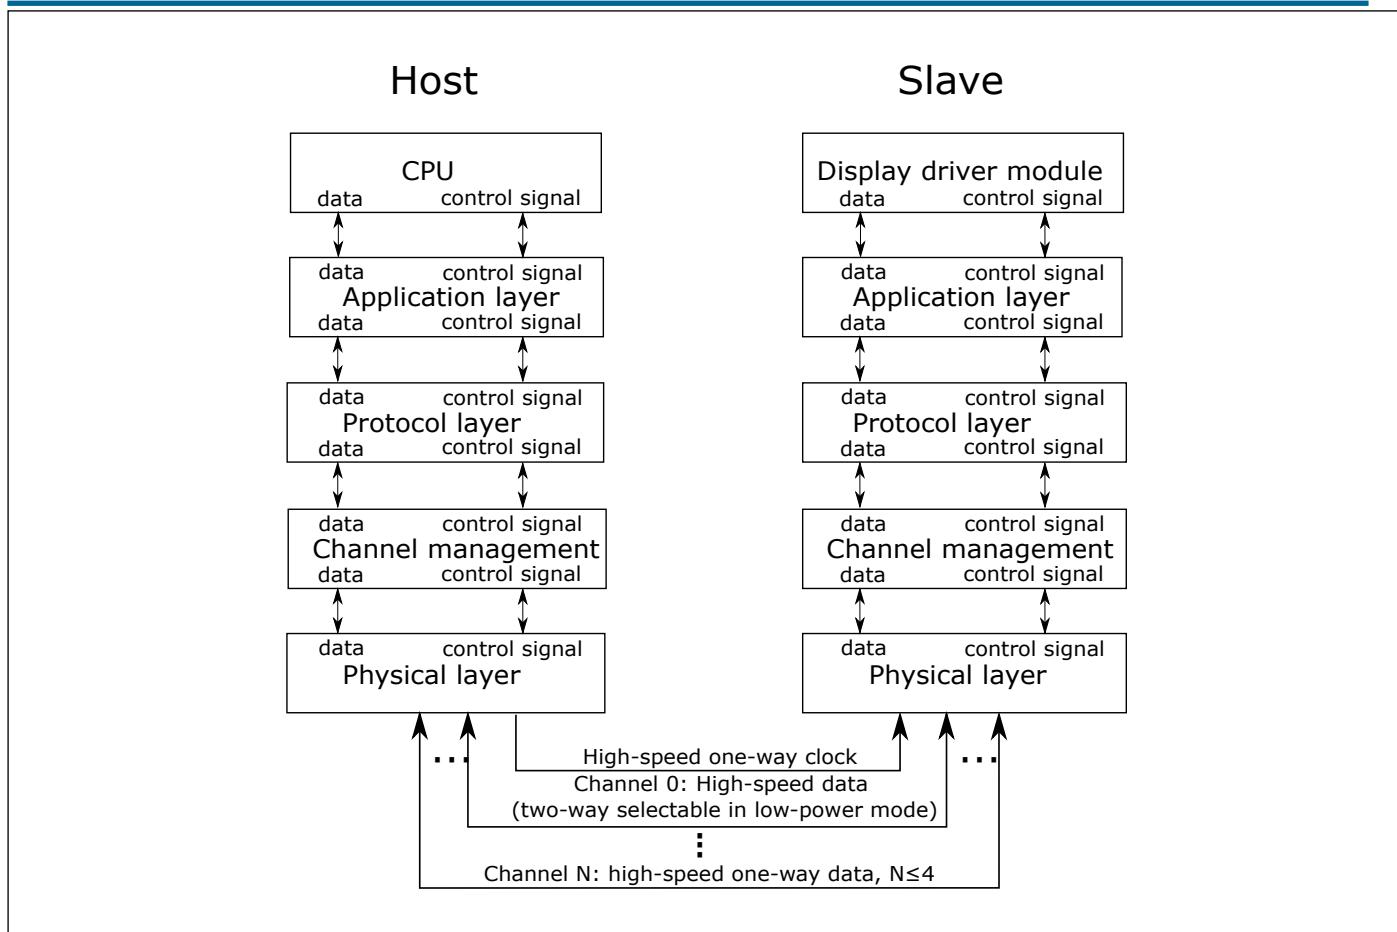


Fig. 12.2: Protocol Layering

Physical layer: It specifies the transmission medium (electrical conductor), the input/output circuit, and the clock mechanism for capturing “1” and “0” from the serial bit stream. In addition, it also specifies the signaling mechanism of start of transmission (SoT) and end of transmission (EoT) and other “out-of-band” information that can be transmitted between transmitting and receiving PHY.

Lane management layer: DSI can expand lanes to improve performance. The number of data lanes can be 1, 2, 3 or 4 depending on the bandwidth requirements of the application. The lane management layer aims to transfer the to-be-sent data from the transmitter (TX) end to the corresponding data lanes by groups according to the lane order, collect the data from each lane at the receiver (RX) end, and then merge them into a recombined data stream, thus recovering the original stream sequence.

Protocol layer: The DSI protocol defines packet formats, including short and long packets. The protocol layer aims to pack packets at the TX end according to the type and content of data, add the ECC and CRC codes, and transmit them to the lane management layer. At the RX end, it checks and corrects the received packet based on the ECC and CRC codes, decodes the packet header and data content, and transmits them to the application layer.

Application layer: Depending on the needs of application modules, at the TX end, it initially encodes the to-be-sent commands and data and converts them into the format specified by DSI; at the RX end, it restores the received data to the data format and timing supported by application modules.

12.3.2 Physical Layer

According to the DPHY protocol, synchronous connection is used between the master and the slave in the physical layer. The clock lane is used to transmit high-speed clocks, and one or more data lanes are used to transmit low-power or high-speed data signals. Each lane uses two interconnected lines to connect the master and the slave, and supports both High-Speed (HS) and Low-Power (LP) Modes. In the HS Mode, TX simultaneously drives two interconnected lines of the lane to output a low-swing differential signal, such as 200 mV. In the LP Mode, TX drives the interconnected lines respectively, to output a single-ended signal with a relatively large swing respectively, such as 1.2 V. The levels of interconnected lines in the two modes are shown as follows:

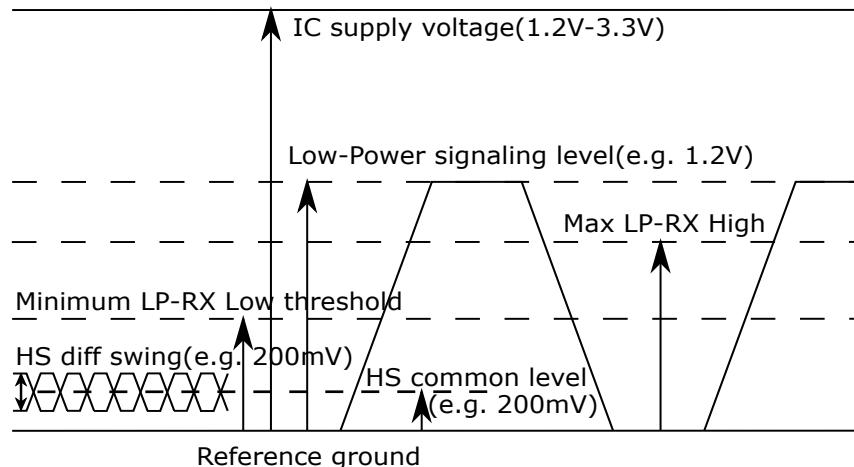


Fig. 12.3: Levels in HS and LP Modes

The two ends of the interconnected line are a driving unit and a receiving unit. The driving unit includes a differential transmitting module (HS_TX) and a low-power single-ended transmitting module (LP_TX), and the receiving unit includes a differential receiving module (HS_RX) and a low-power single-ended receiving module (LP_RX). HS_TX drives the interconnected line with differential signals, and there are two statuses on the high-speed lane: Differential0 and Differential1. LP_TX independently drives two interconnected lines, and there are four statuses on the lane: LP00, LP01, LP10, and LP11. The protocol clearly defines the line levels and configures the HS Mode, Control Mode, and Escape Mode, as shown below:

Lane Pair State Code	Line DC Voltage Levels		High Speed(HS)	Low Power	
	DATA_P	DATA_N	Burst Mode	Control Mode	Escape Mode
HS-0	Low(HS)	High(HS)	Differential-0	Note 1	Note 1
HS-1	High(HS)	Low(HS)	Differential-1	Note 1	Note 1
LP-00	Low(LP)	Low(LP)	Not Defined	Bridge	Space
LP-01	Low(LP)	High(LP)	Not Defined	HS-Request	Mark-0
LP-10	High(LP)	Low(LP)	Not Defined	LP-Request	Mark-1
LP-11	High(LP)	High(LP)	Not Defined	Stop	Note 2

Note:

1. When the lane is in high-speed mode, the low-power receiver (LP_Rx) of each lane will check the LP-00 status code;
2. If the low power receiver (LP-Rx) of each lane recognizes the LP-11 status code, the lane will return to control mode.

Fig. 12.4: Lane Status Code

12.3.3 Clock Lane

The clock lane can be driven to Low Power Mode (LPM), UltraLow Power Mode (ULPM), and High Speed Clock Mode (HSCM). The flow chart of switching between different power modes of the clock lane is as follows:

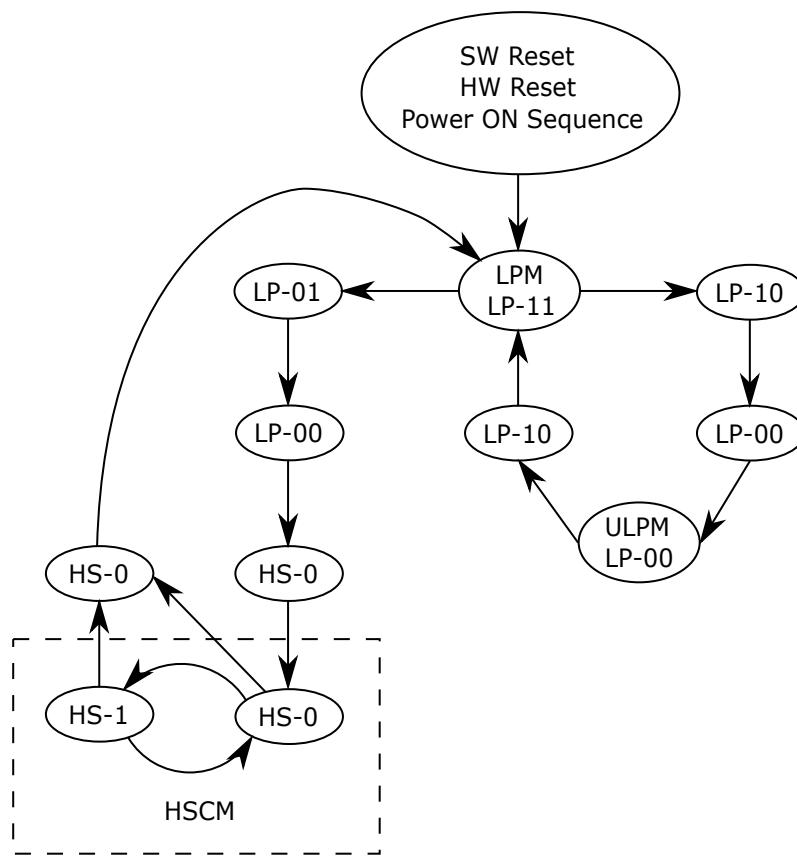


Fig. 12.5: Clock Lane Mode Switching

12.3.3.1 Low Power Mode (LPM, LP11)

Three ways for switching:

1. After the software reset, hardware reset and power-on sequence, the clock lane automatically changes to LP11 (LPM).
2. After leaving LP00 (ULPM), the clock lane changes to LP10 first and then to LP11 (LPM), as shown below:

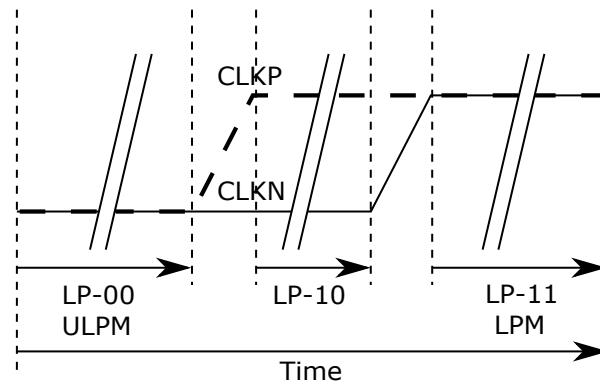


Fig. 12.6: Switching from ULPM to LPM

3. After leaving HS0 or HS1 (HSCM), the clock lane changes to HS0 first and then to LP11 (LPM), as shown below:

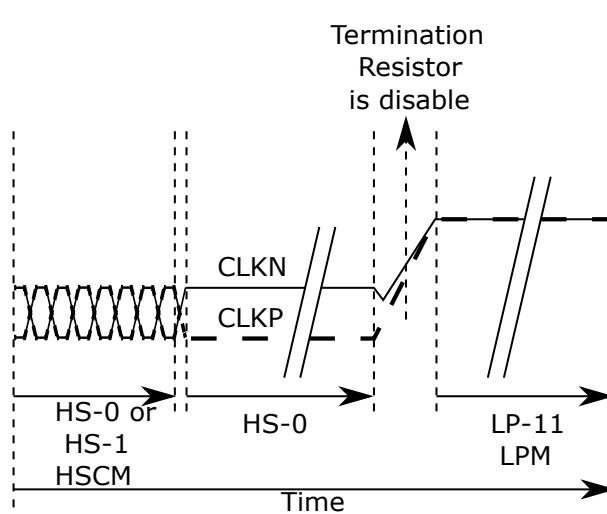


Fig. 12.7: Switching from HSCM to LPM

12.3.3.2 UltraLow Power Mode (ULPM, LP00)

One way for switching: The clock lane switches from LP11 (LPM) to LP10 first and then to LP00 (ULPM), as shown below:

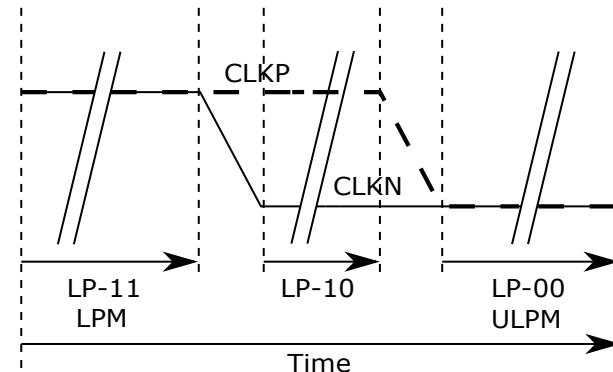


Fig. 12.8: Switching from LPM to ULPM

12.3.3.3 High Speed Clock Mode (HSCM, HS0/1)

One way for switching: The clock lane switches from LP11 (LPM) to LP01, LP00, HS0, and HS0/1 (HSCM) in sequence, as shown below:

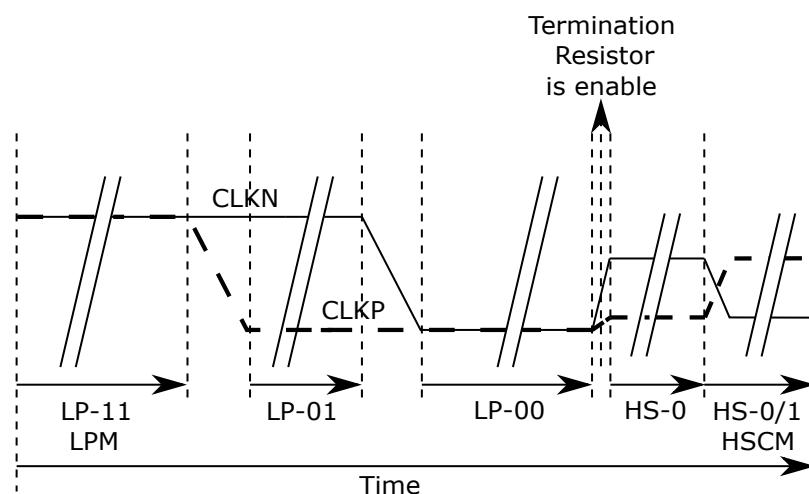


Fig. 12.9: Switching from LPM to HSCM

12.3.4 Data Lanes

All data lanes (D3P/N, D2P/N, D1P/N, and D0P/N) can be driven to HighSpeed Data Transmission (HSDT) Mode, but only data lane 0 (D0P/N) can switch to the Escape Mode and Bus TurnAround Request (BTA) Mode. The entering and leaving sequences of the three modes are shown as follows:

Mode	Entering Mode Sequence	Leaving Mode Sequence
Escape Mode	LP-11 -> LP-10 -> LP-00 -> LP-01 -> LP-00	LP-00 -> LP-10 -> LP-11(Mark-1)
High-Speed Data Transmission	LP-11 -> LP-01 -> LP-00 -> HS-0	(HS-0 or HS-1) -> LP-11
Bus Turnaround Request	LP-11 -> LP-10 -> LP-00 -> LP-10 -> LP-00	Hi-Z

Fig. 12.10: Entering and Leaving Sequences of Three Modes of Data Lanes

12.3.4.1 HighSpeed Data Transmission (HSDT)

When the clock lane of the MCU has switched to the HSCM Mode, the Display Module can switch to the HSDT Mode. The sequence of switching to the HSDT Mode is shown as follows:

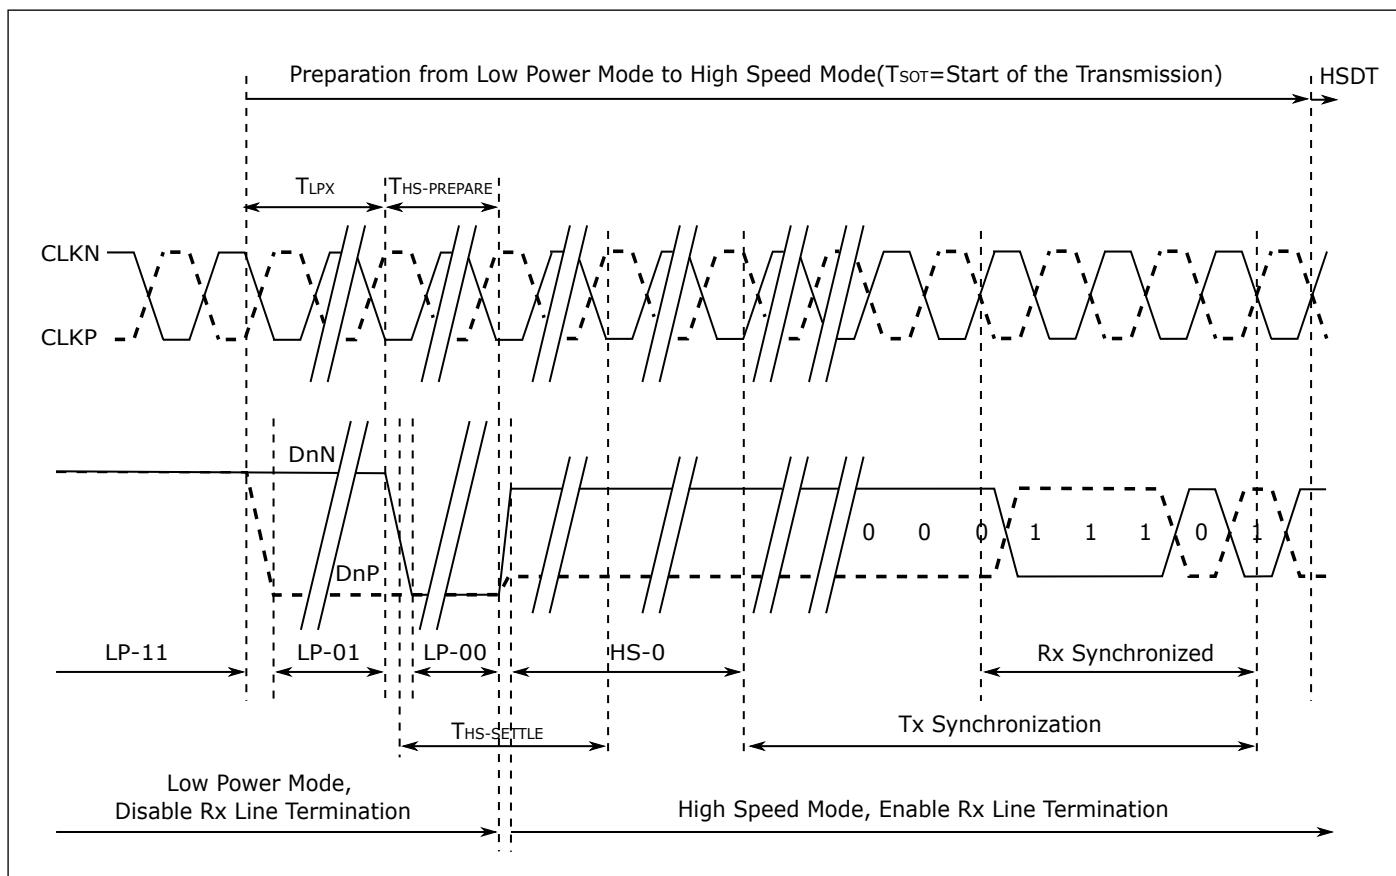


Fig. 12.11: Sequence of Entering HSDT Mode

Sequence:

- Start: LP-11
- HS request: LP01
- HS determination: LP-00=>HS-0 (RX: enabled lane terminal)
- RX synchronization: 011101 (by order of transmitted bits); TX synchronization: 00011101 (by order of transmitted bits)
- End: HSDT, ready to receive loaded high-speed data.

When the clock lane of the MCU is in the HSCM Mode, the Display Module can leave the HSDT Mode, and the clock lane must stay in HSCM until all data lanes switch to the LP11 Mode. The sequence of leaving the HSDT Mode is shown as follows:

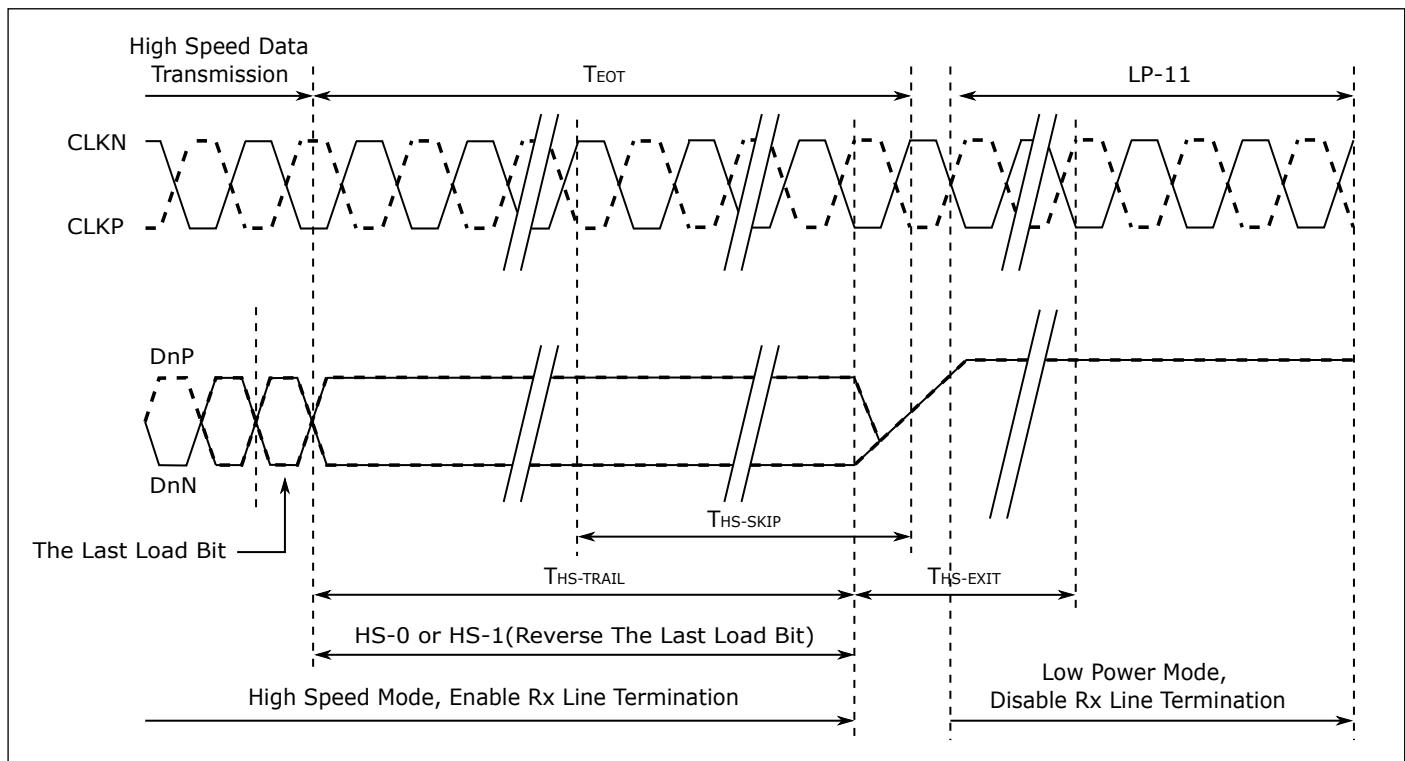


Fig. 12.12: Sequence of Leaving HSDT Mode

Sequence:

- Start: HSDT.
- Stop HSDT: If the last loading bit is HS-0, the MCU changes to HS-1; if the last loading bit is HS-1, MCU changes to HS-0.
- End: LP-11 (RX: disabled lane terminal).

The burst operation of HSDT can be composed of one or multiple packets, which can be either short or long packets.

Here are some different burst examples of HSDT:

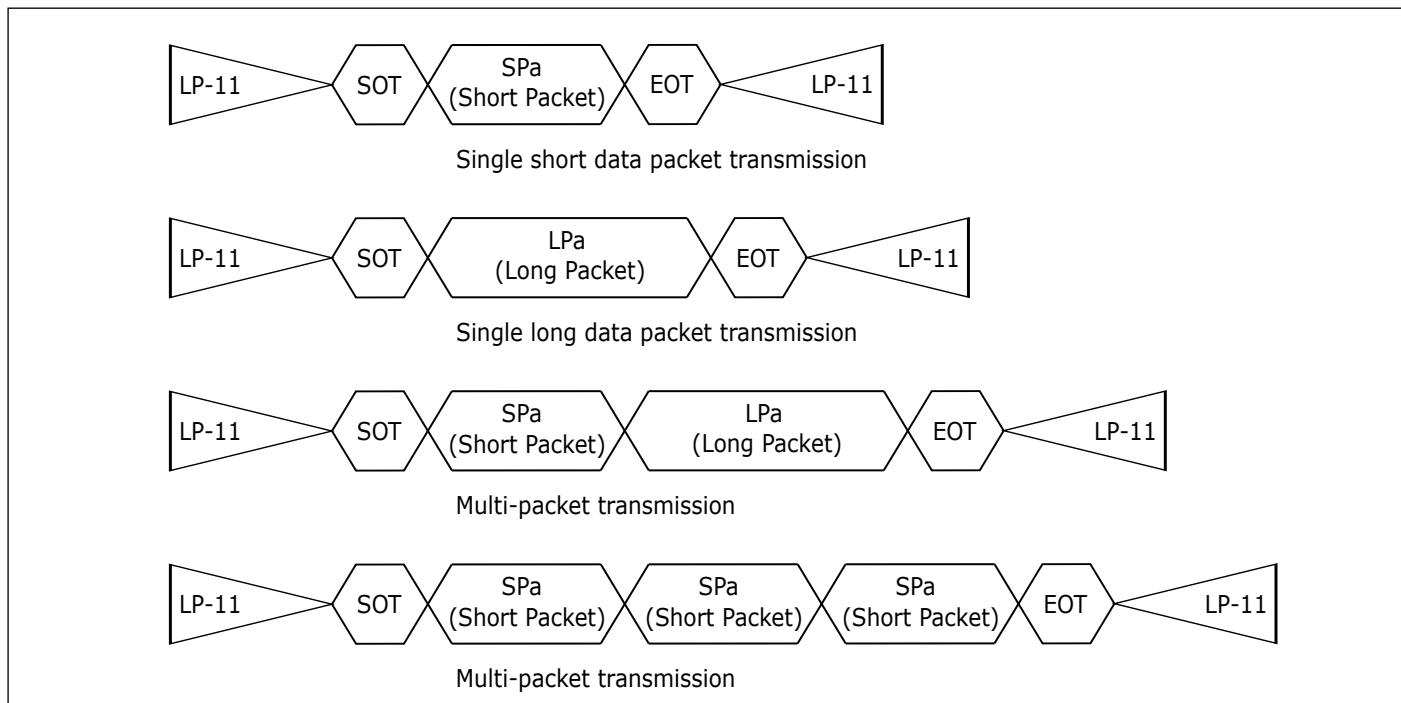


Fig. 12.13: HSDT Burst Sequence

12.3.4.2 Bus Turn-Around(BTA)

When the MCU or Display Module that is controlling the lane D0P/N wants to get information from the RX end, it can initiate a bus turnaround request to reverse the bus control. The MCU and the Display Module initiate the bus turnaround request using the same sequence, as shown below:

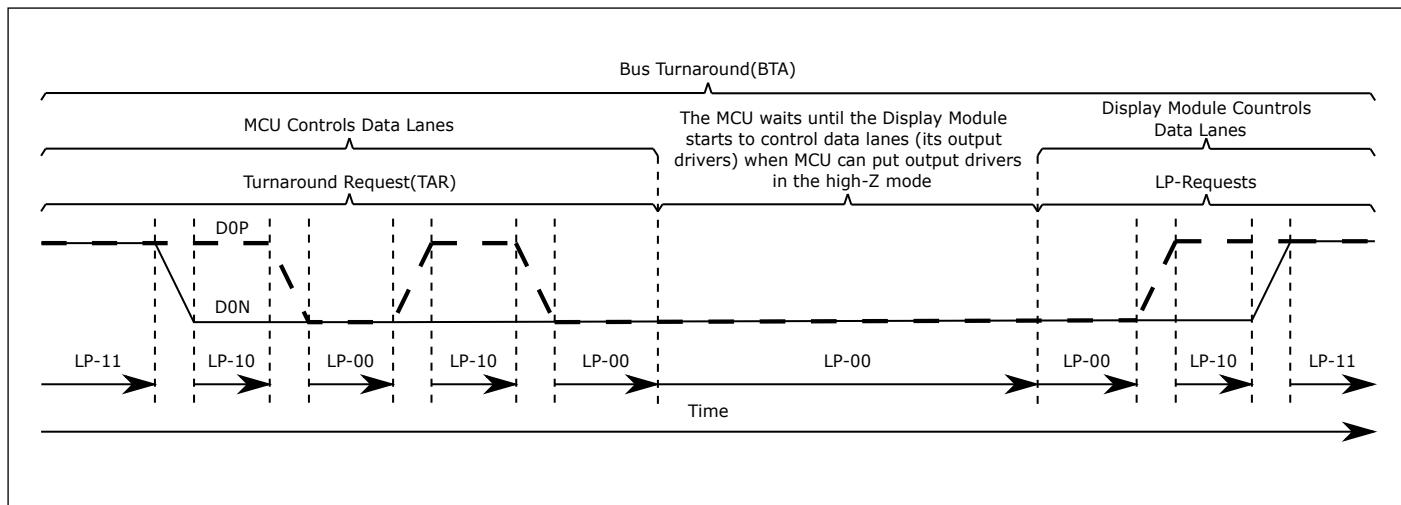


Fig. 12.14: Bus Turnaround Sequence

Sequence:

- Start: LP-11
- Turnaround request (MCU): LP-11=>LP-10=>LP-00=>LP-10=>LP-00
- MCU waits until the Display Module starts to control the lane D0P/N, while the MCU stops controlling the lane D0P/N and sets it to the high-impedance state.
- The Display Module changes to the Stop Mode: LP-00=>LP-10=>LP-11

12.3.4.3 Escape Mode

The Escape Mode, a special mode under LPM, has the following features:

1. Send LPDT command from the MCU to the Display Module.
2. Drive data lanes to the ULPS state.
3. Send a RAR command to reset the Display Module.
4. Send an ACK signal for transmitting non-error events from the Display Module to the MCU.

The basic sequence of the Escape Mode is shown as follows:

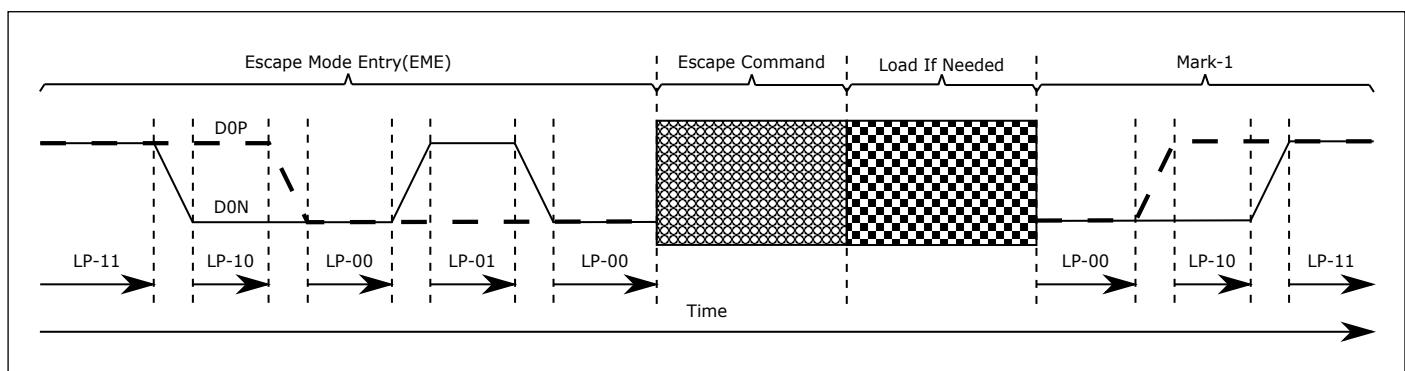


Fig. 12.15: Escape Mode Sequence

Sequence:

- Start: LP-11
- Switch to the Escape Mode (EME): LP-11=>LP-10=>LP-00=>LP-01=>LP-00
- Escape command (EC): When one of the data lanes changes from Low to High and then goes Low, this change shows the value of the current data bit (DOP = 1, DON = 0)
- When the data lane 0 changes from Low to High and then goes Low, the receiver latches 1 bit data, that is, logic 0. The receiver takes the transmission from Low to High and then to Low
- as its internal clock

- If necessary, load the data
- Leave the Escape Mode: LP-00=>LP-10=>LP-11
- End: LP-11

Escape command types are shown in the following table:

Escape Command	Command Type	Entry Command Pattern (First Bit->Last Bit Transmitted)	Dn	D0
Low-Power Data Transmission	Mode	1110 0001 b	✗	✓
Ultra-Low Power Mode	Mode	0001 1110 b	✓	✓
Note 1	Mode	1001 1111 b	✗	✗
Note 1	Mode	1101 1110 b	✗	✗
Remote Application Reset	Trigger	0110 0010 b	✗	✓
Tearing Effect	Trigger	0101 1101 b	✗	✗
Acknowledge	Trigger	0010 0001 b	✗	✓
Note 1	Trigger	1010 0000 b	✗	✗

Note:

1. The support of this command has not been implemented on the display module;
2. The value of n is 1, 2 and 3;
3. "✓" means support;
4. "✗" means not supported.

Fig. 12.16: Escape Commands

12.3.4.4 Low Power Data Transmission (LPDT)

When the data lane changes to the Escape Mode and the MCU has sent the LPDT command to the Display Module, the MCU can send the data to the Display Module in the LPM. The Display Module also uses the same sequence when sending data to the MCU. The LPDT sequence is shown as follows:

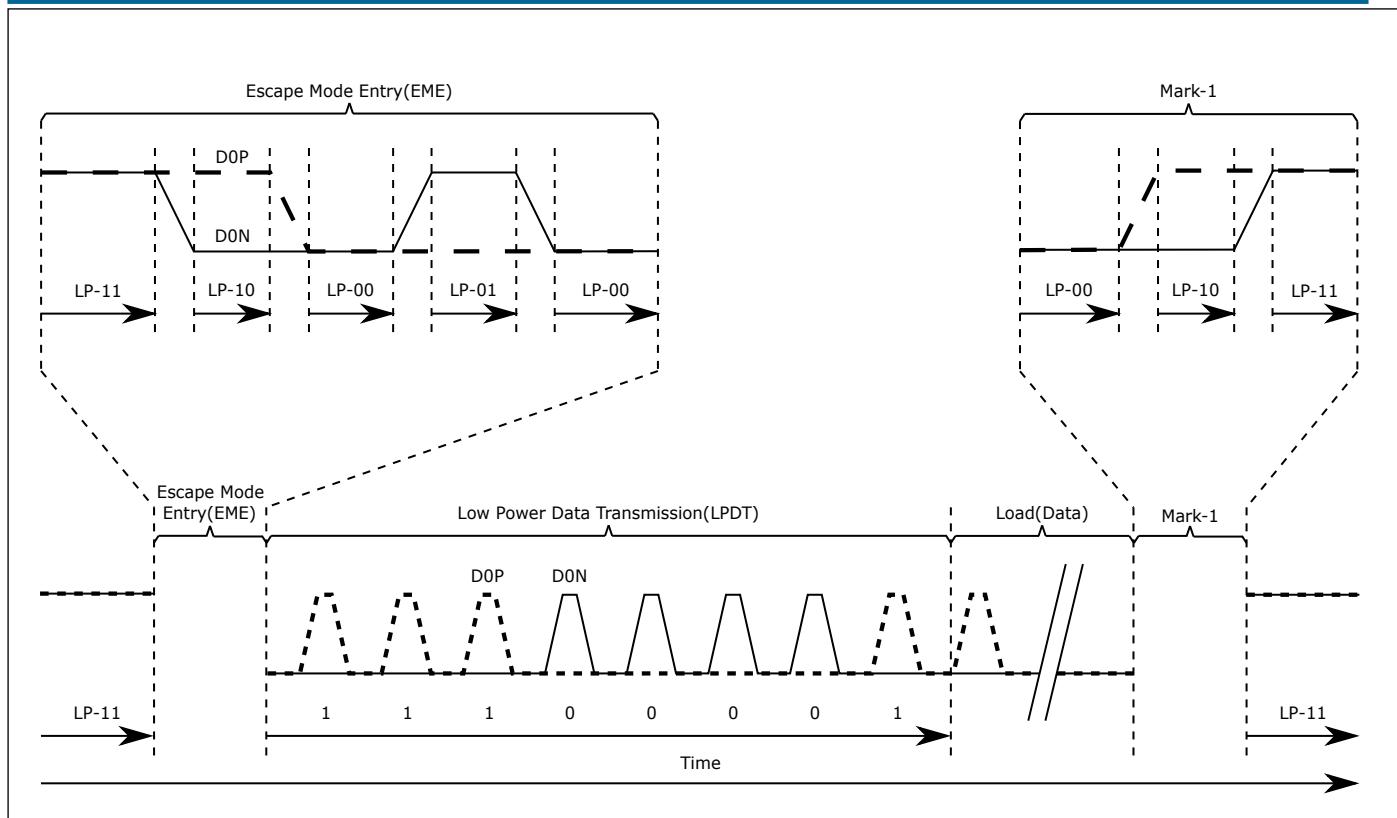


Fig. 12.17: LPDT Sequence

Sequence:

- Start: LP-11
- Switch to the Escape Mode (EME): LP-11=>LP-10=>LP-00=>LP-01=>LP-00
- Send the LPDT command in the Escape Mode: 0x87 (LSBfirst).
- Data loading: One or more bytes, which are in a suspended state when the data lane stops between bytes (all lanes are Low).
- Leave the Escape Mode: LP-00=>LP-10=>LP-11
- End: LP-11

12.3.4.5 UltraLow Power State (ULPS)

When the data lane switches to the Escape Mode, MCU can mandatorily change the data lane to the ULPS. The ULPS sequence is shown as follows:

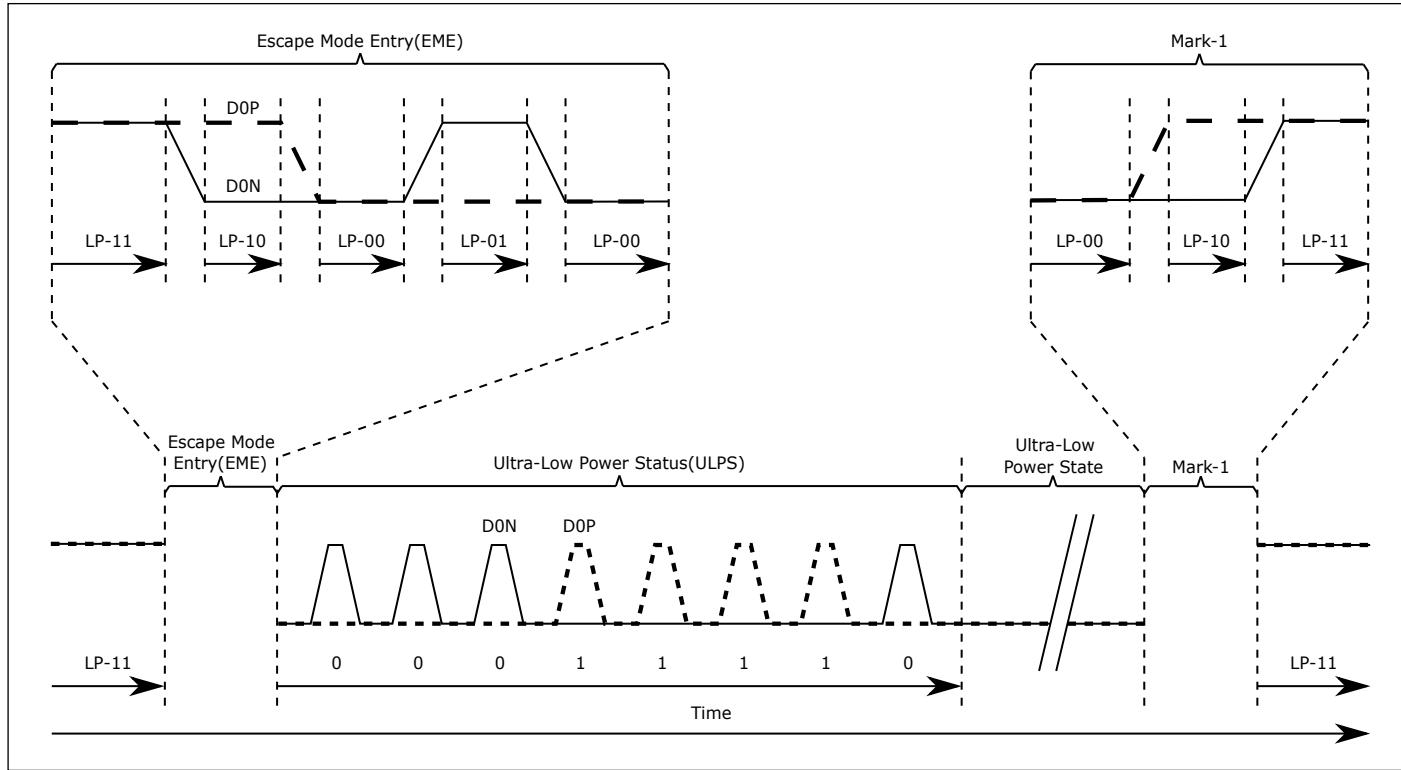


Fig. 12.18: ULPS Sequence

Sequence:

- Start: LP-11
- Switch to the Escape Mode (EME): LP-11=>LP-10=>LP-00=>LP-01=>LP-00
- Send the ULPS command in the Escape Mode: 0x78 (LSBfirst)
- ULPS: The MCU keeps the data lane Low
- Leave the Escape Mode: LP-00=>LP-10=>LP-11
- End: LP-11(after the data lane exits ULPS, wait 100 us before sending the next command)

12.3.4.6 Remote Application Reset (RAR)

RAR is one of the Trigger commands. When the data lane switches to the Escape Mode, the MCU can inform the Display Module to reset in the remote application reset trigger. The RAR sequence is shown as follows:

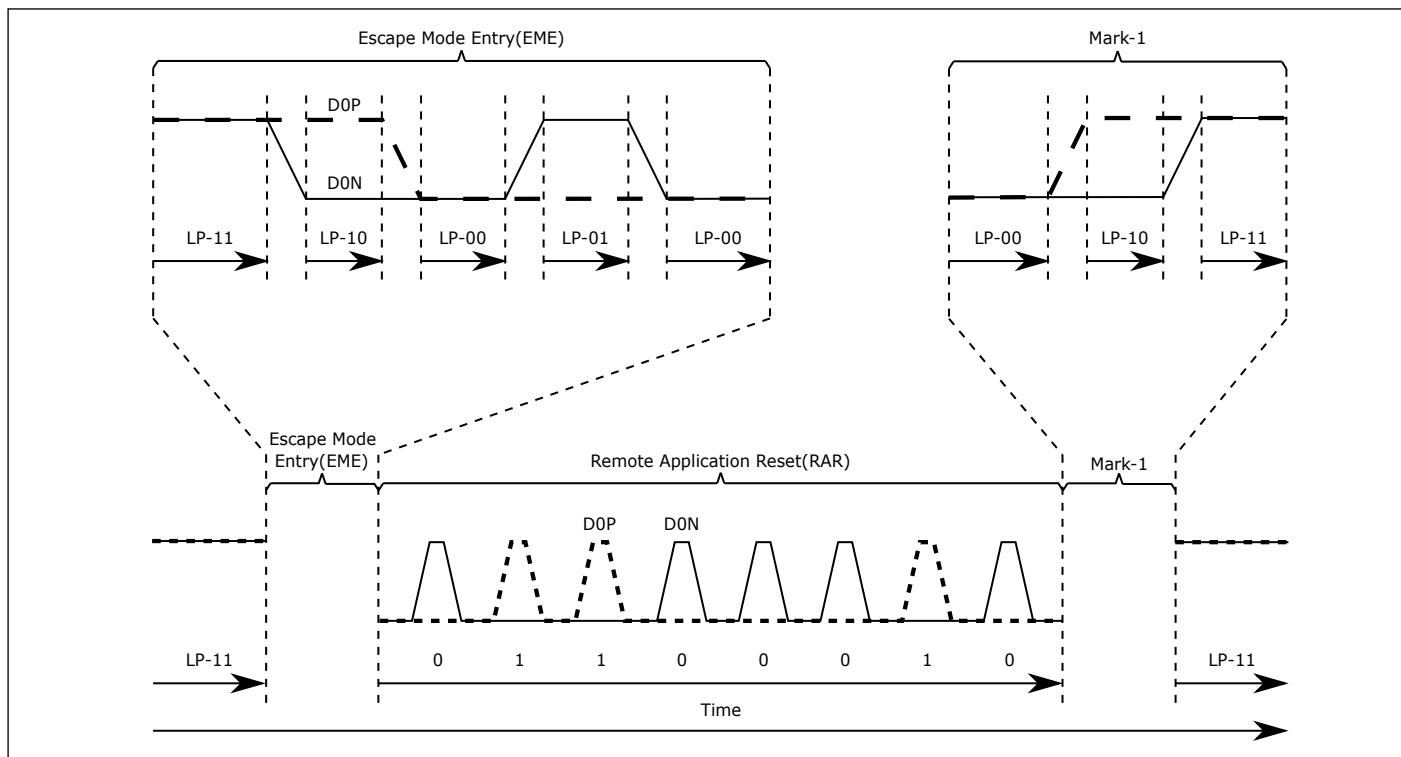


Fig. 12.19: RAR Sequence

Sequence:

- Start: LP-11
- Switch to the Escape Mode (EME): LP-11=>LP-10=>LP-00=>LP-01=>LP-00
- Send the RAR command in the Escape Mode: 0x46 (LSBfirst)
- Leave the Escape Mode: LP-00=>LP-10=>LP-11
- End: LP-11

12.3.4.7 Acknowledgement (ACK)

ACK is one of the Trigger commands. The Display Module can notify the MCU of unrecognized errors through ACK. The Display Module sends ACK in a sequence shown in the following figure:

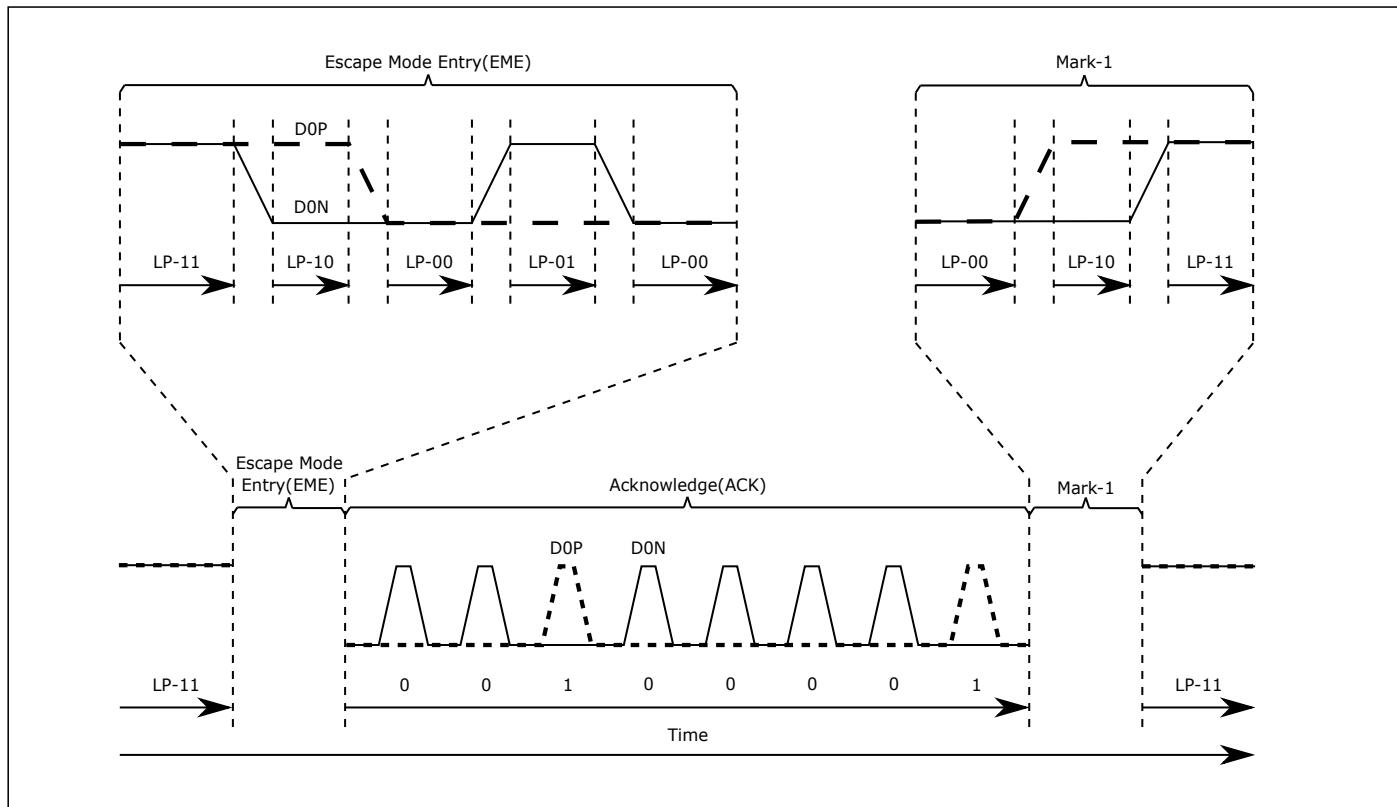


Fig. 12.20: ACK Sequence

Sequence:

- Start: LP-11
- Switch to the Escape Mode (EME): LP-11=>LP-10=>LP-00=>LP-01=>LP-00
- Send the ACK command in the Escape Mode: 0x84 (LSBfirst)
- Leave the Escape Mode: LP-00=>LP-10=>LP-11
- End: LP-11

12.3.5 Lane Management Layer

The lanes of DSI are expandable. The number of data lanes can be one, two, three, or four as expanded based on the bandwidth requirements of practical applications, and the peak bus bandwidth can gain an approximate linear increase. At the TX end, this layer aims to distribute the data from the protocol layer to each data lane in a certain order. At the RX end, this layer aims to collect transmitted bytes from each lane and merge them into a complete packet. All data lanes share a clock signal, but data transfer on each lane may not be completed simultaneously. When the number of bytes transmitted is not an integral multiple of the number of lanes, some lanes will finish data transfer before others. Except for Lane0, the order of the other three lanes can be configured by <CR_LANE_MUX_SEL>.

There are four orders:

- Lane0, Lane1, Lane2, Lane3
- Lane0, Lane3, Lane1, Lane2
- Lane0, Lane2, Lane3, Lane1
- Lane0, Lane2, Lane1, Lane3

Taking the single lane and four lanes (Lane0, Lane1, Lane2, Lane3) as examples, the TX end is shown as follows:

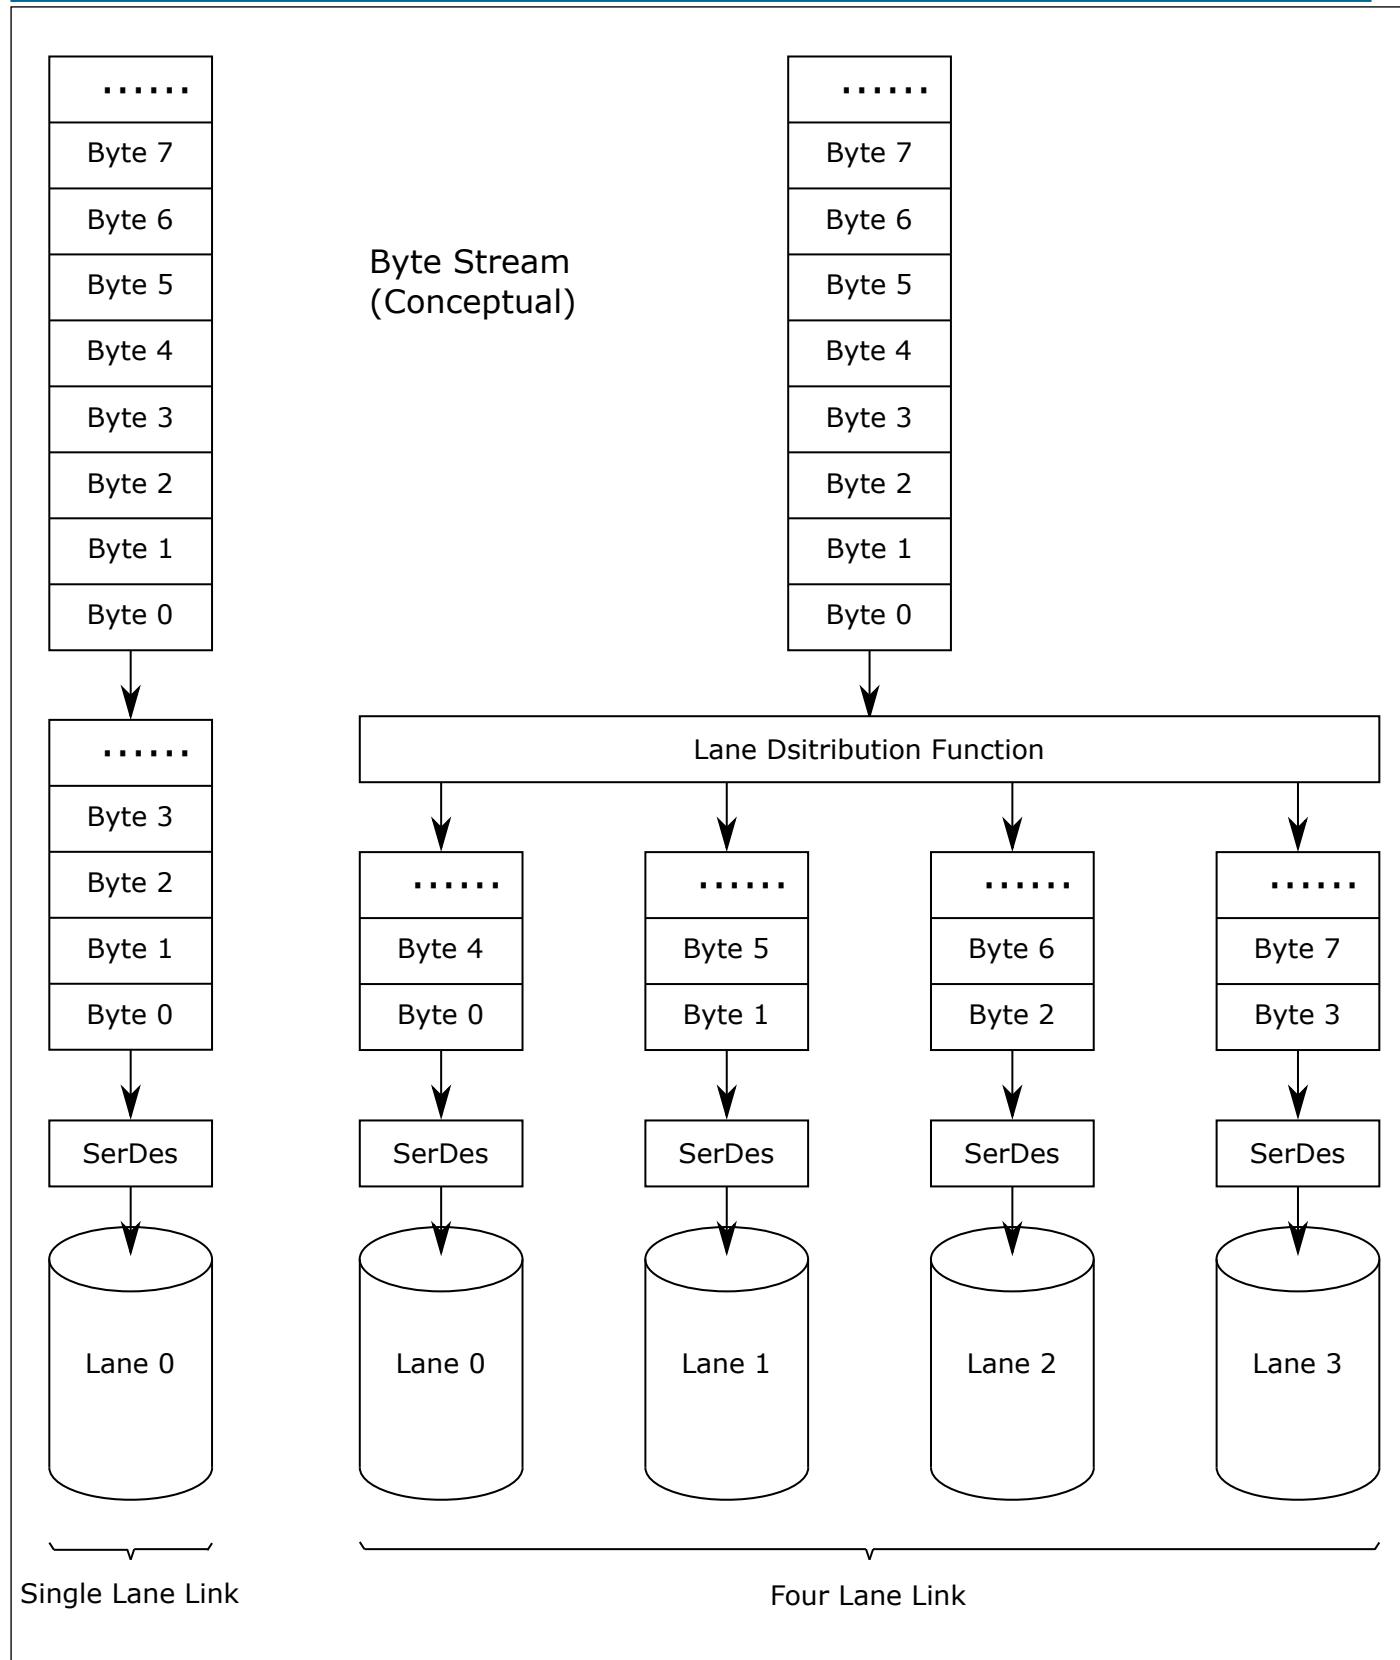


Fig. 12.21: TX End Distribution

The RX end is shown as follows:

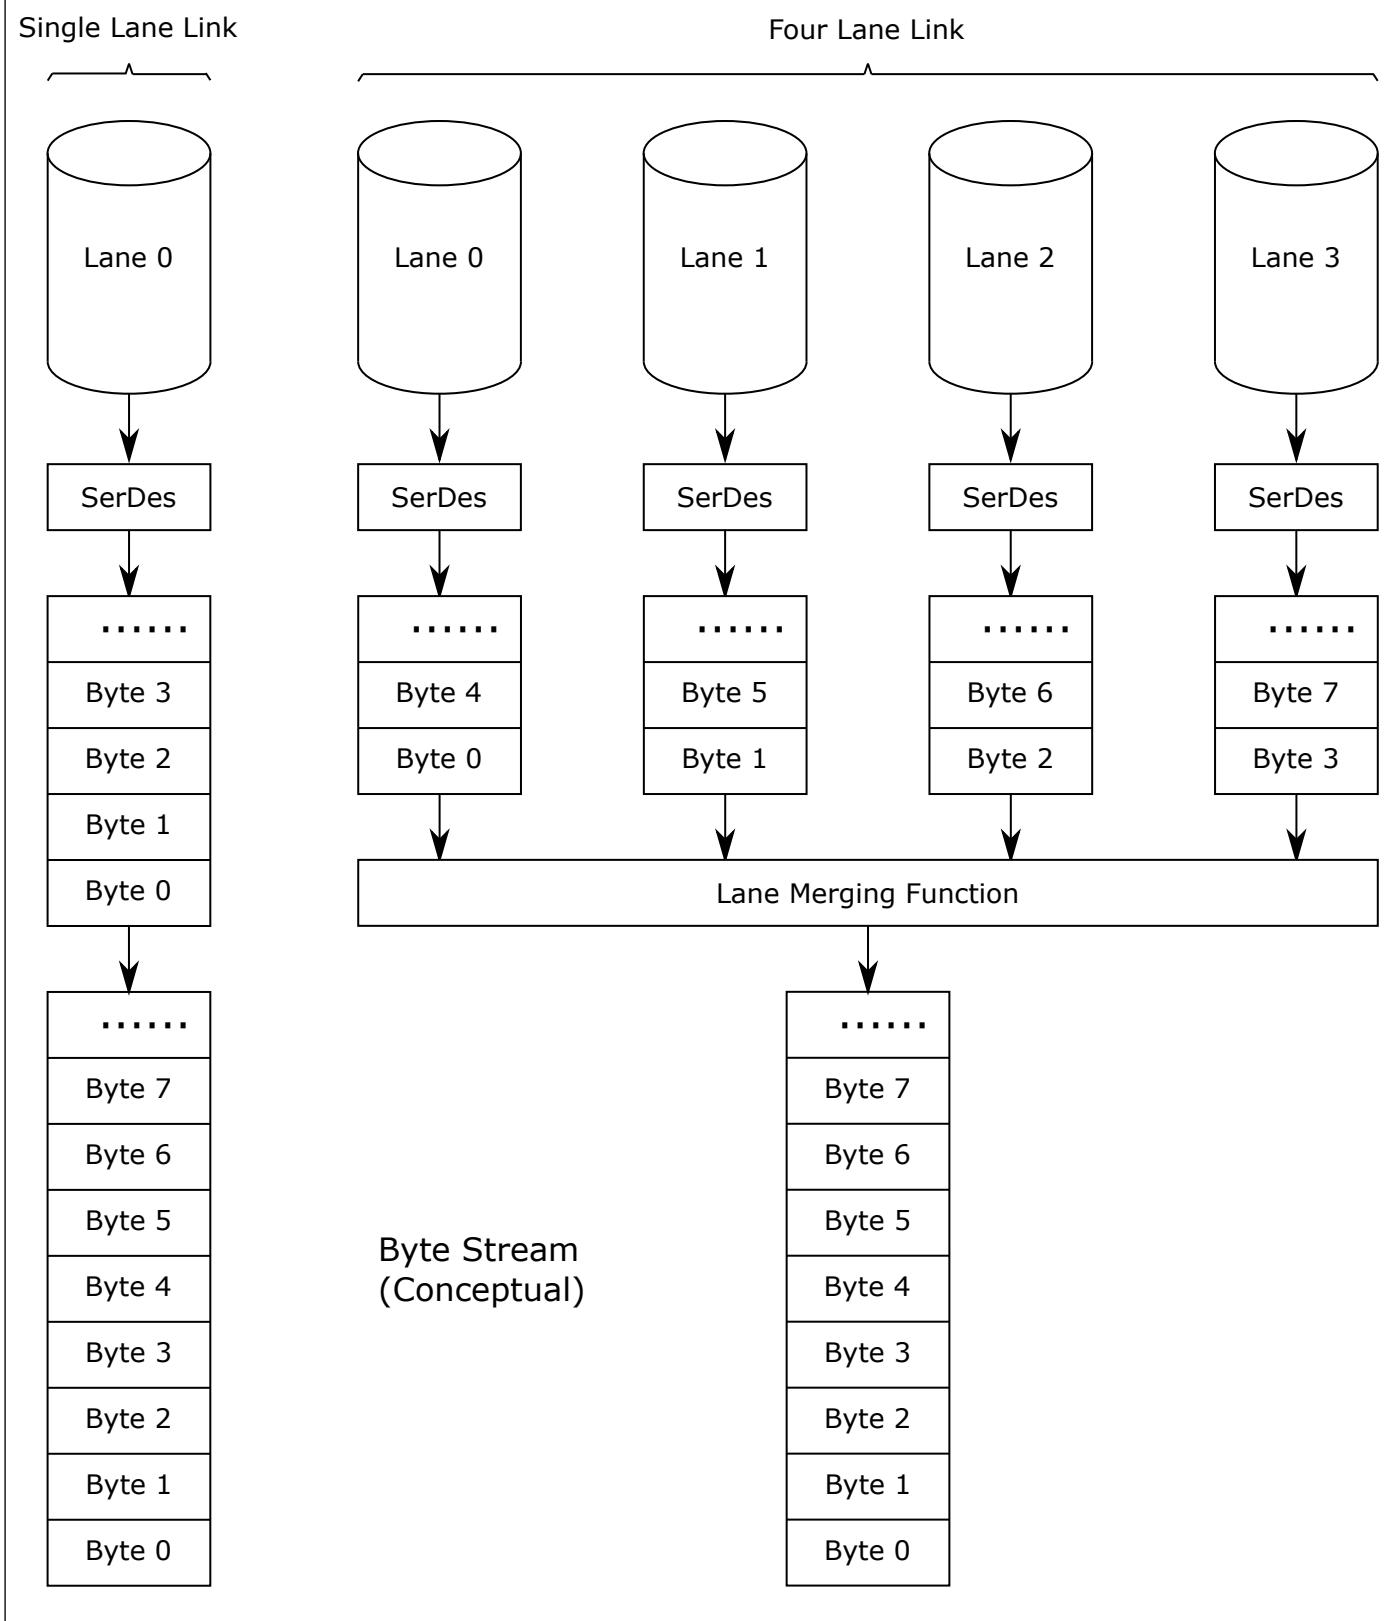


Fig. 12.22: RX End Merging

The lane distributor accepts HS transmission with arbitrary byte length, buffers N bytes, where N is the number of lanes implemented in the interface, and sends N byte arrays on N lanes in parallel. Before sending data, all lanes execute the SoT sequence in parallel to indicate the start of the first byte of the packet to the corresponding receiving unit. After the SoT, the lane sends N byte arrays from the first packet in parallel through a cyclic process. For a four-lane system, Byte 0 of the packet enters Lane 0, Byte 1 enters Lane 1, Byte 2 enters Lane 2, Byte 3 enters Lane 3, Byte 4 enters Lane 0, and so on. As HS transmission involves any number of bytes, which may not be an integral multiple of the number of lanes, some lanes will finish data transfer before others. Although all lanes start transmission at the same time by executing SoT in parallel, each lane runs independently and some lanes may complete HS transmission before others and send EoT one byte in advance. It is as shown below:

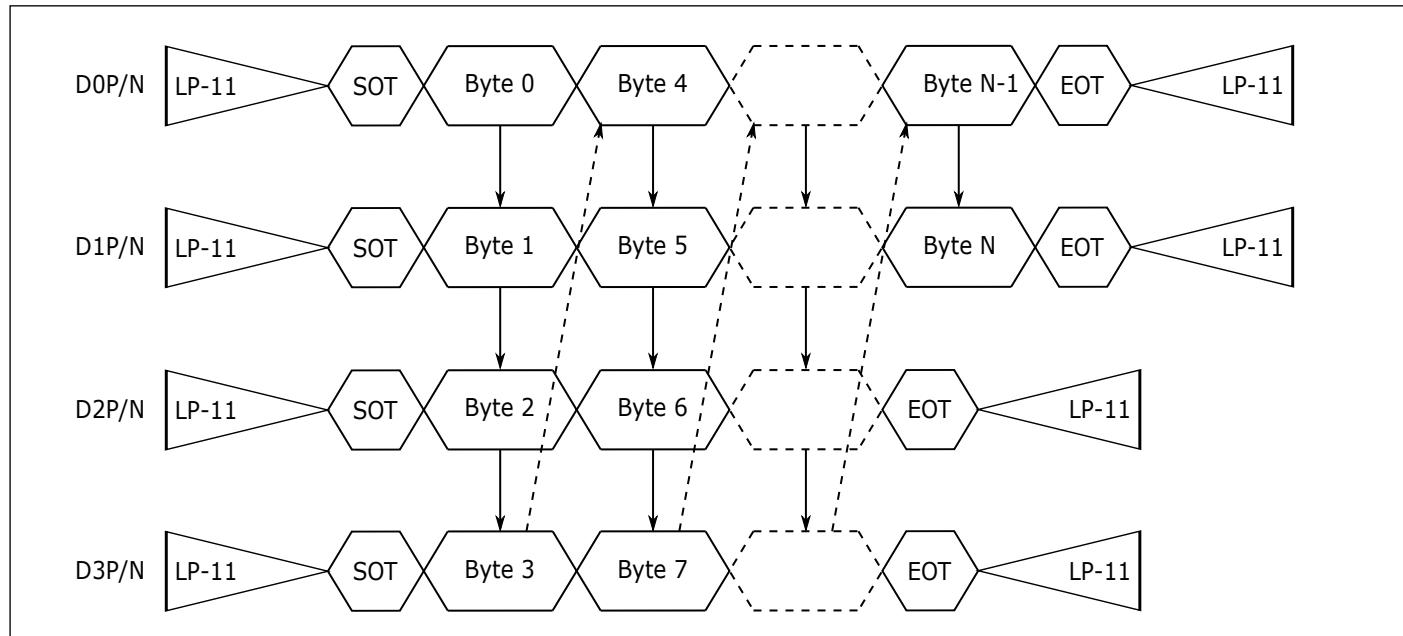


Fig. 12.23: Transmission of Bytes (Non-integral Multiple of the Number of Lanes)

12.3.6 Protocol Layer

DSI is a communication protocol based on packet transmission. Essentially, the commands and data are transmitted between the MCU and the Display Module in the packet format. DSI defines short packet (SPa) and long packet (LPa). The type of packet (SPa or LPa) can be identified from its header (PH).

12.3.6.1 Short Packet

A short packet consists of 8-bit data identification (DI), two bytes of commands or data, and 8-bit ECC. The length of a short packet is 4 bytes including ECC. Short packets are mainly used for most command pattern commands and related parameters and also used to transmit events like H-sync and V-sync edges. Due to short length, the timing information can be accurately transmitted to the peripheral logic. The structure of a short packet is shown as follows:

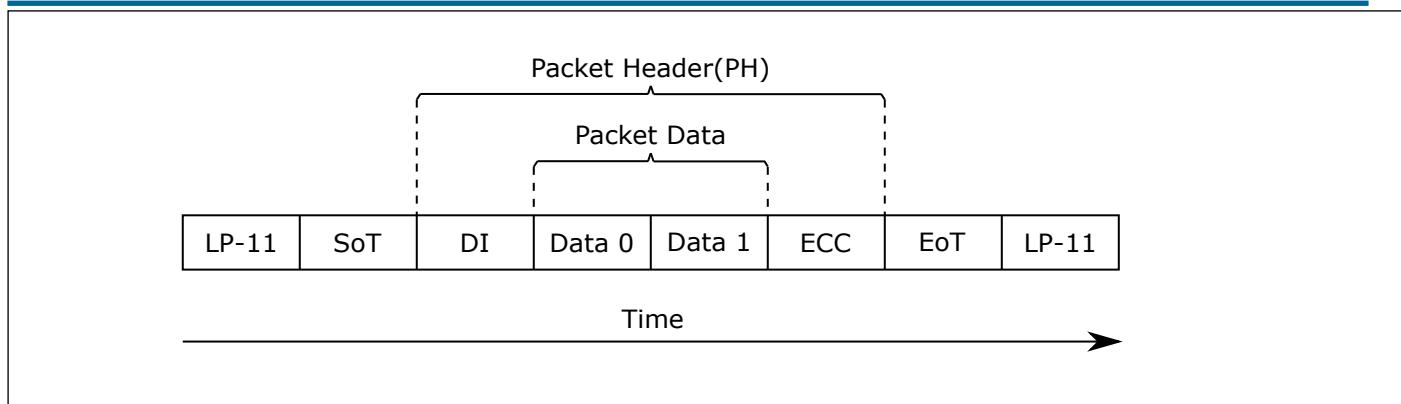


Fig. 12.24: Structure of Short Packet

- LP-11: low power stop state
- SoT: start of transmission
- DI: 8-bit, data identification
- Data 0: 8-bit, packet data 0
- Data 1: 8-bit, packet data 1
- ECC: 8-bit, error correction code
- EoT: end of transmission

12.3.6.2 Long Packet

The long packet consists of a 32-bit packet header (PH), a data payload with a variable number of bytes, and a 16-bit packet footer (PF). The packet header consists of 8-bit data identification, 16-bit word count (WC), and 8-bit ECC. Since the WC that records the payload length is two bytes, and the value ranges from 0 to 65,535, the length of a long packet ranges from 6 to 65,541 bytes. Long packets are mainly used to transmit a large amount of image data or some control commands. The structure of a long packet is shown as follows:

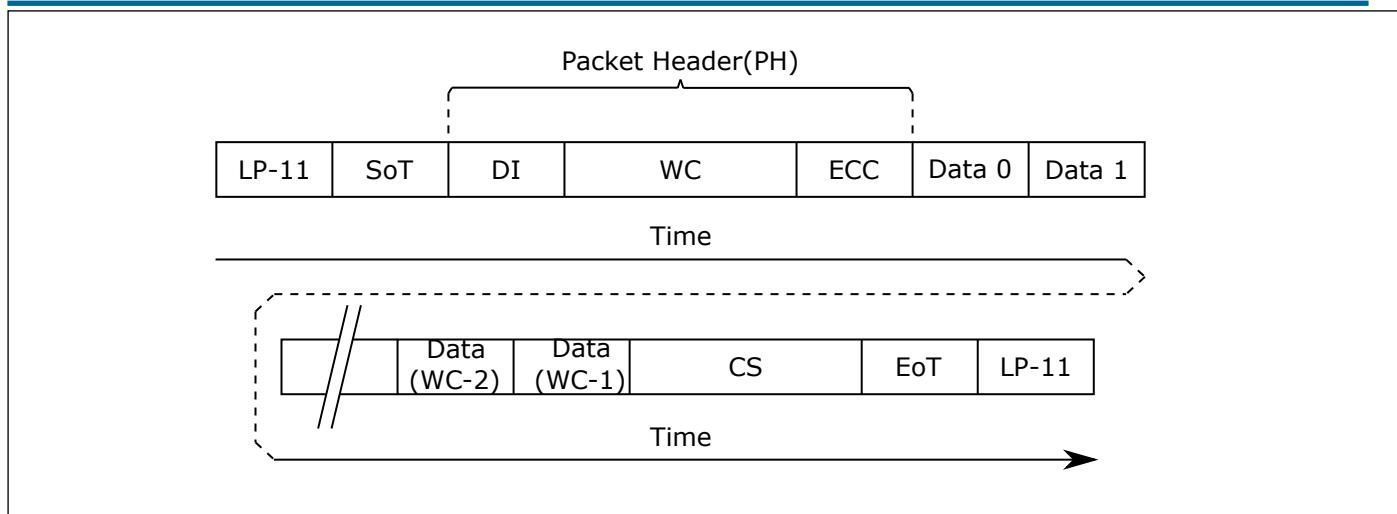


Fig. 12.25: Structure of Long Packet

- LP-11: low power stop state
- SoT: start of transmission
- DI: 8-bit, data identification
- WC: 16-bit, word count
- ECC: 8-bit, error correction code
- Data 0, Data 1…: packet data (0–65535 bytes)
- CS: 16-bit, checksum
- EoT: end of transmission

12.3.6.3 Multiple Packets per Transmission

In the above structural diagrams of short and long packets, the transmission contains only one packet. For multiple packets, if only one packet is sent in each transmission, the overhead of frequent switching between LPS and HS Mode will greatly limit the bandwidth. DSI allows multiple packets to be concatenated and sent without SoT, EoT and LP11 between packets, as shown below:

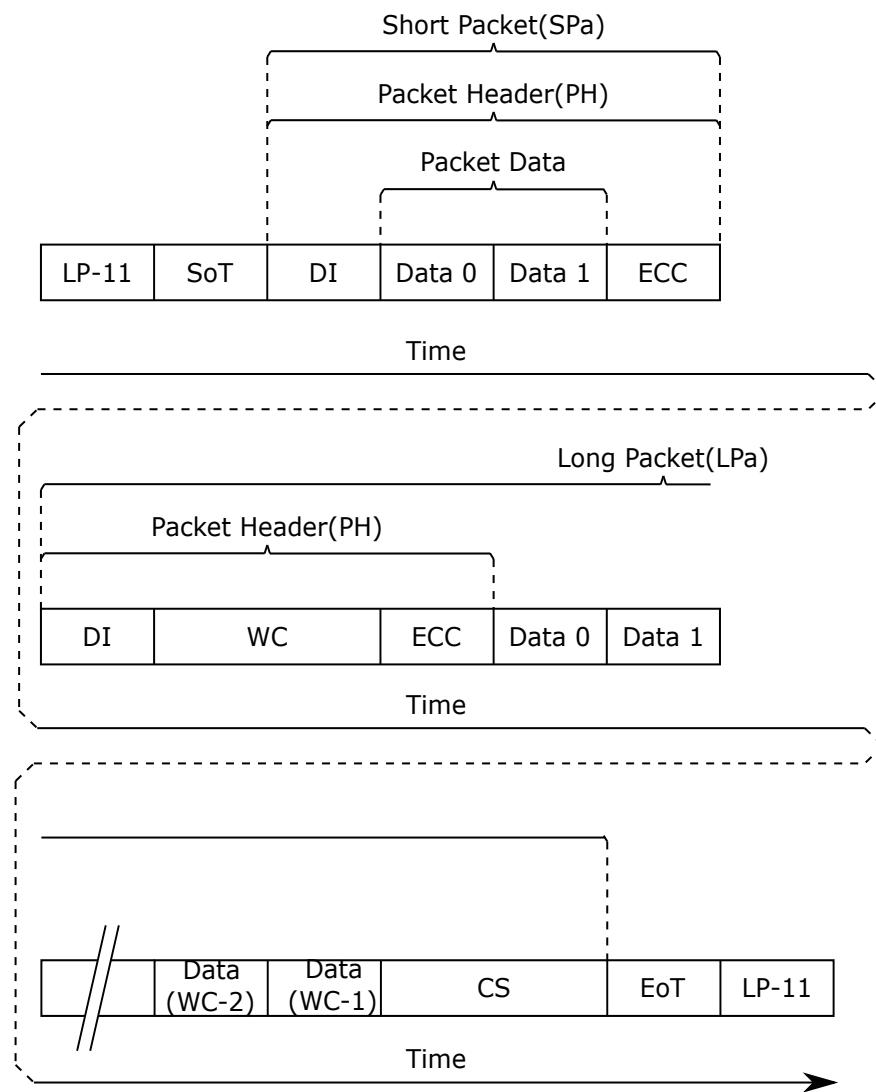


Fig. 12.26: Multiple Packets per Transmission

12.3.6.4 Bit Order of Bytes in a Packet

The bit order of the bytes used in a packet is that the LSB is sent first and the MSB is sent last. The following figure shows an example:

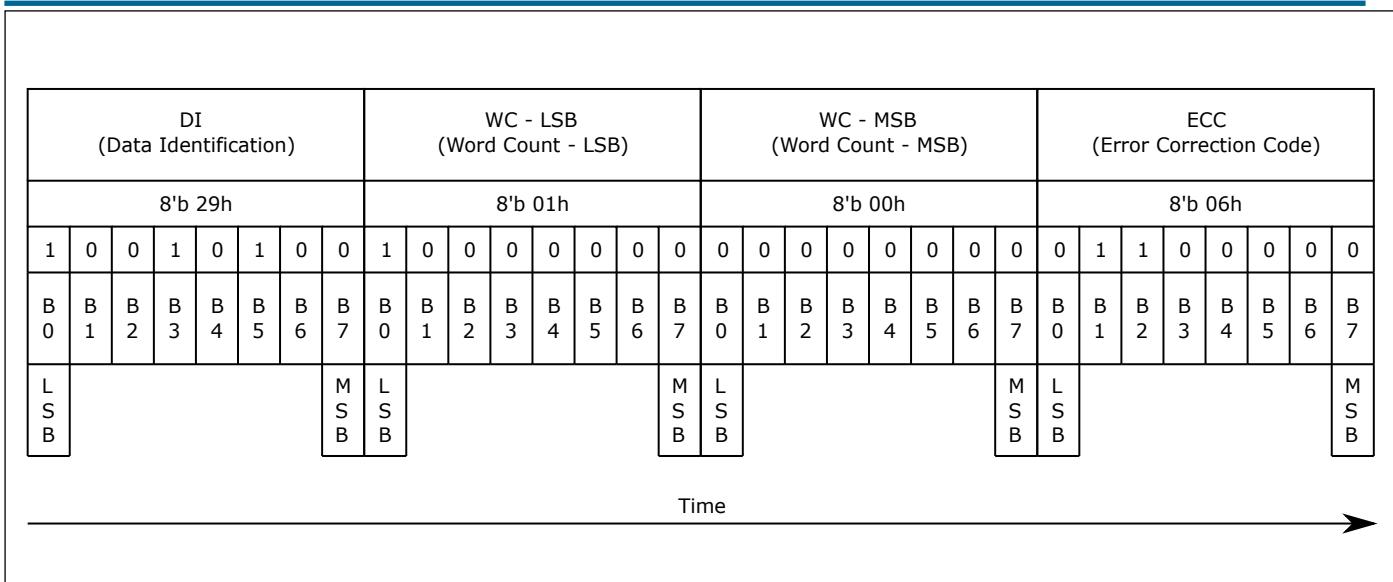


Fig. 12.27: Bit Order of Bytes in a Packet

12.3.6.5 Byte Order in a Packet

The byte order of multi-byte information used in a packet is that the LSB is sent first and the MSB is sent last. For example, the word count (WC) consists of 2 bytes. LSB is sent before the MSB, as shown below:

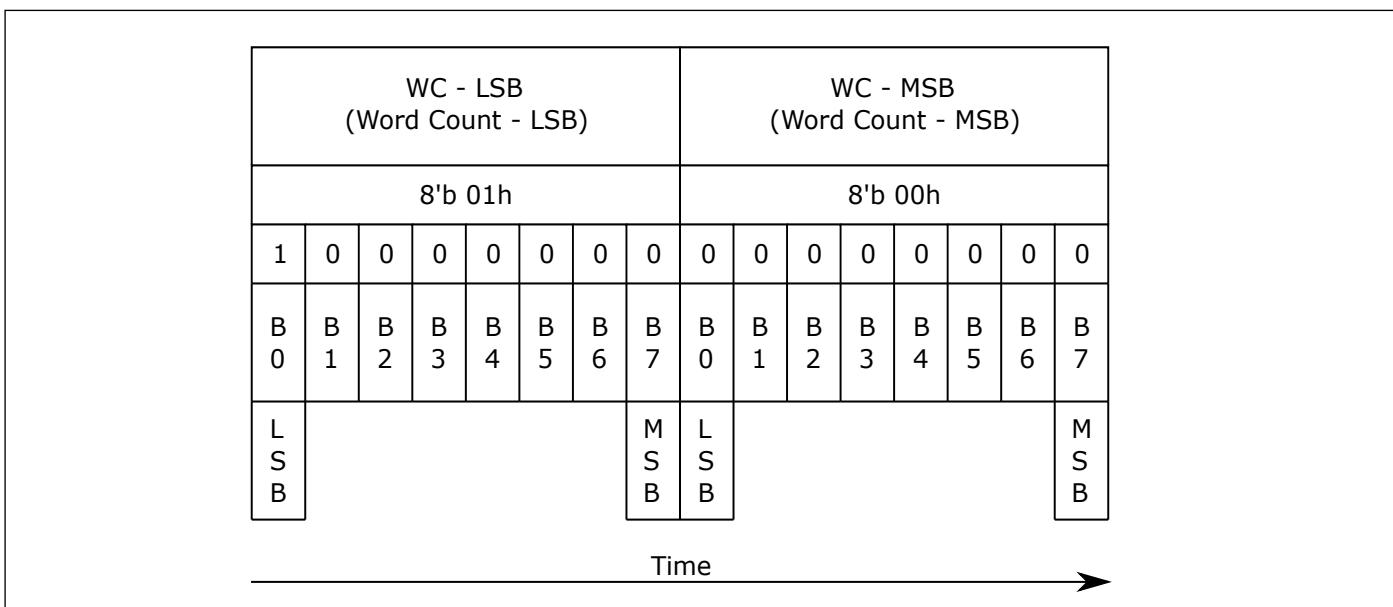


Fig. 12.28: Byte Order in a Packet

12.3.6.6 Packet Header (PH)

The packet header always consists of 4 bytes, and the contents of the 4 bytes are different for short and long packets. The short packet consists of 1-byte data identification (DI), 2-byte packet data (PD0, PD1), and 1-byte ECC. The long packet consists of 1-byte data identification (DI), 2-byte word count (WC), and 1-byte ECC.

12.3.6.7 Data Identification (DI)

DI, a part of the PH, consists of two parts:

- Virtual channel (VC), 2-bit, DI[7:6]
- Data type (DT), 6-bit, DI[5:0]

12.3.6.8 Virtual Channel (VC)

VC, a part of data identification (DI[7:6]) structure, is used to determine the destination to which MCU packets are sent. The virtual channel can allocate 4 different lanes to 4 different Display Modules, and each module uses the same virtual channel used by the MCU to send packets to it.

12.3.6.9 Data Type (DT)

DT, a part of data identification (DI[5:0]) structure, is used to define a short or long packet type and the packet format. The data types from the MCU to the Display Module are defined in the following table:

From the MCU to the Display Module								
Bit5	Bit4	Bit3	Bit2	Bit1	Bit0	Hex	Description	Short/Long Packet
0	0	0	0	0	1	01	Sync Event, V Sync Start	SPa (Short Packet)
0	1	0	0	0	1	11	Sync Event, V Sync End	SPa (Short Packet)
1	0	0	0	0	1	21	Sync Event, H Sync Start	SPa (Short Packet)
1	1	0	0	0	1	31	Sync Event, H Sync End	SPa (Short Packet)
0	0	1	0	0	0	08	End of Transmission Packet (EoTP), Note 1	SPa (Short Packet)
0	0	0	0	1	0	02	Color Mode Off Command	SPa (Short Packet)
0	1	0	0	1	0	12	Color Mode On Command	SPa (Short Packet)
1	0	0	0	1	0	22	Shut Down Peripheral Command	SPa (Short Packet)
1	1	0	0	1	0	32	Turn On Peripheral Command	SPa (Short Packet)
0	0	0	0	1	1	03	Generic Short Write, No Parameter	SPa (Short Packet)
0	1	0	0	1	1	13	Generic Short Write, 1 Parameter	SPa (Short Packet)
1	0	0	0	1	1	23	Generic Short Write, 2 Parameters	SPa (Short Packet)
0	0	0	1	0	0	04	Generic Short Read, No Parameter	SPa (Short Packet)
0	1	0	1	0	0	14	Generic Short Read, 1 Parameter	SPa (Short Packet)
1	0	0	1	0	0	24	Generic Short Read, 2 Parameters	SPa (Short Packet)
0	0	0	1	0	1	05	DCS Write, No Parameter	SPa (Short Packet)
0	1	0	1	0	1	15	DCS Write, 1 Parameter	SPa (Short Packet)
0	0	0	1	1	0	06	DCS Read, No Parameter	SPa (Short Packet)
1	1	0	1	1	1	37	Set Maximum Return Packet Size	SPa (Short Packet)
0	0	1	0	0	1	09	Null Packet, No Data, Note 2	LPa (Long Packet)
0	1	1	0	0	1	19	Blanking Packet, No Data	LPa (Long Packet)
1	0	1	0	0	1	29	Generic Long Write	LPa (Long Packet)
1	1	1	0	0	1	39	DCS Write Long	LPa (Long Packet)
0	0	1	1	1	0	0E	Packed Pixel Stream, 16-bit RGB, 5-6-5 Format	LPa (Long Packet)
0	1	1	1	1	0	1E	Packed Pixel Stream, 18-bit RGB, 6-6-6 Format	LPa (Long Packet)
1	0	1	1	1	0	2E	Loosely Packed Pixel Stream, 18-bit RGB, 6-6-6 Format	LPa (Long Packet)
1	1	1	1	1	1	3E	Packed Pixel Stream, 24-bit RGB, 8-8-8 Format	LPa (Long Packet)
x	x	0	0	0	0	x0	Do Not Use	
x	x	1	1	1	1	xF	All Unspecified Codes Are Reserved	

Note:

1. This item can be used when the MCU wants to confirm the end of the transmission in the high-speed data transmission mode;
2. This item can be used when the data channel remains in high-speed data transfer mode.

Fig. 12.29: Data Types from the MCU to the Display Module

The data types from the Display Module to the MCU are defined in the following table:

From the Display Module to the MCU								
Bit5	Bit4	Bit3	Bit2	Bit1	Bit0	Hex	Description	Short/Long Packet
0	0	0	0	1	0	02	Acknowledge with Error Report	SPa (Short Packet)
0	0	1	0	0	0	08	End of Transmission Packet (EoTP)	SPa (Short Packet)
0	1	0	0	0	1	11	Generic Short Read Response, 1 Byte Returned	SPa (Short Packet)
0	1	0	0	1	0	12	Generic Short Read Response, 2 Bytes Returned	SPa (Short Packet)
0	1	1	0	1	0	1A	Generic Long Read Response	LPa (Long Packet)
0	1	1	1	0	0	1C	DCS Read Long Response	LPa (Long Packet)
1	0	0	0	0	1	21	DCS Read Short Response, 1 Byte Returned	SPa (Short Packet)
1	0	0	0	1	0	22	DCS Read Short Response, 2 Bytes Returned	SPa (Short Packet)

Fig. 12.30: Data Types from the Display Module to the MCU

12.3.6.10 Packet Data (PD)

For short packets, PD is a part of the PH, located after the data identification, and is fixed to 2 bytes, namely data 0 and data 1. The order of sending PD is sending data 0 before data 1. If the length of information is 1 byte, the value of data 1 is 0. For long packets, PD is located after the PH, and the byte length depends on the WC.

12.3.6.11 Word Count (WC)

WC is a part of the header of a long packet and located after the data identification. It is used to determine the total number of bytes in the PD of a long packet. WC is fixed to 2 bytes. The LSB is sent before the MSB.

12.3.6.12 Error Correction Code (ECC)

ECC, a part of the PH, can identify one or more errors and correct only one error. ECC protects the following fields:

- short packet: DI (8-bit), PD (16-bit) and ECC (8-bit)
- long packet: DI (8-bit), WC (16-bit) and ECC (8-bit)

Taking short packets as an example, the ECC calculation method for each byte is shown as follows (" ^ " indicates exclusive OR operation).

DI (Data Identification)								Data 0 (Packet Data)								Data 1 (Packet Data)								ECC (Error Correction Code)									
8'b 05h								8'b 10h								8'b 00h								8'b 2Ch									
1	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	1	0	0	
D 0	D 1	D 2	D 4	D 5	D 7	D 10	D 11	D 13	D 16	D 20	D 21	D 22	D 23	P 0																			
D 0	D 1		D 3	D 4	D 6	D 8	D 10	D 12	D 14	D 17	D 20	D 21	D 22	D 23	P 1																		
D 0		D 2	D 3	D 5	D 6	D 9	D 11	D 12	D 15	D 18	D 20	D 21	D 22		P 2																		
	D 1	D 2	D 3		D 7	D 8	D 9	D 13	D 14	D 15	D 19	D 20	D 21	D 23	P 3																		
			D 4	D 5	D 6	D 7	D 8	D 9	D 16	D 17	D 18	D 19	D 20	D 22	D 23	P 4																	
						D 10	D 11	D 12	D 13	D 14	D 15	D 16	D 17	D 18	D 19	D 21	D 22	D 23									P 5						
B 0	B 1	B 2	B 3	B 4	B 5	B 6	B 7	B 0	B 1	B 2	B 3	B 4	B 5	B 6	B 7	B 0	B 1	B 2	B 3	B 4	B 5	B 6	B 7	B 0	B 1	B 2	B 3	B 4	B 5	B 6	B 7		
L S B								M S B	L S B	M S B	L S B	M S B	L S B	M S B	L S B	M S B	L S B	M S B	L S B	M S B	L S B	M S B	L S B	M S B	L S B	M S B	L S B	M S B	L S B	M S B			

Time →

Fig. 12.31: Example of ECC Calculation

Formula:

- $ECC[7] = 0$
- $ECC[6] = 0$
- $ECC[5] = D10 \wedge D11 \wedge D12 \wedge D13 \wedge D14 \wedge D15 \wedge D16 \wedge D17 \wedge D18 \wedge D19 \wedge D21 \wedge D22 \wedge D23$
- $ECC[4] = D4 \wedge D5 \wedge D6 \wedge D7 \wedge D8 \wedge D9 \wedge D16 \wedge D17 \wedge D18 \wedge D19 \wedge D20 \wedge D22 \wedge D23$
- $ECC[3] = D1 \wedge D2 \wedge D3 \wedge D7 \wedge D8 \wedge D9 \wedge D13 \wedge D14 \wedge D15 \wedge D19 \wedge D20 \wedge D21 \wedge D23$
- $ECC[2] = D0 \wedge D2 \wedge D3 \wedge D5 \wedge D6 \wedge D9 \wedge D11 \wedge D12 \wedge D15 \wedge D18 \wedge D20 \wedge D21 \wedge D22$
- $ECC[1] = D0 \wedge D1 \wedge D3 \wedge D4 \wedge D6 \wedge D8 \wedge D10 \wedge D12 \wedge D14 \wedge D17 \wedge D20 \wedge D21 \wedge D22 \wedge D23$
- $ECC[0] = D0 \wedge D1 \wedge D2 \wedge D4 \wedge D5 \wedge D7 \wedge D10 \wedge D11 \wedge D13 \wedge D16 \wedge D20 \wedge D21 \wedge D22 \wedge D23$

12.3.6.13 Packet Footer (PF)

PF, a part of a long packet, is located after the packet data. PF is a checksum calculated from the packet data of a long packet. The checksum is a 16-bit cyclic redundancy check (CRC) value generated by the polynomial $X^{16}+X^{12}+X^5+X^0$, as shown below:

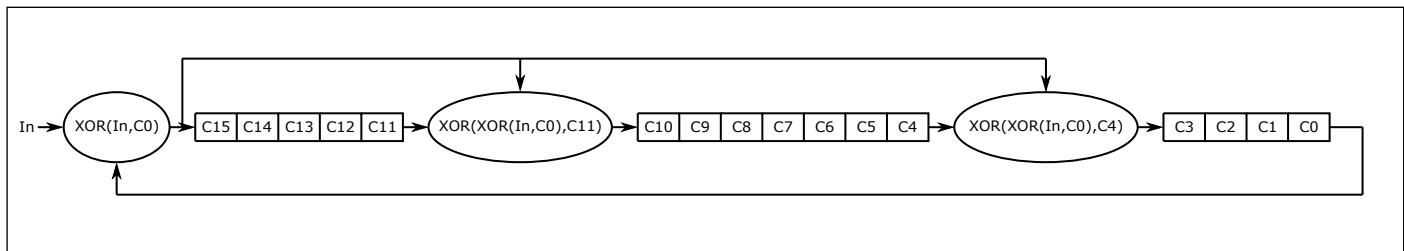


Fig. 12.32: CRC Calculation Method

The initial value of the 16-bit CRC generator before calculation is 0xFFFF, and the LSB of packet data is the first bit of the input CRC. The following figure illustrates the steps of CRC calculation by citing the data 0x01 as an example:

Step	In	XOR(In,C0)	C15	C14	C13	C12	C11	XOR(XOR(In,C0),C11(Step-1))	C10	C9	C8	C7	C6	C5	C4	XOR(XOR(In,C0),C4(Step-1))	C3	C2	C1	C0	C0
0	X	X	1	1	1	1	1	X	1	1	1	1	1	1	1	X	1	1	1	1	X
1	1(LSB)	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
2	0	1	1	0	1	1	1	0	0	1	1	1	1	1	1	0	0	1	1	1	1
3	0	1	1	1	0	1	1	0	0	0	1	1	1	1	1	0	0	0	1	1	1
4	0	1	1	1	1	0	1	0	0	0	0	1	1	1	1	0	0	0	0	1	1
5	0	1	1	1	1	1	0	0	0	0	0	0	1	1	1	0	0	0	0	0	0
6	0	0	0	1	1	1	1	0	0	0	0	0	0	1	1	1	0	0	0	0	0
7	0	0	0	0	1	1	1	1	1	0	0	0	0	0	1	1	1	0	0	0	0
8	0(MSB)	0	0	0	0	1	1	1	1	1	0	0	0	0	0	1	1	1	0	0	0
1 byte	CRC result	0	0	0	0	1	1		1	1	0	0	0	0	0	1	1	1	0	0	LSB

Fig. 12.33: Example of CRC Calculation

12.3.7 Application Layer

This layer describes the higher-level encoding and interpretation of data contained in the data stream. Depending on the display subsystem architecture, it may consist of pixels or coded bit streams having a prescribed format, or of commands that are interpreted by the display controller inside a Display Module. The DSI specification describes the mapping of pixel values, bit streams, commands and command parameters to bytes in the packet assembly. (For more details, see the Display Command Set (DCS) specification, which will not be presented here).

12.3.8 Command Mode

Command Mode refers to that the interaction between MCU and peripherals including the display controller (such as Display Module) by sending commands and data. The display controller may include local registers and compressed or uncompressed frame buffers. Systems using Command Mode write to, and read from, the registers and frame buffer memory. The MCU indirectly controls the activities at peripherals by sending commands, parameters and data to the display controller. The MCU can also read Display Module status information or the contents of the frame memory. Command Mode operation requires a bidirectional interface.

12.3.9 Video Mode

Video Mode refers to operation in which the transfer from the MCU to the peripheral takes the form of a real-time pixel stream. The Display Module relies on the MCU to provide image data at sufficient bandwidth to avoid flicker or other visible artifacts in the displayed image. Video information can only be transmitted in the HS Mode. Video Mode involves three modes: NonBurst Mode with SYNC Pulses, NonBurst Mode with SYNC Events, and Burst Mode. The three modes have different packet sequences, and the timing requirements of peripherals determine which mode is appropriate.

12.3.9.1 Non-Burst Mode with SYNC Pulses

It enables the peripheral to reconstruct the original video timing accurately, including sync pulse widths. In this mode, the goal is to convey DPI-type timing over the DSI serial Link. It includes matching DPI pixel-transmission rates, and widths of timing events like sync pulses. Accordingly, synchronization periods are defined using packets transmitting both start and end of sync pulses. The following figure shows an example of the mode. Periods shown as Horizontal Sync Active (HSA), Horizontal Back Porch (HBP) and Horizontal Front Porch (HFP) are filled by the timing intervals in LP Mode. DSI switches from HS to LP Mode at the beginning of HSA, HBP and HFP, stays in the LP11 state during the periods, and switches back to HS Mode at the end:

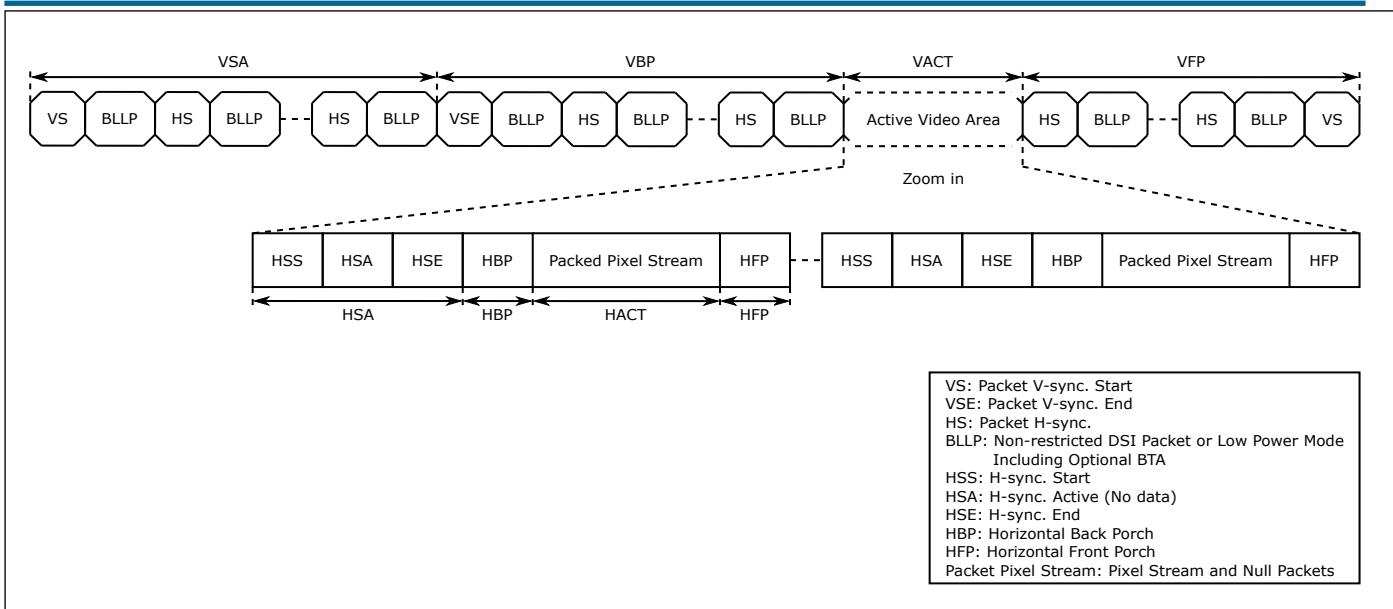


Fig. 12.34: Timing of NonBurst Mode with SYNC Pulses

12.3.9.2 Non-Burst Mode with SYNC Events

It is similar to the NonBurst Mode with SYNC Pulses. But an accurate reconstruction of sync pulse widths is not required, and hence the sync pulse is substituted by a single sync event, which is a simplification of the above NonBurst Mode with SYNC Pulses. In this mode, only the start of each sync pulse is transmitted. The peripheral may regenerate sync pulses as needed from each Sync Event packet received. Pixels are transmitted at the same rate as they would in a corresponding parallel display interface such as DPI-2. The following figure shows an example of the mode. Periods shown as Horizontal Sync Active (HSA), Horizontal Back Porch (HBP) and Horizontal Front Porch (HFP) are filled by the timing intervals in LP Mode. DSI switches from HS to LP Mode at the beginning of HSA, HBP and HFP, stays in the LP11 state during the periods, and switches back to HS Mode at the end:

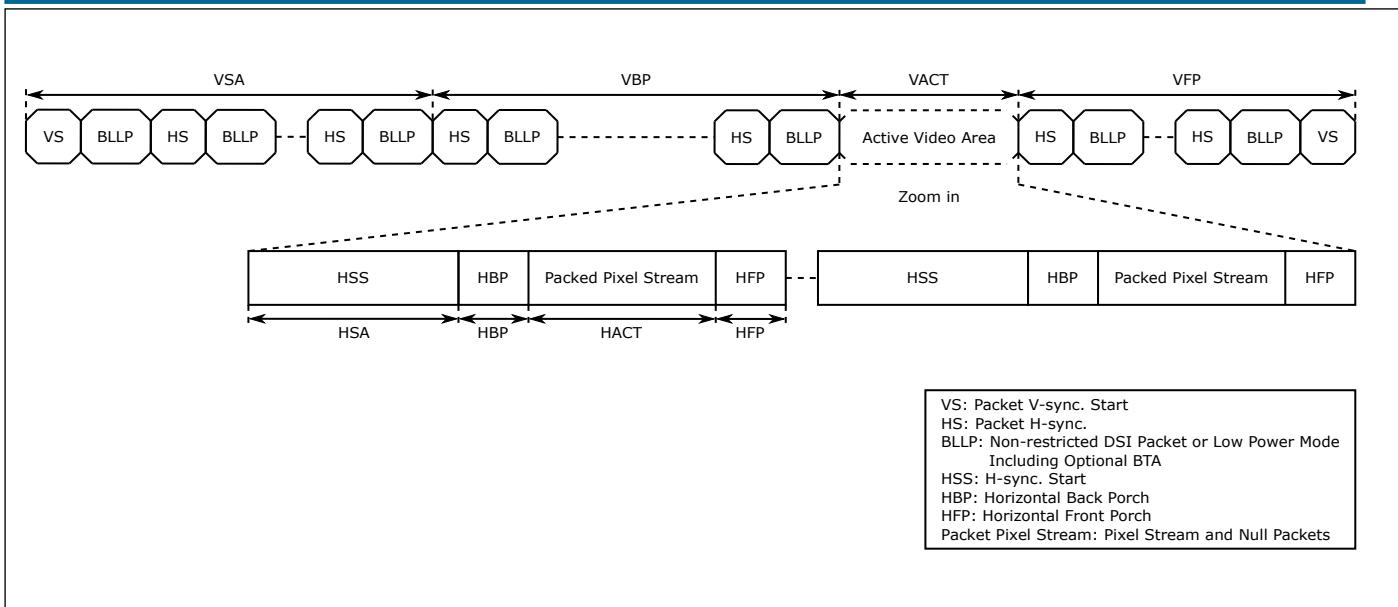


Fig. 12.35: Timing of NonBurst Mode with SYNC Events

12.3.9.3 Burst Mode

In this mode, the pixel packets are time-compressed, so that transmission can be completed in a short time. This strategy reduces overall DSI power consumption and enables larger blocks of time for other data transmissions over the Link in either direction. After the transmission of HS pixel data is completed, the bus switches to LP Mode. During this period, the bus may remain idle, i.e. staying in the LP11 state, or LP transmission can be performed in either direction. If the peripheral controls the bus that sends data to the MCU, its transmission time shall be limited to ensure that data will not flow from its internal buffer memory to the display device. The following figure shows an example of the mode. Periods shown as Horizontal Sync Active (HSA), Horizontal Back Porch (HBP) and Horizontal Front Porch (HFP) are filled by the timing intervals in LP Mode. DSI switches from HS to LP Mode at the beginning of HSA, HBP and HFP, stays in the LP11 state during the periods, and switches back to HS Mode at the end:

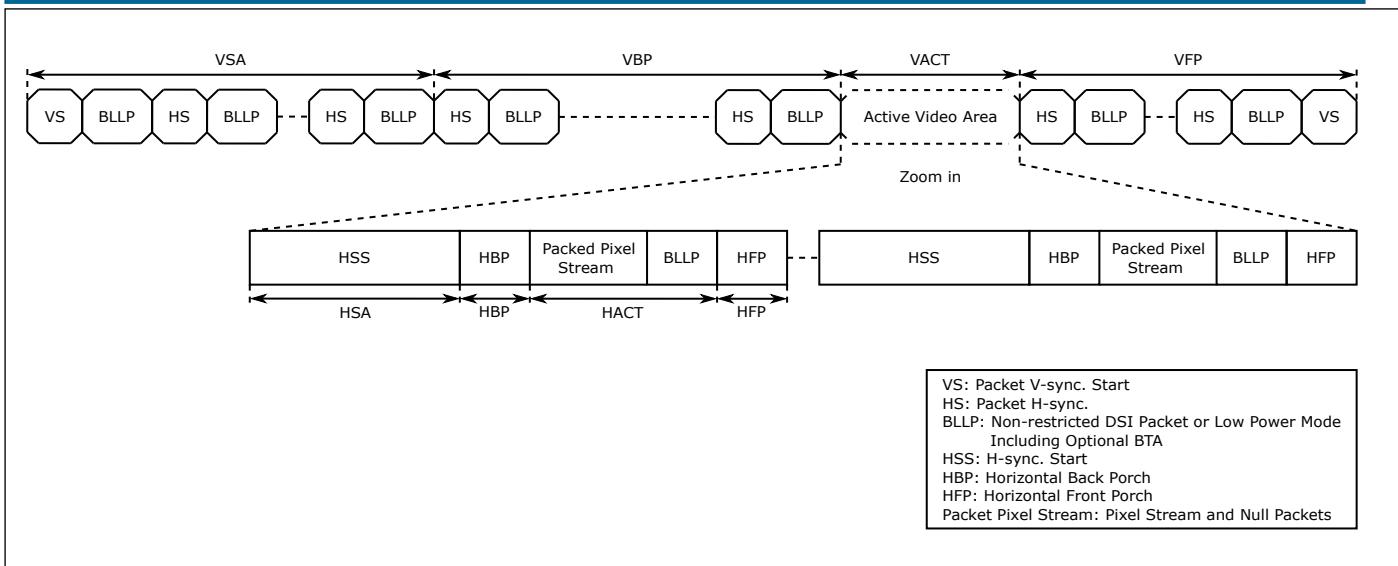


Fig. 12.36: Timing of Burst Mode

12.3.10 Line Buffer

Because the speed at which the frontend module inputs data to the DSI does not match the speed at which the DSI outputs data, it is necessary to buffer the data. Inside the DSI, there is a Line Buffer that can hold up to 1280*3 bytes and is used to cache the data input to the DSI in Video Mode. Users need to set a threshold through <CR_HSTX_OUT_TH>. Then, for each row (H-Sync) of image data in Video Mode, the DSI will not send the data immediately after receiving the data input from its frontend module, but will cache it in Line Buffer first. When the pixels cached in Line Buffer reach the set threshold, the DSI starts to send data to the Display Module. In this way, when the DSI's input speed is greater than the output speed, the input data that cannot be sent out timely will be cached in Line Buffer first. When that is lower than the output speed, Line Buffer will cache some data first, and the DSI will start sending data after the pixel threshold is met. This can ensure that the time of sending the whole row of pixels by the DSI matches the time of inputting the remaining pixels. The formula for calculating the threshold is as follows:

$$\text{Threshold} = \text{ceil}(\text{Width} * (1 - \text{Fdp} * \text{BPP} / \text{Fhs} / \text{LN}))$$

- `ceil()` is rounded up.
- Width is the number of pixels in one row of the image.
- Fdp is the work clock of the previous-level module of DSI (data input module `dp_dvp_tsra` of DSI).
- Byte Per Pixel (BPP) refers to the number of bytes in a pixel format, such as 3 for RGB888/RGB666 and 2 for RGB565/YUV422_8.
- Lane Number (LN) is the number of data lanes.
- Threshold is to be calculated and its minimum value is 6. When the calculated value is less than 6, it shall be set to 6.

12.3.11 Display Data Format

The display data formats support YUV422 (8-bit), RGB565, RGB666 (loosely packed), and RGB888, which are configured in <CR_DT>.

12.3.11.1 YUV422(8-bit)

In YUV422 (8-bit) format, the Y, U and V components of one pixel are 8 bits each, in which two pixels share a set of UV. The long packet in YUV422 (8-bit) format consists of 1-byte DI, 2-byte non-zero WC, 1-byte ECC, payload with length in WC bytes, and 2-byte CRC. With this format, pixel boundaries are aligned with some byte boundaries, and the value in WC shall be any non-zero value divisible by 4. The structure of a long packet in YUV422 (8-bit) format is shown as follows:

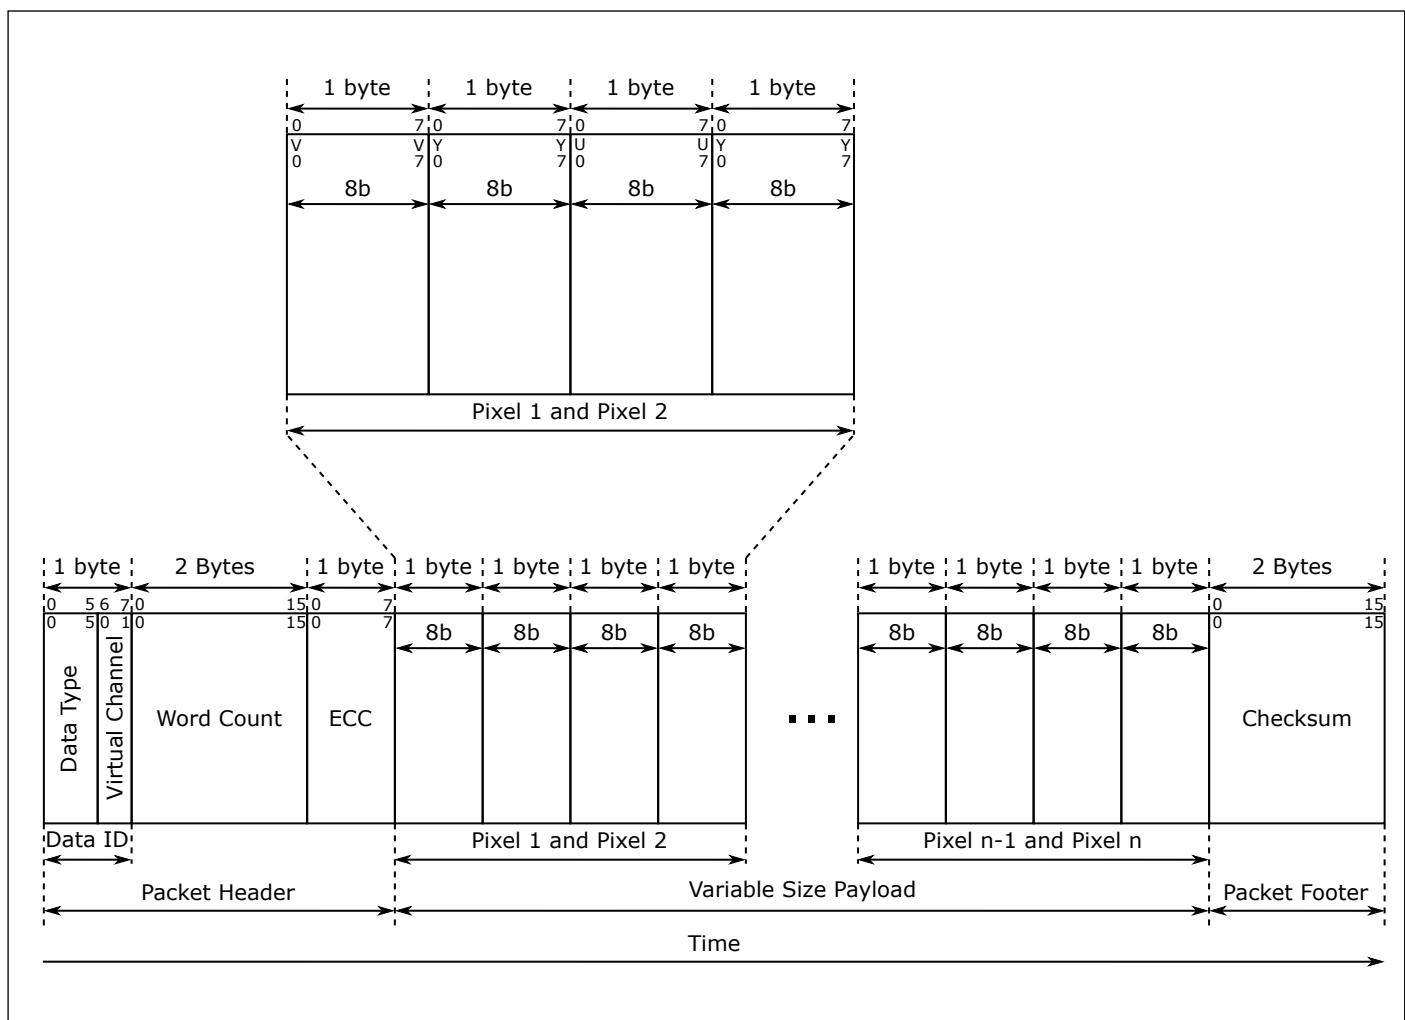


Fig. 12.37: YUV422 Pixel Format

12.3.11.2 RGB565

The R, G and B components of one pixel in RGB565 format are 5-bit, 6-bit and 5-bit respectively. The long packet in RGB565 format consists of 1-byte DI, 2-byte WC, 1-byte ECC, payload with length in WC bytes, and 2-byte CRC. With this format, the pixel boundary is aligned with the byte boundary every two bytes, and the value in WC shall be a multiple of 2. The structure of a long packet in RGB565 format is shown as follows:

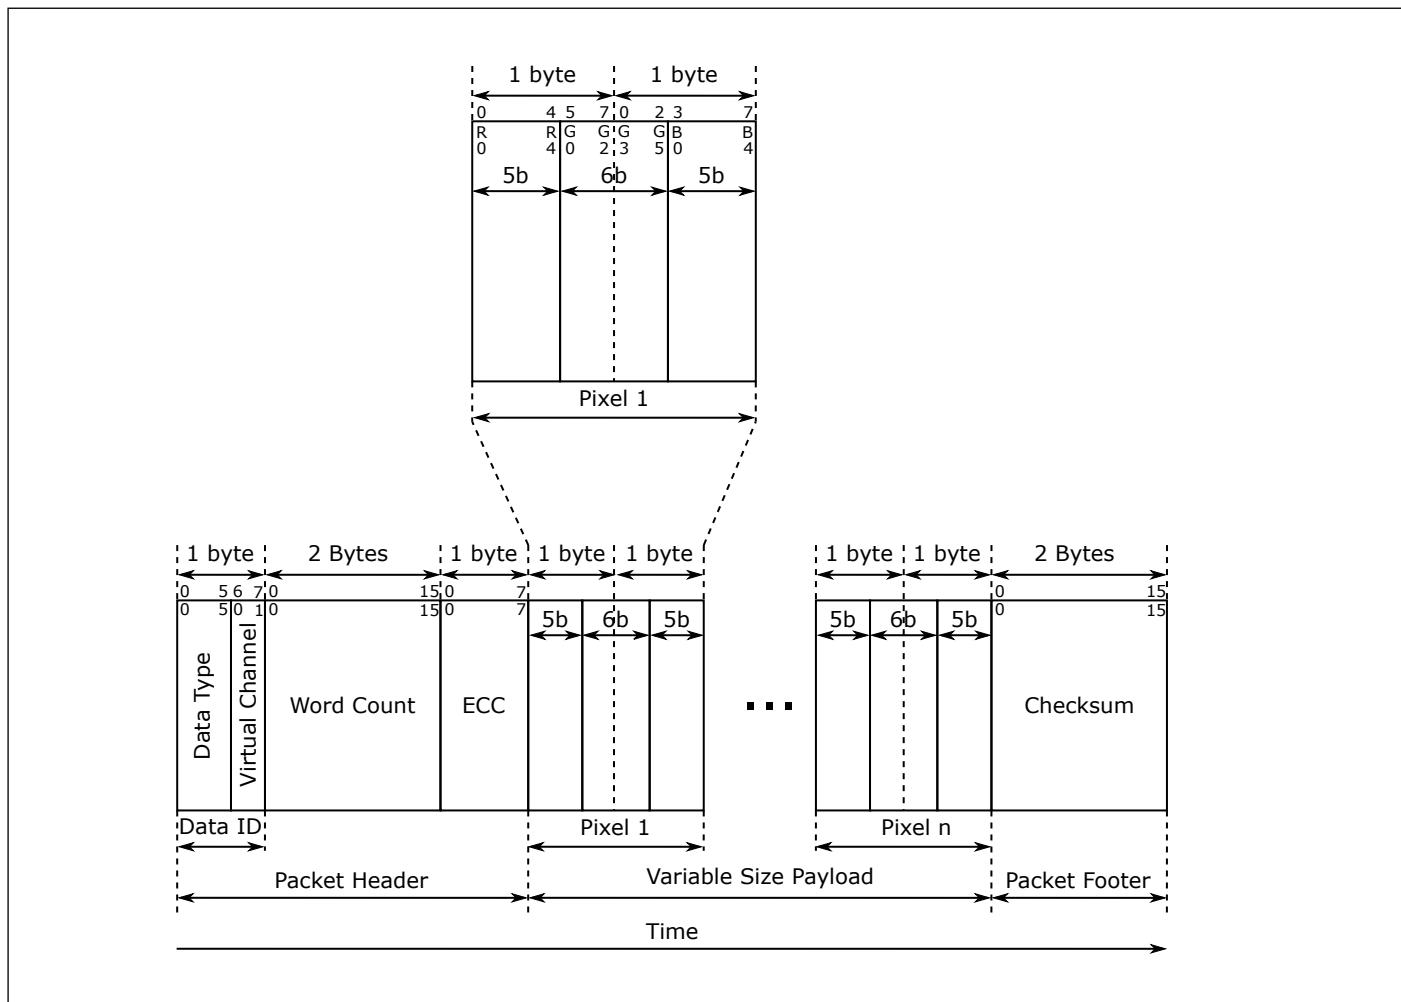


Fig. 12.38: RGB565 Pixel Format

12.3.11.3 RGB666(loosely packed)

The R, G and B components of one pixel in RGB666 (loosely packed) format are 6 bits each, but they will move to the high bit of the byte, so that the significant BPP occupies the bits [7:2] of each byte, while the bits [1:0] will be ignored. Accordingly, it takes three bytes for each pixel to be transmitted on the channel. The long packet in RGB666 format consists of 1-byte DI, 2-byte WC, 1-byte ECC, payload with length in WC bytes, and 2-byte CRC. With this format, the pixel boundary is aligned with the byte boundary every three bytes, and the value in WC shall be a multiple of 3. The structure of a long packet in RGB666 (loosely packed) format is shown as follows:

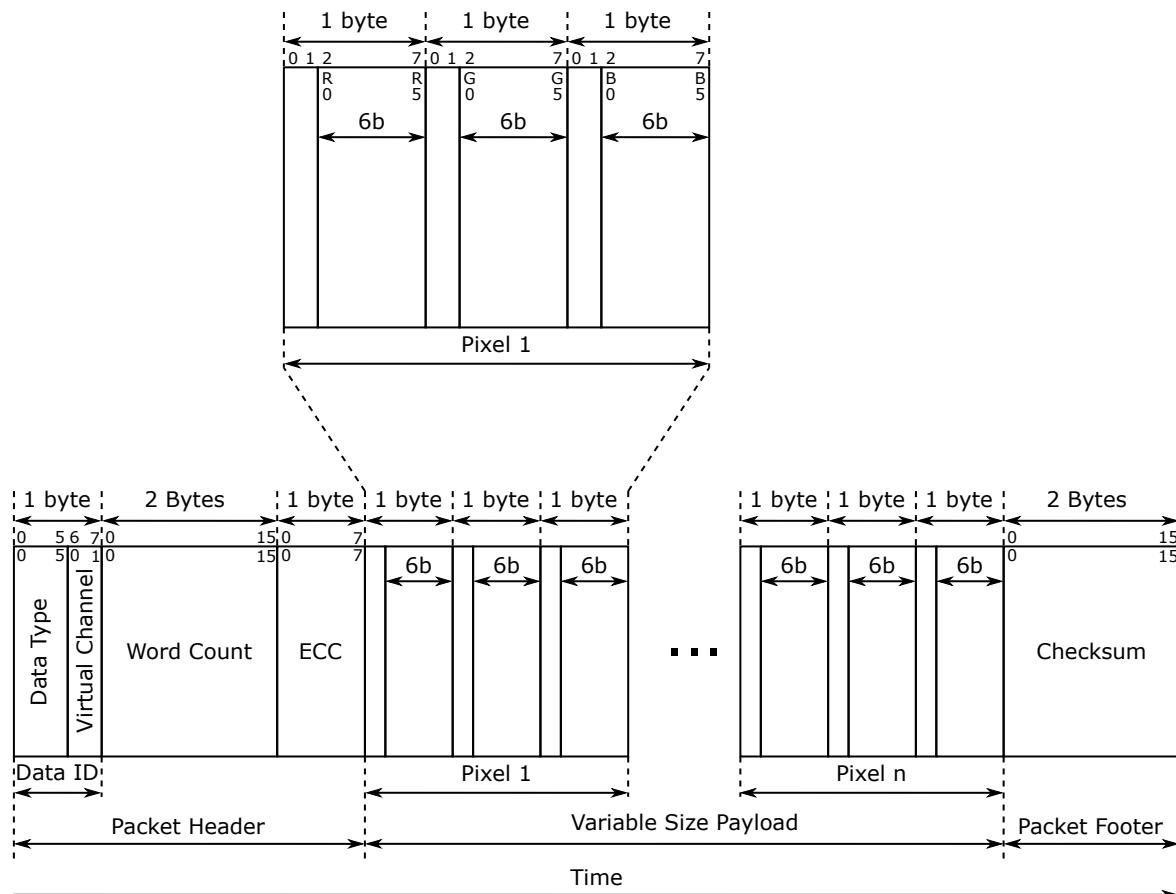


Fig. 12.39: RGB666 Pixel Format

12.3.11.4 RGB888

The R, G and B components of one pixel in RGB888 format are 8 bits each. The long packet in RGB888 format consists of 1-byte DI, 2-byte WC, 1-byte ECC, payload with length in WC bytes, and 2-byte CRC. With this format, the pixel boundary is aligned with the byte boundary every three bytes, and the value in WC shall be a multiple of 3. The structure of a long packet in RGB888 format is shown as follows:

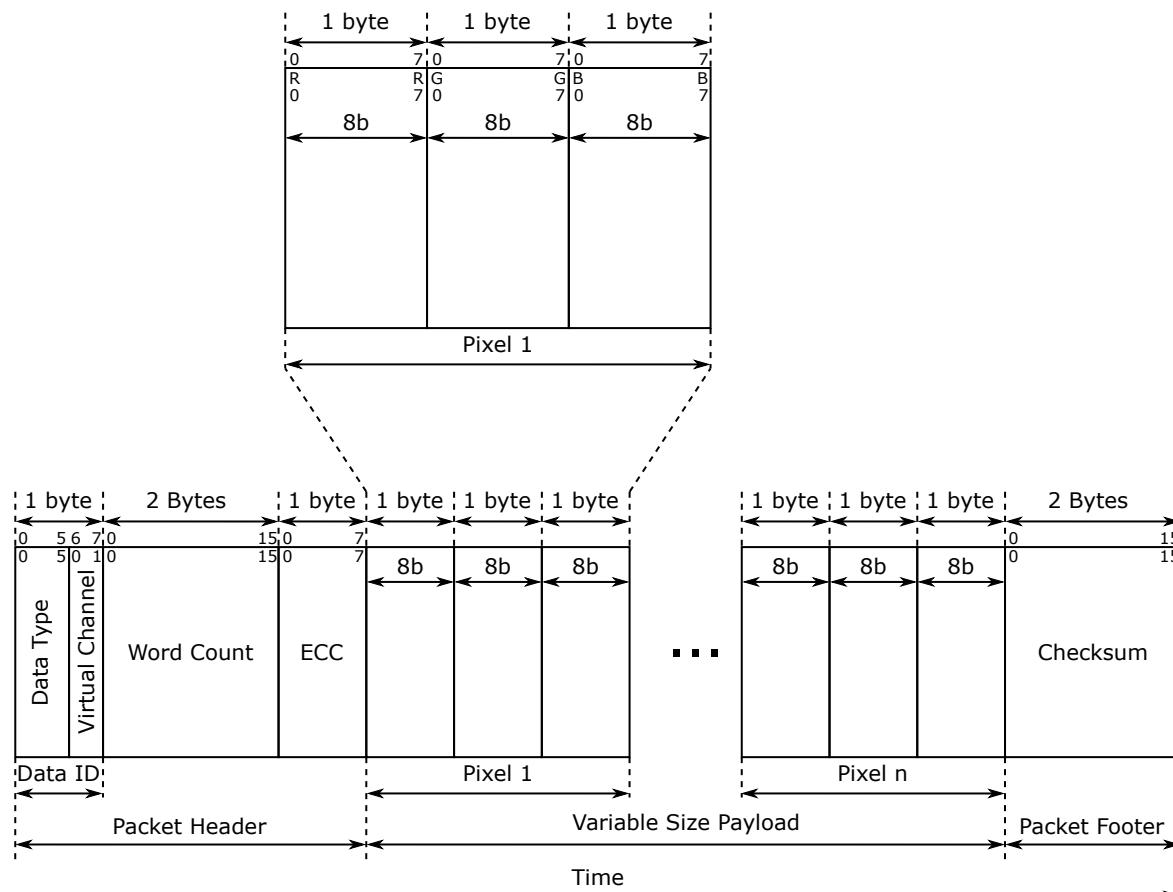


Fig. 12.40: RGB888 Pixel Format

12.3.12 Interrupt

DSI supports the following interrupts:

- TX Escape command end interrupt
- RX LPDT end interrupt
- RX ULPS command interrupt
- RX Trigger 0 command interrupt
- RX Trigger 1 command interrupt
- RX Trigger 2 command interrupt
- RX Trigger 3 command interrupt
- TX LPDT FIFO request interrupt
- RX LPDT FIFO request interrupt

- Buffer Overrun error interrupt
- Buffer Underrun error interrupt
- Too few pixel error interrupt
- Excessive pixel error interrupt
- FIFO overflow error interrupt

The TX Escape command end interrupt is triggered when any Escape command is sent.

RX LPDT end interrupt, RX ULPS command interrupt, RX Trigger 0 command interrupt, RX Trigger 1 command interrupt, RX Trigger 2 command interrupt, and RX Trigger 3 command interrupt will be triggered after the corresponding command is sent out and the ACK replied by the other side is received.

When TFICNT in DSI_FIFO_CONFIG_1 is greater than TFITH, the TX FIFO request interrupt will be generated, and the interrupt flag will be automatically cleared when the condition is not met.

When RFICNT in DSI_FIFO_CONFIG_1 is greater than RFITH, the RX FIFO request interrupt will be generated, and the interrupt flag will be automatically cleared when the condition is not met.

The Buffer Overrun error interrupt will be generated at Line Buffer Overrun, which means that the data cached in Line Buffer cannot be sent out timely and Line Buffer is full.

The Buffer Underrun error interrupt will be generated at Line Buffer Underrun, which means that the data in Line Buffer is completely read out and no new data is filled in timely.

The “too few pixel error interrupt” is generated when the number of pixels sent during HSync is smaller than the value configured by <CR_HSTX_PC>.

The “excessive pixel error interrupt” is generated when the number of pixels sent during HSync is greater than the value configured by <CR_HSTX_PC>.

The FIFO overflow error interrupt is generated in the case of Overflow or Underflow of TX or RX.

12.3.13 DMA

DSI LPDT supports the DMA transfer mode, which requires to set the thresholds of TX FIFO and RX FIFO respectively by configuring the <TFITH> and <RFITH> bits in the register DSI_FIFO_CONFIG_1. When this mode is enabled, if <TFICNT> is greater than <TFITH>, the DMA TX request is triggered. After DMA is configured, when receiving this request, DMA transfers data from memory to TX FIFO as configured. If <RFICNT> is greater than <RFITH>, the DMA RX request will be triggered. After DMA is configured, when receiving this request, DMA transfers the data in RX FIFO to the memory as configured.

12.3.14 Use with OSD

The input data of DSI can be configured to be processed by the OSD first. See the OSD Module section for functional description.


12.4 Register description

Name	Description
dsi_config	
dsi_esc_config	
dsi_lpdt_tx_config	
dsi_hstx_config	
dsi_int_status	
dsi_int_mask	
dsi_int_clear	
dsi_int_enable	
dsi_fifo_config_0	
dsi_fifo_config_1	
dsi_fifo_wdata	
dsi_fifo_rdata	
dphy_config_0	
dphy_config_1	
dphy_config_2	
dphy_config_3	
dphy_config_4	
dphy_config_5	
dphy_config_6	
dphy_config_7	
dphy_config_8	
dphy_config_9	
dphy_config_10	
dphy_config_11	

Name	Description
dphy_config_12	
dphy_config_13	
dphy_config_14	
dphy_config_15	
dphy_config_16	
dummy_reg	

12.4.1 dsi_config

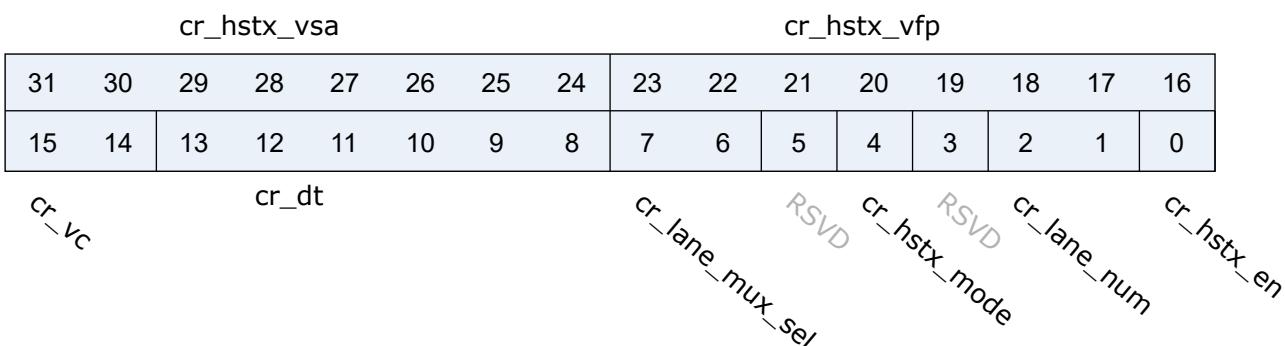Address: 0x30001a100




Bits	Name	Type	Reset	Description
31:24	cr_hstx_vsa	r/w	8'd2	HSTX Vertical Sync Active width
23:16	cr_hstx_vfp	r/w	8'd2	HSTX Vertical Front Porch width
15:14	cr_vc	r/w	2'd0	Virtual Channel number
13:8	cr_dt	r/w	6'h3E	Data Type 6'h2C: YUV422, 8-bit 6'h0E: RGB565 6'h2E: RGB666, loosely packed 6'h3E: RGB888 Others: Reserved
7:6	cr_lane_mux_sel	r/w	2'd0	Controls lane order 2'd0: lane3, lane2, lane1, lane0 (no lane is switched) 2'd1: lane2, lane1, lane3, lane0 2'd2: lane1, lane3, lane2, lane0 2'd3: lane3, lane1, lane2, lane0

Bits	Name	Type	Reset	Description
5	RSVD			
4	cr_hstx_mode	r/w	1'b1	HSTX mode select 1'b0: Sync Event mode 1'b1: Sync Pulse mode
3	RSVD			
2:1	cr_lane_num	r/w	2'd0	Lane number configuration 2'd0: 1-lane MIPI TX 2'd1: 2-lane MIPI TX 2'd2: 4-lane MIPI TX 2'd3: Reserved
0	cr_hstx_en	r/w	1'b0	HSTX function enable signal

12.4.2 dsi_esc_config

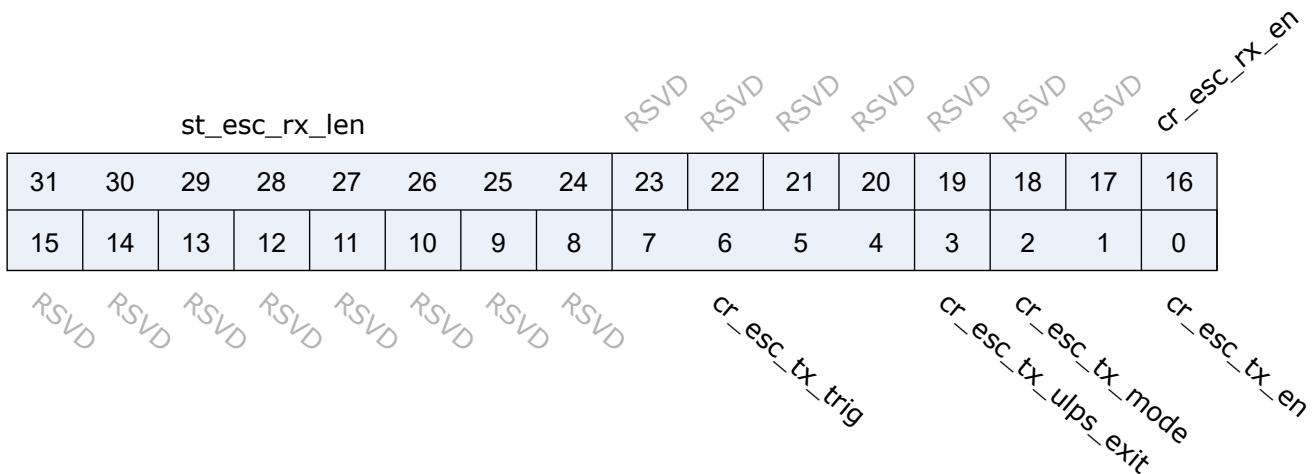Address: 0x30001a104




Bits	Name	Type	Reset	Description
31:24	st_esc_rx_len	r	8'd0	Escape RX length received (Include header/data/footer) (unit: byte)
23:17	RSVD			
16	cr_esc_rx_en	r/w	1'b0	Escape RX enable signal
15:8	RSVD			
7:4	cr_esc_tx_trig	r/w	4'h0	Escape TX trigger command
3	cr_esc_tx_ulps_exit	w1p	1'b0	Escape TX ULPS exit signal trigger

Bits	Name	Type	Reset	Description
2:1	cr_esc_tx_mode	r/w	2'd0	Escape TX mode select 2'd0: LPDT 2'd1: Trigger command 2'd2: ULPS Enable 2'd3: ULPS Disable
0	cr_esc_tx_en	w1p	1'b0	Escape TX enable signal

12.4.3 dsi_lpdt_tx_config

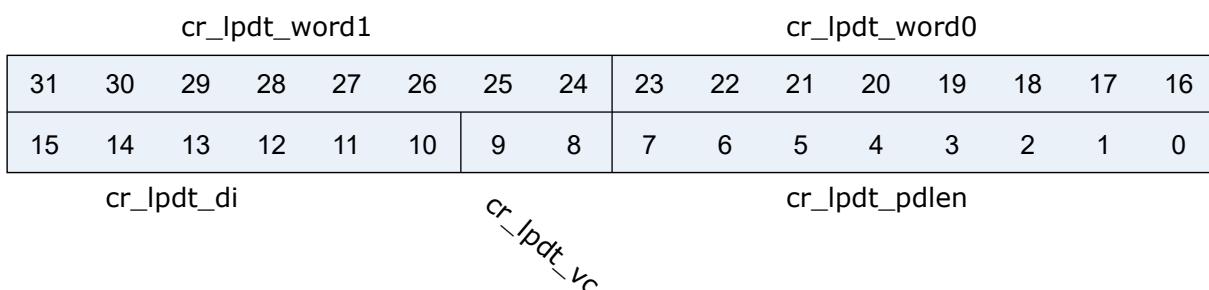
Address: 0x30001a108



Bits	Name	Type	Reset	Description
31:24	cr_lpdt_word1	r/w	8'h0	LPDT TX word 1
23:16	cr_lpdt_word0	r/w	8'h0	LPDT TX word 0
15:10	cr_lpdt_di	r/w	6'h0	LPDT TX data identifier
9:8	cr_lpdt_vc	r/w	2'h0	LPDT TX virtual channel
7:0	cr_lpdt_pdlen	r/w	8'd0	LPDT TX packet data length (exclude packet header & footer) (unit: byte)

12.4.4 dsi_hstx_config

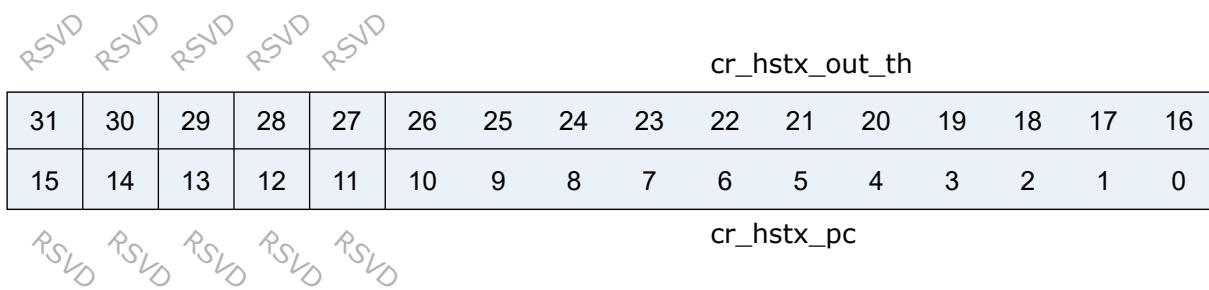Address: 0x30001a10c



Bits	Name	Type	Reset	Description
31:27	RSVD			
26:16	cr_hstx_out_th	r/w	11'd840	<p>Line buffer threshold for controller to start transmitting each line (unit: pixel)</p> <p>Formula: th = ceil(W * (1 - Fdp*BPP/Fhs/Ln))</p> <p>th: cr_hstx_out_th</p> <p>W: Frame width</p> <p>Fdp: Display (dp_dvp_tsrc) clock rate</p> <p>Fhs: DSI byte clock rate (dsi_bit_clk/8 or mipipll_clk/8)</p> <p>BPP: Byte-per-pixel (equals 3 for RGB888 & RGB666; equals 2 for RGB565 & YUV422_8)</p> <p>Ln: DSI lane number (controlled by cr_lane_num)</p> <p>Note: The minimum value is 6 for synchronization concern (Set to 6 if the formula result is negative or less than 6)</p>
15:11	RSVD			
10:0	cr_hstx_pc	r/w	11'd1280	<p>Pixel count of each line (frame width) (unit:pixel)</p> <p>Note: Pixel count should not exceed 1280 (720p) and should be a multiple of 4</p>

12.4.5 dsi_int_status

Address: 0x3001a110

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |

dsi_int_status

Bits	Name	Type	Reset	Description
31:14	RSVD			

Bits	Name	Type	Reset	Description
13:0	dsi_int_status	r	14'h0	[13]: FIFO Error (check 0x60[7:4] for detail) [12]: Pixel Count Too Large Error [11]: Pixel Count Too Small Error [10]: Buffer Underrun Error [9]: Buffer Overrun Error [8]: RX LPDT FIFO ready [7]: TX LPDT FIFO ready [6:3]: RX Trigger Command [2]: RX ULPS Command [1]: RX LPDT End [0]: TX Escape Command End

12.4.6 dsi_int_mask

Address: 0x3001a114

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

dsi_int_mask

Bits	Name	Type	Reset	Description
31:14	RSVD			
13:0	dsi_int_mask	r/w	14'h3FFF	[13]: FIFO Error (check 0x60[7:4] for detail) [12]: Pixel Count Too Large Error [11]: Pixel Count Too Small Error [10]: Buffer Underrun Error [9]: Buffer Overrun Error [8]: RX LPDT FIFO ready [7]: TX LPDT FIFO ready [6:3]: RX Trigger Command [2]: RX ULPS Command [1]: RX LPDT End [0]: TX Escape Command End

12.4.7 dsi_int_clear

Address: 0x3001a118

RSVD																										
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16											
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0											

dsi_int_clear

Bits	Name	Type	Reset	Description
31:14	RSVD			
13:0	dsi_int_clear	w1p	14'h0	[13]: FIFO Error (check 0x60[7:4] for detail) [12]: Pixel Count Too Large Error [11]: Pixel Count Too Small Error [10]: Buffer Underrun Error [9]: Buffer Overrun Error [8]: RX LPDT FIFO ready [7]: TX LPDT FIFO ready [6:3]: RX Trigger Command [2]: RX ULPS Command [1]: RX LPDT End [0]: TX Escape Command End

12.4.8 dsi_int_enable

Address: 0x3001a11c

RSVD																										
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16											
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0											


dsi_int_enable

Bits	Name	Type	Reset	Description
31:14	RSVD			

Bits	Name	Type	Reset	Description
13:0	dsi_int_enable	r/w	14'h3FFF	[13]: FIFO Error (check 0x60[7:4] for detail) [12]: Pixel Count Too Large Error [11]: Pixel Count Too Small Error [10]: Buffer Underrun Error [9]: Buffer Overrun Error [8]: RX LPDT FIFO ready [7]: TX LPDT FIFO ready [6:3]: RX Trigger Command [2]: RX ULPS Command [1]: RX LPDT End [0]: TX Escape Command End

12.4.9 dsi_fifo_config_0

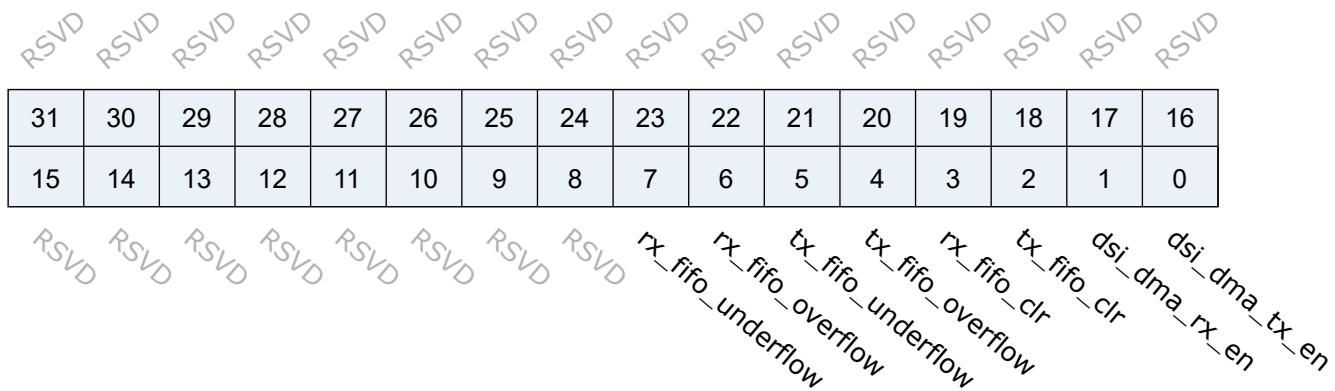Address: 0x3001a160



Bits	Name	Type	Reset	Description
31:8	RSVD			
7	rx_fifo_underflow	r	1'b0	Underflow flag of RX FIFO, can be cleared by rx_fifo_clr
6	rx_fifo_overflow	r	1'b0	Overflow flag of RX FIFO, can be cleared by rx_fifo_clr
5	tx_fifo_underflow	r	1'b0	Underflow flag of TX FIFO, can be cleared by tx_fifo_clr
4	tx_fifo_overflow	r	1'b0	Overflow flag of TX FIFO, can be cleared by tx_fifo_clr
3	rx_fifo_clr	w1p	1'b0	Clear signal of RX FIFO
2	tx_fifo_clr	w1p	1'b0	Clear signal of TX FIFO
1	dsi_dma_rx_en	r/w	1'b0	Enable signal of dma_rx_req/ack interface
0	dsi_dma_tx_en	r/w	1'b0	Enable signal of dma_tx_req/ack interface

12.4.10 dsi_fifo_config_1

Address: 0x3001a164

RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	rx_fifo_th	RSVD	RSVD	RSVD	RSVD	RSVD	tx_fifo_th			
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

RSVD	RSVD	RSVD	RSVD	RSVD	rx_fifo_cnt	RSVD	RSVD	RSVD	RSVD	RSVD	tx_fifo_cnt
------	------	------	------	------	-------------	------	------	------	------	------	-------------

Bits	Name	Type	Reset	Description
31:26	RSVD			
25:24	rx_fifo_th	r/w	2'd0	RX FIFO threshold, dma_rx_req will not be asserted if tx_fifo_cnt is less than this value
23:18	RSVD			
17:16	tx_fifo_th	r/w	2'd0	TX FIFO threshold, dma_tx_req will not be asserted if tx_fifo_cnt is less than this value
15:11	RSVD			
10:8	rx_fifo_cnt	r	3'd0	RX FIFO available count
7:3	RSVD			
2:0	tx_fifo_cnt	r	3'd4	TX FIFO available count

12.4.11 dsi_fifo_wdata

Address: 0x3001a168

dsi_fifo_wdata

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

dsi_fifo_wdata

Bits	Name	Type	Reset	Description
31:0	dsi_fifo_wdata	w	x	

12.4.12 dsi_fifo_rdata

Address: 0x3001a16c

dsi_fifo_rdata

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

dsi_fifo_rdata

Bits	Name	Type	Reset	Description
31:0	dsi_fifo_rdata	r	32'h0	

12.4.13 dphy_config_0

Address: 0x3001a180

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

dsi_reset_n
 dI0_turnesc
 RSVD
 RSVD
 dI3_forcetxstopmode
 dI2_forcetxstopmode
 dI1_forcetxstopmode
 dI0_forcetxstopmode
 dI3_forcerxmode
 dI2_forcerxmode
 dI1_forcerxmode
 dI0_forcerxmode
 dI3_upsactivenot
 dI2_upsactivenot
 dI1_upsactivenot
 dI0_upsactivenot

Bits	Name	Type	Reset	Description
31	dsi_reset_n	r/w	1'b0	MIPI DSI D-PHY reset pin
30	dI0_turnesc	w1p	1'b0	Data lane0 Bus Turnaround
29:28	RSVD			
27	dI3_forcetxstopmode	r/w	1'b0	Force Lane3 to Generate Stop State
26	dI2_forcetxstopmode	r/w	1'b0	Force Lane2 to Generate Stop State
25	dI1_forcetxstopmode	r/w	1'b0	Force Lane1 to Generate Stop State
24	dI0_forcetxstopmode	r/w	1'b0	Force Lane0 to Generate Stop State

Bits	Name	Type	Reset	Description
23	dl3_forcerxmode	r/w	1'b0	Enables the reverse escape LP receiver. Lane3 immediately transitions to receive mode.
22	dl2_forcerxmode	r/w	1'b0	Enables the reverse escape LP receiver. Lane2 immediately transitions to receive mode.
21	dl1_forcerxmode	r/w	1'b0	Enables the reverse escape LP receiver. Lane1 immediately transitions to receive mode.
20	dl0_forcerxmode	r/w	1'b0	Enables the reverse escape LP receiver. Lane0 immediately transitions to receive mode.
19	dl3_ulpsactivenot	r	1'b1	Data lane3 is NOT in the ULP state
18	dl2_ulpsactivenot	r	1'b1	Data lane2 is NOT in the ULP state
17	dl1_ulpsactivenot	r	1'b1	Data lane1 is NOT in the ULP state
16	dl0_ulpsactivenot	r	1'b1	Data lane0 is NOT in the ULP state
15	dl3_stopstate	r	1'b1	Data lane3 is in Stop state
14	dl2_stopstate	r	1'b1	Data lane2 is in Stop state
13	dl1_stopstate	r	1'b1	Data lane1 is in Stop state
12	dl0_stopstate	r	1'b1	Data lane0 is in Stop state
11	dl3_enable	r/w	1'b0	Data lane3 enable
10	dl2_enable	r/w	1'b0	Data lane2 enable
9	dl1_enable	r/w	1'b0	Data lane1 enable
8	dl0_enable	r/w	1'b0	Data lane0 enable
7:6	RSVD			
5	cl_ulpsactivenot	r	1'b1	Clock lane is NOT in the ULP state
4	cl_stopstate	r	1'b1	Clock lane is in Stop state
3	cl_txulpsexit	w1p	1'b0	Clock lane Transmit ULP Exit Sequence
2	cl_txulpsclk	r/w	1'b0	Clock lane Transmit Ultra-Low Power State
1	cl_txrequesths	r/w	1'b0	Clock lane High-Speed Transmit Request
0	cl_enable	r/w	1'b0	Clock lane enable

12.4.14 dphy_config_1

Address: 0x3001a184

RSVD	reg_en_lprx_at_ulps	reg_time_ck_exit	reg_time_ck_trail	reg_time_ck_zero											
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

Bits	Name	Type	Reset	Description
31:25	RSVD			
24	reg_en_lprx_at_ulps	r/w	1'b0	MIPI DSI D-PHY control register - reg_en_lprx_at_ulps
23:16	reg_time_ck_exit	r/w	8'h5	MIPI DSI D-PHY control register - reg_time_ck_exit (tx_clk_esc) txclkesc: 40M, datarate: 800Mbps
15:8	reg_time_ck_trail	r/w	8'h3	MIPI DSI D-PHY control register - reg_time_ck_trail (tx_clk_esc)
7:0	reg_time_ck_zero	r/w	8'hF	MIPI DSI D-PHY control register - reg_time_ck_zero (tx_clk_esc)

12.4.15 dphy_config_2

Address: 0x3001a188

reg_time_hs_exit	reg_time_hs_prep														
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
reg_time_hs_trail	reg_time_hs_zero														

Bits	Name	Type	Reset	Description
31:24	reg_time_hs_exit	r/w	8'h5	MIPI DSI D-PHY control register - reg_time_hs_exit (tx_clk_esc)
23:16	reg_time_hs_prep	r/w	8'h2	MIPI DSI D-PHY control register - reg_time_hs_prep (tx_clk_esc)

Bits	Name	Type	Reset	Description
15:8	reg_time_hs_trail	r/w	8'h3	MIPI DSI D-PHY control register - reg_time_hs_trail (tx_clk_esc)
7:0	reg_time_hs_zero	r/w	8'h5	MIPI DSI D-PHY control register - reg_time_hs_zero (tx_clk_esc)

12.4.16 dphy_config_3

Address: 0x3001a18c

reg_time_lpx								reg_time_reqrdy							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
reg_time_ta_get								reg_time_ta_go							

Bits	Name	Type	Reset	Description
31:24	reg_time_lpx	r/w	8'h3	MIPI DSI D-PHY control register - reg_time_lpx (tx_clk_esc)
23:16	reg_time_reqrdy	r/w	8'h0	MIPI DSI D-PHY control register - reg_time_reqrdy
15:8	reg_time_ta_get	r/w	8'hF	MIPI DSI D-PHY control register - reg_time_ta_get (tx_clk_esc)
7:0	reg_time_ta_go	r/w	8'hC	MIPI DSI D-PHY control register - reg_time_ta_go (tx_clk_esc)

12.4.17 dphy_config_4

Address: 0x3001a190

RSVD															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

reg_time_wakeup

Bits	Name	Type	Reset	Description
31:16	RSVD			

Bits	Name	Type	Reset	Description
15:0	reg_time_wakeup	r/w	16'h9C41	MIPI DSI D-PHY control register - reg_time_wakeup (tx_clk_esc)

12.4.18 dphy_config_5

Address: 0x3001a194

Bits	Name	Type	Reset	Description
31:24	reg_trig0_code	r/w	8'b0100_0110	MIPI DSI D-PHY control register - reg_trig0_code
23:16	reg_trig1_code	r/w	8'b1011_1010	MIPI DSI D-PHY control register - reg_trig1_code
15:8	reg_trig2_code	r/w	8'b1000_0100	MIPI DSI D-PHY control register - reg_trig2_code
7:0	reg_trig3_code	r/w	8'b0000_0101	MIPI DSI D-PHY control register - reg_trig3_code

12.4.19 dphy_config_6


Address: 0x3001a198

Bits	Name	Type	Reset	Description
31:16	RSVD			

Bits	Name	Type	Reset	Description
15:8	reg_lpdt_code	r/w	8'b1000_-0111	MIPI DSI D-PHY control register - reg_lpdt_code
7:0	reg_ulpss_code	r/w	8'b0111_-1000	MIPI DSI D-PHY control register - reg_ulpss_code

12.4.20 dphy_config_7

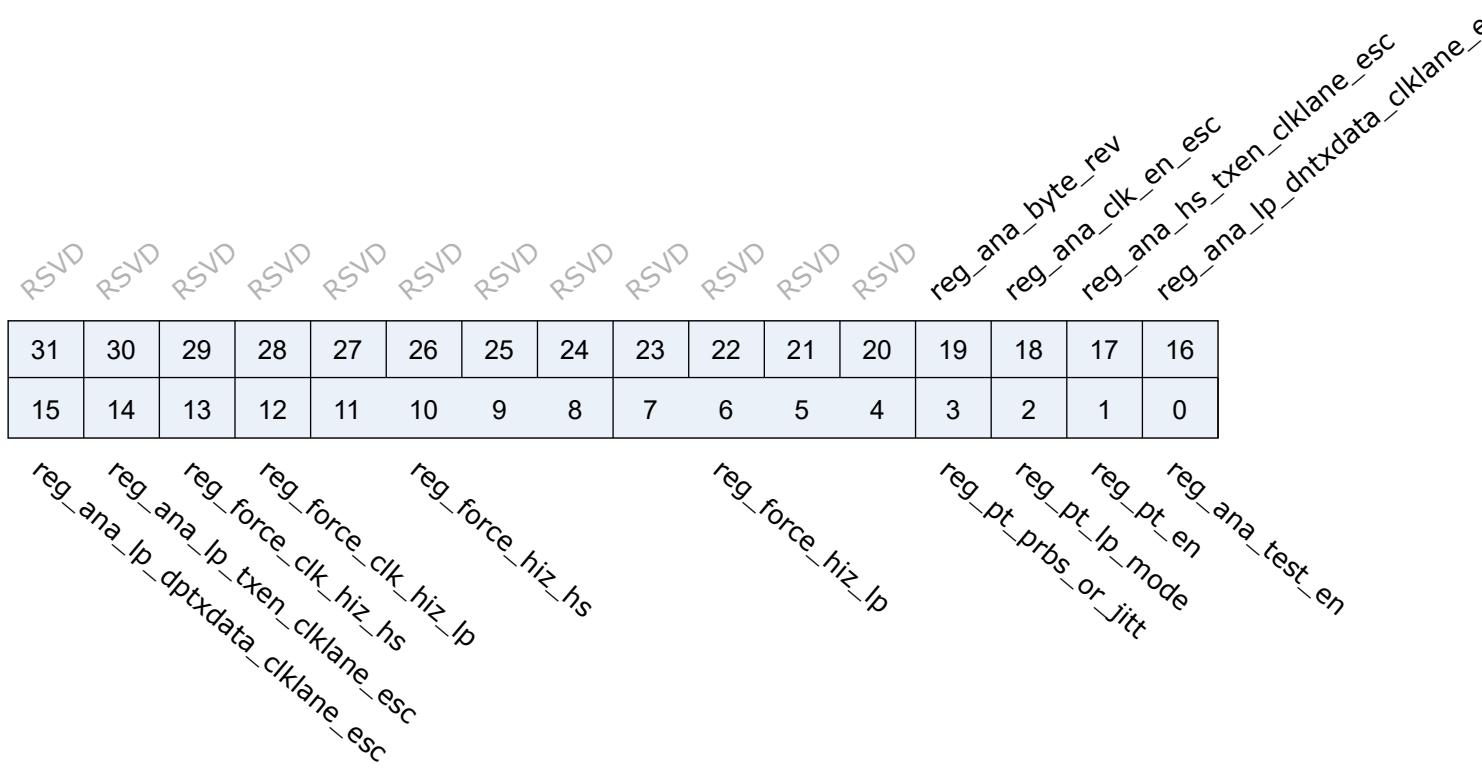Address: 0x3001a19c




Bits	Name	Type	Reset	Description
31:20	RSVD			
19	reg_ana_byte_rev	r/w	1'b0	MIPI DSI D-PHY control register - reg_ana_byte_rev
18	reg_ana_clk_en_esc	r/w	1'b0	MIPI DSI D-PHY control register - reg_ana_clk_en_esc
17	reg_ana_hs_txen_clklane_esc	r/w	1'b0	MIPI DSI D-PHY control register - reg_ana_hs_txen_clklane_esc
16	reg_ana_ip_dtxdata_clklane_esc	r/w	1'b0	MIPI DSI D-PHY control register - reg_ana_ip_dtxdata_clklane_esc

Bits	Name	Type	Reset	Description
15	reg_ana_lp_dptxdata_clklane_esc	r/w	1'b0	MIPI DSI D-PHY control register - reg_ana_lp_dptxdata_clklane_esc
14	reg_ana_lp_txen_clklane_esc	r/w	1'b0	MIPI DSI D-PHY control register - reg_ana_lp_txen_clklane_esc
13	reg_force_clk_hiz_hs	r/w	1'b0	MIPI DSI D-PHY control register - reg_force_clk_hiz_hs
12	reg_force_clk_hiz_lp	r/w	1'b0	MIPI DSI D-PHY control register - reg_force_clk_hiz_lp
11:8	reg_force_hiz_hs	r/w	4'h0	MIPI DSI D-PHY control register - reg_force_hiz_hs
7:4	reg_force_hiz_lp	r/w	4'h0	MIPI DSI D-PHY control register - reg_force_hiz_lp
3	reg_pt_prbs_or_jitt	r/w	1'b0	MIPI DSI D-PHY control register - reg_pt_prbs_or_jitt
2	reg_pt_lp_mode	r/w	1'b0	MIPI DSI D-PHY control register - reg_pt_lp_mode
1	reg_pt_en	r/w	1'b0	MIPI DSI D-PHY control register - reg_pt_en
0	reg_ana_test_en	r/w	1'b0	MIPI DSI D-PHY control register - reg_ana_test_en

12.4.21 dphy_config_8

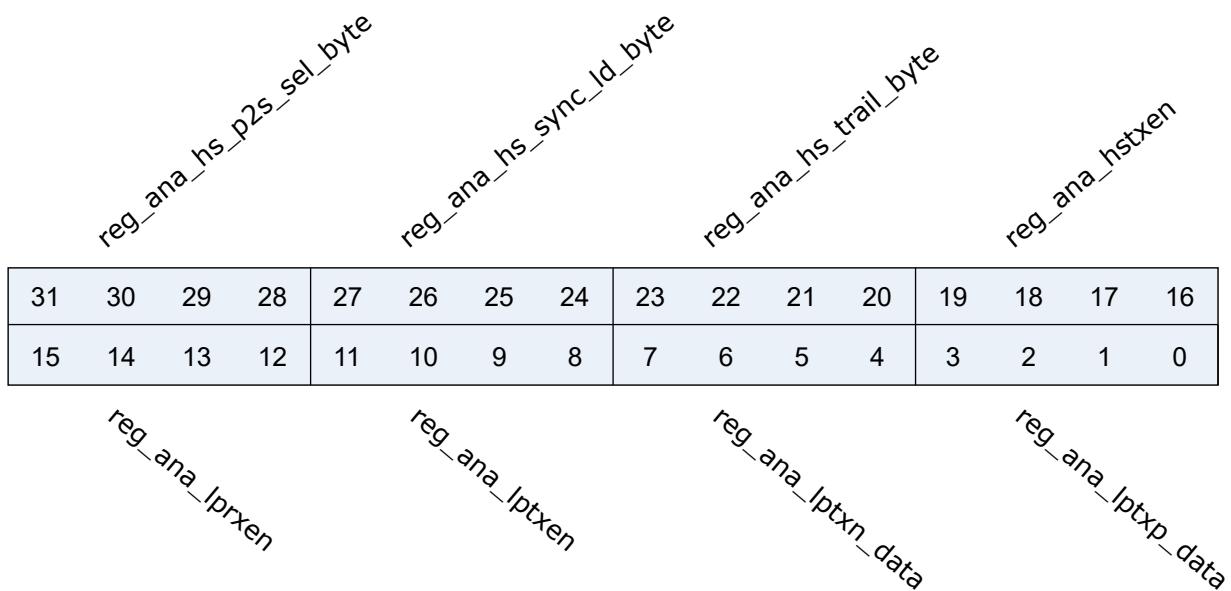Address: 0x30001a1a0



Bits	Name	Type	Reset	Description
31:28	reg_ana_hs_p2s_sel_byte	r/w	4'h0	MIPI DSI D-PHY control register - reg_ana_hs_p2s_sel_byte
27:24	reg_ana_hs_sync_id_byte	r/w	4'h0	MIPI DSI D-PHY control register - reg_ana_hs_sync_id_byte

Bits	Name	Type	Reset	Description
23:20	reg_ana_hs_trail_byte	r/w	4'h0	MIPI DSI D-PHY control register - reg_ana_hs_trail_byte
19:16	reg_ana_hstxen	r/w	4'h0	MIPI DSI D-PHY control register - reg_ana_hstxen
15:12	reg_ana_lprxen	r/w	4'h0	MIPI DSI D-PHY control register - reg_ana_lprxen
11:8	reg_ana_lptxen	r/w	4'h0	MIPI DSI D-PHY control register - reg_ana_lptxen
7:4	reg_ana_lptxn_data	r/w	4'h0	MIPI DSI D-PHY control register - reg_ana_lptxn_data
3:0	reg_ana_lptxp_data	r/w	4'h0	MIPI DSI D-PHY control register - reg_ana_lptxp_data

12.4.22 dphy_config_9

Address: 0x3001a1a4

reg_ana_hs_data_out_byte


31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

reg_ana_hs_data_out_byte

Bits	Name	Type	Reset	Description
31:0	reg_ana_hs_data_out_byte	r/w	32'h0	MIPI DSI D-PHY control register - reg_ana_hs_data_out_-byte

12.4.23 dphy_config_10

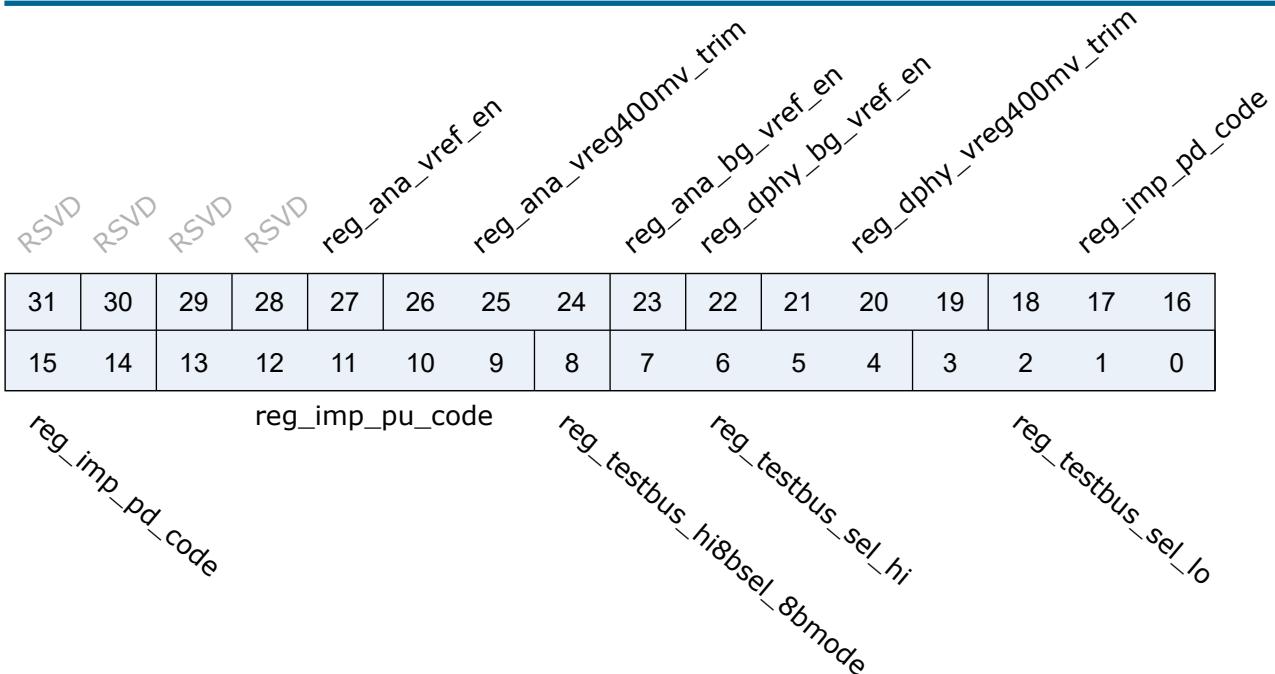Address: 0x3001a1a8



Bits	Name	Type	Reset	Description
31:28	RSVD			
27	reg_ana_vref_en	r/w	1'b0	MIPI DSI D-PHY control register - reg_ana_vref_en
26:24	reg_ana_vreg400mv_trim	r/w	3'h0	MIPI DSI D-PHY control register - reg_ana_vreg400mv_trim
23	reg_ana_bg_vref_en	r/w	1'b0	MIPI DSI D-PHY control register - reg_ana_bg_vref_en
22	reg_dphy_bg_vref_en	r/w	1'b0	MIPI DSI D-PHY control register - reg_dphy_bg_vref_en
21:19	reg_dphy_vreg400mv_trim	r/w	3'h0	MIPI DSI D-PHY control register - reg_dphy_vreg400mv_trim
18:14	reg_imp_pd_code	r/w	5'h9	MIPI DSI D-PHY control register - reg_imp_pd_code
13:9	reg_imp_pu_code	r/w	5'h8	MIPI DSI D-PHY control register - reg_imp_pu_code
8	reg_testbus_hi8bsel_8bmode	r/w	1'b0	MIPI DSI D-PHY control register - reg_testbus_hi8bsel_8bmode
7:4	reg_testbus_sel_hi	r/w	4'h0	MIPI DSI D-PHY control register - reg_testbus_sel_hi
3:0	reg_testbus_sel_lo	r/w	4'h0	MIPI DSI D-PHY control register - reg_testbus_sel_lo

12.4.24 dphy_config_11

Address: 0x3001a1ac

reg_dsi_ana_1

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

reg_dsi_ana_0

Bits	Name	Type	Reset	Description
31:16	reg_dsi_ana_1	r/w	16'h0	MIPI DSI D-PHY control register - reg_dsi_ana_1
15:0	reg_dsi_ana_0	r/w	16'hc14	MIPI DSI D-PHY control register - reg_dsi_ana_0

12.4.25 dphy_config_12

Address: 0x3001a1b0

RSVD															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

reg_dsi_ana_2

Bits	Name	Type	Reset	Description
31:16	RSVD			
15:0	reg_dsi_ana_2	r/w	16'h0	MIPI DSI D-PHY control register - reg_dsi_ana_2

12.4.26 dphy_config_13

Address: 0x3001a1b4

RSVD															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

reg_rd_dig_test_bus

Bits	Name	Type	Reset	Description
31:16	RSVD			
15:0	reg_rd_dig_test_bus	r	16'h0	MIPI DSI D-PHY control register - reg_rd_dig_test_bus

12.4.27 dphy_config_14

Address: 0x3001a1b8

reg_pt_free_rep_pat															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

Bits	Name	Type	Reset	Description
31:0	reg_pt_free_rep_pat	r/w	32'h8765432	MIPI DSI D-PHY control register - reg_pt_free_rep_pat

12.4.28 dphy_config_15

Address: 0x3001a1bc

Bits	Name	Type	Reset	Description
31:30	RSVD			

Bits	Name	Type	Reset	Description
29	reg_csi_RST_N_PRE	r/w	1'b0	Note: reg_csi_RST_N_PRE should be released at least 2 us BEFORE releasing csi_reset_n
28	reg_dsi_RST_N_PRE	r/w	1'b0	Note: reg_dsi_RST_N_PRE should be released at least 2 us BEFORE releasing dsi_reset_n
27:25	RSVD			
24	reg_mipi_ldo_fast	r/w	1'b0	
23:21	RSVD			
20	reg_ten_dsi_ldo	r/w	1'b0	
19	RSVD			
18:16	reg_dphy_ldo11_rfb_sw	r/w	3'd4	
15:13	RSVD			
12	reg_dphy_short_ldo11	r/w	1'b0	
11:9	RSVD			
8	reg_dphy_pu_ldo11	r/w	1'b1	enable LDO11 for both dsi and csi
7:5	RSVD			
4	reg_dsi_pw_avdd1815	r/w	1'b0	0: power switch on
3:1	RSVD			
0	reg_dsi_dc_tp_out_en	r/w	1'b0	

12.4.29 dphy_config_16

Address: 0x3001a1c0

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RSVD															

reg_dsi_lpx_clk_inv

reg_dsi_byte_clk_inv

Bits	Name	Type	Reset	Description
31:2	RSVD			
1	reg_dsi_lprx_clk_inv	r/w	1'b0	
0	reg_dsi_byte_clk_inv	r/w	1'b0	

12.4.30 dummy_reg

Address: 0x3001a1fc

dummy_reg

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

dummy_reg

Bits	Name	Type	Reset	Description
31:0	dummy_reg	r/w	32'h0	Dummy registers

13.1 Overview

The CAM (Camera) module is responsible for converting the parallel interface (DVP) into a general bus interface (AHB), and writing the pixel data generated by the image sensor into the system memory for subsequent image transmission or compression. The CAM module has a flexible output format configuration, which can meet a variety of image processing needs.

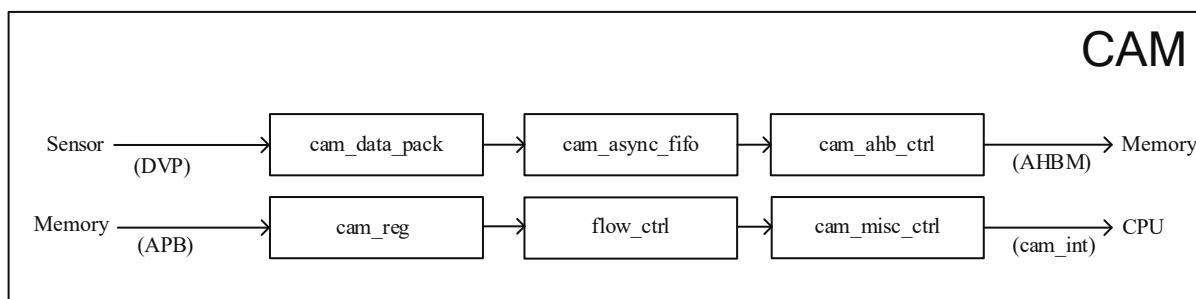


Fig. 13.1: CAM block diagram

13.2 Features

- Parallel interface 8-bit DVP signal, high-speed data transmission (80M), configurable DVP signal effective level and logic combination
- Support 8-bit/16-bit/24-bit input pixel width
- Support converting RGB888 input format to RGB565 or RGBA8888 output
- Support movie mode and photo mode
- Configurable drop patterns including:
 - Discard odd-digit data
 - Discard even-digit data

- Discard odd-numbered data in odd-numbered rows
- Discard even-digit data of odd-numbered rows
- Configurable image sensor line frame sync signal selection and polarity selection
- Support image rectangle cropping
- Frame selection function with a cycle of 1~32
- Support integrity detection of line frame synchronization signal
- AHB bus communication interface
- 512-byte buffer FIFO for occasional busy bus status
- Continuously cache up to 4 sets of image information
- A variety of application interruptions are conducive to flexible use and error prompts

13.3 Function description

13.3.1 DVP (Digital Video Port) signal and configuration

DVP (Digital Video Port) is a parallel interface, mainly including clock, frame synchronization, line synchronization and 8-bit data pins. The limit of the clock is limited to 80MHz, so it is generally used for sensors with resolutions below 5MP. The effective level of frame synchronization and line synchronization can be independently configured in the chip, and four modes are provided on the effective data:

- A. Frame sync and line sync are active at the same time (" & " logic)
- B. Either frame sync or line sync is valid ("| " logic)
- C. Frame synchronization is valid
- D. Line synchronization is valid

13.3.2 YCbCr format

The luminance signal is called Y, and the chrominance signal is composed of two independent signals. Depending on the color system and format, the two chrominance signals are often referred to as U, V or Pb, Pr or Cb, Cr. This results from different encoding formats, but in fact they have basically the same concept.

Since there are more retinal rod cells that recognize brightness than retinal cone cells that recognize chrominance on the human retina, the human eye is more sensitive to brightness than to chrominance. Therefore, part of the chrominance information can be discarded without being perceived by the human eye.

The format with the highest resolution of the chrominance signal is 4:4:4, that is, every 4-point Y sampling corresponds to 4-point Cb and 4-point Cr sampling. And 4:2:2 is that every 4 points of Y sampling corresponds to 2 points of Cb and 2 points of Cr sampling. In this format, the number of scan lines for chrominance signals is as many as that for

luminance signals, but the color of each scan line is The degree sample points are only half of the luminance signal. Different from the format mentioned above, 4:2:0 does not correspond to 2 points of Cb and 0 points of Cr sampling for every 4 points of Y sampling, but corresponds to 1 point of Cb and 1 point of Cr sampling for every 4 points of Y sampling. 4:0:0 is to discard all chrominance information, that is, the grayscale image.

13.3.3 Movie Mode/Photo Mode

In the photo mode, when the fixed-size memory given by the software is full, the CAM will stop, and the software will need to perform a POP operation to free up the space before continuing to write.

In video mode, it will keep rewriting on the fixed-size memory provided by the software, that is, using the memory as a ring buffer, without software for POP operation, to ensure that the image is taken out in real time or linked with the MJPEG module.

13.3.4 RGB888 to RGB565/RGBA8888 output

For image data whose input format is RGB888, you can choose to convert it to RGB565 or RGBA8888 and write it to the memory. If it is converted to RGB565 format, the arrangement order of R, G, B can be controlled by the bit FORMAT_565 of the register MISC. The arrangement order corresponding to different values is as follows:

- 0: byte2[7:3],byte1[7:2],byte0[7:3]
- 1: byte1[7:3],byte2[7:2],byte0[7:3]
- 2: byte2[7:3],byte0[7:2],byte1[7:3]
- 3: byte0[7:3],byte2[7:2],byte1[7:3]
- 4: byte1[7:3],byte0[7:2],byte2[7:3]
- 5: byte0[7:3],byte1[7:2],byte2[7:3]

If it is converted to RGBA8888 format, the value of A is the same as the value filled in bit ALPHA of the register MISC.

13.3.5 Image rectangle crop

By setting the start and end positions of the line synchronization signal and the frame synchronization signal cropping by the high 16 bits and the low 16 bits of the registers HSYNC_CONTROL and VSYNC_CONTROL, the image in the rectangular window of the specified position and size can be cropped, and the image beyond the rectangular part can be cropped. Data will be discarded. The start and end of the line synchronization signal are set to the pixel serial number, the start and end of the frame synchronization signal are set to the line number, and the cropped image contains the start point but not the end point.

13.3.6 Frame rounding function

A frame period n can be set through the register FRAME_PERIOD, the value range of n is 0~31, and the corresponding actual value is n+1, and then the register FRAME_VLD is used to set which frames of images are retained in a frame period. Write 1 in the corresponding bit position if you need to keep it, and write 0 in the corresponding bit position if you need to discard it. For example, if n is set to 5 and the value of FRAME_VLD is set to 0x13, in every 6 frames of images, the 1st, 2nd, and 5th frames will be written into the memory, and the 3rd, 4th, and 6th frames will be discarded. The cycle is performed with 6 frames of images as a cycle.

13.3.7 Line Frame Sync Signal Integrity Detection

The line synchronization signal comparison value and the frame synchronization signal comparison value can be set respectively through the lower 16 bits and the upper 16 bits of the register FRAME_SIZE_CONTROL, and the integrity of the signal can be detected. The line sync signal sets the total number of pixels in each row, and the frame sync signal sets the total number of lines. When the count value of the line or frame synchronization signal of a frame image is not equal to the comparison value, a corresponding interrupt will be generated.

13.3.8 Cache image information

The module contains 4 groups of FIFO to record the image address and image ID. Whenever this module completely writes a frame to the memory, it will record the start address and image ID of the frame image in this FIFO, but it should be noted that when the memory is insufficient, or the 4 sets of FIFO are full. In this case, the module will automatically discard the information of the next image. In the part where the image information is taken out, the oldest image information can be emptied by the pop operation. At this time, the FIFO will automatically advance to ensure the timing of the image information in the FIFO, as shown in the figure below:

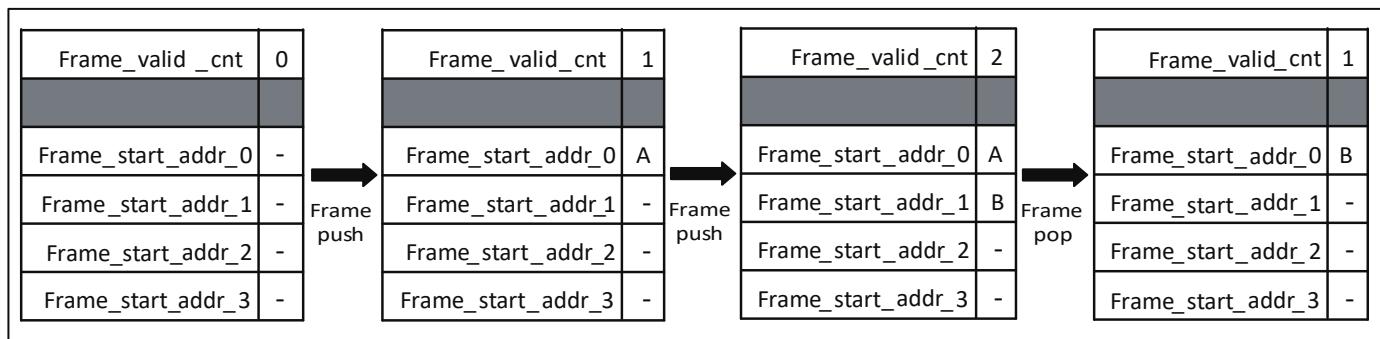


Fig. 13.2: FIFO framework

13.3.9 Support a variety of interrupt information (can be configured independently of the switch)

- Normal interrupt * a count value n can be set, and an interrupt will be issued every time n images are written
- Memory Interrupt * When the remaining memory space is less than one frame size, and the used memory is overwritten, an interrupt is issued, as shown in the following figure:

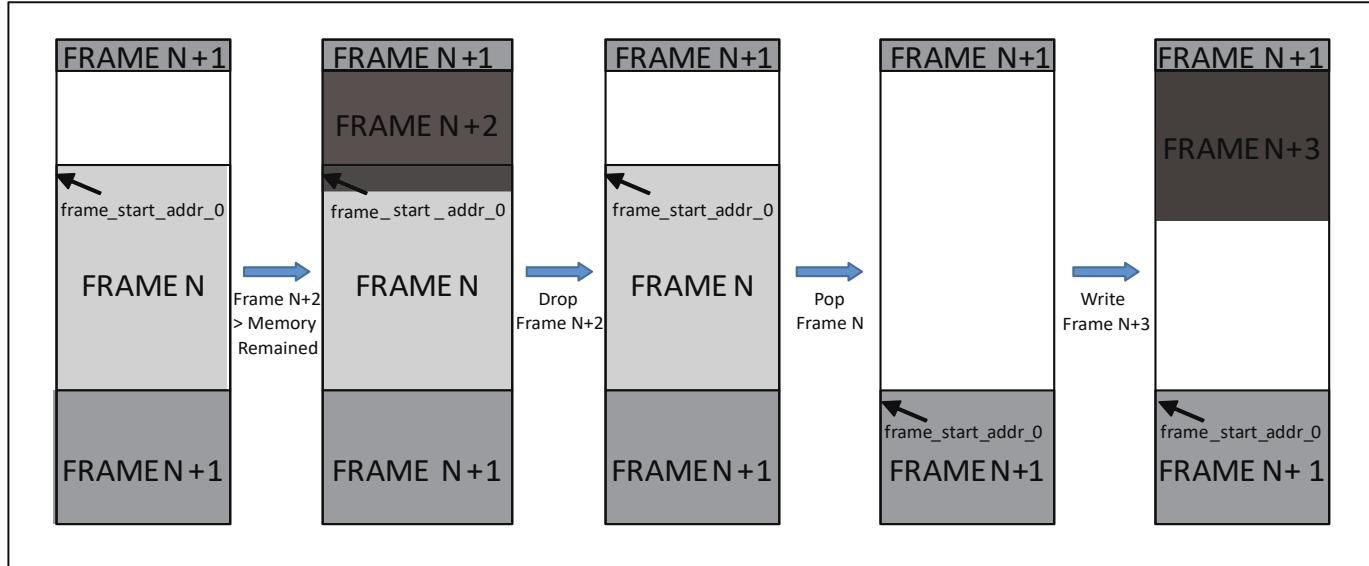


Fig. 13.3: Memory

- Frame interrupt * when there are more than 4 groups of unprocessed images and no more image information can be stored, an interrupt is issued
- FIFO interrupt * when the bus is too late to write to the memory, causing the FIFO to overflow, an interrupt is issued
- Hsync interrupt * when the number of pixels of a line in a frame of image is not equal to the set value (the line sync signal integrity test fails), an interrupt is issued
- Vsync interrupt * when the total number of lines in a frame of image is not equal to the set value (frame sync signal integrity check fails), an interrupt is issued


13.4 Register description

Name	Description
dvp2axi_configue	
dvp2axi_addr_start	
dvp2axi_mem_bcnt	
dvp_status_and_error	

Name	Description
dvp2axi_frame_bcnt	
dvp_frame_fifo_pop	
dvp2axi_frame_vld	
dvp2axi_frame_period	
dvp2axi_misc	
dvp2axi_hsync_crop	
dvp2axi_vsync_crop	
dvp2axi_fram_exm	
frame_start_addr0	
frame_start_addr1	
frame_start_addr2	
frame_start_addr3	
frame_id_sts01	
frame_id_sts23	
dvp_debug	
dvp_dummy_reg	

13.4.1 dvp2axi_configue

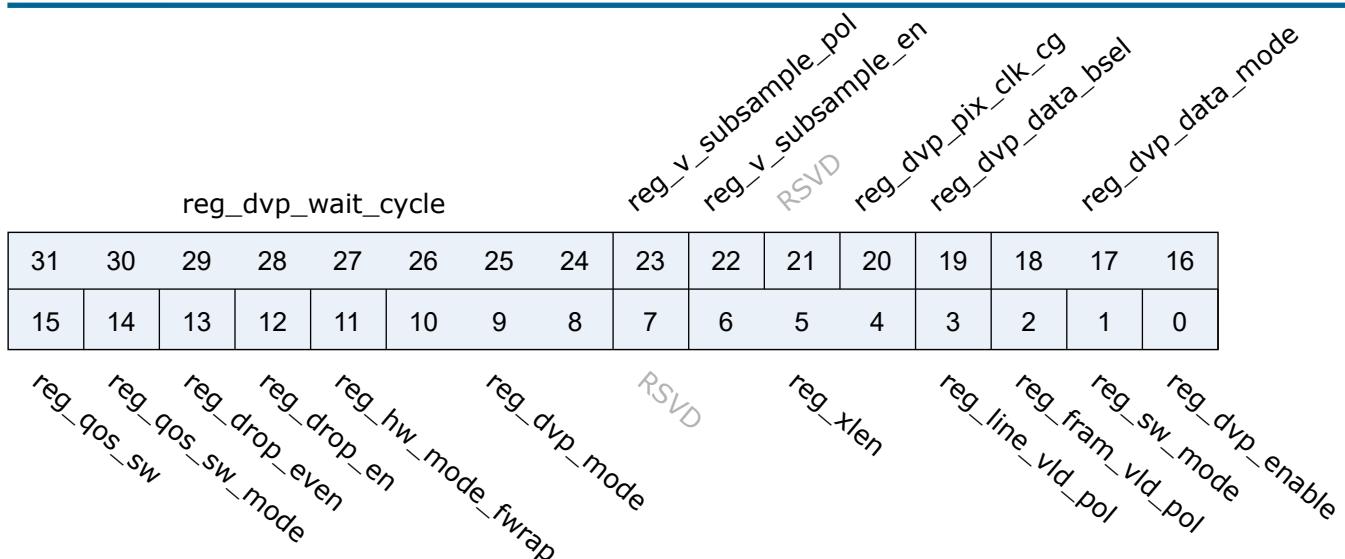Address: 0x30012000



Bits	Name	Type	Reset	Description
31:24	reg_dvp_wait_cycle	r/w	8'h40	Cycles in FSM Wait mode
23	reg_v_subsample_pol	r/w	1'b0	DVP2BUS vertical sub-sampling polarity 1'b0: Odd lines are masked 1'b1: Even lines are masked
22	reg_v_subsample_en	r/w	1'b0	DVP2BUS vertical sub-sampling enable
21	RSVD			
20	reg_dvp_pix_clk_cg	r/w	1'b0	DVP pix clk gate
19	reg_dvp_data_bsel	r/w	1'b0	Byte select signal for DVP 8-bit mode, don't care if reg_dvp_data_8bit is disabled 1'b0: Select the lower byte of pix_data 1'b1: Select the upper byte of pix_data
18:16	reg_dvp_data_mode	r/w	3'b0	DVP 8-bit mode enable 3'd0: DVP pix_data is 16-bit wide 3'd1: DVP pix_data is 24-bit mode 3'd2: DVP pix_data is 24-comp-16-bit mode 3'd3: DVP pix_data is 24-exp-32-bit mode 3'd4: DVP pix_data is 8-bit wide Others - Reserved
15	reg_qos_sw	r/w	1'b0	AXI Qos software mode value
14	reg_qos_sw_mode	r/w	1'b0	AXI QoS software mode enable
13	reg_drop_even	r/w	1'b0	Only effect when reg_drop_en=1 : 1'b1 : Drop all even bytes 1'b0 : Drop all odd bytes
12	reg_drop_en	r/w	1'b0	Drop mode Enable

Bits	Name	Type	Reset	Description
11	reg_hw_mode_fwrap	r/w	1'b1	DVP2BUS HW mode with frame start address wrap to reg_addr_start
10:8	reg_dvp_mode	r/w	3'd0	Image sensor mode selection: 3'd0-Vsync&Hsync 3'd1-Vsync Hsync 3'd2-Vsync 3'd3-Hsync
7	RSVD			
6:4	reg_xlen	r/w	3'd3	burst length setting 3'd0 - Single / 3'd1 - INCR4 / 3'd2 - INCR8 3'd3 - INCR16 / 3'd5 - INCR32 / 3'd6 - INCR64
3	reg_line_vld_pol	r/w	1'b1	Image sensor line valid polarity, 1'b0 - Active low, 1'b1 - Active high
2	reg_fram_vld_pol	r/w	1'b1	Image sensor frame valid polarity, 1'b0 - Active low, 1'b1 - Active high
1	reg_sw_mode	r/w	1'b0	DVP2BUS SW manual mode (don't care if reg_swap_mode is enabled)
0	reg_dvp_enable	r/w	1'b0	module enable

13.4.2 dvp2axi_addr_start

Address: 0x30012004

reg_addr_start

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

reg_addr_start

Bits	Name	Type	Reset	Description
31:0	reg_addr_start	r/w	32'h80000000	AXI start address

13.4.3 dvp2axi_mem_bcnt

Address: 0x30012008

reg_mem_burst_cnt

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

reg_mem_burst_cnt

Bits	Name	Type	Reset	Description
31:0	reg_mem_burst_cnt	r/w	32'hC000	AXI burst cnt before wrap to "reg_addr_start"

13.4.4 dvp_status_and_error

Address: 0x3001200c

RSVD	RSVD	st_dvp_idle	axi_idle	st_bus_fls	st_bus_wait	st_bus_func	st_bus_idle	RSVD	sts_vcvt_int	sts_hcnt_int	frame_valid_cnt				
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

sts_fifo_int	sts_frame_int	sts_mem_int	sts_normal_int	reg_int_fifo_en	reg_int_frame_en	reg_int_mem_en	reg_int_normal_en	reg_int_vcvt_en	reg_int_hcnt_en	RSVD	reg_frame_cnt_trgr_int				

Bits	Name	Type	Reset	Description
31:30	RSVD			
29	st_dvp_idle	r	1'b1	DVP2BUS asynchronous fifo idle status
28	axi_idle	r	1'b1	DVP2BUS AHB idle status
27	st_bus_fls	r	1'b0	DVP in flush state
26	st_bus_wait	r	1'b0	DVP in wait state
25	st_bus_func	r	1'b0	DVP in functional state
24	st_bus_idle	r	1'b1	DVP in idle state
23	RSVD			
22	sts_vcvt_int	r	1'b0	Vsync valid line count non-match interrupt status

Bits	Name	Type	Reset	Description
21	sts_hcnt_int	r	1'b0	Hsync valid pixel count non-match interrupt status
20:16	frame_valid_cnt	r	5'd0	Frame counts in memory before read out in SW mode
15	sts_fifo_int	r	1'b0	FIFO OverWrite interrupt status
14	sts_frame_int	r	1'b0	Frame OverWrite interrupt status
13	sts_mem_int	r	1'b0	Memory OverWrite interrupt status
12	sts_normal_int	r	1'b0	Normal Write interrupt status
11	reg_int_fifo_en	r/w	1'b1	FIFO OverWrite interrupt enable
10	reg_int_frame_en	r/w	1'b0	Frame OverWrite interrupt enable
9	reg_int_mem_en	r/w	1'b0	Memory OverWrite interrupt enable
8	reg_int_normal_en	r/w	1'b0	Normal Write interrupt enable
7	reg_int_vcnt_en	r/w	1'b0	Vsync valid line count match interrupt enable
6	reg_int_hcnt_en	r/w	1'b0	Hsync valid pixel count match interrupt enable
5	RSVD			
4:0	reg_frame_cnt_trgr_int	r/w	5'd0	Frame to issue interrupt at SW Mode

13.4.5 dvp2axi_frame_bcmt

Address: 0x30012010

reg_frame_byte_cnt

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

reg_frame_byte_cnt

Bits	Name	Type	Reset	Description
31:0	reg_frame_byte_cnt	r/w	32'h7e90	Single Frame byte cnt(Need pre-calculation)

13.4.6 dvp_frame_fifo_pop

Address: 0x30012014

Bits	Name	Type	Reset	Description
31:10	RSVD			
9	reg_int_vcnt_clr	w1p	1'd0	Interrupt clear
8	reg_int_hcnt_clr	w1p	1'd0	Interrupt clear
7	reg_int_fifo_clr	w1p	1'd0	Interrupt clear
6	reg_int_frame_clr	w1p	1'd0	Interrupt clear
5	reg_int_mem_clr	w1p	1'd0	Interrupt clear
4	reg_int_normal_clr	w1p	1'd0	Interrupt clear
3:1	RSVD			
0	rfifo_pop	w1p	1'b0	Write this bit will trigger fifo pop

13.4.7 dvp2axi_frame_vld

Address: 0x30012018

reg_frame_n_vld															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

Bits	Name	Type	Reset	Description
31:0	reg_frame_n_vld	r/w	32'hffff_- ffff	Bitwise frame valid in period

13.4.8 dvp2axi_frame_period

Address: 0x3001201c

RSVD															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

reg_frame_period

Bits	Name	Type	Reset	Description
31:5	RSVD			
4:0	reg_frame_period	r/w	5'h0	Frame period cnt. (EX. Set this register 0, the period is 1)

13.4.9 dvp2axi_misc

Address: 0x30012020

RSVD															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

reg_alpha

reg_format_565

Bits	Name	Type	Reset	Description
31:11	RSVD			
10:8	reg_format_565	r/w	3'd0	Only work when reg_dvp_data_mode=2 (24-comp-16-bit mode) 3'd0: B2(5)B1(6)B0(5) 3'd1: B1(5)B2(6)B0(5) 3'd2: B2(5)B0(6)B1(5) 3'd3: B0(5)B2(6)B1(5) 3'd4: B1(5)B0(6)B2(5) 3'd5: B0(5)B1(6)B2(5)

Bits	Name	Type	Reset	Description
7:0	reg_alpha	r/w	8'h0	Only work when "reg_dvp_data_mode==2'd3(DVP pix_data is 24-exp-32-bit mode)" The value of [31:24]

13.4.10 dvp2axi_hsync_crop

Address: 0x30012030

reg_hsync_act_start

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

reg_hsync_act_end

Bits	Name	Type	Reset	Description
31:16	reg_hsync_act_start	r/w	16'h0	Valid hsync start cnt
15:0	reg_hsync_act_end	r/w	16'hFFFF	Valid hsync end cnt

13.4.11 dvp2axi_vsync_crop

Address: 0x30012034

reg_vsync_act_start

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

reg_vsync_act_end

Bits	Name	Type	Reset	Description
31:16	reg_vsync_act_start	r/w	16'h0	Valid vsync start cnt
15:0	reg_vsync_act_end	r/w	16'hFFFF	Valid vsync end cnt

13.4.12 dvp2axi_fram_exm

Address: 0x30012038

reg_total_vcnt

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

reg_total_hcnt

Bits	Name	Type	Reset	Description
31:16	reg_total_vcnt	r/w	16'h0	Total valid line count in a frame
15:0	reg_total_hcnt	r/w	16'h0	Total valid pix count in a line

13.4.13 frame_start_addr0

Address: 0x30012040

frame_start_addr_0

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

frame_start_addr_0

Bits	Name	Type	Reset	Description
31:0	frame_start_addr_0	r	32'd0	DVP2BUS PIC 0 Start address

13.4.14 frame_start_addr1

Address: 0x30012048

frame_start_addr_1

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

frame_start_addr_1

Bits	Name	Type	Reset	Description
31:0	frame_start_addr_1	r	32'd0	DVP2BUS PIC 1 Start address

13.4.15 frame_start_addr2

Address: 0x30012050

frame_start_addr_2

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

frame_start_addr_2

Bits	Name	Type	Reset	Description
31:0	frame_start_addr_2	r	32'd0	DVP2BUS PIC 2 Start address

13.4.16 frame_start_addr3

Address: 0x30012058

frame_start_addr_3

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

frame_start_addr_3

Bits	Name	Type	Reset	Description
31:0	frame_start_addr_3	r	32'd0	DVP2BUS PIC 3 Start address

13.4.17 frame_id_sts01

Address: 0x30012060

frame_id_1

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

frame_id_0

Bits	Name	Type	Reset	Description
31:16	frame_id_1	r	16'd0	DVP2BUS PIC 1 ID
15:0	frame_id_0	r	16'd0	DVP2BUS PIC 0 ID

13.4.18 frame_id_sts23

Address: 0x30012064

frame_id_3

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

frame_id_2

Bits	Name	Type	Reset	Description
31:16	frame_id_3	r	16'd0	DVP2BUS PIC 3 ID
15:0	frame_id_2	r	16'd0	DVP2BUS PIC 2 ID

13.4.19 dvp_debug

Address: 0x300120f0

RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
RSVD	RSVD	RSVD	RSVD	reg_id_latch_line				RSVD	RSVD	RSVD	RSVD	reg_dvp_dbg_sel				reg_dvp_dbg_en

Bits	Name	Type	Reset	Description
31:12	RSVD			
11:8	reg_id_latch_line	r/w	4'd5	ID latch timing (line count)
7:4	RSVD			
3:1	reg_dvp_dbg_sel	r/w	3'd0	DVP2BUS debug flag selection
0	reg_dvp_dbg_en	r/w	1'b0	DVP2BUS debug flag enable

13.4.20 dvp_dummy_reg

Address: 0x300120fc

RESERVED

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

RESERVED

Bits	Name	Type	Reset	Description
31:0	RESERVED	rsvd	32'hf0f0f0f0	RESERVED

14

IR

14.1 Overview

Infrared Remote Control (IR) is a wireless and non-contact control technique that features strong anti-interference, reliable information transmission, low power consumption, and low cost. The IR radiating circuit uses the IR LED to emit the modulated infrared waves. The receiving circuit consists of infrared receiving diodes, triodes or silicon photocells, which convert the infrared light emitted by the infrared transmitter into corresponding electrical signals, and then send them to the post amplifier.

14.2 Features

- Receives data through the fixed NEC and RC5 protocols
- Receives data in any format by pulse width counting
- With powerful infrared waveform editing capability: It can emit waveforms conforming to various protocols
- Up to 15-gear power settings to adapt to different power consumption requirements
- Receives up to 64-bit data
- Sends up to 128-bit data in the non-free mode and continuously sends the data of any length in the free mode
- 4*4 byte TX FIFO, 64*2 byte RX FIFO
- Adjustable width of the TX FIFO in the free mode (8/16/24/32-bit)
- Programmable carrier frequency and duty ratio
- Maximum operating frequency of 32 MHz
- Supports the DMA sending mode
- End of sending and receiving interrupts

14.3 Functional Description

14.3.1 Fixed Protocol Based Receiving

IR receiving supports the fixed NEC and RC5 protocols.

- NEC Protocol

Logical ‘1’ and logical ‘0’ waveforms of the NEC protocol are shown as follows:

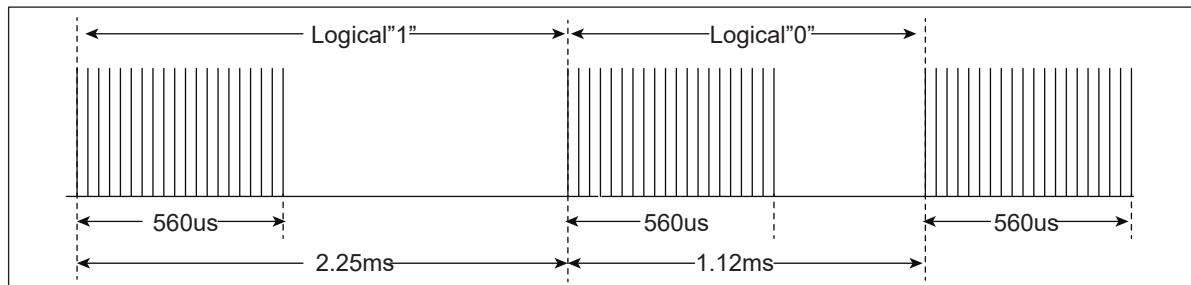


Fig. 14.1: NEC Logic Waveform

Logical ‘1’ is 2.25 ms and the pulse time is 560 us. Logical ‘0’ is 1.12 ms and the pulse time is 560 us. The format of the NEC protocol is shown as follows:

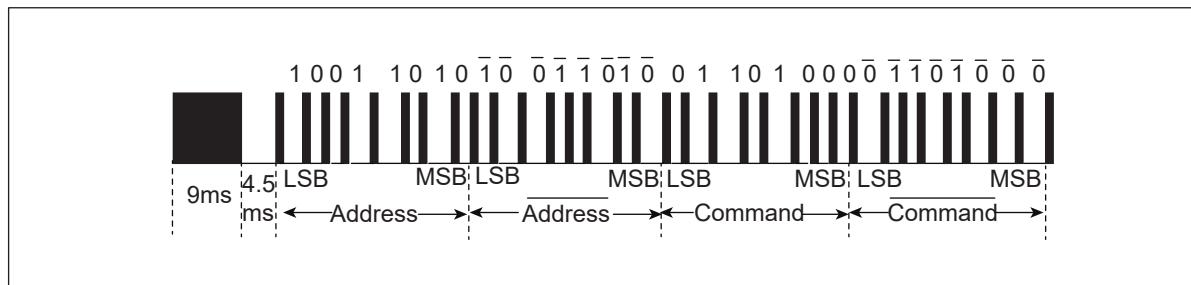


Fig. 14.2: NEC Protocol Waveform

The head pulse is a 9 ms high-level pulse and a 4.5 ms low-level pulse, followed by an 8-bit address code and its radix-minus-one complement (diminished radix complement), then an 8-bit command code and its radix complement, and the tail pulse is a 560 us high-level pulse and a 560 us low-level pulse.

- RC5 Protocol

Logical ‘1’ and logical ‘0’ waveforms of the RC5 protocol are shown as follows:

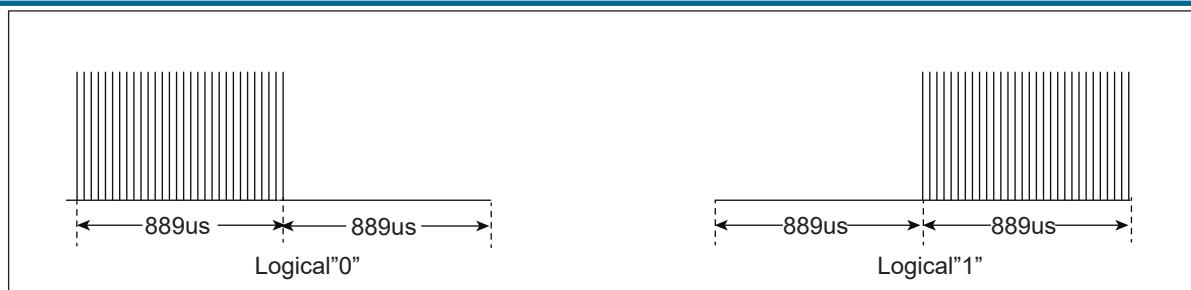


Fig. 14.3: RC5 Logic Waveform

The logical ‘1’ is 1.778 ms, first the 889 us low level and then the 889 us high level. Logical ‘0’ is opposite to the logical 1 waveform. The format of the RC5 protocol is shown as follows:

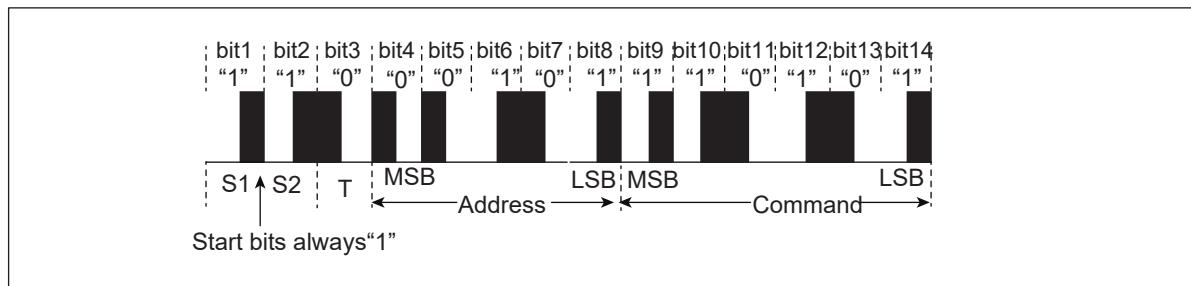


Fig. 14.4: RC5 Protocol Waveform

The first two bits are the Start bits, both logical ‘1’ . The third bit is the toggle bit, which toggles each time a key is released and pressed again. The next 5 bits are address bits and the next 6 bits are command bits.

It is worth noting that to improve the receiving sensitivity, the common infrared integrated receiver outputs a low level after receiving a high level, so you need to enable the receiving toggle function when using the IR receiving function.

14.3.2 Pulse width receiving

For data in any format other than the NEC and RC5 protocols, IR will count the duration of each high or low level in turn by its clock, and then store the data into the RX FIFO with a depth of 64 and a width of 2 bytes.

14.3.3 Normal sending mode

You can configure the head pulse, tail pulse, logical ‘0’ pulse, and logical ‘1’ pulse depending on protocols. During setting, you need to calculate the common pulse width unit—the greatest common divisor—of various pulses with different widths in the used protocol, fill it in the low 12 bits in the register IRTX_PULSE_WIDTH, and then fill the corresponding multiple of each pulse in the register IRTX_PW.

Then, you can fill the logic value to be sent into the TX FIFO with a depth of 4 and a width of 4 bytes.

14.3.4 Pulse width sending

IR provides a way of sending pulse width for the protocols that are unsuitable for the normal sending mode. You need to calculate the common pulse width unit—the greatest common divisor—of various pulses with different widths in the used protocol, and fill it in the low 12 bits in the register IRTX_PULSE_WIDTH. Then, for the multiples (8-bit per multiple) corresponding to each level width from the first high level to the last level, every four multiples are combined into a 32-bit number for padding in the TX FIFO.

14.3.5 Carrier modulation

Setting the high 16 bits of the register IRTX_PULSE_WIDTH can generate carriers with different frequencies and duty ratios. The <TXMPH1W> bit in the register is set to the width of carrier phase 1, while the <TXMPH0W> bit is set to the width of carrier phase 0.

14.3.6 Free mode

In the free mode, there is no limit to the total length of data to be sent. When there is data in TX FIFO, it will be sent, so it can be used with DMA. The width of TX FIFO in free mode can be configured to 8/16/24/32-bit.

14.3.7 DMA mode

IR TX supports the DMA mode, which requires to enable the free mode and set the threshold of TX FIFO by configuring <TFITH> in the register IRTX_FIFO_CONFIG_1.

When this mode is enabled, if <TFICNT> in the IRTX_FIFO_CONFIG_1 is greater than <TFITH>, the DMA TX request will be triggered. After DMA is configured, when receiving this request, DMA will transfer data from memory to TX FIFO as configured.

14.3.8 IR Interrupt

There are separate end of sending and receiving interrupts for IR, and when a sending action ends, a TX interrupt will be generated. When a piece of data is received, it will wait for the level duration to reach the preset end threshold before generating a receiving interrupt.


The register IRTX_INT_STS can query the TX interrupt status and clear the interrupt, and the register IRRX_INT_STS can query the receiving interrupt status and clear the interrupt.

14.4 Register description

Name	Description
irtx_config	
irtx_int_sts	
irtx_pulse_width	
irtx_pw_0	
irtx_pw_1	
irrx_config	
irrx_int_sts	
irrx_pw_config	
irrx_data_count	
irrx_data_word0	
irrx_data_word1	
irtx_fifo_config_0	
irtx_fifo_config_1	
ir_fifo_wdata	
ir_fifo_rdata	

14.4.1 irtx_config

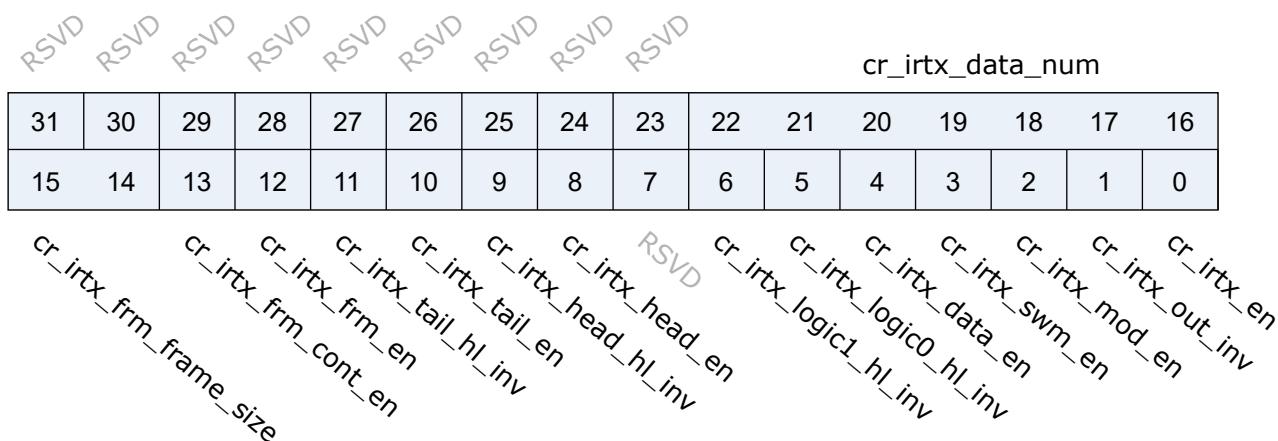Address: 0x2000a600




Bits	Name	Type	Reset	Description
31:23	RSVD			
22:16	cr_irtx_data_num	r/w	7'd31	Bit count of Data phase (unit: bit / PW for normal / SWM) (Don't-care if cr_irtx_frm_en is enabled)
15:14	cr_irtx_frm_frame_size	r/w	2'd0	IRTX freerun mode frame size (also the valid width for each FIFO entry) 2'd0: 8-bit 2'd1: 16-bit 2'd2: 24-bit 2'd3: 32-bit
13	cr_irtx_frm_cont_en	r/w	1'b0	Enable signal of IRTX freerun continuous mode 0: Disabled, each data frame is separated by an idle time (tail_ph0_w+1 + tail_ph1_w+1)*pw_unit 1: Enabled, data continuously sent without interval (if FIFO data is valid)
12	cr_irtx_frm_en	r/w	1'b0	Enable signal of IRTX freerun mode (Don't care if SWM is enabled) Note: HEAD/TAIL is disabled in freerun mode
11	cr_irtx_tail_hl_inv	r/w	1'b0	Tail pulse H/L inverse signal (Don't care if SWM or FRM is enabled) 0: Phase 0 is High (Active), phase 1 is Low (Idle) (H -> L) 1: Phase 0 is Low (Idle), phase 1 is High (Active) (L -> H)
10	cr_irtx_tail_en	r/w	1'b1	Enable signal of tail pulse (Don't care if SWM or FRM is enabled)
9	cr_irtx_head_hl_inv	r/w	1'b0	Tail pulse H/L inverse signal (Don't care if SWM or FRM is enabled) 0: Phase 0 is High (Active), phase 1 is Low (Idle) (H -> L) 1: Phase 0 is Low (Idle), phase 1 is High (Active) (L -> H)
8	cr_irtx_head_en	r/w	1'b1	Enable signal of head pulse (Don't care if SWM or FRM is enabled)
7	RSVD			
6	cr_irtx_logic1_hl_inv	r/w	1'b0	Logic 1 H/L inverse signal (Don't care if SWM is enabled) 0: Phase 0 is High (Active), phase 1 is Low (Idle) (H -> L) 1: Phase 0 is Low (Idle), phase 1 is High (Active) (L -> H)
5	cr_irtx_logic0_hl_inv	r/w	1'b0	Logic 0 H/L inverse signal (Don't care if SWM is enabled) 0: Phase 0 is High (Active), phase 1 is Low (Idle) (H -> L) 1: Phase 0 is Low (Idle), phase 1 is High (Active) (L -> H)
4	cr_irtx_data_en	r/w	1'b1	Enable signal of data phase (Don't care if SWM or FRM is enabled)

Bits	Name	Type	Reset	Description
3	cr_irtx_swm_en	r/w	1'b0	Enable signal of IRTX Software Mode (SWM)
2	cr_irtx_mod_en	r/w	1'b0	Enable signal of output modulation
1	cr_irtx_out_inv	r/w	1'b0	Output inverse signal 1'b0: Output stays at Low during idle state 1'b1: Output stays at High during idle state
0	cr_irtx_en	r/w	1'b0	Enable signal of IRTX function Asserting this bit will trigger the transaction, and should be de-asserted after finish

14.4.2 irtx_int_sts

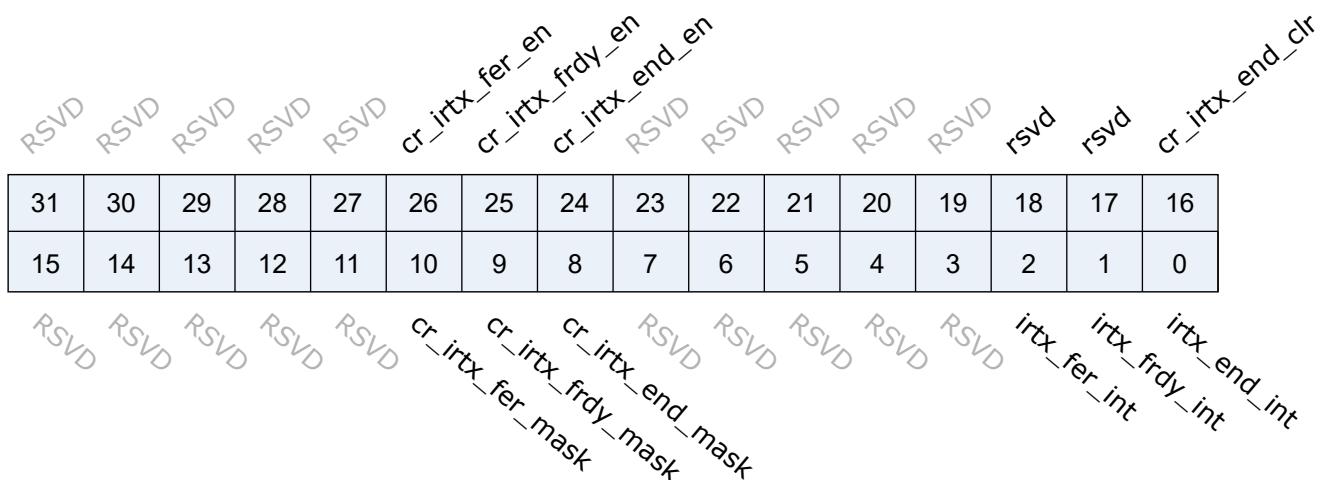Address: 0x2000a604



Bits	Name	Type	Reset	Description
31:27	RSVD			
26	cr_irtx_fer_en	r/w	1'b1	Interrupt enable of irtx_fer_int
25	cr_irtx_frdy_en	r/w	1'b1	Interrupt enable of irtx_frdy_int
24	cr_irtx_end_en	r/w	1'b1	Interrupt enable of irtx_end_int
23:19	RSVD			
18	rsvd	rsvd	1'b0	
17	rsvd	rsvd	1'b0	
16	cr_irtx_end_clr	w1c	1'b0	Interrupt clear of irtx_end_int
15:11	RSVD			
10	cr_irtx_fer_mask	r/w	1'b1	Interrupt mask of irtx_fer_int

Bits	Name	Type	Reset	Description
9	cr_irtx_frdy_mask	r/w	1'b1	Interrupt mask of irtx_frdy_int
8	cr_irtx_end_mask	r/w	1'b1	Interrupt mask of irtx_end_int
7:3	RSVD			
2	irtx_fer_int	r	1'b0	IRTX FIFO error interrupt, auto-cleared when FIFO overflow/underflow error flag is cleared
1	irtx_frdy_int	r	1'b1	IRTX FIFO ready (tx_fifo_cnt > tx_fifo_th) interrupt, auto-cleared when data is pushed
0	irtx_end_int	r	1'b0	IRTX transfer end interrupt

14.4.3 irtx_pulse_width

Address: 0x2000a610

cr_irtx_mod_ph1_w								cr_irtx_mod_ph0_w							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
cr_irtx_pw_unit															
RSVD				RSVD				RSVD				RSVD			

Bits	Name	Type	Reset	Description
31:24	cr_irtx_mod_ph1_w	r/w	8'd34	Modulation phase 1 width
23:16	cr_irtx_mod_ph0_w	r/w	8'd17	Modulation phase 0 width
15:12	RSVD			
11:0	cr_irtx_pw_unit	r/w	12'd1124	Pulse width unit

14.4.4 irtx_pw_0

Address: 0x2000a614

cr_irtx_logic1_ph1_w								cr_irtx_logic1_ph0_w							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
cr_irtx_logic0_ph1_w								cr_irtx_logic0_ph0_w							
RSVD															

Bits	Name	Type	Reset	Description
31:24	cr_irtx_logic1_ph1_w	r/w	8'd2	Pulse width of logic1 phase 1 (Don't care if SWM is enabled)
23:16	cr_irtx_logic1_ph0_w	r/w	8'd0	Pulse width of logic1 phase 0 (Don't care if SWM is enabled)
15:8	cr_irtx_logic0_ph1_w	r/w	8'd0	Pulse width of logic0 phase 1 (Don't care if SWM is enabled)
7:0	cr_irtx_logic0_ph0_w	r/w	8'd0	Pulse width of logic0 phase 0 (Don't care if SWM is enabled)

14.4.5 irtx_pw_1

Address: 0x2000a618

cr_irtx_tail_ph1_w								cr_irtx_tail_ph0_w							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
cr_irtx_head_ph1_w								cr_irtx_head_ph0_w							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16

Bits	Name	Type	Reset	Description
31:24	cr_irtx_tail_ph1_w	r/w	8'd0	Pulse width of tail pulse phase 1 (Don't care if SWM is enabled)
23:16	cr_irtx_tail_ph0_w	r/w	8'd0	Pulse width of tail pulse phase 0 (Don't care if SWM is enabled)
15:8	cr_irtx_head_ph1_w	r/w	8'd7	Pulse width of head pulse phase 1 (Don't care if SWM is enabled)
7:0	cr_irtx_head_ph0_w	r/w	8'd15	Pulse width of head pulse phase 0 (Don't care if SWM is enabled)

14.4.6 irrx_config

Address: 0x2000a640


| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |

RSVD RSVD RSVD RSVD cr_irrx_deg_cnt RSVD RSVD RSVD cr_irrx_deg_en cr_irrx_mode cr_irrx_in_inv

Bits	Name	Type	Reset	Description
31:12	RSVD			
11:8	cr_irrx_deg_cnt	r/w	4'd0	De-glitch function cycle count
7:5	RSVD			
4	cr_irrx_deg_en	r/w	1'b0	Enable signal of IRRX input de-glitch function
3:2	cr_irrx_mode	r/w	2'd0	IRRX mode 0: NEC 1: RC5 2: SW pulse-width detection mode (SWM) 3: Reserved
1	cr_irrx_in_inv	r/w	1'b1	Input inverse signal
0	cr_irrx_en	r/w	1'b0	Enable signal of IRRX function Asserting this bit will trigger the transaction, and should be de-asserted after finish

14.4.7 irrx_int_sts

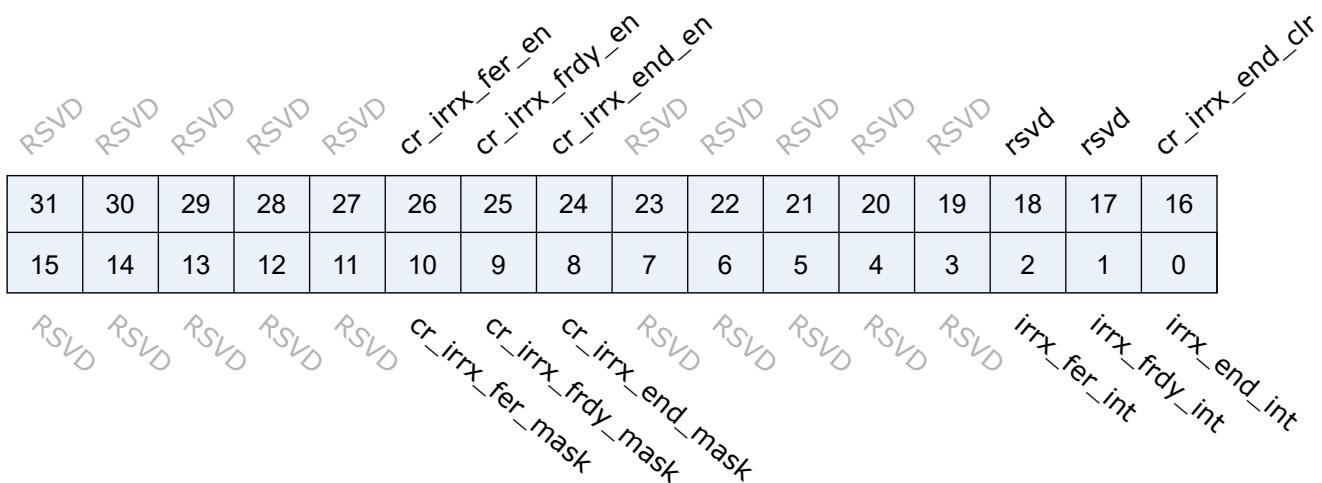Address: 0x2000a644



Bits	Name	Type	Reset	Description
31:27	RSVD			
26	cr_irrx_fer_en	r/w	1'b1	Interrupt enable of irrx_fer_int
25	cr_irrx_frdy_en	r/w	1'b1	Interrupt enable of irrx_frdy_int
24	cr_irrx_end_en	r/w	1'b1	Interrupt enable of irrx_end_int
23:19	RSVD			

Bits	Name	Type	Reset	Description
18	rsvd	rsvd	1'b0	
17	rsvd	rsvd	1'b0	
16	cr_irrx_end_clr	w1c	1'b0	Interrupt clear of irrx_end_int
15:11	RSVD			
10	cr_irrx_fer_mask	r/w	1'b1	Interrupt mask of irrx_fer_int
9	cr_irrx_frdy_mask	r/w	1'b1	Interrupt mask of irrx_frdy_int
8	cr_irrx_end_mask	r/w	1'b1	Interrupt mask of irrx_end_int
7:3	RSVD			
2	irrx_fer_int	r	1'b0	IRRX FIFO error interrupt, auto-cleared when FIFO overflow/underflow error flag is cleared
1	irrx_frdy_int	r	1'b0	IRRX FIFO ready ($rx_fifo_cnt > rx_fifo_th$) interrupt, auto-cleared when data is popped
0	irrx_end_int	r	1'b0	IRRX transfer end interrupt

14.4.8 irrx_pw_config

Address: 0x2000a648

cr_irrx_end_th

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

cr_irrx_data_th

Bits	Name	Type	Reset	Description
31:16	cr_irrx_end_th	r/w	16'd8999	Pulse width threshold to trigger END condition
15:0	cr_irrx_data_th	r/w	16'd3399	Pulse width threshold for Logic0/1 detection (Don't care if SWM is enabled)

14.4.9 irrx_data_count

Address: 0x2000a650

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |

sts_irrx_data_cnt

Bits	Name	Type	Reset	Description
31:7	RSVD			
6:0	sts_irrx_data_cnt	r	7'd0	RX data bit count (pulse-width count for SWM)

14.4.10 irrx_data_word0

Address: 0x2000a654

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |

sts_irrx_data_word0

Bits	Name	Type	Reset	Description
31:0	sts_irrx_data_word0	r	32'h0	RX data word 0

14.4.11 irrx_data_word1

Address: 0x2000a658

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |

sts_irrx_data_word1

Bits	Name	Type	Reset	Description
31:0	sts_irrx_data_word1	r	32'h0	RX data word 1

14.4.12 irtx_fifo_config_0

Address: 0x2000a680

Bits	Name	Type	Reset	Description
31:8	RSVD			
7	rx_fifo_underflow	r	1'b0	Underflow flag of RX FIFO, can be cleared by rx_fifo_clr
6	rx_fifo_overflow	r	1'b0	Overflow flag of RX FIFO, can be cleared by rx_fifo_clr
5	tx_fifo_underflow	r	1'b0	Underflow flag of TX FIFO, can be cleared by tx_fifo_clr
4	tx_fifo_overflow	r	1'b0	Overflow flag of TX FIFO, can be cleared by tx_fifo_clr
3	rx_fifo_clr	w1c	1'b0	Clear signal of RX FIFO
2	tx_fifo_clr	w1c	1'b0	Clear signal of TX FIFO
1	rsvd	rsvd	1'b0	
0	irtx_dma_en	r/w	1'b0	Enable signal of dma_tx_req/ack interface

14.4.13 irtx_fifo_config_1

Address: 0x2000a684

rx_fifo_th																tx_fifo_th															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	tx_fifo_th							
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	RSVD	rx_fifo_cnt	RSVD	RSVD	RSVD	RSVD	RSVD	tx_fifo_cnt								

Bits	Name	Type	Reset	Description
31:30	RSVD			
29:24	rx_fifo_th	r/w	6'd0	RX FIFO threshold, irrx_frdy_int will not be asserted if rx_fifo_cnt is less than this value
23:18	RSVD			
17:16	tx_fifo_th	r/w	2'd0	TX FIFO threshold, irtx_frdy_int & dma_tx_req will not be asserted if tx_fifo_cnt is less than this value
15	RSVD			
14:8	rx_fifo_cnt	r	7'd0	RX FIFO available count
7:3	RSVD			
2:0	tx_fifo_cnt	r	3'd4	TX FIFO available count

14.4.14 ir_fifo_wdata

Address: 0x2000a688

tx_fifo_wdata															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
tx_fifo_wdata															

Bits	Name	Type	Reset	Description
31:0	tx_fifo_wdata	w	32'h0	IRTX FIFO data Normal Mode: Each entry contains a 32-bit data word, LSB is sent first Software Mode: Each entry contains 4 pulse widths, [7:0] is the 1st pulse, [15:8] is the 2nd pulse, etc)

14.4.15 ir_fifo_rdata

Address: 0x2000a68c

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |

rx_fifo_rdata

Bits	Name	Type	Reset	Description
31:16	RSVD			
15:0	rx_fifo_rdata	r	16'h0	IRRX FIFO pulse width data for Software Mode

15.1 Overview

Serial Peripheral Interface (SPI) Bus is a synchronous serial communication interface specification for short-range communication. Devices communicate in the full duplex mode, which is a master-slave mode where one master controls one or more slaves.

SPI completes full-duplex communication with 4 signal lines, namely CS (chip select), SCLK (clock), MOSI (master output slave input), and MISO (master input slave output).

15.2 Features

- Can be used as SPI master or slave
- Both master and slave support 4 operating modes (CPOL, CPHA)
- Both master and slave support 1/2/3/4-byte transfer mode
- The sending and receiving channels each have a FIFO with a depth of 32 bytes
- The adaptive FIFO depth variation characteristic suits high-performance applications
 - When the Frame is 32Bits, the depth of FIFO is 8
 - When the Frame is 24Bits, the depth of FIFO is 8
 - When the Frame is 16Bits, the depth of FIFO is 16
 - When the Frame is 8Bits, the depth of FIFO is 32
- Adjustable byte transfer sequence
- Flexible clock configuration, which supports up to 80M clock
- Configurable MSB/LSB transfer priority

- Receive ignore function: You can set to ignore the reception of data from the specified location
- Supports timeout mechanism in the slave mode
- Supports DMA transfer mode

15.3 Functional Description

15.3.1 Clock Control

Due to different clock phases and polarity settings, the SPI clock has four modes, which can be set by cr_spi_sclk_pol (CPOL) and cr_spi_sclk_ph (CPHA) in the register spi_config. CPOL determines the level of SCK clock signal when it is idle. If CPOL=0(cr_spi_sclk_pol=0), the idle level is low, and if CPOL=1(cr_spi_sclk_pol=1), the idle level is high. CPHA determines the sampling time. If CPHA=0(cr_spi_sclk_ph=1), sampling is made at the first lock edge of each cycle, and if CPHA=1(cr_spi_sclk_ph=0), that is made at the second clock edge of each cycle.

By setting the registers spi_prd_0 and spi_prd_1, you can also adjust the duration of the start and end levels of the clock, time of phase 0/1, and interval between frames of data. The settings of the four modes are shown as follows:

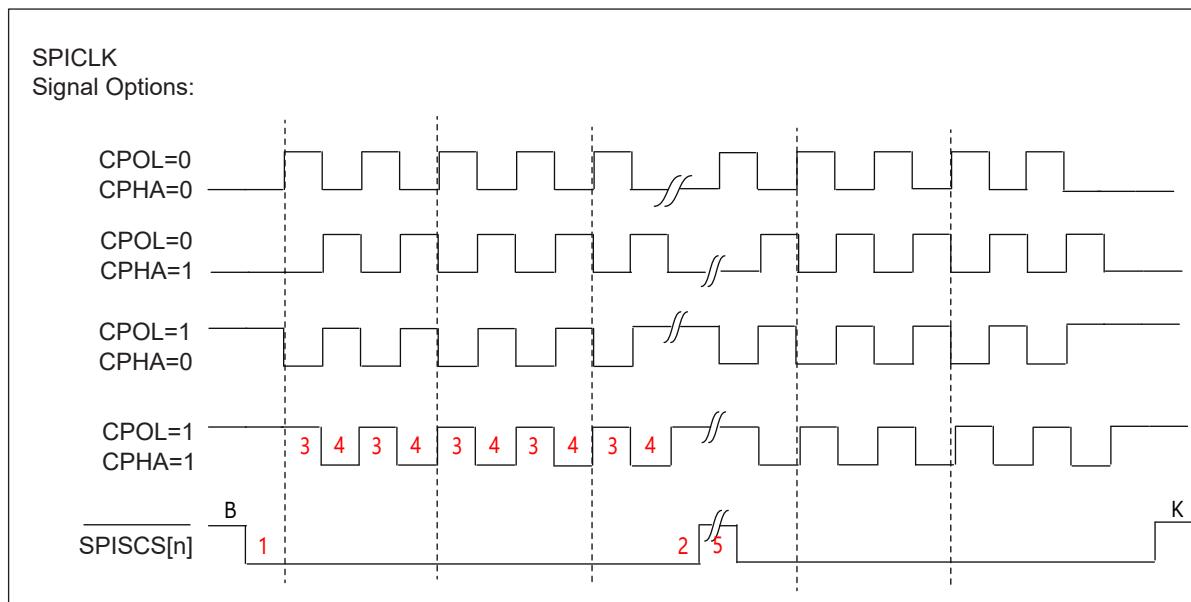


Fig. 15.1: SPI Timing

The meanings of numbers are as follows:

- “1” denotes the length of the START condition, which is configured by the cr_spi_prd_s in the register spi_prd_0.
- “2” denotes the length of the STOP condition, which is configured by the cr_spi_prd_p in the register spi_prd_0.
- “3” denotes the length of phase 0, which is configured by the cr_spi_prd_d_ph_0 in the register spi_prd_0.
- “4” denotes the length of phase 1, which is configured by the cr_spi_prd_d_ph_1 in the register spi_prd_0.
- “5” denotes the interval between frames of data, which is configured by the cr_spi_prd_i in the register spi_prd_1.

15.3.2 Master Continuous Transfer Mode

After this mode is enabled, the CS signal will not be released when the current data is sent and there are still available data in FIFO.

15.3.3 Master-Slave: Transfer and Receive Data

The same framesize shall be set for the master and slave for transferring and receiving data by configuring the cr_spi_frame_size in the register spi_config. When the master and slave agree to communicate at a 32 bits framesize, if the clk of the master does not meet 32 bits due to an exception in a frame of data, the following symptoms occur.

- The data sent by the master cannot be transferred to the RX FIFO of the slave. The slave cannot receive data from the master.
- When the slave sends data, it will skip this frame of data and continue to send the next frame of data when the master's clk is normal again.

15.3.4 Receive Ignore Function

When the start and end bits to be filtered out are set, SPI will discard the corresponding data segments in the received data, as shown below:

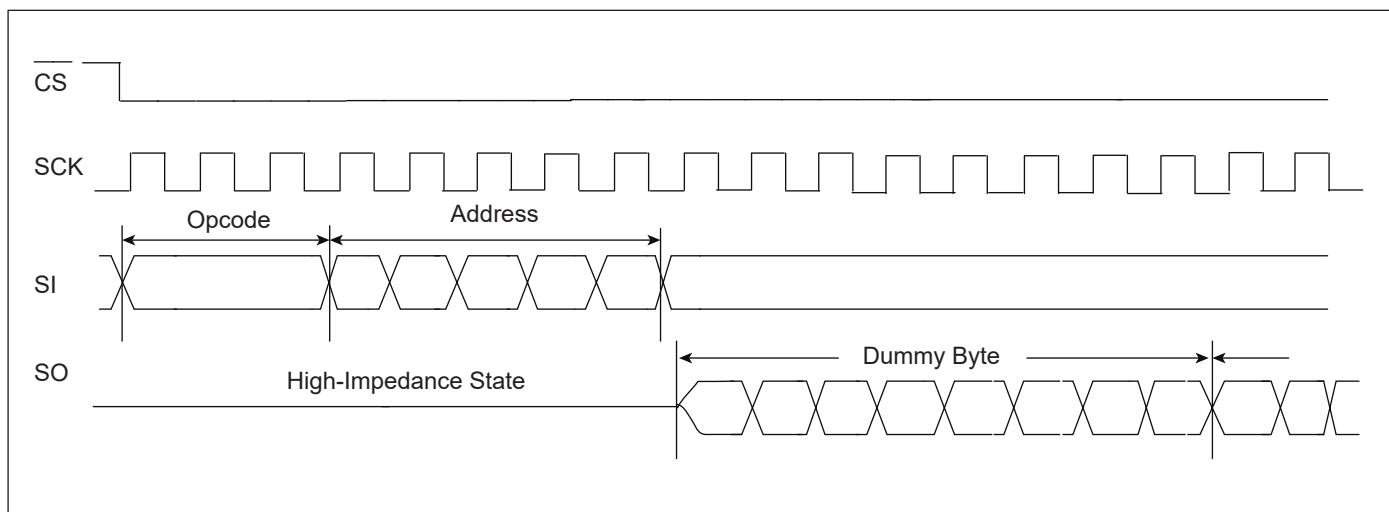


Fig. 15.2: SPI Ignore Waveform

You can enable this function by configuring the cr_spi_rxd_ignr_en in the register spi_config. The start bit of this function is set by configuring the cr_spi_rxd_ignr_s in the register spi_rxd_ignr. The end bit of this function is set by configuring the cr_spi_rxd_ignr_p in the register spi_rxd_ignr.

In the above figure, the start bit to be filtered is set to 0, and if the end bit is set to 7, Dummy Byte will be received; if the end bit is set to 15, Dummy Byte will be discarded.

15.3.5 Filtering Function

When this function is enabled and a threshold is set, SPI will filter the data less than or equal to the width threshold. Assuming that the SPI top clock is 160MHz and the threshold is set to 4, any data with a width below ($4/160\text{MHz} = 25\text{ns}$) will be filtered out.

When this function is enabled by setting the `cr_spi_deg_en` in the register `spi_config` and the threshold is set by configuring the `cr_spi_deg_cnt`, SPI will filter out the data that cannot reach the width threshold. As shown in the figure below, the data width is 4, “Input” is the initial data and “output” is the filtered data.

Filtering logic process:

- “Tgl” is the exclusive OR result of input and output.
- “Deg_cnt” counts from 0, and the counting condition is that “tgl” is at the high level and “reached” is at the low level.
- “Reached” means whether the current `deg_cnt` count reaches the set `cr_spi_deg_cnt`, and it is at a high level once reached.
- When “reached” is at a high level, “input” is output to “output” .
- Note: user-defined condition for `deg_cnt`: “tgl” is at a high level and “reached” is at a low level. In other cases, “`deg_cnt`” will be cleared to 0.

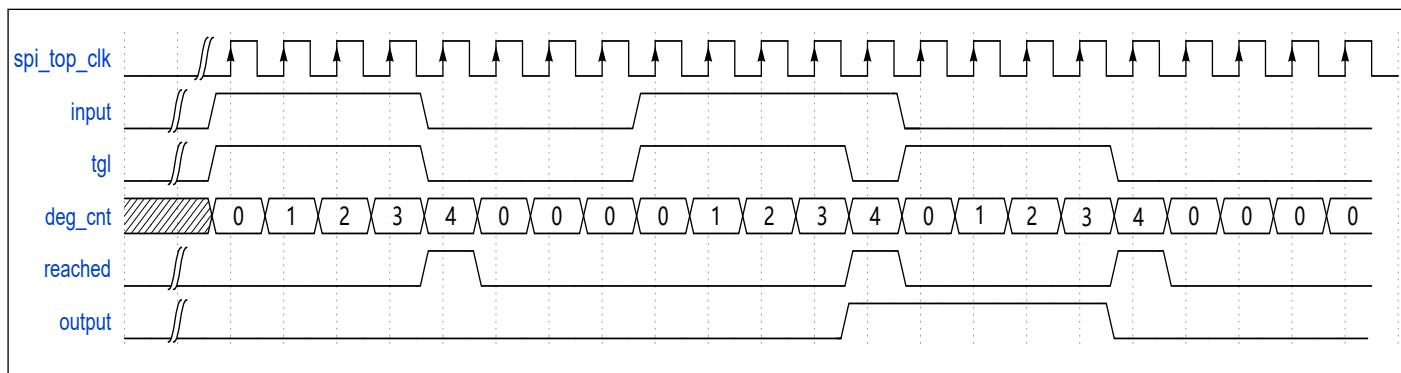


Fig. 15.3: SPI Filter Waveform

15.3.6 Configurable MSB/LSB Transfer

The configurable MSB/LSB transfer mode is limited to the priority transfer sequence of 8 bits in one byte, and the transfer sequence of bits in one byte is set by configuring the `cr_spi_bit_inv` bit in the register `spi_config`. 0 indicates MSB and 1 indicates LSB.

For example, for data transfer where the frame size is 24 bits, the data format is `Data[23:0]=0x123456`.

When MSB transfer is set, the transfer sequence is: 01010110 (binary, 1st byte: 0x56); 00110100 (binary, 2nd byte: 0x34); 00010010 (binary, 3rd byte: 0x12). When LSB transfer is set, the transfer sequence is: 01101010 (binary, 1st byte: 0x56); 00101100 (binary, 2nd byte: 0x34); 01001000 (binary, 3rd byte: 0x12).

15.3.7 Adjustable Byte Transfer Sequence

The adjustable byte transfer sequence is limited to the priority transfer sequence between different bytes in FIFO. The transfer sequence of bytes in FIFO is set by configuring the cr_spi_byte_inv bit in the register spi_config. 0 means sending LSB first, and 1 means sending MSB first.

For example, for data transfer where the frame size is 24 bits, the data format is Data[23:0]=0x123456.

When LSB transfer priority is set, the transfer sequence is 0x56 (1st byte: LSB); 0x34 (2nd byte: intermediate byte); 0x12 (3rd byte: MSB). When MSB transfer priority is set, the transfer sequence is 0x12 (3rd byte: MSB); 0x34 (2nd byte: intermediate byte); 0x56 (1st byte: LSB).

Adjustable byte transfer can be used in conjunction with configurable MSB/LSB transfer.

15.3.8 Slave Mode Timeout Mechanism

When a timeout threshold is set, an interrupt will be triggered when SPI in the slave mode receives no clock signal after the threshold exceeds.

15.3.9 I/O Transfer Mode

The chip communication processor can perform FIFO padding and clearing operations in response to the interrupt from the FIFO. Each FIFO has a programmable FIFO trigger threshold to trigger an interrupt. When rx_fifo_cnt in the register spi_fifo_config_1 is greater than the trigger threshold of rx_fifo_th, an interrupt will be generated to send a signal to the chip communication processor to clear the RX FIFO. When rx_fifo_cnt in the register spi_fifo_config_1 is greater than rx_fifo_th, an interrupt will be generated to send a signal to the chip communication processor to re-pad the TX FIFO.

You can query the SPI status register to determine the sampled value in the FIFO and the FIFO status. The software must provide correct trigger thresholds for RX FIFO and TX FIFO, and prevent the overflow of RX FIFO and the underflow of TX FIFO.

15.3.10 DMA Transfer Mode

SPI supports the DMA transfer mode. To enable this mode, you must set the thresholds of TX FIFO and RX FIFO respectively. Setting spi_dma_tx_en in the register spi_fifo_config_0 to 1 can enable the DMA sending mode. Setting spi_dma_rx_en in the register spi_fifo_config_0 to 1 can enable the DMA receiving mode. When this mode is enabled, UART will check the TX/RX FIFO. Once the tx_fifo_cnt/rx_fifo_cnt in the register spi_fifo_config_1 is greater than tx_fifo_th/rx_fifo_th, a DMA request will be initiated, and DMA will transfer data into TX FIFO or remove data from RX FIFO as configured.

15.3.11 SPI Interrupt

SPI supports the following interrupt control modes:

- SPI end of transfer interrupt
 - In the master mode, the SPI end of transfer interrupt will be triggered when the transfer of each frame of data ends.
 - In the slave mode, that interrupt is triggered when the CS signal is released.
- TX FIFO request interrupt
 - The TX FIFO request interrupt will be triggered when the FIFO available count value is greater than the preset threshold, and the interrupt flag will be cleared automatically when the condition is unmet.
- RX FIFO request interrupt
 - The RX FIFO request interrupt will be triggered when the FIFO available count value is greater than the preset threshold, and the interrupt flag will be cleared automatically when the condition is unmet.
- Slave mode transfer timeout interrupt
 - The slave mode transfer timeout interrupt will be triggered when no clock signal is received in the slave mode after the threshold exceeds. If the TX/RX FIFO overflows or underflows, it will trigger the TX/RX FIFO overflow interrupt.
- Slave mode TX overload interrupt
 - Slave mode TX overload interrupt will trigger when the TX is not ready to transmit in slave mode.
- TX/RX FIFO overflow interrupt
 - TX/RX FIFO overflow interrupt is triggered if an overflow or underflow occurs in the TX/RX FIFO. When the tx_fifo_clr/rx_fifo_clr bit in the FIFO clear register spi_fifo_config_0 is set to 1, the corresponding FIFO will be cleared and the overflow interrupt flag will be cleared automatically.

You can query the interrupt status through the register SPI_INT_STS and write 1 to the corresponding bit to clear the interrupt.

15.4 Register description

Name	Description
spi_config	
spi_int_sts	
spi_bus_busy	

Name	Description
spi_prd_0	
spi_prd_1	
spi_rxd_ignr	
spi_sto_value	
spi_fifo_config_0	
spi_fifo_config_1	
spi_fifo_wdata	
spi_fifo_rdata	
backup_io_en	

15.4.1 spi_config

Address: 0x2000a200

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |


cr_spi_deg_cnt cr_spi_deg_en cr_spi_s_3pin_mode cr_spi_m_cont_en cr_spi_rxn_ignr_en cr_spi_bit_inv cr_spi_sclk_ph cr_spi_frame_size cr_spi_s_en cr_spi_m_en

Bits	Name	Type	Reset	Description
31:16	RSVD			
15:12	cr_spi_deg_cnt	r/w	4'd0	De-glitch function cycle count
11	cr_spi_deg_en	r/w	1'b0	Enable signal of all input de-glitch function
10	cr_spi_s_3pin_mode	r/w	1'b0	SPI slave 3-pin mode 1'b0: 4-pin mode (SS_n is enabled) 1'b1: 3-pin mode (SS_n is disabled / don't care)

Bits	Name	Type	Reset	Description
9	cr_spi_m_cont_en	r/w	1'b0	Enable signal of master continuous transfer mode 1'b0: Disabled, SS_n will de-assert between each data frame 1'b1: Enabled, SS_n will stay asserted between each consecutive data frame if the next data is valid in the FIFO
8	cr_spi_rxd_ignr_en	r/w	1'b0	Enable signal of RX data ignore function
7	cr_spi_byte_inv	r/w	1'b0	Byte-inverse signal for each FIFO entry data 0: Byte[0] is sent out first 1: Byte[3] is sent out first
6	cr_spi_bit_inv	r/w	1'b0	Bit-inverse signal for each data byte 0: Each byte is sent out MSB-first 1: Each byte is sent out LSB-first
5	cr_spi_sclk_ph	r/w	1'b0	SCLK clock phase inverse signal
4	cr_spi_sclk_pol	r/w	1'b0	SCLK polarity 0: SCLK output LOW at IDLE state 1: SCLK output HIGH at IDLE state
3:2	cr_spi_frame_size	r/w	2'd0	SPI frame size (also the valid width for each FIFO entry) 2'd0: 8-bit 2'd1: 16-bit 2'd2: 24-bit 2'd3: 32-bit
1	cr_spi_s_en	r/w	1'b0	Enable signal of SPI Slave function, Master and Slave should not be both enabled at the same time (This bit becomes don't-care if cr_spi_m_en is enabled)
0	cr_spi_m_en	r/w	1'b0	Enable signal of SPI Master function Asserting this bit will trigger the transaction, and should be de-asserted after finish

15.4.2 spi_int_sts

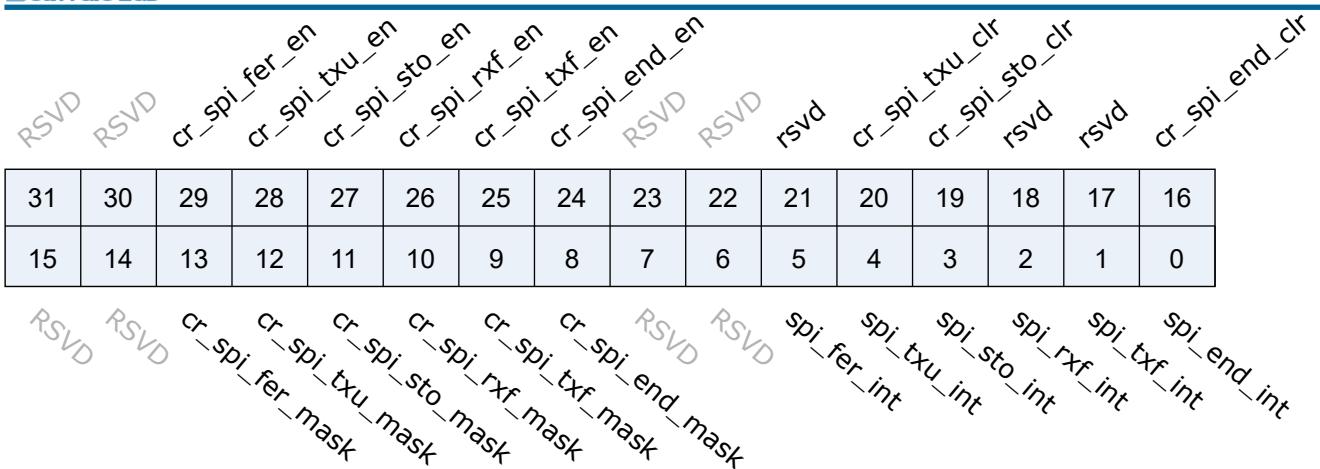Address: 0x2000a204



Bits	Name	Type	Reset	Description
31:30	RSVD			
29	cr_spi_fer_en	r/w	1'b1	Interrupt enable of spi_fer_int
28	cr_spi_txu_en	r/w	1'b1	Interrupt enable of spi_txu_int
27	cr_spi_sto_en	r/w	1'b1	Interrupt enable of spi_sto_int
26	cr_spi_rxf_en	r/w	1'b1	Interrupt enable of spi_rxv_int
25	cr_spi_txf_en	r/w	1'b1	Interrupt enable of spi_txe_int
24	cr_spi_end_en	r/w	1'b1	Interrupt enable of spi_end_int
23:22	RSVD			
21	rsvd	rsvd	1'b0	
20	cr_spi_txu_clr	w1c	1'b0	Interrupt clear of spi_txu_int
19	cr_spi_sto_clr	w1c	1'b0	Interrupt clear of spi_sto_int
18	rsvd	rsvd	1'b0	
17	rsvd	rsvd	1'b0	
16	cr_spi_end_clr	w1c	1'b0	Interrupt clear of spi_end_int
15:14	RSVD			
13	cr_spi_fer_mask	r/w	1'b1	Interrupt mask of spi_fer_int
12	cr_spi_txu_mask	r/w	1'b1	Interrupt mask of spi_txu_int
11	cr_spi_sto_mask	r/w	1'b1	Interrupt mask of spi_sto_int
10	cr_spi_rxf_mask	r/w	1'b1	Interrupt mask of spi_rxv_int
9	cr_spi_txf_mask	r/w	1'b1	Interrupt mask of spi_txe_int
8	cr_spi_end_mask	r/w	1'b1	Interrupt mask of spi_end_int
7:6	RSVD			

Bits	Name	Type	Reset	Description
5	spi_fer_int	r	1'b0	SPI TX/RX FIFO error interrupt, auto-cleared when FIFO overflow/underflow error flag is cleared
4	spi_txu_int	r	1'b0	SPI slave mode TX underrun error flag, triggered when TXD is not ready during transfer in slave mode
3	spi_sto_int	r	1'b0	SPI slave mode transfer time-out interrupt, triggered when SPI bus is idle for a given value
2	spi_rxf_int	r	1'b0	SPI RX FIFO ready ($rx_fifo_cnt > rx_fifo_th$) interrupt, auto-cleared when data is popped
1	spi_txf_int	r	1'b1	SPI TX FIFO ready ($tx_fifo_cnt > tx_fifo_th$) interrupt, auto-cleared when data is pushed
0	spi_end_int	r	1'b0	SPI transfer end interrupt, shared by both master and slave mode Master mode: Triggered when the final frame is transferred Slave mode: Triggered when CS_n is de-asserted

15.4.3 spi_bus_busy

Address: 0x2000a208

RSVD	RSVD	RSVD															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16		
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
RSVD	sts_spi_bus_busy																

Bits	Name	Type	Reset	Description
31:1	RSVD			
0	sts_spi_bus_busy	r	1'b0	Indicator of SPI bus busy

15.4.4 spi_prd_0

Address: 0x2000a210

cr_spi_prd_d_ph_1								cr_spi_prd_d_ph_0							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
cr_spi_prd_p								cr_spi_prd_s							

Bits	Name	Type	Reset	Description
31:24	cr_spi_prd_d_ph_1	r/w	8'd15	Length of DATA phase 1 (please refer to "Timing" tab)
23:16	cr_spi_prd_d_ph_0	r/w	8'd15	Length of DATA phase 0 (please refer to "Timing" tab)
15:8	cr_spi_prd_p	r/w	8'd15	Length of STOP condition (please refer to "Timing" tab)
7:0	cr_spi_prd_s	r/w	8'd15	Length of START condition (please refer to "Timing" tab)

15.4.5 spi_prd_1

Address: 0x2000a214

RSVD															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

cr_spi_prd_i

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	cr_spi_prd_i	r/w	8'd15	Length of INTERVAL between frame (please refer to "Timing" tab)

15.4.6 spi_rxd_ignr

Address: 0x2000a218

RSVD	cr_spi_rxd_ignr_s																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16		
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		

cr_spi_rxd_ignr_p

Bits	Name	Type	Reset	Description
31:21	RSVD			
20:16	cr_spi_rxd_ignr_s	r/w	5'd0	Starting point of RX data ignore function
15:5	RSVD			
4:0	cr_spi_rxd_ignr_p	r/w	5'd0	Stopping point of RX data ignore function

15.4.7 spi_sto_value

Address: 0x2000a21c

RSVD	cr_spi_sto_value																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16		
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		

Bits	Name	Type	Reset	Description
31:12	RSVD			
11:0	cr_spi_sto_value	r/w	12'hFFF	Time-out value for spi_sto_int triggering

15.4.8 spi_fifo_config_0

Address: 0x2000a280

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |

RSVD RSVD

rx_fifo_underrflow rx_fifo_overflow tx_fifo_underrflow tx_fifo_overflow tx_fifo_clr spi_dma_rx_en spi_dma_tx_en

Bits	Name	Type	Reset	Description
31:8	RSVD			
7	rx_fifo_underflow	r	1'b0	Underflow flag of RX FIFO, can be cleared by rx_fifo_clr
6	rx_fifo_overflow	r	1'b0	Overflow flag of RX FIFO, can be cleared by rx_fifo_clr
5	tx_fifo_underflow	r	1'b0	Underflow flag of TX FIFO, can be cleared by tx_fifo_clr
4	tx_fifo_overflow	r	1'b0	Overflow flag of TX FIFO, can be cleared by tx_fifo_clr
3	rx_fifo_clr	w1c	1'b0	Clear signal of RX FIFO
2	tx_fifo_clr	w1c	1'b0	Clear signal of TX FIFO
1	spi_dma_rx_en	r/w	1'b0	Enable signal of dma_rx_req/ack interface
0	spi_dma_tx_en	r/w	1'b0	Enable signal of dma_tx_req/ack interface

15.4.9 spi_fifo_config_1

Address: 0x2000a284

Bits	Name	Type	Reset	Description
31:29	RSVD			
28:24	rx_fifo_th	r/w	5'd0	RX FIFO threshold, dma_rx_req will not be asserted if rx_fifo_cnt is less than this value
23:21	RSVD			
20:16	tx_fifo_th	r/w	5'd0	TX FIFO threshold, dma_tx_req will not be asserted if tx_fifo_cnt is less than this value
15:14	RSVD			
13:8	rx_fifo_cnt	r	6'd0	RX FIFO available count (unit: byte)
7:6	RSVD			
5:0	tx_fifo_cnt	r	6'd32	TX FIFO available count (unit: byte)

15.4.10 spi_fifo_wdata

Address: 0x2000a288

spi_fifo_wdata

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

spi_fifo_wdata

Bits	Name	Type	Reset	Description
31:0	spi_fifo_wdata	w	x	TX FIFO write data port Note: Partial valid if cr_spi_frame_size is set to different value: 2'd0 (8-bit frame): Only [7:0] are valid and [31:8] are don't-care 2'd1 (16-bit frame): Only [15:0] are valid and [31:16] are don't-care 2'd2 (24-bit frame): Only [23:0] are valid and [31:24] are don't-care 2'd3 (32-bit frame): Entire [31:0] are valid

15.4.11 spi_fifo_rdata

Address: 0x2000a28c

spi fifo rdata

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

spi fifo rdata

Bits	Name	Type	Reset	Description
31:0	spi_fifo_rdata	r	32'h0	<p>RX FIFO read data port</p> <p>Note: Partial valid if cr_spi_frame_size is set to different value:</p> <ul style="list-style-type: none"> 2'd0 (8-bit frame): Only [7:0] are valid and [31:8] are all 0s 2'd1 (16-bit frame): Only [15:0] are valid and [31:16] are all 0s 2'd2 (24-bit frame): Only [23:0] are valid and [31:24] are all 0s 2'd3 (32-bit frame): Entire [31:0] is valid

15.4.12 backup_io_en

Address: 0x2000a2fc

Bits	Name	Type	Reset	Description
31:1	RSVD			
0	backup_io_en	r/w	1'b0	

16

UART

16.1 Overview

The Universal Asynchronous Receiver/Transmitter (UART) provides a flexible way to exchange full-duplex data with external devices. BL808 is provided with four UARTs, which can be used together with DMA to achieve efficient data communication.

16.2 Features

- Full-duplex asynchronous communication
- Optional data bit length: 5/6/7/8-bit
- Optional stop bit length: 0.5/1/1.5/2-bit
- Supports odd/even/none check bit
- Error-detectable start bit
- Abundant interrupt control modes
- Hardware flow control (RTS/CTS)
- Convenient baud rate programming
- Configurable MSB/LSB transfer priority
- Automatic baud rate detection of ordinary/fixed characters
- 32-byte TX/RX FIFO
- Supports DMA transfer mode
- Supports baud rate of 10 Mbps and below
- Supports the LIN bus protocol

- Supports the RS485 mode
- Optional clock sources: 160M/BCLK/XCLK
- Support filter function

16.3 Functional Description

16.3.1 Data Formats

The normal UART communication data consists of start bits, data bits, parity check bits, and stop bits. The UART of xx supports configurable data bits, parity check bits, and stop bits, which are set in registers utx_config and urx_config. The waveform of a frame of data is shown as follows:

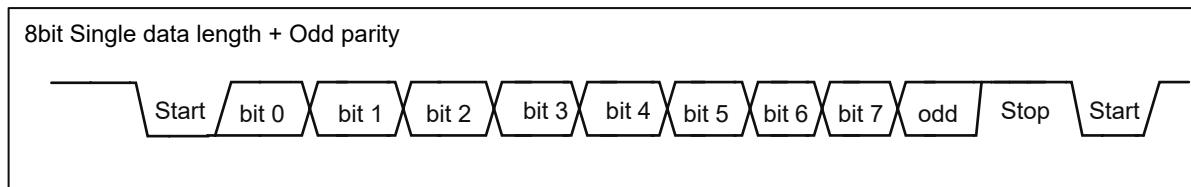


Fig. 16.1: UART Data Format

The start bit of the data frame occupies 1 bit, and the stop bit can be 0.5/1/1.5/2-bit wide by configuring the cr_utx_bit_cnt_p bit in the register utx_config. The start bit is at a low level and the stop bit is at a high level. The data bit width can be set to 5/6/7/8-bit by the cr_utx_bit_cnt_d bit in the register utx_config.

When the cr_utx_prt_en bit in the register utx_config and the cr_urx_prt_en bit in the register urx_config are set, the data frame adds a parity check bit after the data. The cr_utx_prt_sel bit in the register utx_config and the cr_urx_prt_sel bit in the register urx_config are used to select odd or even parity check. When the receiver detects the check bit error of the input data, it will generate the check error interrupt. However, the received data will still be stored into the FIFO.

Calculation method of odd parity check: If there is an odd number of “1” in the current data bit, the odd parity check bit is set to 0. Otherwise, it is set to 1.

Calculation method of even parity check: If there is an odd number of “1” in the current data bit, the even parity check bit is set to 1. Otherwise, it is set to 0.

16.3.2 Basic Architecture

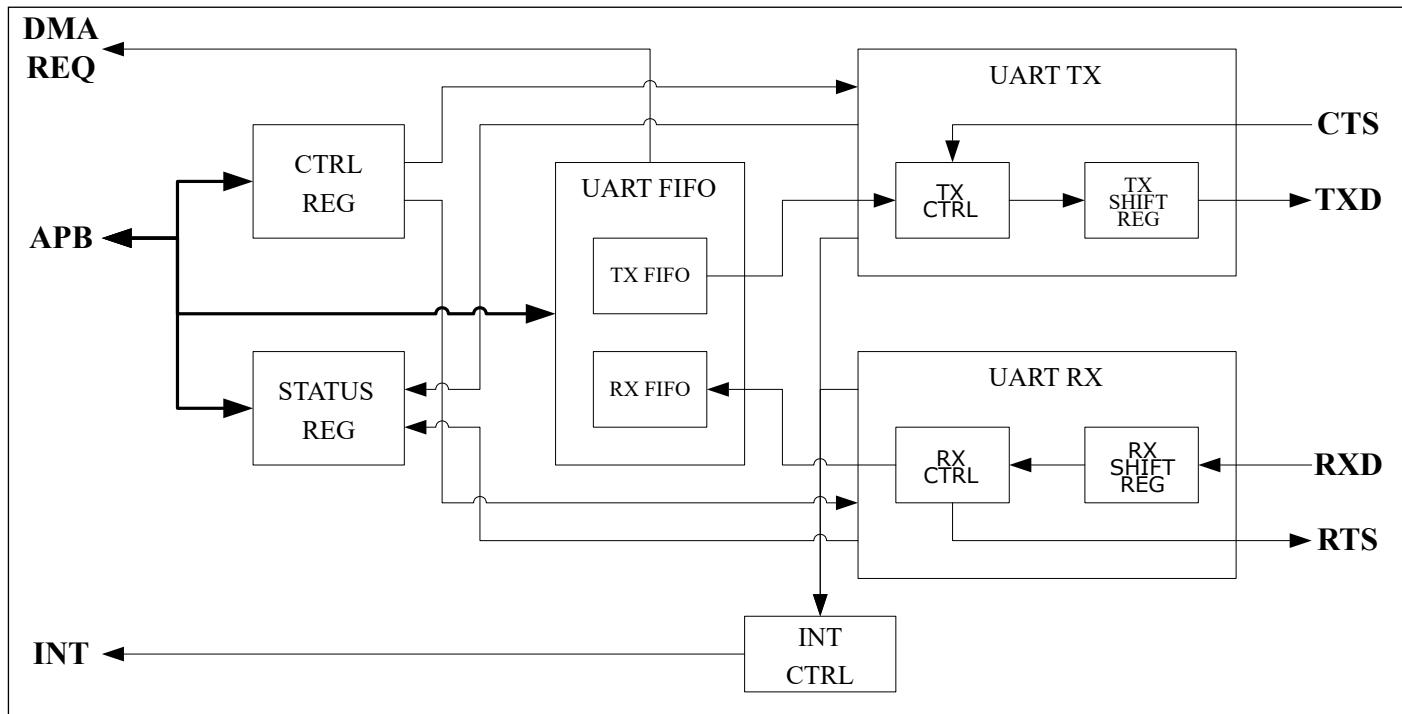


Fig. 16.2: UART Architecture

The UART has 3 clock sources: XCLK, 160MHz CLK and BCLK. The frequency divider in the clock is used to divide the frequency of the clock source and then generate the clock signal to drive the UART module.

The UART controller is divided into two functional blocks: transmitter and receiver.

16.3.3 Transmitter

The transmitter contains a 32-byte TX FIFO to store the data to be sent. When the transmission enable bit is set, the data stored in FIFO will be output from the TX pin. Software can transfer data into TX FIFO through DMA or APB bus. Software can check the status of transmitter by querying the remaining free space count value of TX FIFO through tx_fifo_cnt in the register uart_fifo_config_1.

FreeRun mode of transmitter:

- If the FreeRun mode is disabled, transmission will be terminated and an interrupt will be generated when the sent bytes reach the specified length. Before next transmission, you need to re-disable and enable the TxE bit.
- If the FreeRun mode is enabled, the transmitter will send when there is data in the TX FIFO, and will not stop working because the sent bytes reach the specified length.

16.3.4 Receiver

The receiver contains a 32-byte RX FIFO to store the received data. Software can check the status of receiver by querying the available data count value of RX FIFO through rx_fifo_cnt in the register uart_fifo_config_1. The low 8 bits of the register URX_RTO_TIMER are used to set a receiving timeout threshold, which will trigger an interrupt when the receiver fails to receive data beyond the threshold. The cr_urx_deg_en and cr_urx_deg_cnt in the register urx_config are used to enable the deburring function and set the threshold, which control the filtering part before sampling by UART. UART will filter out the burrs whose width is lower than the threshold in the waveform and then send it to sampling.

16.3.5 Baud Rate Setting

$$\text{Baudrate} = \frac{\text{UART_clk}}{\text{uart_prd} + 1}$$

The user can set the baud rate of RX and TX separately. Take TX as an example: the value of uart_prd is the value of the lower 16 bits cr_utx_bit_prd of the register UART_BIT_PRD. Since the maximum value of the 16-bit bit width coefficient is 65535, the minimum baud rate supported by UART is : UART_clk/65536.

Before sampling the data, UART will filter the data to remove the burrs in the waveform. Then, the data will be sampled at the intermediate value of the 16-bit width factor, so that the sampling time can be adjusted based on baud rates, to ensure that the intermediate value is always sampled, providing much higher flexibility and accuracy. The sampling process is shown as follows:

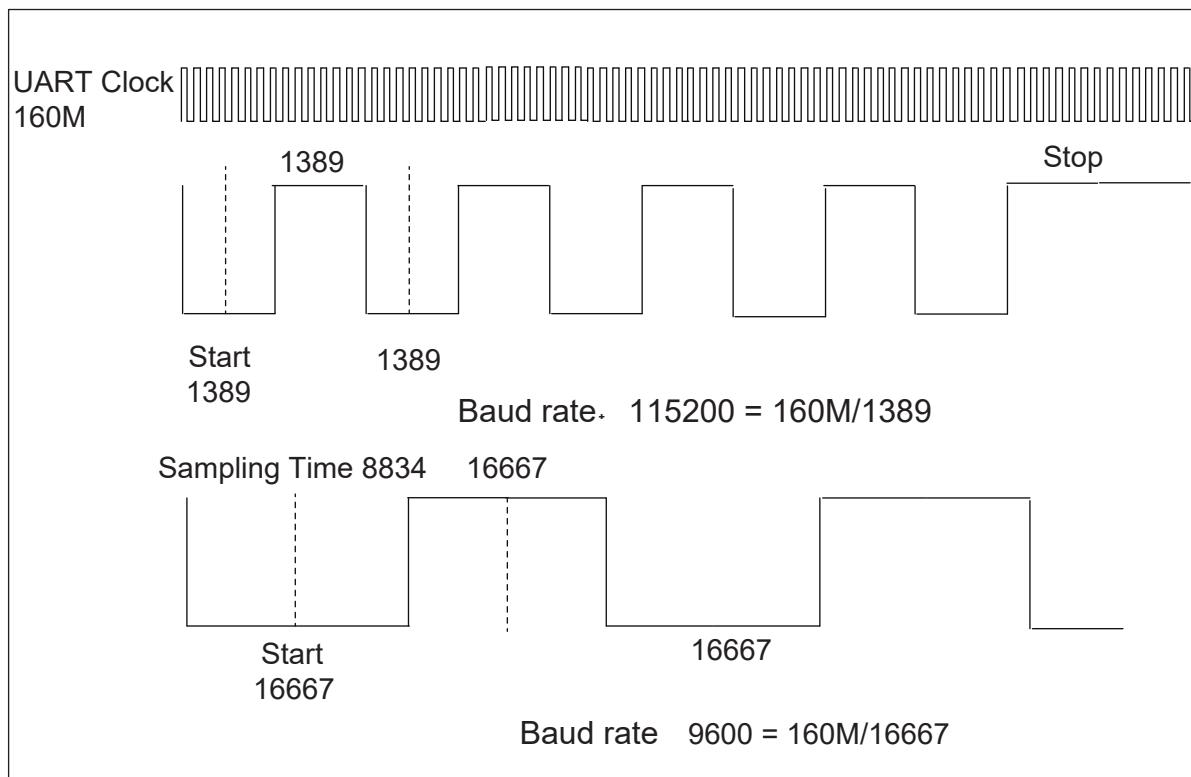


Fig. 16.3: UART Sampling Waveform

16.3.6 Filtering

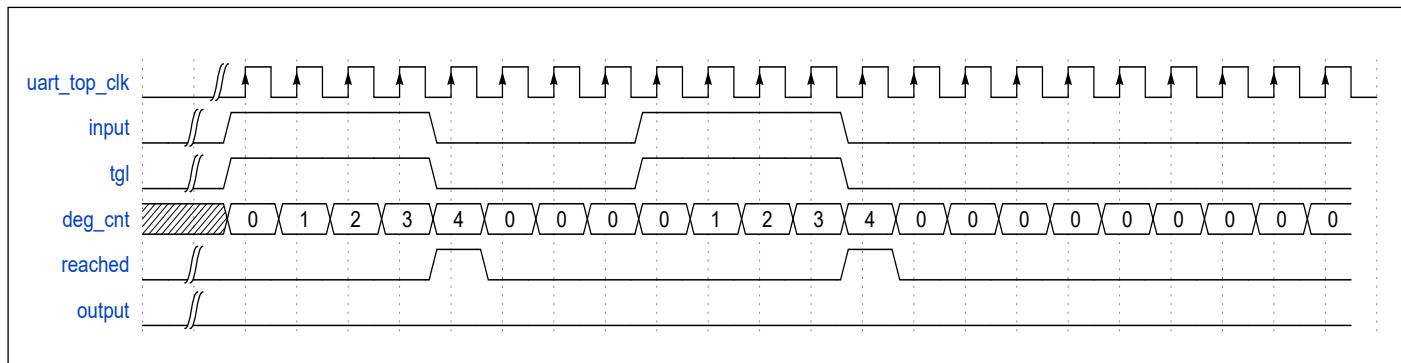


Fig. 16.4: UART Filter Waveform

When this function is enabled by configuring `cr_urx_deg_en` and the threshold is set by configuring `cr_urx_deg_cnt` in the register `urx_config`, UART will filter out the data that cannot meet the width threshold. As shown in the figure below, when the data width is 4, setting `cr_urx_deg_cnt` to 4 can meet this condition. “Input” is the initial data and “output” is the filtered data.

Filtering logic process:

- “Tgl” is the exclusive OR result of input and output.
- “Deg_cnt” counts from 0, and the counting condition is that “tgl” is at the high level and “reached” is at the low level.
- If the count value of `deg_cnt` reaches the value set by `cr_urx_deg_cnt`, `reached` is high level.
- When “reached” is at a high level, “input” is output to “output” .
- Note: user-defined condition for `deg_cnt`: “tgl” is at a high level and “reached” is at a low level. In other cases, “`deg_cnt`” will be cleared to 0.

16.3.7 Automatic Baud Rate Detection

The UART module supports automatic baud rate detection, which is divided into two modes, a generic mode and a fixed character (square wave) mode. The `cr_urx_abr_en` in the `urx_config` register enables auto baud rate detection, and when it is turned on, both detection modes are enabled.

Common mode

For any character data received, UART will count the number of clocks in the start bit width, which will then be written into the low 16 bits `sts_urx_abr_prd_start` in the register `STS_URX_ABR_PRD` and used to calculate the baud rate. So the correct baud rate can be obtained when the first received data bit is 1, such as ‘0x01’ under LSBFIRST.

Fixed character (square wave) mode

In this mode, after the UART module counts the number of clocks in the bit width, it will continue to count the number

of clocks in the subsequent data bits and compare it with the start bit. The check is passed, otherwise the count value is discarded. The allowable error can be set by setting the cr_urx_abr_pw_tol bit in the register urx_abr_pw_tol, and the unit is the clock source of the UART.

Therefore, only when the fixed character ‘0x55’ / ‘0xD5’ under LSB-FIRST or ‘0xAA’ / ‘0xAB’ under MSB-FIRST is received, the UART module will write the clock count value in the starting bit width into the high 16-bit sts_urx_abr_prd_0x55 of the register STS_URX_ABR_PRD. As shown below:

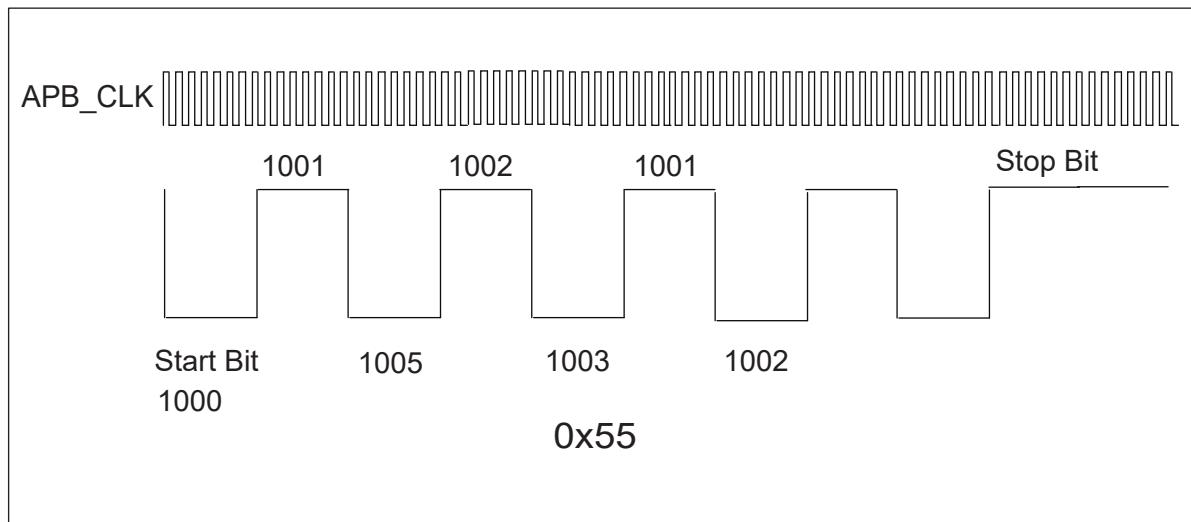


Fig. 16.5: Waveform of UART in fixed character mode

As shown above, assuming the maximum allowable error set is 4, for a received data with unknown baud rate, the UART uses UART_CLK to count the bit width of the starting bit as 1000, the bit width of the second bit as 1001, which is not more than 4 UART_CLK up or down from the previous bit width, then the UART will continue to count the third bit. The third bit is 1005, the difference with the starting bit is more than 4, the detection is not passed and the data is discarded. UART compares the first 6 bit widths of the data bits with the starting bit in turn.

Formula for calculating the detected baud rate:

$$\text{Baudrate} = \frac{\text{UART_clk}}{\text{Count} + 1}$$

16.3.8 Hardware Flow Control

UART supports hardware flow control in CTS/RTS mode to prevent data in FIFO from being lost due to too late processing. Hardware flow control connection is shown as follows:

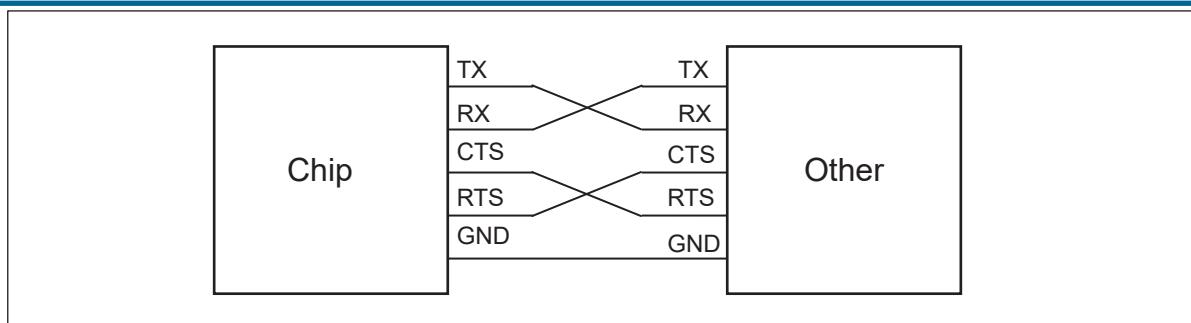


Fig. 16.6: UART hardware flow control

Require To Send (RTS) is an output signal, which indicates whether the chip is ready to receive data from the other side. This is valid at a low level denoting that the chip can receive data.

Clear To Send (CTS) is an input signal, which determines whether the chip can send data to the other side. This is valid at a low level denoting that the chip can send data to the other side.

When the hardware flow control function is enabled, the low level of chip's RTS indicates requesting the other side to send data, and the high level of that indicates informing the other side to stop sending data. When the chip detects that CTS goes high, TX will stop sending data, and continue sending until CTS goes low. If CTS goes high or low at any time during communication, it does not affect the continuity of data sent by TX, and the other side also can receive continuous data.

Two ways for hardware flow control of the transmitter:

- Hardware control (the cr_urx_rts_sw_mode in the register uart_sw_mode is 0): RTS goes high when cr_urx_en in the register urx_config is not turned on or the RX FIFO is almost full (one byte left).
- Software control(the cr_urx_rts_sw_mode in the register uart_sw_mode is 1): The level of RTS can be changed by configuring cr_urx_rts_sw_val in the register uart_sw_mode.

16.3.9 DMA Transfer

UART supports DMA transfer. Using DMA transfer, the TX and RX FIFO thresholds need to be set respectively by tx_fifo_th and rx_fifo_th in register uart_fifo_config_1. When this mode is enabled, if tx_fifo_cnt in uart_fifo_config_1 is greater than tx_fifo_th, a DMA TX request will be triggered. After the DMA is configured, when the DMA receives the request, it will move the data from the memory to the TX FIFO according to the settings. If the rx_fifo_cnt in uart_fifo_config_1 is greater than rx_fifo_th, the DMA RX request will be triggered. After the DMA is configured, when the DMA receives the request, it will transfer the data of the RX FIFO to the memory according to the settings.

In order to ensure the correctness of the data transferred by the chip DMA TX Channel, the following conditions need to be met in the Channel configuration: $(\text{transferWidth} * \text{burstSize}) \leq (\text{tx_fifo_th} + 1)$.

In order to ensure the integrity of the data transferred by the chip DMA RX Channel, the following conditions need to be met in the Channel configuration: $(\text{transferWidth} * \text{burstSize}) = (\text{rx_fifo_th} + 1)$.

16.3.10 Support for LIN Bus

The protocol for the Local Interconnect Network (LIN) is based on the Volvo-Lite technology developed by the Volvo spin-out company—Volvo Communications Technology (VCT). LIN is a complementary protocol to CAN and SAE J1850, suitable for applications that have low requirement for time or require no precise fault tolerance (as LIN is not as reliable as CAN). LIN aims to be easy to use as a low-cost alternative to CAN. The vehicle parts where LIN can be used include window regulator, rearview mirror, wiper, and rain sensor.

UART supports the LIN bus mode. The LIN bus is under the master-slave mode, and data is always initiated by the master node. The frame (header) sent by the master node contains synchronization interval field, synchronization byte field, and identifier field. A typical LIN data transfer is shown as follows.

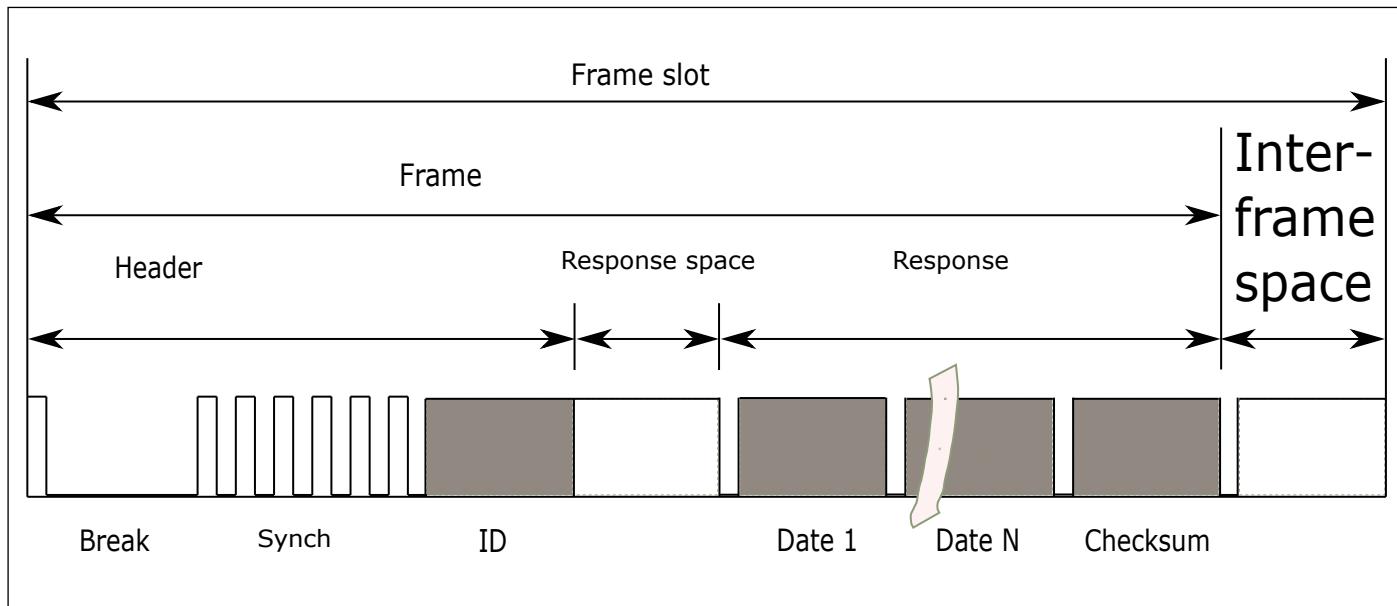


Fig. 16.7: A typical LIN frame

1. LIN Break Field

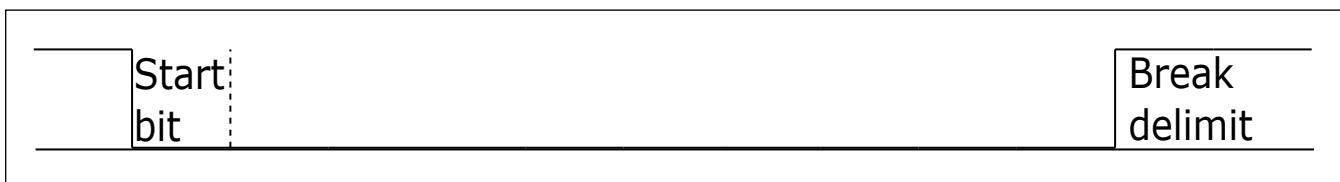


Fig. 16.8: Break Field of LIN

The synchronization interval field indicates the start of the message, with at least 13 dominant bits (including the start bit). The synchronization interval ends with an “interval separator”, which contains at least one recessive bit.

The length of the Break in the LIN frame can be set by `cr_utx_bit_cnt_b` in `utx_config`.

2. LIN Sync Field

A synchronization byte field is sent to determine the time between two falling edges, to determine the transmission rate used by the master node. The bit pattern is 0x55 (01010101, maximum number of falling edges).

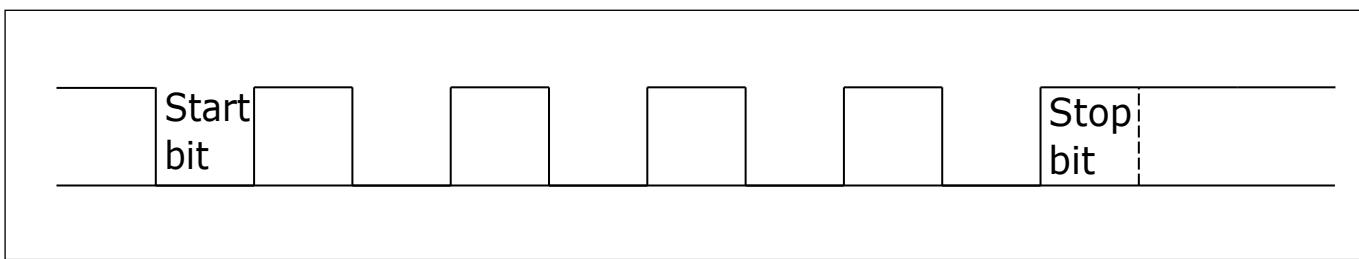


Fig. 16.9: Sync Field of LIN

3. LIN ID Field

The identifier field contains a 6-bit identifier and two parity check bits. The 6-bit identifier contains information about the sender and receiver, and the number of bytes required in the response. The parity check bit is calculated as follows: The check bit P0 is the result of logical OR operation among ID0, ID1, ID2, and ID4. The check bit P1 is the result of inversion after logical OR operation among ID1, ID3, ID4, and ID5.

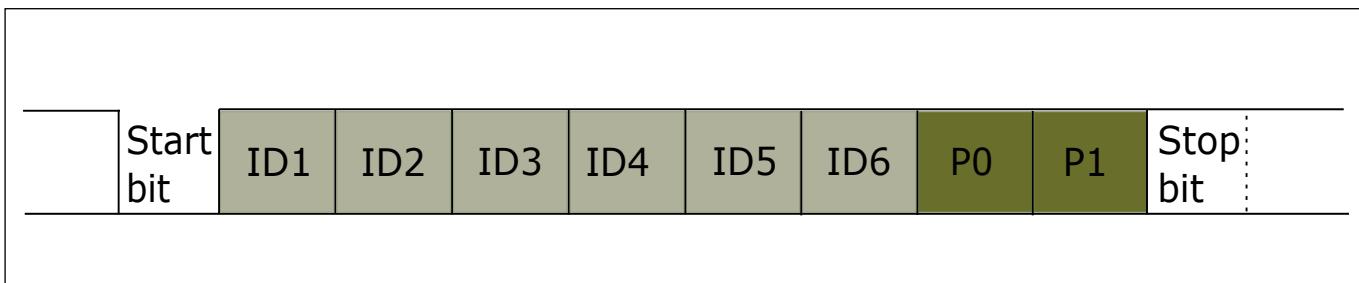


Fig. 16.10: ID Field of LIN

The slave node waits for the synchronization interval field, and then starts to synchronize between master and slave nodes through the synchronization byte field. Depending on the identifier sent by the master node, the slave node will receive, send or do not respond. The slave node that should send data sends the number of bytes requested by the master node, and then ends the transmission with a checksum field.

UART supports the LIN transfer mode. To enable this mode, you need to configure the cr_utx_bit_cnt_b by setting cr_utx_lin_en in the register utx_config so that the synchronization interval field consists of at least a 13-bit dominant level.

16.3.11 RS485 mode

UART supports the RS485 mode. After the cr_utx_rs485_en in the register UTX_RS485_CFG is set, UART can work in the RS485 mode. Then, UART can be connected to the RS485 bus through an external RS485 transceiver. In this mode, the RTS pin in the module performs the Dir function of transceiver. When UART has data to send, it will automatically control the RTS pin at a high level, so that the transceiver can send data to the bus. Contrarily, when UART has no data to send, it will automatically control the RTS at a low level, to keep the transceiver in the RX state.

UART supports the RS485 transfer mode. To enable this mode, you need to set cr_utx_rs485_pol and cr_utx_rs485_en in the register UTX_RS485_CFG.

16.3.12 UART Interrupt

UART supports the following interrupt control modes:

- TX end of transfer interrupt
- RX end interrupt
- TX FIFO request interrupt
- RX FIFO request interrupt
- RX timeout interrupt
- RX parity check error interrupt
- TX FIFO overflow interrupt
- RX FIFO overflow interrupt
- RX BCR interrupt
- LIN synchronization error interrupt
- Auto baud rate detection (universal mode) interrupt
- Auto baud rate detection (fixed characters mode) interrupt

16.3.13 TX/RX end of transfer interrupt

You can set a transfer length for TX and RX respectively by configuring the high 16 bits of the registers utx_config and urx_config. When the number of transferred bytes reaches this value, the corresponding TX/RX end of transfer interrupt will be triggered. While this interrupt is generated, TX stops working. To continue to use TX, you must re-initialize this module. Then, RX resumes to work. If the preset transfer length of TX is less than the data volume actually sent by TX, the other side can only receive the data equal to the transfer length, and the remaining data will be stored in TX FIFO. After this module is re-initialized, the data in TX FIFO can be sent out.

For TX, if the data continuously filled into the TX FIFO is greater than the set transmission length value, only the data

of the set length value will be transmitted on the TX pin, and the excess data will be kept in the TX FIFO, and the TX will be re-enabled. After the function, the remaining data in the TX FIFO will be sent out.

For example: set the TX transmission length value to 64, enable the TX function, first fill 63 bytes into the TX FIFO, these 63 bytes will be transmitted on the pins, but no TX transmission completion interrupt is generated, and then the TX FIFO is sent to the TX FIFO. Fill in 1 byte, at this time, the transmission length reaches the transmission length value set by TX, a transmission completion interrupt will be generated, and the TX function will stop. Continue to fill 1 byte into the TX FIFO, you will find that there is no data transmission on the pin, the byte is still retained in the TX FIFO, and the TX function is turned off and re-enabled, and the byte is sent out on the pin.

For RX, if the data length sent by the other party exceeds the set transmission length, RX can continue to receive data after the RX transmission completion interrupt is generated.

For example: set the RX transmission length value to 16, the other party sends 32 bytes of data, RX will generate an RX transmission completion interrupt when it receives 16 bytes of data, and continue to receive the remaining 16 bytes of data, all saved in the RX FIFO.

16.3.14 TX/RX FIFO request interrupt

A TX FIFO request interrupt will be generated when tx_fifo_cnt in uart_fifo_config_1 is greater than tx_fifo_th. When the condition is not met, the interrupt flag will be cleared automatically.

A RX FIFO request interrupt will be generated when rx_fifo_cnt in uart_fifo_config_1 is greater than rx_fifo_th. When the condition is not met, the interrupt flag will be cleared automatically.

TX/RX supports multiple rounds of transmission/receiving, instead of reaching the value set by tx_fifo_th/rx_fifo_th at a time.

E.g:

1. Set tx_fifo_th/rx_fifo_th in register uart_fifo_config_1 to 16.
2. Set cr_utx_frm_en in register utx_config to enable free run mode.
3. Set cr_utx_frdy_mask/cr_urx_frdy_mask in register uart_int_mask to 0, and enable FIFO interrupt of TX/RX.
4. Set cr_utx_en/cr_urx_en in register utx_config/urx_config to enable TX/RX.
5. TX FIFO interrupt: TX will always enter the FIFO interrupt, when the chip sends 128 bytes, set cr_utx_frdy_mask to 1 to shield the interrupt. If you want to enter the TX FIFO interrupt again, set cr_utx_frdy_mask to 0.
6. RX FIFO interrupt: the other party first sends 15 bytes, no interrupt is generated, at this time, the value of rx_fifo_cnt is 15, and an interrupt is generated when 1 byte is sent again to reach the value set by rx_fifo_th. After the transmission is interrupted, the other party sends the data again, and the chip can receive the data.

16.3.15 RX timeout interrupt

The RX timeout interrupt generation condition is: after receiving data last time, the receiver will start timing, and the interrupt will be triggered when the timing value exceeds the timeout threshold and the next data has not been received. The time-out threshold value is in the unit of communication bit.

When the other party sends data to the chip, a timeout interrupt will be generated after the set timeout period is reached.

16.3.16 RX parity check error interrupt

The RX parity check error interrupt will be generated when a parity check error occurs. But it does not affect the RX, which still can correctly receive and analyze the data sent by the other side. When receiving data, RX takes the first 8 bits as data bits and ignores parity check bits, ensuring data consistency.

For example, you can enable parity check by setting cr_utx_prt_en/cr_urx_prt_en in the register utx_config/urx_config, and select the parity check type by setting cr_utx_prt_sel/cr_urx_prt_sel in the register utx_config/urx_config. When the other side sends data to the chip through odd/even parity check, the parity check of RX is disabled, but RX can receive correct data.

16.3.17 TX/RX FIFO overflow interrupt

If the TX/RX FIFO overflows or underflows, it will trigger the corresponding overflow interrupt. When the tx_fifo_clr and rx_fifo_clr bits in the FIFO clear bit register UART_FIFO_CONFIG_0 are set to 1, the corresponding FIFO will be cleared and the overflow interrupt flag will be cleared automatically. You can query the interrupt status through the register UART_INT_STS, and clear the interrupt by writing 1 to the corresponding bit in the register UART_INT_CLEAR.

16.3.18 RX BCR interrupt

A BCR interrupt will be generated when the data received by RX reaches the value set by cr_urx_bcr_value in the register urx_bcr_int_cfg.

The difference from RX END interrupt is that END interrupt is suitable for receiving data of known length, while BCR interrupt can be used to receive interrupts of unknown length. The trigger position of the END interrupt is controlled by cr_urx_len, and the counter will be cleared to 0 when an interrupt is triggered. The trigger position of BCR interrupt is controlled by cr_urx_bcr_value. When the interrupt is triggered, the counter will accumulate instead of being cleared to 0, but it can be cleared by software (cr_urx_bcr_clr). When the BCR interrupt is used together with the chained DMA, if you do not know how much data has been transferred by DMA, you can check it through “count” .

16.3.19 LIN synchronization error interrupt

When cr_utx_lin_en in utx_config is enabled, the LIN mode is enabled. Then, if the synchronization field of the LIN bus is not detected when data is received in this mode, the LIN synchronization error interrupt will be generated.

16.3.20 Auto baud rate detection (universal/fixed characters mode) interrupt

In the auto baud rate detection mode, when a baud rate is detected, the auto baud rate detection (universal/fixed characters mode) interrupt will be generated as configured.


16.4 Register description

Name	Description
utx_config	
urx_config	
uart_bit_prd	
data_config	
utx_ir_position	
urx_ir_position	
urx_rto_timer	
uart_sw_mode	
uart_int_sts	UART interrupt status
uart_int_mask	UART interrupt mask
uart_int_clear	UART interrupt clear
uart_int_en	UART interrupt enable
uart_status	
sts_urx_abr_prd	
urx_abr_prd_b01	
urx_abr_prd_b23	
urx_abr_prd_b45	
urx_abr_prd_b67	
urx_abr_pw_tol	
urx_bcr_int_cfg	
utx_rs485_cfg	

Name	Description
uart_fifo_config_0	
uart_fifo_config_1	
uart_fifo_wdata	
uart_fifo_rdata	

16.4.1 utx_config

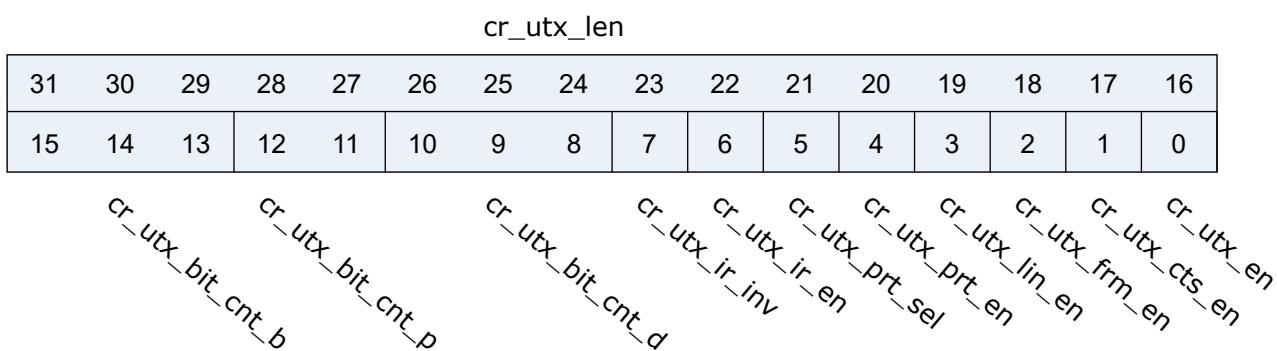Address: 0x2000a000




Bits	Name	Type	Reset	Description
31:16	cr_utx_len	r/w	16'd0	Length of UART TX data transfer (Unit: character/byte) (Don't-care if cr_utx_frm_en is enabled)
15:13	cr_utx_bit_cnt_b	r/w	3'd4	UART TX BREAK bit count (for LIN protocol) Note: Additional 8 bit times will be added since LIN Break field requires at least 13 bit times
12:11	cr_utx_bit_cnt_p	r/w	2'd1	UART TX STOP bit count (unit: 0.5 bit)
10:8	cr_utx_bit_cnt_d	r/w	3'd7	UART TX DATA bit count for each character
7	cr_utx_ir_inv	r/w	1'b0	Inverse signal of UART TX output in IR mode
6	cr_utx_ir_en	r/w	1'b0	Enable signal of UART TX IR mode
5	cr_utx_prt_sel	r/w	1'b0	Select signal of UART TX parity bit 1: Odd parity 0: Even parity
4	cr_utx_prt_en	r/w	1'b0	Enable signal of UART TX parity bit
3	cr_utx_lin_en	r/w	1'b0	Enable signal of UART TX LIN mode (LIN header will be sent before sending data)

Bits	Name	Type	Reset	Description
2	cr_utx_frm_en	r/w	1'b0	Enable signal of UART TX freerun mode (utx_end_int will be disabled)
1	cr_utx_cts_en	r/w	1'b0	Enable signal of UART TX CTS flow control function
0	cr_utx_en	r/w	1'b0	Enable signal of UART TX function Asserting this bit will trigger the transaction, and should be de-asserted after finish

16.4.2 urx_config

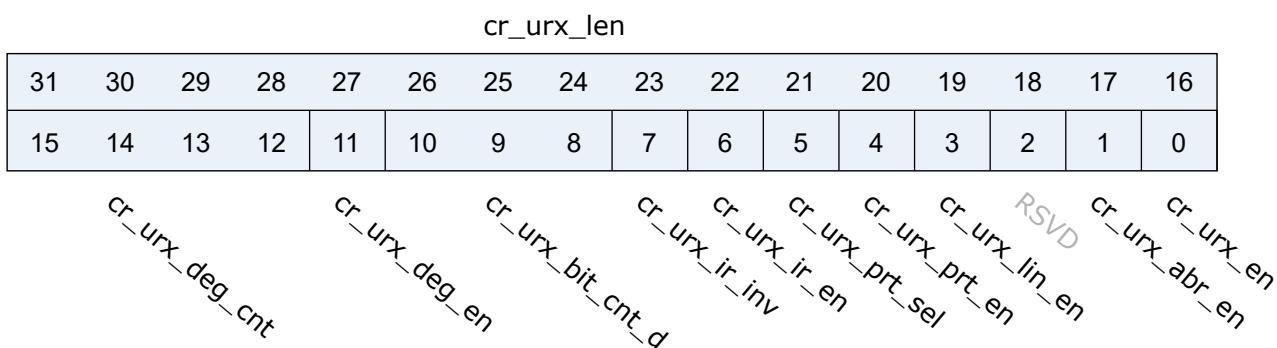Address: 0x2000a004



Bits	Name	Type	Reset	Description
31:16	cr_urx_len	r/w	16'd0	Length of UART RX data transfer (Unit: character/byte) urx_end_int will assert when this length is reached
15:12	cr_urx_deg_cnt	r/w	4'd0	De-glitch function cycle count
11	cr_urx_deg_en	r/w	1'b0	Enable signal of RXD input de-glitch function
10:8	cr_urx_bit_cnt_d	r/w	3'd7	UART RX DATA bit count for each character
7	cr_urx_ir_inv	r/w	1'b0	Inverse signal of UART RX input in IR mode
6	cr_urx_ir_en	r/w	1'b0	Enable signal of UART RX IR mode
5	cr_urx_prt_sel	r/w	1'b0	Select signal of UART RX parity bit 1: Odd parity 0: Even parity
4	cr_urx_prt_en	r/w	1'b0	Enable signal of UART RX parity bit
3	cr_urx_lin_en	r/w	1'b0	Enable signal of UART RX LIN mode (LIN header will be required and checked before receiving data)
2	RSVD			

Bits	Name	Type	Reset	Description
1	cr_urx_abr_en	r/w	1'b0	Enable signal of UART RX Auto Baud Rate detection function
0	cr_urx_en	r/w	1'b0	Enable signal of UART RX function

16.4.3 uart_bit_prd

Address: 0x2000a008

cr_urx_bit_prd

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

cr_utx_bit_prd

Bits	Name	Type	Reset	Description
31:16	cr_urx_bit_prd	r/w	16'd255	Period of each UART RX bit, related to baud rate
15:0	cr_utx_bit_prd	r/w	16'd255	Period of each UART TX bit, related to baud rate

16.4.4 data_config

Address: 0x2000a00c

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

RSVD	cr_uart_bit_inv															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

Bits	Name	Type	Reset	Description
31:1	RSVD			
0	cr_uart_bit_inv	r/w	1'b0	Bit-inverse signal for each data byte 0: Each byte is sent out LSB-first 1: Each byte is sent out MSB-first

16.4.5 utx_ir_position

Address: 0x2000a010

cr_utx_ir_pos_p

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

cr_utx_ir_pos_s

Bits	Name	Type	Reset	Description
31:16	cr_utx_ir_pos_p	r/w	16'd159	STOP position of UART TX IR pulse
15:0	cr_utx_ir_pos_s	r/w	16'd112	START position of UART TX IR pulse

16.4.6 urx_ir_position

Address: 0x2000a014

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

cr_urx_ir_pos_s

Bits	Name	Type	Reset	Description
31:16	RSVD			
15:0	cr_urx_ir_pos_s	r/w	16'd111	START position of UART RXD pulse recovered from IR signal

16.4.7 urx_rto_timer

Address: 0x2000a018

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

cr_urx_rto_value

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	cr_urx_rto_value	r/w	8'd15	Time-out value for triggering RTO interrupt (unit: bit time)

16.4.8 uart_sw_mode

Address: 0x2000a01c

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

RSVD RSVD

cr_urx_rts_sw_val cr_utx_txd_sw_mode cr_utx_txd_sw_val cr_utx_txd_sw_mode

Bits	Name	Type	Reset	Description
31:4	RSVD			
3	cr_urx_rts_sw_val	r/w	1'b0	UART RX RTS output SW control value
2	cr_urx_rts_sw_mode	r/w	1'b0	UART RX RTS output SW control mode
1	cr_utx_txd_sw_val	r/w	1'b0	UART TX TXD output SW control value
0	cr_utx_txd_sw_mode	r/w	1'b0	UART TX TXD output SW control mode

16.4.9 uart_int_sts

Address: 0x2000a020

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

RSVD RSVD

urx_ad5_int urx_ads_int urx_bcr_int urx_lse_int urx_fer_int utx_fer_int urx_pce_int urx_rto_int urx_frdy_int urx_end_int utx_end_int

Bits	Name	Type	Reset	Description
31:12	RSVD			
11	urx_ad5_int	r	1'b0	UART RX ABR Detection finish interrupt using codeword 0x55
10	urx_ads_int	r	1'b0	UART RX ABR Detection finish interrupt using START bit
9	urx_bcr_int	r	1'b0	UART RX byte count reached interrupt
8	urx_lse_int	r	1'b0	UART RX LIN mode sync field error interrupt
7	urx_fer_int	r	1'b0	UART RX FIFO error interrupt, auto-cleared when FIFO overflow/underflow error flag is cleared
6	utx_fer_int	r	1'b0	UART TX FIFO error interrupt, auto-cleared when FIFO overflow/underflow error flag is cleared
5	urx_pce_int	r	1'b0	UART RX parity check error interrupt
4	urx_rto_int	r	1'b0	UART RX Time-out interrupt
3	urx_frdy_int	r	1'b0	UART RX FIFO ready ($rx_fifo_cnt > rx_fifo_th$) interrupt, auto-cleared when data is popped
2	utx_frdy_int	r	1'b1	UART TX FIFO ready ($tx_fifo_cnt > tx_fifo_th$) interrupt, auto-cleared when data is pushed
1	urx_end_int	r	1'b0	UART RX transfer end interrupt (set according to cr_urx_len)
0	utx_end_int	r	1'b0	UART TX transfer end interrupt (set according to cr_utx_len)

16.4.10 uart_int_mask

Address: 0x2000a024

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

RSVD RSVD RSVD RSVD cr_urx_ad5_mask cr_urx_ads_mask cr_urx_bcr_mask cr_urx_lse_mask cr_utx_fer_mask cr_urx_frdy_mask cr_urx_rto_mask cr_utx_frdy_mask cr_urx_end_mask cr_utx_end_mask

Bits	Name	Type	Reset	Description
31:12	RSVD			
11	cr_urx_ad5_mask	r/w	1'b1	Interrupt mask of urx_ad5_int
10	cr_urx_ads_mask	r/w	1'b1	Interrupt mask of urx_ads_int
9	cr_urx_bcr_mask	r/w	1'b1	Interrupt mask of urx_bcr_int
8	cr_urx_lse_mask	r/w	1'b1	Interrupt mask of urx_lse_int
7	cr_urx_fer_mask	r/w	1'b1	Interrupt mask of urx_fer_int
6	cr_utx_fer_mask	r/w	1'b1	Interrupt mask of utx_fer_int
5	cr_urx_pce_mask	r/w	1'b1	Interrupt mask of urx_pce_int
4	cr_urx_rto_mask	r/w	1'b1	Interrupt mask of urx_rto_int
3	cr_urx_frdy_mask	r/w	1'b1	Interrupt mask of urx_frdy_int
2	cr_utx_frdy_mask	r/w	1'b1	Interrupt mask of utx_frdy_int
1	cr_urx_end_mask	r/w	1'b1	Interrupt mask of urx_end_int
0	cr_utx_end_mask	r/w	1'b1	Interrupt mask of utx_end_int

16.4.11 uart_int_clear

Address: 0x2000a028

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | |

RSVD RSVD RSVD RSVD cr_urx_ad5_clr cr_urx_ads_clr cr_urx_bcr_clr cr_urx_lse_clr rsvd rsvd cr_urx_pce_clr cr_urx_rto_clr rsvd rsvd cr_urx_end_clr cr_utx_end_clr

Bits	Name	Type	Reset	Description
31:12	RSVD			
11	cr_urx_ad5_clr	w1c	1'b0	Interrupt clear of urx_ad5_int
10	cr_urx_ads_clr	w1c	1'b0	Interrupt clear of urx_ads_int
9	cr_urx_bcr_clr	w1c	1'b0	Interrupt clear of urx_bcr_int
8	cr_urx_lse_clr	w1c	1'b0	Interrupt clear of urx_lse_int

Bits	Name	Type	Reset	Description
7	rsvd	rsvd	1'b0	
6	rsvd	rsvd	1'b0	
5	cr_urx_pce_clr	w1c	1'b0	Interrupt clear of urx_pce_int
4	cr_urx_rto_clr	w1c	1'b0	Interrupt clear of urx_rto_int
3	rsvd	rsvd	1'b0	
2	rsvd	rsvd	1'b0	
1	cr_urx_end_clr	w1c	1'b0	Interrupt clear of urx_end_int
0	cr_utx_end_clr	w1c	1'b0	Interrupt clear of utx_end_int

16.4.12 uart_int_en

Address: 0x2000a02c

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

RSVD RSVD RSVD RSVD cr_urx_ad5_en cr_urx_ads_en cr_urx_bcr_en cr_urx_lse_en cr_urx_fer_en cr_utx_fer_en cr_urx_pce_en cr_urx_rto_en cr_urx_frdy_en cr_utx_frdy_en cr_utx_end_en cr_urx_end_en

Bits	Name	Type	Reset	Description
31:12	RSVD			
11	cr_urx_ad5_en	r/w	1'b1	Interrupt enable of urx_ad5_int
10	cr_urx_ads_en	r/w	1'b1	Interrupt enable of urx_ads_int
9	cr_urx_bcr_en	r/w	1'b1	Interrupt enable of urx_bcr_int
8	cr_urx_lse_en	r/w	1'b1	Interrupt enable of urx_lse_int
7	cr_urx_fer_en	r/w	1'b1	Interrupt enable of urx_fer_int
6	cr_utx_fer_en	r/w	1'b1	Interrupt enable of utx_fer_int
5	cr_urx_pce_en	r/w	1'b1	Interrupt enable of urx_pce_int
4	cr_urx_rto_en	r/w	1'b1	Interrupt enable of urx_rto_int
3	cr_urx_frdy_en	r/w	1'b1	Interrupt enable of urx_frdy_int

Bits	Name	Type	Reset	Description
2	cr_utx_frdy_en	r/w	1'b1	Interrupt enable of utx_frdy_int
1	cr_urx_end_en	r/w	1'b1	Interrupt enable of urx_end_int
0	cr_utx_end_en	r/w	1'b1	Interrupt enable of utx_end_int

16.4.13 uart status

Address: 0x2000a030

Bits	Name	Type	Reset	Description
31:2	RSVD			
1	sts_urx_bus_busy	r	1'b0	Indicator of UART RX bus busy
0	sts_utx_bus_busy	r	1'b0	Indicator of UART TX bus busy

16.4.14 sts_urx_abr_prd

Address: 0x2000a034

sts_urx_abr_prd_0x55

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

sts_urx_abr_prd_start

Bits	Name	Type	Reset	Description
31:16	sts_urx_abr_prd_0x55	r	16'd0	Bit period of Auto Baud Rate detection using codeword 0x55

Bits	Name	Type	Reset	Description
15:0	sts_urx_abr_prd_start	r	16'd0	Bit period of Auto Baud Rate detection using START bit

16.4.15 urx_abr_prd_b01

Address: 0x2000a038

sts_urx_abr_prd_bit1

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

sts_urx_abr_prd_bit0

Bits	Name	Type	Reset	Description
31:16	sts_urx_abr_prd_bit1	r	16'd0	Bit period of Auto Baud Rate detection - bit[1]
15:0	sts_urx_abr_prd_bit0	r	16'd0	Bit period of Auto Baud Rate detection - bit[0]

16.4.16 urx_abr_prd_b23

Address: 0x2000a03c

sts_urx_abr_prd_bit3

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

sts_urx_abr_prd_bit2

Bits	Name	Type	Reset	Description
31:16	sts_urx_abr_prd_bit3	r	16'd0	Bit period of Auto Baud Rate detection - bit[3]
15:0	sts_urx_abr_prd_bit2	r	16'd0	Bit period of Auto Baud Rate detection - bit[2]

16.4.17 urx_abr_prd_b45

Address: 0x2000a040

sts_urx_abr_prd_bit5

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

sts_urx_abr_prd_bit4

Bits	Name	Type	Reset	Description
31:16	sts_urx_abr_prd_bit5	r	16'd0	Bit period of Auto Baud Rate detection - bit[5]
15:0	sts_urx_abr_prd_bit4	r	16'd0	Bit period of Auto Baud Rate detection - bit[4]

16.4.18 urx_abr_prd_b67

Address: 0x2000a044

sts_urx_abr_prd_bit7

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

sts_urx_abr_prd_bit6

Bits	Name	Type	Reset	Description
31:16	sts_urx_abr_prd_bit7	r	16'd0	Bit period of Auto Baud Rate detection - bit[7]
15:0	sts_urx_abr_prd_bit6	r	16'd0	Bit period of Auto Baud Rate detection - bit[6]

16.4.19 urx_abr_pw_tol

Address: 0x2000a048

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

cr_urx_abr_pw_tol

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	cr_urx_abr_pw_tol	r/w	8'd3	Auto Baud Rate detection pulse-width tolerance for using codeword 0x55

16.4.20 urx_bcr_int_cfg

Address: 0x2000a050

sts_urx_bcr_count

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

cr_urx_bcr_value

Bits	Name	Type	Reset	Description
31:16	sts_urx_bcr_count	r	16'd0	Current byte count of urx_bcr_int counter, auto-cleared by cr_urx_bcr_clr
15:0	cr_urx_bcr_value	r/w	16'hFFFF	Byte count setting for urx_bcr_int counter

16.4.21 utx_rs485_cfg

Address: 0x2000a054

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

cr_utx_rs485_en

cr_utx_rs485_pol

Bits	Name	Type	Reset	Description
31:2	RSVD			
1	cr_utx_rs485_pol	r/w	1'b1	DE pin polarity in RS-485 transceiver mode 1'b0: DE is active-low 1'b1: DE is active-high
0	cr_utx_rs485_en	r/w	1'b0	Enable signal for RS-485 transceiver mode 1'b0: Disabled, normal UART 1'b1: Enabled, IO is connected to RS-485 transceiver and RTS_O becomes DE function

16.4.22 uart_fifo_config_0

Address: 0x2000a080

Bits	Name	Type	Reset	Description
31:8	RSVD			
7	rx_fifo_underflow	r	1'b0	Underflow flag of RX FIFO, can be cleared by rx_fifo_clr
6	rx_fifo_overflow	r	1'b0	Overflow flag of RX FIFO, can be cleared by rx_fifo_clr
5	tx_fifo_underflow	r	1'b0	Underflow flag of TX FIFO, can be cleared by tx_fifo_clr
4	tx_fifo_overflow	r	1'b0	Overflow flag of TX FIFO, can be cleared by tx_fifo_clr
3	rx_fifo_clr	w1c	1'b0	Clear signal of RX FIFO
2	tx_fifo_clr	w1c	1'b0	Clear signal of TX FIFO
1	uart_dma_rx_en	r/w	1'b0	Enable signal of dma_rx_req/ack interface
0	uart_dma_tx_en	r/w	1'b0	Enable signal of dma_tx_req/ack interface

16.4.23 uart_fifo_config_1

Address: 0x2000a084

Bits	Name	Type	Reset	Description
31:29	RSVD			
28:24	rx_fifo_th	r/w	5'd0	RX FIFO threshold, dma_rx_req will not be asserted if rx_fifo_cnt is less than this value
23:21	RSVD			
20:16	tx_fifo_th	r/w	5'd0	TX FIFO threshold, dma_tx_req will not be asserted if tx_fifo_cnt is less than this value
15:14	RSVD			
13:8	rx_fifo_cnt	r	6'd0	RX FIFO available count
7:6	RSVD			
5:0	tx_fifo_cnt	r	6'd32	TX FIFO available count

16.4.24 uart_fifo_wdata

Address: 0x2000a088

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | |

uart_fifo_wdata

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	uart_fifo_wdata	w	x	

16.4.25 uart_fifo_rdata

Address: 0x2000a08c

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	uart_fifo_rdata	r	8'h0	

17.1 Overview

Inter-Integrated Circuit (I2C) is a serial communication bus, which uses a multi-slave and multi-master architecture and is connected to low-speed peripherals. Each device has a unique address identifier and can be used as a transmitter or receiver. The address of each device connected to the bus can be set by software through a unique address and the existing master or slave relation. The master can work as a master transmitter or a master receiver. If two or more masters are initialized at the same time, data can be prevented from being damaged through conflict detection and arbitration during transmission.

BL808 has four I2C controller masters, whose slaveAddr, subAddr, and data to be transferred can be flexibly configured, to facilitate communication with slaves. With the FIFO of 2-word depth and interrupt function, it can be used with DMA to improve efficiency and supports flexible adjustment of clock frequency.

17.2 Features

- Master mode
- Multi-master mode and arbitration function
- Flexible control of the level duration of the start, end and data transmission phases in segments
- Supports 7-bit address mode and 10-bit address mode
- Supports DMA transfer mode
- Supports multiple interrupt mechanisms

17.3 Functional Description

Table 17.1: I2C pin list

Name	Type	Description
I2Cx_SCL	Input/output	I2C serial clock signal
I2Cx_SDA	Input/output	I2C serial data signal

17.3.1 Start and stop conditions

All transmissions start with a START condition and end with a STOP condition. The START and STOP conditions are generally generated by the master. The bus is considered to be busy after the START condition and to be idle for a certain period of time after the STOP condition.

START condition: SDA produces a high-to-low level transition when SCL is high;

STOP condition: SDA produces a low-to-high level transition when SCL is high.

Waveform diagram:

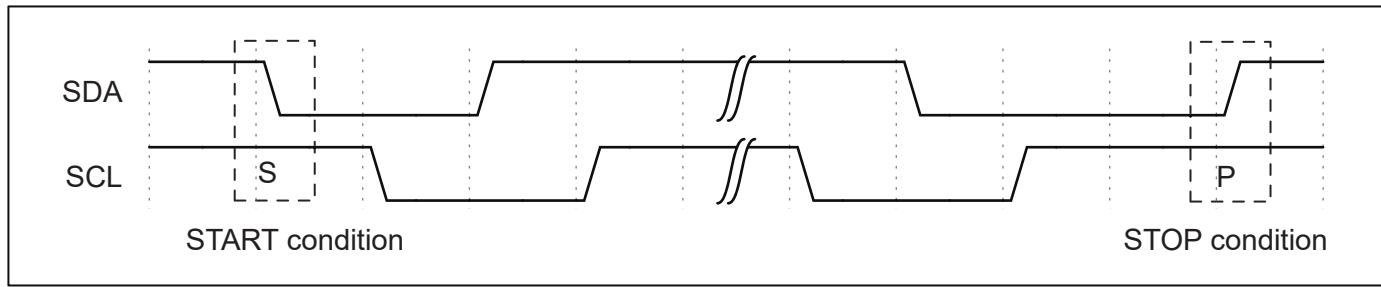


Fig. 17.1: Start and stop conditions of I2C

17.3.2 Data Transfer Format

1. 7-bit address mode:

The first 8 bits transferred are addressing bytes, including a 7-bit slave address and a 1-bit direction bit. Sending or receiving data by the master is controlled by the 8th bit in the first byte sent by the master. If it is 0, it means that the data is sent by the master, while “1” indicates that data is received by the master. After the direction bit is the answer bit (ACK), which is sent by the slave to answer (pull the signal low) and the host starts transmitting the specified length of data after receiving the answer. Upon data transfer completed, the master sends out a STOP signal, with waveform shown below:

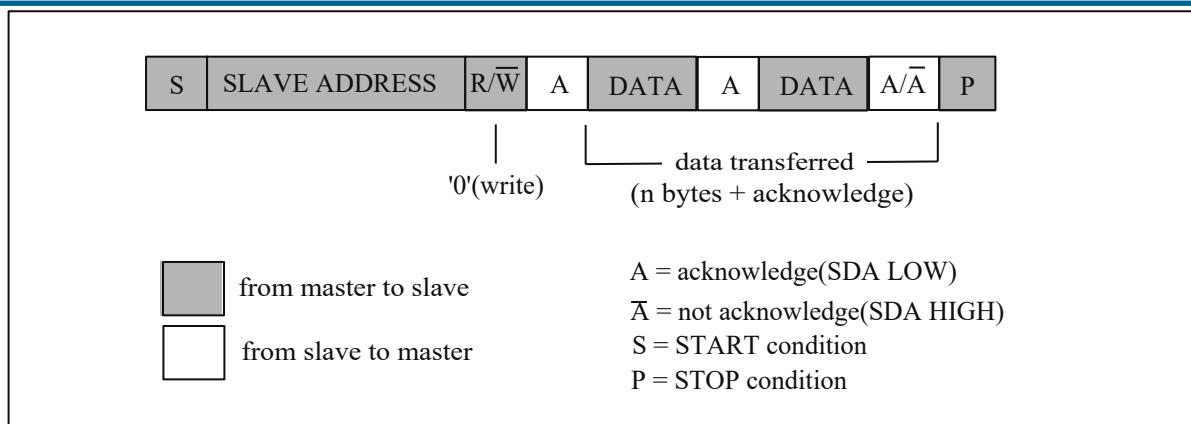


Fig. 17.2: Master transmit and slave receive data formats

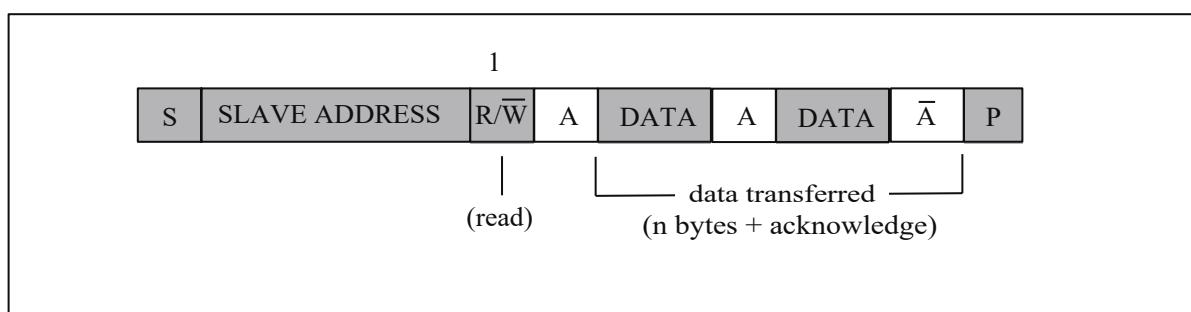


Fig. 17.3: Master receive and slave transmit data formats

Master Transmit and Slave Receive Timing

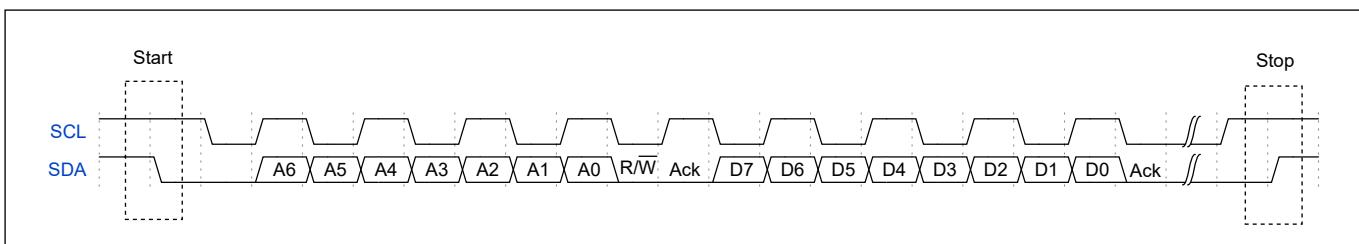


Fig. 17.4: Timing of master transmitter and slave receiver

Master Receive and Slave Transmit Timing

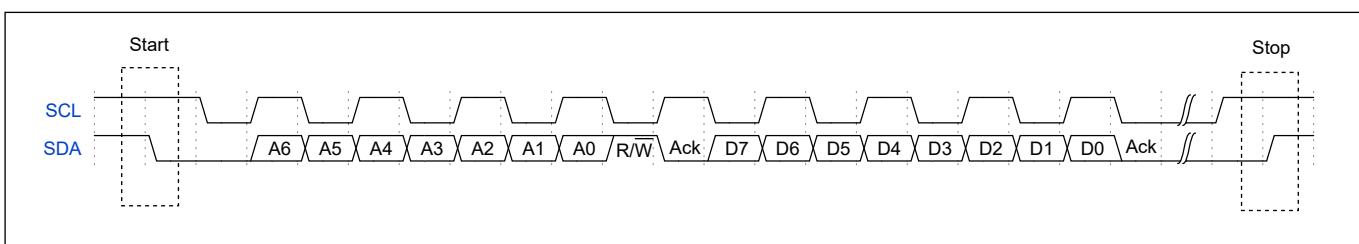


Fig. 17.5: Timing of master receiver and slave transmitter

2. 10-bit address mode

The cr_i2c_10b_addr_en in the register i2c_config must be set to 1 before use.

The 10-bit slave address consists of the two bytes after the START condition (S) or the repeated START condition (Sr). The first 7 bits of the first byte are 1111 0XX, where XX are the first two bits of MSB of the 10-bit address. The 8th bit of the first byte is the read/write bit that determines the transfer direction. The second byte is the remaining low 8 bits of the 10 bit address. The data transfer format is as follows.

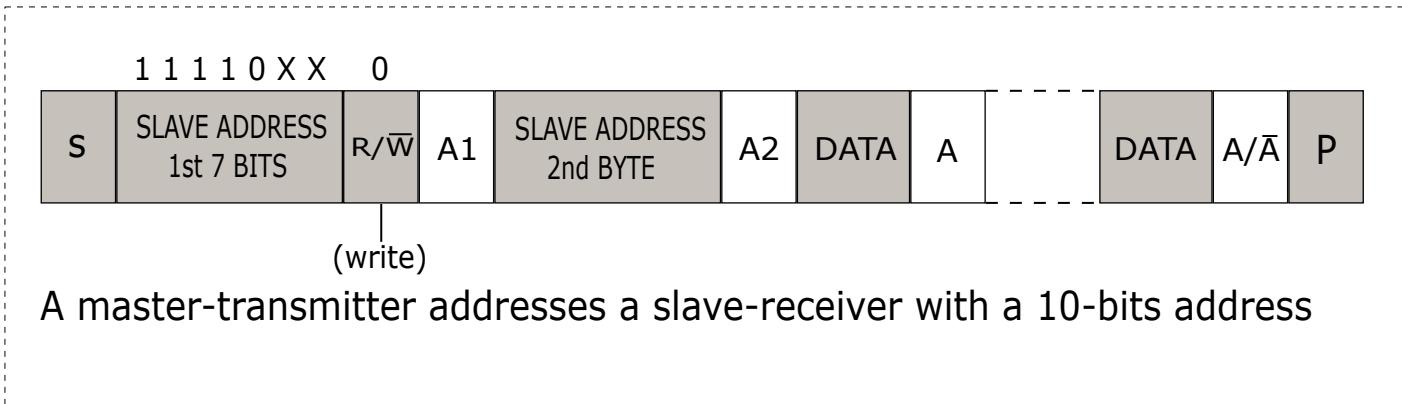


Fig. 17.6: Master transmit and slave receive data format (10bit slave address)

When receiving the 10-bit address following the START condition, the slave compares the first byte (1111 0XX) of the slave address with its own address, and checks whether the eighth bit (read/write bit) is 0. If the value of XX in the first byte is the same as the top two bits of the slave's 10 bit address, the first byte match passes and the slave will give answer A. If there are multiple slave devices connected to the bus, more than one device may match and generate answer A. Next, all slaves start to match the second byte (XXXX XXXX), where only one slave will have the exact same lower eight bits of the 10 bit address as the second byte, and that slave will give answer A. The slave that is addressed by the master will remain addressed until it receives a termination condition or a repeat start condition.

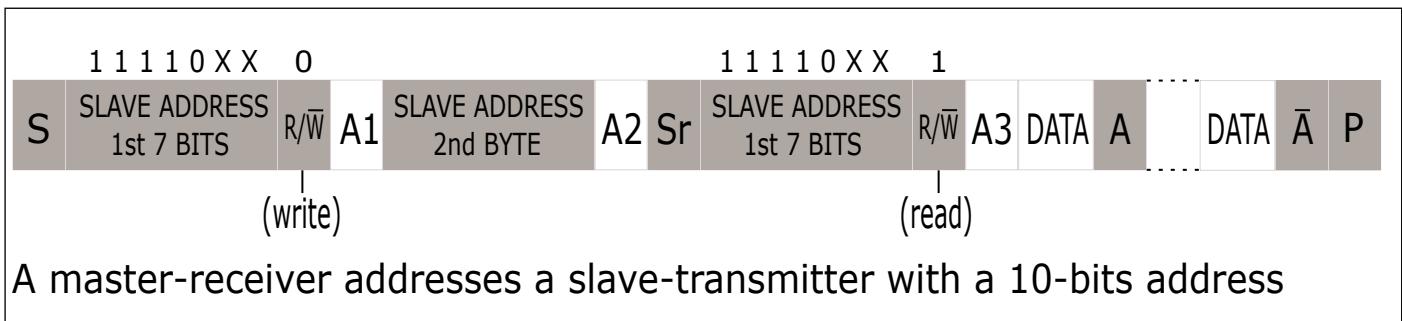


Fig. 17.7: Master receive and slave transmit data format (10bit slave address)

Before the second acknowledgement A, the process is the same as that of the master-transmitter addressing the slave-receiver. After the repeated START condition (Sr), the matched slave will remain in the addressed state. This slave will check whether the first 7 bits of the first byte after Sr are 1111 0XX, and then test whether the 8th bit is 1 (read). If this also matches, the slave considers that it is addressed as a transmitter and generates an acknowledgement (A).

The slave-transmitter will remain in the addressed state until it receives the STOP condition (P) or the repeated START condition (Sr) followed by a different slave address. Then, under Sr, all the slaves will compare their addresses with 11110XX and test the eighth bit (read/write bit). However, they will not be addressed, because for 10-bit devices, the read/write bit is 1, or for 7-bit devices, the slave addresses of 1111 0XX do not match.

17.3.3 Arbitration

When there are multiple masters on I2C bus, it may happen that multiple masters start data transfer at the same time. At this time, the arbitration mechanism will decide which master has the right to transfer data, while other masters have to give up the control of the bus and wait until the bus is idle before transferring data again.

During data transfer, all masters must check whether the SDA is consistent with the data they want to send when SCL stays high. When the SDA level is different from the expected one, it means that other masters are transferring data at the same time. The masters with different SDA levels will lose the arbitration and other masters will complete the data transfer.

The waveform of two masters transferring data and initiating the arbitration mechanism at the same time is as follows:

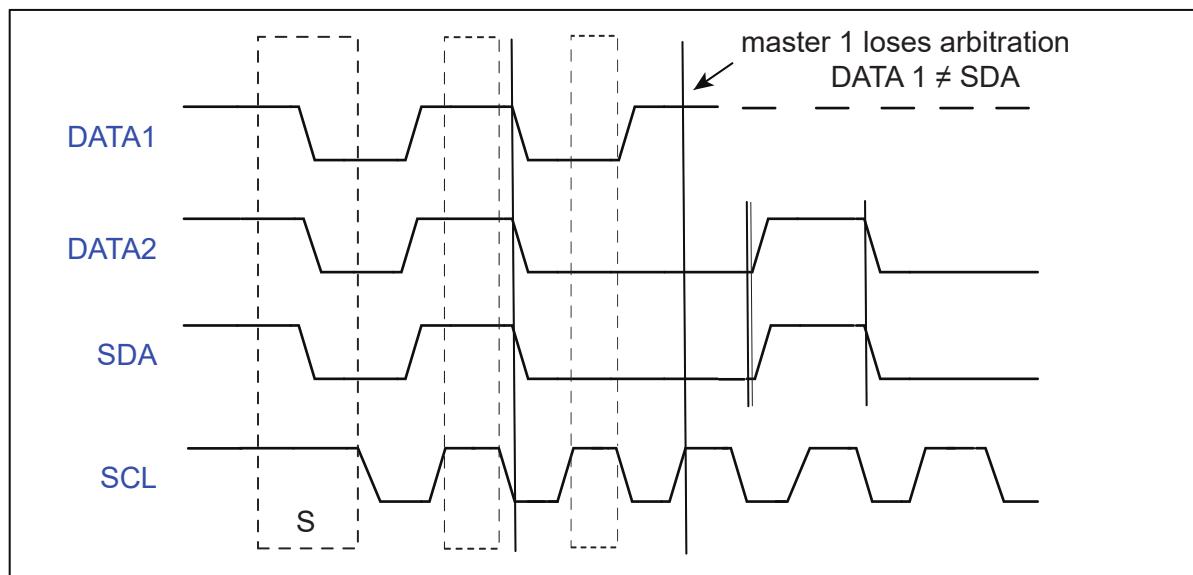


Fig. 17.8: Waveform of simultaneous data transfer

17.4 I2C Clock Setting

I2C clock can be derived from bclk (bus clock) and xclk, and frequency division can be done on this basis. The duration of the start condition, each bit of data and the end condition are set by registers i2c_prd_start, i2c_prd_data and i2c_prd_stop respectively. Each of these durations can be subdivided into 4 phases, and the number of samples in each phase is controlled by a separate byte in the register (the actual value is the register value plus 1). The 4 phase settings in the data section together determine the frequency division factor of the i2c clock. As shown in the figure below, suppose the I2C clock source is selected as 32M bclk and the register i2c_prd_data is set to 0x0f0f0f0f, then the second 0 in the figure is $0x0f+1=0x10$, the second 1 is $0x0f+1=0x10$, the second 2 is $0x0f+1=0x10$, and the

second 3 is $0x0f+1=0x10$. Then the clock frequency of I2C is $32MHz/(0x10+0x10+0x10+0x10) = 500KHz$. Similarly, the first 0, 1, 2 and 3 are set by register i2c_prd_start, which determines the duration of the start condition, and the third 0, 1, 2 and 3 are set by register i2c_prd_stop, which determines the duration of the end condition.

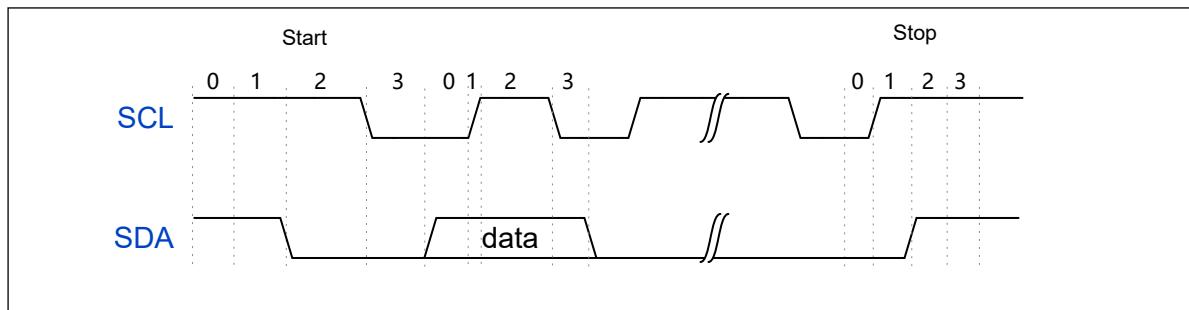


Fig. 17.9: I2C clock setting

17.5 I2C Configuration Flow

17.5.1 Configuration Items

- Read/write flag bit
- Slave address
- Slave register address
- Slave register address length
- Data (TX: configure the sent data; RX: store the received data)
- Data length
- Enable signal

17.5.2 Read/Write Flag Bit

I2C supports TX and RX working statuses. The cr_i2c_pkt_dir in the register i2c_config represents the TX/RX status, “0” for TX status and “1” for RX status.

17.5.3 Slave Address

Each slave connected to I2C will have a unique device address, which is usually 7 bits long. This address will be written into the cr_i2c_slv_addr in the register i2c_config. I2C will automatically shift to the left by 1 bit before sending the address, and the TX/RX direction bit will be added to the LSB.

17.5.4 Slave Register Address

The slave register address represents the register address where I2C needs to read and write a slave register. The slave register address is written to the register i2c_sub_addr, and the cr_i2c_sub_addr_en in the register i2c_config must be set to 1. If cr_i2c_sub_addr_en in the register i2c_config is set to 0, the I2C master will skip the slave register address field when sending.

17.5.5 Slave Register Address Length

The slave register address length is subtracted by 1 and then written to cr_i2c_sub_addr_bc in the register i2c_config.

17.5.6 Data

It refers to the data that needs to be sent to or received from the slave. When sending data, I2C must write the data (in word) into the register i2c_fifo_wdata. When receiving data, I2C must read out the data (in word) from the register i2c_fifo_rdata.

17.5.7 Data Length

The cr_i2c_pkt_len in the i2c_config register sets the send data length (the value written to the register + 1 is the send data length), and the maximum send length is 256 bytes.

17.5.8 Enable Signal

After the above items are configured, when cr_i2c_m_en in the enable signal register i2c_config is set to 1, the I2C sending process will be started automatically.

When the read/write flag bit is configured as 0, I2C sends data. Take sending 2 bytes as an example, the master's transmission flow is as follows:

1. Start bit
2. (The slave address shifts to the left by 1 bit + 0) + ACK
3. Slave register address + ACK
4. 1-byte data + ACK
5. 1-byte data + ACK
6. Stop bit

When the read/write flag bit is configured as 1, I2C receives data. Take receiving 2 bytes as an example, the master's transmission flow is as follows:

1. Start bit
2. (The slave address shifts to the left by 1 bit + 0) + ACK

3. Slave register address + ACK
4. Start bit
5. (The slave address shifts to the left by 1 bit + 1) + ACK
6. 1-byte data + ACK
7. 1-byte data + ACK
8. Stop bit

17.6 FIFO Management

I2C FIFO has a 2-word depth, and I2C includes RX FIFO and TX FIFO. The rx_fifo_cnt in the register i2c_fifo_config_1 represents how much data (in word) in RX FIFO needs to be read. The tx_fifo_cnt in the register i2c_fifo_config_1 represents how much free space (in word) in TX FIFO for writing.

I2C FIFO status:

- RX FIFO underflow: When the data in RX FIFO is completely read out or empty, if I2C continues to read data from RX FIFO, the rx_fifo_underflow in the register i2c_fifo_config_0 will be set to 1;
- RX FIFO overflow: When I2C receives data until the two words of RX FIFO are filled, without reading RX FIFO, if I2C receives data again, the rx_fifo_overflow in the register i2c_fifo_config_0 will be set to 1;
- TX FIFO underflow: When the data size filled into TX FIFO does not meet the configured I2C data length: cr_i2c_pkt_len in i2c_config, and no new data is filled into TX FIFO, the tx_fifo_underflow in the register i2c_fifo_config_0 will be set to 1;
- TX FIFO overflow: After the two words of TX FIFO are filled, before the data in TX FIFO is sent out, if data is filled into TX FIFO again, the tx_fifo_overflow in the register i2c_fifo_config_0 will be set to 1.

17.7 Use with DMA

I2C can send and receive data through DMA. Setting i2c_dma_tx_en in the register i2c_fifo_config_0 to 1 will enable the DMA TX mode. After the channel for I2C is allocated, DMA will transfer data from memory to the i2c_fifo_wdata register. Setting i2c_dma_rx_en in the register i2c_fifo_config_0 to 1 will enable the DMA RX mode. After the channel for I2C is allocated, DMA will transfer the data in the register i2c_fifo_rdata to memory. When I2C is used with DMA, DMA will automatically transfer data, so it is unnecessary for CPU to write data into I2C TX FIFO or read data from I2C RX FIFO.

17.7.1 DMA Sending Flow

1. Set read/write flag bit to 0
2. Set slave address
3. Set slave register address
4. Set slave register address length
5. Data Length
6. Set enable signal register to 1
7. Configure DMA transfer size
8. Configure the transfer width of DMA source address
9. Configure the transfer width of DMA destination address (when I2C is used with DMA, the transfer width of destination address must be set to 32 bits, which is word-aligned)
10. Configure the DMA source address as the memory address for storing sent data
11. Configure the DMA destination address to I2C TX FIFO address, i2c_fifo_wdata
12. Enable DMA

17.7.2 DMA Receiving Flow

1. Set read/write flag bit to 1
2. Set slave address
3. Set slave register address
4. Set slave register address length
5. Data Length
6. Set enable signal register to 1
7. Configure DMA transfer size
8. Configure the transfer width of DMA source address (when I2C is used with DMA, the transfer width of source address must be set to 32 bits, which is word-aligned)
9. Configure the transfer width of DMA destination address
10. Configure the DMA source address to I2C RX FIFO address, i2c_fifo_rdata
11. Configure the DMA destination address as the memory address for storing received data
12. Enable DMA

17.8 Interrupt

I2C includes the following interrupts:


- I2C_TRANS_END_INT * I2C transfer end interrupt, which is generated when I2C completes a transfer
- I2C_TX_FIFO_READY_INT * When tx_fifo_cnt in i2c_fifo_config_1 is greater than tx_fifo_th, a TX FIFO request interrupt will be generated, and the interrupt flag will be automatically cleared when the condition is not satisfied
- I2C_RX_FIFO_READY_INT * When rx_fifo_cnt in i2c_fifo_config_1 is greater than rx_fifo_th, an RX FIFO request interrupt will be generated, and the interrupt flag will be automatically cleared when the condition is not satisfied
- I2C_NACK_RECV_INT * When the I2C module detects a NACK state, a NACK interrupt is generated
- I2C_ARB_LOST_INT * I2C arbitration lost interrupt
- I2C_FIFO_ERR_INT * FIFO ERROR interrupt is generated when TX/RX FIFO overflows or underflows

17.9 Register description

Name	Description
i2c_config	
i2c_int_sts	
i2c_sub_addr	
i2c_bus_busy	
i2c_prd_start	
i2c_prd_stop	
i2c_prd_data	
i2c_fifo_config_0	
i2c_fifo_config_1	
i2c_fifo_wdata	
i2c_fifo_rdata	

17.9.1 i2c_config

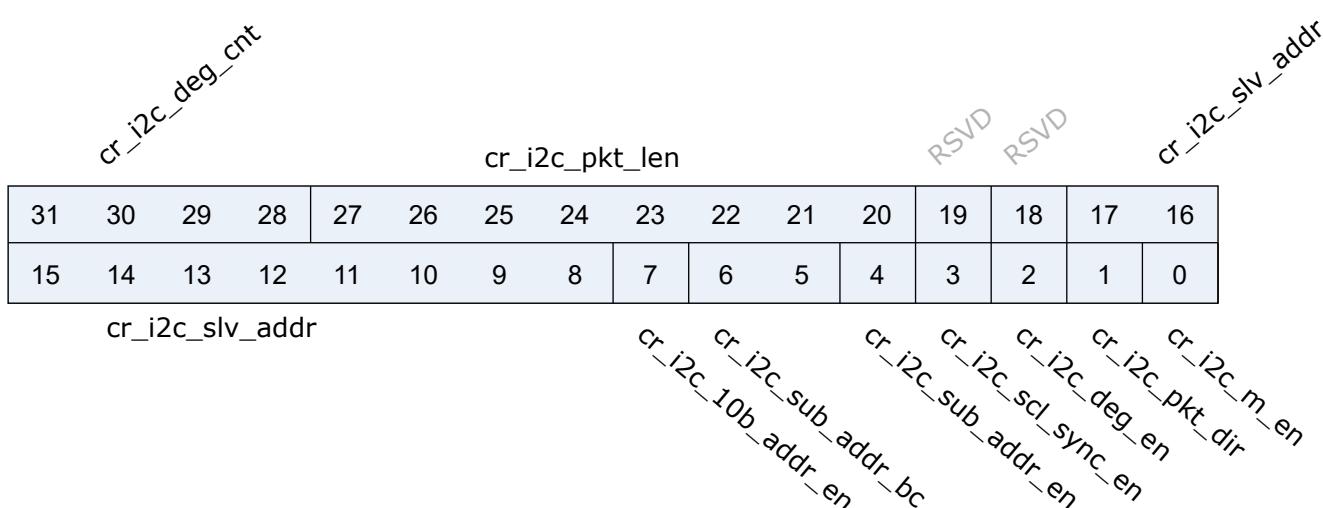
Address: 0x2000a300



Bits	Name	Type	Reset	Description
31:28	cr_i2c_deg_cnt	r/w	4'd0	De-glitch function cycle count
27:20	cr_i2c_pkt_len	r/w	8'd0	Packet length (unit: byte)
19:18	RSVD			
17:8	cr_i2c_slv_addr	r/w	10'h0	Slave address for I2C transaction (target address)
7	cr_i2c_10b_addr_en	r/w	1'b0	Slave address 10-bit mode enable
6:5	cr_i2c_sub_addr_bc	r/w	2'd0	Sub-address field byte count 2'd0: 1-byte, 2'd1: 2-byte, 2'd2: 3-byte, 2'd3: 4-byte
4	cr_i2c_sub_addr_en	r/w	1'b0	Enable signal of I2C sub-address field
3	cr_i2c_scl_sync_en	r/w	1'b1	Enable signal of I2C SCL synchronization, should be enabled to support Multi-Master and Clock-Stretching (Normally should not be turned-off)
2	cr_i2c_deg_en	r/w	1'b0	Enable signal of I2C input de-glitch function (for all input pins)
1	cr_i2c_pkt_dir	r/w	1'b1	Transfer direction of the packet 1'b0: Write; 1'b1: Read
0	cr_i2c_m_en	r/w	1'b0	Enable signal of I2C Master function Asserting this bit will trigger the transaction, and should be de-asserted after finish

17.9.2 i2c_int_sts

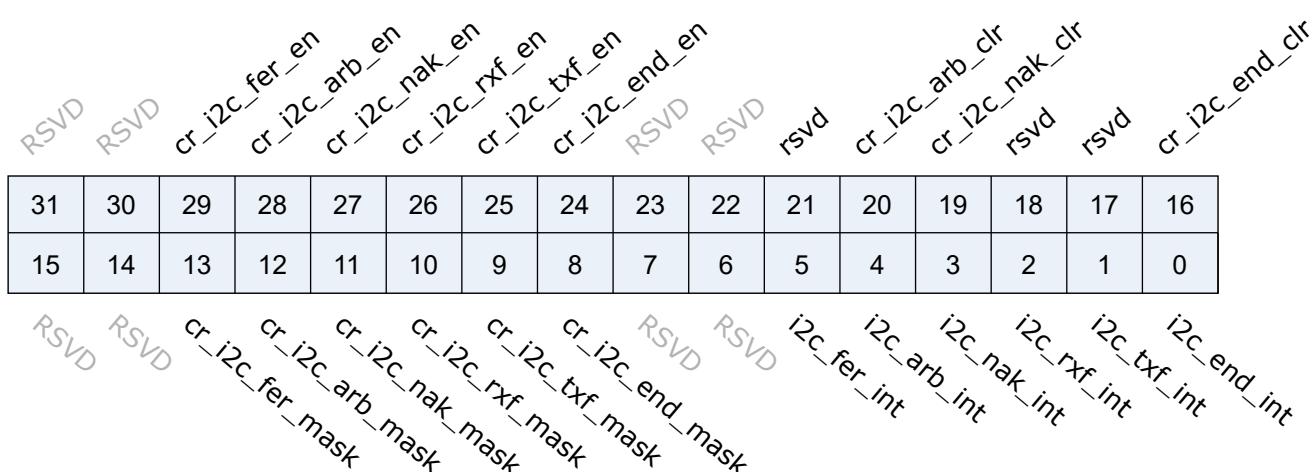Address: 0x2000a304



Bits	Name	Type	Reset	Description
31:30	RSVD			
29	cr_i2c_fer_en	r/w	1'b1	Interrupt enable of i2c_fer_int
28	cr_i2c_arb_en	r/w	1'b1	Interrupt enable of i2c_arb_int
27	cr_i2c_nak_en	r/w	1'b1	Interrupt enable of i2c_nak_int
26	cr_i2c_rxf_en	r/w	1'b1	Interrupt enable of i2c_rxf_int
25	cr_i2c_txf_en	r/w	1'b1	Interrupt enable of i2c_txf_int
24	cr_i2c_end_en	r/w	1'b1	Interrupt enable of i2c_end_int
23:22	RSVD			
21	rsvd	rsvd	1'b0	
20	cr_i2c_arb_clr	w1c	1'b0	Interrupt clear of i2c_arb_int
19	cr_i2c_nak_clr	w1c	1'b0	Interrupt clear of i2c_nak_int
18	rsvd	rsvd	1'b0	
17	rsvd	rsvd	1'b0	
16	cr_i2c_end_clr	w1c	1'b0	Interrupt clear of i2c_end_int
15:14	RSVD			
13	cr_i2c_fer_mask	r/w	1'b1	Interrupt mask of i2c_fer_int
12	cr_i2c_arb_mask	r/w	1'b1	Interrupt mask of i2c_arb_int
11	cr_i2c_nak_mask	r/w	1'b1	Interrupt mask of i2c_nak_int
10	cr_i2c_rxf_mask	r/w	1'b1	Interrupt mask of i2c_rxf_int
9	cr_i2c_txf_mask	r/w	1'b1	Interrupt mask of i2c_txf_int

Bits	Name	Type	Reset	Description
8	cr_i2c_end_mask	r/w	1'b1	Interrupt mask of i2c_end_int
7:6	RSVD			
5	i2c_fer_int	r	1'b0	I2C TX/RX FIFO error interrupt, auto-cleared when FIFO overflow/underflow error flag is cleared
4	i2c_arb_int	r	1'b0	I2C arbitration lost interrupt
3	i2c_nak_int	r	1'b0	I2C NACK-received interrupt
2	i2c_rxf_int	r	1'b0	I2C RX FIFO ready ($rx_fifo_cnt > rx_fifo_th$) interrupt, auto-cleared when data is popped
1	i2c_txf_int	r	1'b1	I2C TX FIFO ready ($tx_fifo_cnt > tx_fifo_th$) interrupt, auto-cleared when data is pushed
0	i2c_end_int	r	1'b0	I2C transfer end interrupt

17.9.3 i2c_sub_addr

Address: 0x2000a308

cr_i2c_sub_addr_b3								cr_i2c_sub_addr_b2							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
cr_i2c_sub_addr_b1								cr_i2c_sub_addr_b0							

Bits	Name	Type	Reset	Description
31:24	cr_i2c_sub_addr_b3	r/w	8'd0	I2C sub-address field - byte[3]
23:16	cr_i2c_sub_addr_b2	r/w	8'd0	I2C sub-address field - byte[2]
15:8	cr_i2c_sub_addr_b1	r/w	8'd0	I2C sub-address field - byte[1]
7:0	cr_i2c_sub_addr_b0	r/w	8'd0	I2C sub-address field - byte[0] (sub-address starts from this byte)

17.9.4 i2c_bus_busy

Address: 0x2000a30c

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |

RSVD RSVD

cr_i2c_bus_busy_clr sts_i2c_bus_busy

Bits	Name	Type	Reset	Description
31:2	RSVD			
1	cr_i2c_bus_busy_clr	w1c	1'b0	Clear signal of bus_busy status, not for normal usage (in case I2C bus hangs)
0	sts_i2c_bus_busy	r	1'b0	Indicator of I2C bus busy

17.9.5 i2c_prd_start

Address: 0x2000a310

Bits	Name	Type	Reset	Description
31:24	cr_i2c_prd_s_ph_3	r/w	8'd15	Length of START condition phase 3
23:16	cr_i2c_prd_s_ph_2	r/w	8'd15	Length of START condition phase 2
15:8	cr_i2c_prd_s_ph_1	r/w	8'd15	Length of START condition phase 1
7:0	cr_i2c_prd_s_ph_0	r/w	8'd15	Length of START condition phase 0

17.9.6 i2c_prd_stop

Address: 0x2000a314

cr_i2c_prd_p_ph_3								cr_i2c_prd_p_ph_2							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
cr_i2c_prd_p_ph_1								cr_i2c_prd_p_ph_0							

Bits	Name	Type	Reset	Description
31:24	cr_i2c_prd_p_ph_3	r/w	8'd15	Length of STOP condition phase 3
23:16	cr_i2c_prd_p_ph_2	r/w	8'd15	Length of STOP condition phase 2
15:8	cr_i2c_prd_p_ph_1	r/w	8'd15	Length of STOP condition phase 1
7:0	cr_i2c_prd_p_ph_0	r/w	8'd15	Length of STOP condition phase 0

17.9.7 i2c_prd_data

Address: 0x2000a318

cr_i2c_prd_d_ph_3								cr_i2c_prd_d_ph_2							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
cr_i2c_prd_d_ph_1								cr_i2c_prd_d_ph_0							

Bits	Name	Type	Reset	Description
31:24	cr_i2c_prd_d_ph_3	r/w	8'd15	Length of DATA phase 3
23:16	cr_i2c_prd_d_ph_2	r/w	8'd15	Length of DATA phase 2
15:8	cr_i2c_prd_d_ph_1	r/w	8'd15	Length of DATA phase 1 Note: This value should not be set to 8'd0, adjust source clock rate instead if higher I2C clock rate is required
7:0	cr_i2c_prd_d_ph_0	r/w	8'd15	Length of DATA phase 0

17.9.8 i2c_fifo_config_0

Address: 0x2000a380

RSVD															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

rx_fifo_underflow *rx_fifo_overflow* *tx_fifo_underflow* *tx_fifo_overflow* *tx_fifo_clr* *i2c_dma_tx_en*
i2c_dma_rx_en

Bits	Name	Type	Reset	Description
31:8	RSVD			
7	rx_fifo_underflow	r	1'b0	Underflow flag of RX FIFO, can be cleared by rx_fifo_clr
6	rx_fifo_overflow	r	1'b0	Overflow flag of RX FIFO, can be cleared by rx_fifo_clr
5	tx_fifo_underflow	r	1'b0	Underflow flag of TX FIFO, can be cleared by tx_fifo_clr
4	tx_fifo_overflow	r	1'b0	Overflow flag of TX FIFO, can be cleared by tx_fifo_clr
3	rx_fifo_clr	w1c	1'b0	Clear signal of RX FIFO
2	tx_fifo_clr	w1c	1'b0	Clear signal of TX FIFO
1	i2c_dma_rx_en	r/w	1'b0	Enable signal of dma_rx_req/ack interface
0	i2c_dma_tx_en	r/w	1'b0	Enable signal of dma_tx_req/ack interface

17.9.9 i2c_fifo_config_1

Address: 0x2000a384

RSVD	rx_fifo_th	RSVD	tx_fifo_th												
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

rx_fifo_cnt *tx_fifo_th* *tx_fifo_cnt*

Bits	Name	Type	Reset	Description
31:25	RSVD			
24	rx_fifo_th	r/w	1'd0	RX FIFO threshold, dma_rx_req will not be asserted if rx_fifo_cnt is less than this value
23:17	RSVD			
16	tx_fifo_th	r/w	1'd0	TX FIFO threshold, dma_tx_req will not be asserted if tx_fifo_cnt is less than this value
15:10	RSVD			
9:8	rx_fifo_cnt	r	2'd0	RX FIFO available count
7:2	RSVD			
1:0	tx_fifo_cnt	r	2'd2	TX FIFO available count

17.9.10 i2c_fifo_wdata

Address: 0x2000a388

i2c_fifo_wdata

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

i2c_fifo_wdata

Bits	Name	Type	Reset	Description
31:0	i2c_fifo_wdata	w	x	

17.9.11 i2c_fifo_rdata

Address: 0x2000a38c

i2c_fifo_rdata

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

i2c_fifo_rdata

Bits	Name	Type	Reset	Description
31:0	i2c_fifo_rdata	r	32'h0	

18

PWM

18.1 Overview

Pulse Width Modulation (PWM), an efficient technique that uses the digital signal of microprocessor to control the analog circuit, is widely used in fields like measurement, communication, and power control and conversion.

18.2 Features

- Two PWM signals are generated, each containing 4-channel PWM signal outputs, with 2 pairs of complementary PWM per channel
- There are optional three clock sources (bclk, xclk, f32k), with 16-bit clock divider, up to 65535 divisions
- Each PWM channel has double threshold setting, allowing different duty ratios and phases, with more flexible pulse
- Each PWM channel has independent dead time setting
- Different active levels can be set for each PWM output pin
- Each PWM has an independent linked switch to connect/disconnect with the internal counter, and you can set the default output level when disconnected
- The software and external brake signals can set the PWM output level to a preset state
- Up to 9 trigger sources for triggering ADC conversion
- Support 11 interrupts

18.3 Functional Description

18.3.1 Clock and Frequency Divider

There are three options for PWM counter clock sources, which can be set through the `reg_clk_sel` field in the `pwm_mc0_config0` register, and the clock source configuration is shown in the following table.

Table 18.1: Clock source

<code>reg_clk_sel</code>	PWM clock source
0	xclk
1	bclk
others	f32k

Each counter has its own 16-bit frequency divider, which can divide the selected clock through APB. The PWM counter will take the divided clock as the counting cycle unit, and add one every time a counting cycle ends.

18.3.2 Active Level

Different application scenarios require different active level states, some being active at low level and others being active at high level. The active level of each PWM output can be set independently.

When the `<pwm_chy_ppl>` bit in the register `pwm_mcx_config1` is set to 1, it means that the forward channel of channel y ($y = 0, 1, 2, 3$) of `pwmx` ($x = 0, 1$) is set to be active at high level. That is, when the PWM module outputs logical ‘1’, its corresponding pin outputs high level, and when it outputs logical ‘0’, that outputs low level. When `<pwm_chy_ppl>` is set to 0, it means that the same is set to be active at low level. That is, when the PWM module outputs logical ‘1’, its corresponding pin outputs low level, and when it outputs logical ‘0’, that outputs high level. The setting bit of the complementary channel is `<pwm_chy_npl>`, and its setting rule is the same as that of the forward channel.

18.3.3 Principle of Pulse Generation

When the `<pwm_chy_pen>` bit in the register `pwm_mcx_config1` is set to 0, it means that the forward channel of channel y ($y = 0, 1, 2, 3$) of `pwmx` ($x = 0, 1$) is set to a determined logic state, and then the state is determined by the `<pwm_chy_psi>` bit. When `<pwm_chy_psi>` is 0, the corresponding forward channel pin outputs logical ‘0’, and when the same is 1, that outputs logical ‘1’. The actual output level must be jointly determined with `<pwm_chy_ppl>`. The setting bit of the complementary channel is `<pwm_chy_nen>`, and its setting rule is the same as that of the forward channel.

When the `<pwm_chy_pen>` (`<pwm_chy_nen>`) bit in the register `pwm_mcx_config1` is set to 1, the forward (complementary) channel output of channel y ($y = 0, 1, 2, 3$) of `pwmx` ($x = 0, 1$) is determined by comparing the internal counter with the two thresholds. If the counter value is between the two thresholds, the forward channel outputs logical ‘1’,

while the complementary one outputs logical ‘0’ . If the counter value is beyond the two thresholds, the forward channel outputs logical ‘0’ , while the complementary one outputs logical ‘1’ . The waveform is shown as follows.

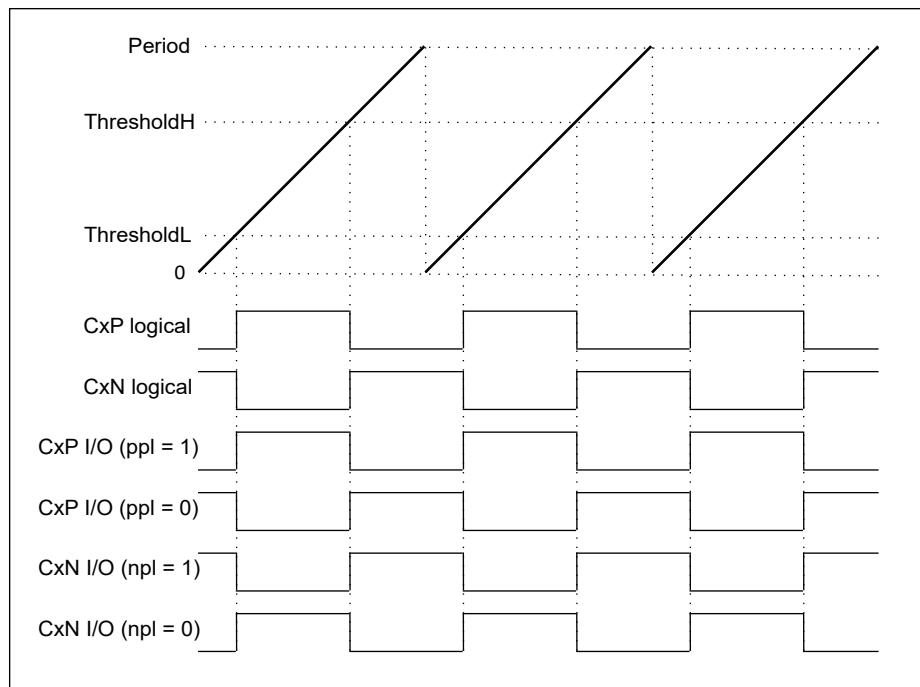


Fig. 18.1: Waveform of PWM in different configurations

18.3.4 Brake

When the brake function is used and the brake signal is generated, the level of the PWM output will be changed to a preset state, which is determined by the `<pwm_chy_pbs>` and `<pwm_chy_nbs>` ($y = 0, 1, 2, 3$) bits in the register `pwm_mcx_config1` ($x = 0, 1$). When the bits are set to 1, PWM outputs logical ‘1’ after the brake signal is generated. When the same is set to 0, PWM outputs logical ‘0’ after the brake signal is generated.

Brake signals include external brake and software brake. When the `<pwm_sw_break_en>` in `pwm_mcx_config0` ($x = 0, 1$) is 1, the internal brake signal will be generated. When this bit is 0, the brake state will be exited and PWM will resume to its previous operation mode. When the `<pwm_ext_break_en>` bit is 1, the external brake function is enabled. If the external brake pin state matches the value set by `<pwm_ext_break_pl>`, a brake signal will be generated. If that state is opposite to the value set by `<pwm_ext_break_pl>`, PWM will exit the brake state. It should be noted that only PWM0 supports external brake, and PWM1 cannot do that.

If the brake interrupt is enabled, the interrupt will be triggered when the external brake signal is generated. Software brake will not trigger an interrupt.

18.3.5 Dead Zone

Different dead time can be set for each PWM channel independently. When the value of dead time is not 0, the forward channel of PWM will delay the generation of jump level when it matches the ThresholdL, and immediately change the level state when it matches the ThresholdH. The complementary channel of PWM will change the level state immediately when it matches the ThresholdL, and delay the generation of jump level when it matches the ThresholdH. The length of dead zone is set by the register `pwm_mc0_dead_time`, the deadband length is calculated as shown in the following table.

Table 18.2: Deadband length calculation formula

<code>pwm_chy_dtg</code>	Deadband length
0xxxxxx	<code>pwm_chy_dtg[7:0]</code>
10xxxxx	$(64 + \text{pwm_chy_dtg}[5:0]) * 2$
110xxxx	$(32 + \text{pwm_chy_dtg}[4:0]) * 8$
111xxxx	$(32 + \text{pwm_chy_dtg}[4:0]) * 16$

The output waveform after inserting the deadband for PWM is shown in the following figure.

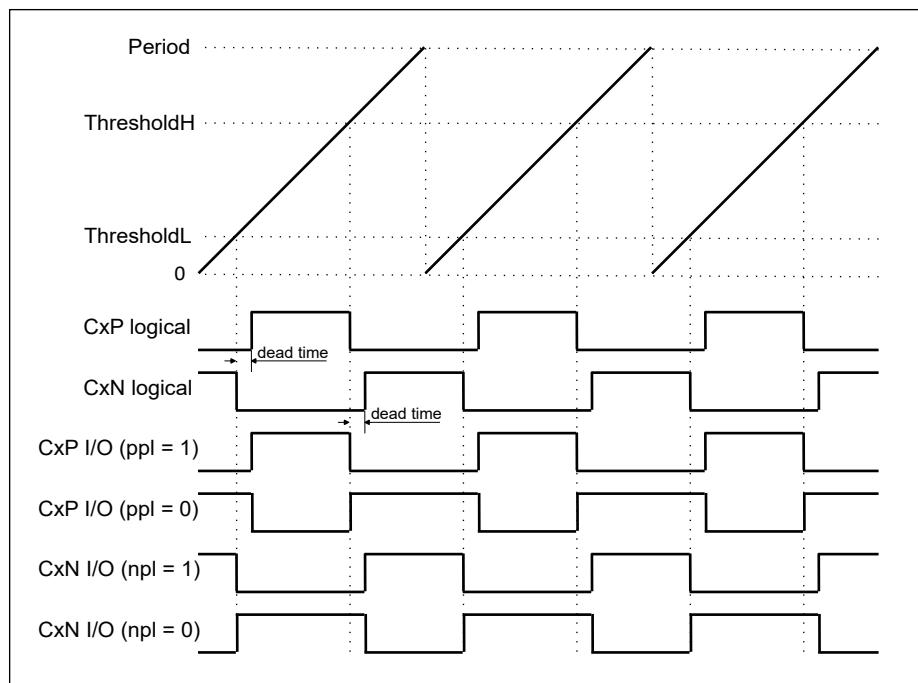


Fig. 18.2: PWM insertion deadband output waveform

18.3.6 Cycle and Duty Ratio Calculation

The PWM cycle is determined by the clock division factor and the clock duration cycle. The clock division factor is set by the register `PWMx_CLK_DIV[15:0]`(x: 0~1) and is used to divide the source clock of PWM. The clock duration cycle is set by the register `PWMx_PERIOD[15:0]`(x: 0~1) and is used to set how many divided clock cycles a PWM cycle consists of. That is, $\text{PWM cycle} = \text{PWM source clock}/\text{PWMx_CLK_DIV}[15:0]/\text{PWMx_PERIOD}[15:0]$.

18.3.7 PWM Interrupt

The PWM can generate a total of 10 types of interrupts, described as follows.

- Channel 0 ThresholdL Interrupt
 - This interrupt is generated when the PWM count value is equal to the value of the field `pwm_ch0_threL` in the `pwm_mc0_ch0_thre` register.
- Channel 0 ThresholdH Interrupt
 - This interrupt is generated when the PWM count value is equal to the value of the field `pwm_ch0_threH` in the `pwm_mc0_ch0_thre` register.
- Channel 1 ThresholdL Interrupt
 - This interrupt is generated when the PWM count value is equal to the value of field `pwm_ch1_threL` in the `pwm_mc0_ch1_thre` register.
- Channel 1 ThresholdH Interrupt
 - This interrupt is generated when the PWM count value is equal to the value of the field `pwm_ch1_threH` in the `pwm_mc0_ch1_thre` register.
- Channel 2 ThresholdL Interrupt
 - This interrupt is generated when the PWM count value is equal to the value of field `pwm_ch2_threL` in the `pwm_mc0_ch2_thre` register.
- Channel 2 ThresholdH Interrupt
 - This interrupt is generated when the PWM count value is equal to the value of the field `pwm_ch2_threH` in the `pwm_mc0_ch2_thre` register.
- Channel 3 ThresholdL Interrupt
 - This interrupt is generated when the PWM count value is equal to the value of the field `pwm_ch3_threL` in the `pwm_mc0_ch3_thre` register.
- Channel 3 ThresholdH Interrupt
 - This interrupt is generated when the PWM count value is equal to the value of the field `pwm_ch3_threH` in the `pwm_mc0_ch3_thre` register.

- End-of-cycle interrupt
 - This interrupt is generated when the PWM count value is equal to the value of field pwm_period in register pwm_mc0_period, indicating the end of a PWM cycle.
- Cycle Repeat Interrupt
 - This interrupt is generated when the number of PWM cycles reaches the value set in the field pwm_int_period_cnt in the register pwm_mc0_period. This interrupt can be used in stepper motor application scenarios, where setting pwm_int_period_cnt allows the stepper motor to generate an interrupt after rotating a specific angle.
- external brake Interrupt
 - A PWM interrupt will be generated when an external brake signal is generated.

18.3.8 ADC Linkage

When the counter matches the threshold or the count value reaches the number of cycles, it will generate the signal that internally triggers ADC startup conversion. It should be noted that only PWM0 can trigger such conversion, while PWM1 cannot do that. The specific trigger source is set by the <pwm_adc_trg_src> bit in the register pwm_mcx_config0. This feature is commonly used in timing sampling. The following is an example.

Application scenario: In BLDC application, there is such a requirement that the current flowing through the coil shall be detected while the motor speed is controlled by PWM. In a PWM cycle, after PWM controls the power device to turn on, the current becomes stable after a certain period of time. Then, it is necessary to sample the current value, which means that there is a strict phase difference between the time point of triggering ADC conversion and PWM. For example, if the channel 0 of PWM is used to drive one of the phases of the motor, and a 10 KHz square wave with a duty ratio of 20% needs to be generated, and ADC sampling needs to be performed at the middle time point of the high level of the square wave, then the PWM cycle is 100us. When the clock source is 1 MHz, the cycle count value is 100, and the two thresholds of channel 1 can be set to 0 and 20 respectively. At this time, the counter is between 0 and 20, and PWM outputs a high level, and otherwise it outputs a low level. When the threshold L of channel 2 is set to 10 and the pwm_adc_trg_src in the register pwm_mc0_config0 is set to 4, pwm_ch2l_int can trigger ADC conversion. When the counter counts to 10, ADC will start sampling conversion at the middle time point of the high level generated by channel 1. This ensures that each sampling can meet the exact time requirement without CPU intervention, thus improving the performance.


18.4 Register description

Name	Description
pwm_int_config	
pwm_mc0_config0	
pwm_mc0_config1	

Name	Description
pwm_mc0_period	
pwm_mc0_dead_time	
pwm_mc0_ch0_thre	
pwm_mc0_ch1_thre	
pwm_mc0_ch2_thre	
pwm_mc0_ch3_thre	
pwm_mc0_int_sts	
pwm_mc0_int_mask	
pwm_mc0_int_clear	
pwm_mc0_int_en	
pwm_mc1_config0	
pwm_mc1_config1	
pwm_mc1_period	
pwm_mc1_dead_time	
pwm_mc1_ch0_thre	
pwm_mc1_ch1_thre	
pwm_mc1_ch2_thre	
pwm_mc1_ch3_thre	
pwm_mc1_int_sts	
pwm_mc1_int_mask	
pwm_mc1_int_clear	
pwm_mc1_int_en	

18.4.1 pwm_int_config

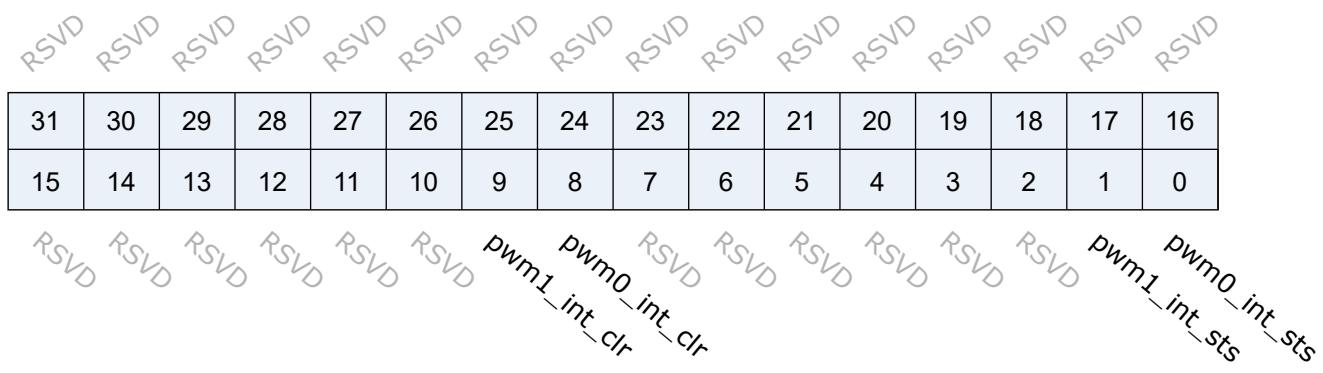
Address: 0x2000a400



Bits	Name	Type	Reset	Description
31:10	RSVD			
9	pwm1_int_clr	w1c	1'b0	PWM 1 interrupt clear (clear pwm_mc1_int_sts[10:0] all)
8	pwm0_int_clr	w1c	1'b0	PWM 0 interrupt clear (clear pwm_mc0_int_sts[10:0] all)
7:2	RSVD			
1	pwm1_int_sts	r	1'b0	PWM 1 interrupt status (Check pwm_mc1_int_sts for detailed interrupt status)
0	pwm0_int_sts	r	1'b0	PWM 0 interrupt status (Check pwm_mc0_int_sts for detailed interrupt status)

18.4.2 pwm_mc0_config0

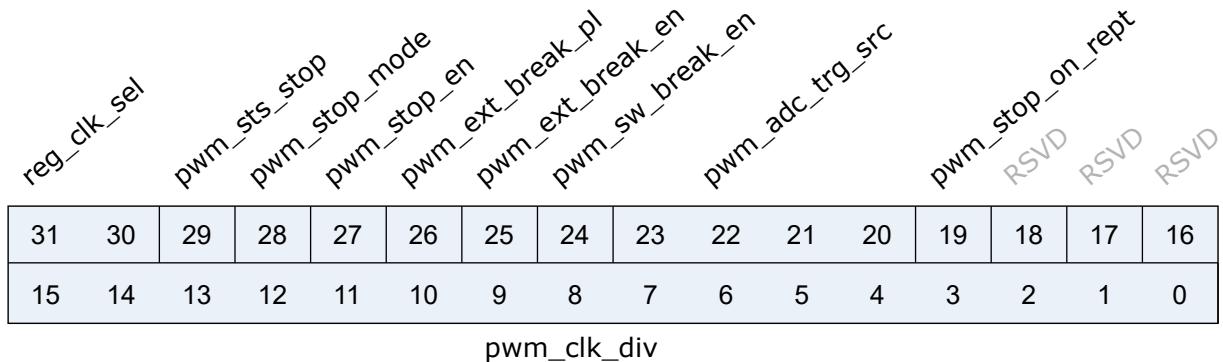
Address: 0x2000a440



Bits	Name	Type	Reset	Description
31:30	reg_clk_sel	r/w	2'd0	PWM clock source select, 2'b00-xclk ; 2'b01-bclk ; others-f32k_clk
29	pwm_sts_stop	r	1'b0	PWM stop status
28	pwm_stop_mode	r/w	1'b1	PWM stop mode, 1'b1 - graceful ; 1'b0 - abrupt
27	pwm_stop_en	r/w	1'b0	PWM stop enable
26	pwm_ext_break_pl	r/w	1'b0	PWM external break source polarity 1'b0: Active-LOW 1'b1: Active-HIGH
25	pwm_ext_break_en	r/w	1'b0	PWM external break source enable 1'b0: Disabled, external break signal is masked 1'b1: Enabled, external break signal is effective
24	pwm_sw_break_en	r/w	1'b0	PWM break enable 1'b0: Disabled, normal operation 1'b1: Enabled, PWM output will be determined by CxPBS/CxNBS
23:20	pwm_adc_trg_src	r/w	4'hF	Select signal of ADC triggering source 4'd0: pwm_ch0l_int (Channel 0 ThresholdL reached) 4'd1: pwm_ch0h_int (Channel 0 ThresholdH reached) 4'd2: pwm_ch1l_int (Channel 1 ThresholdL reached) 4'd3: pwm_ch1h_int (Channel 1 ThresholdH reached) 4'd4: pwm_ch2l_int (Channel 2 ThresholdL reached) 4'd5: pwm_ch2h_int (Channel 2 ThresholdH reached) 4'd6: pwm_ch3l_int (Channel 3 ThresholdL reached) 4'd7: pwm_ch3h_int (Channel 3 ThresholdH reached) 4'd8: pwm_prde_int (Period End reached) Others: Disabled
19	pwm_stop_on_rept	r/w	1'b0	PWM stopped when rept_int is asserted 1'b0: Disabled, PWM keeps running when rept_int is asserted 1'b1: Enabled, PWM stops when rept_int is asserted. Clear rept_int to restore operation
18:16	RSVD			
15:0	pwm_clk_div	r/w	16'b0	PWM clock division

18.4.3 pwm_mc0_config1

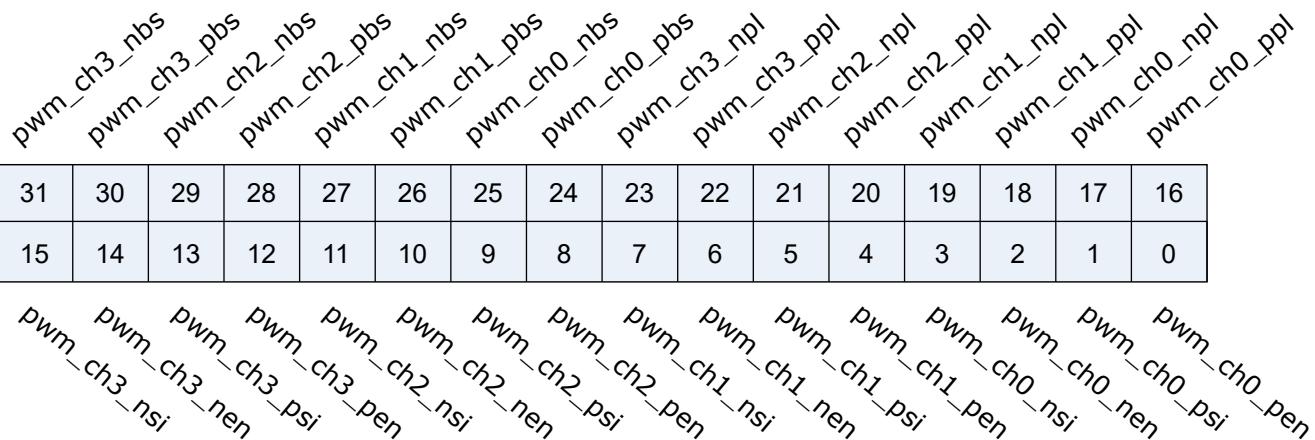Address: 0x2000a444



Bits	Name	Type	Reset	Description
31	pwm_ch3_nbs	r/w	1'b0	PWM channel 3 negative break state
30	pwm_ch3_pbs	r/w	1'b0	PWM channel 3 positive break state
29	pwm_ch2_nbs	r/w	1'b0	PWM channel 2 negative break state
28	pwm_ch2_pbs	r/w	1'b0	PWM channel 2 positive break state
27	pwm_ch1_nbs	r/w	1'b0	PWM channel 1 negative break state
26	pwm_ch1_pbs	r/w	1'b0	PWM channel 1 positive break state
25	pwm_ch0_nbs	r/w	1'b0	PWM channel 0 negative break state
24	pwm_ch0_pbs	r/w	1'b0	PWM channel 0 positive break state
23	pwm_ch3_npl	r/w	1'b1	PWM channel 3 negative polarity
22	pwm_ch3_ppl	r/w	1'b1	PWM channel 3 positive polarity
21	pwm_ch2_npl	r/w	1'b1	PWM channel 2 negative polarity
20	pwm_ch2_ppl	r/w	1'b1	PWM channel 2 positive polarity
19	pwm_ch1_npl	r/w	1'b1	PWM channel 1 negative polarity
18	pwm_ch1_ppl	r/w	1'b1	PWM channel 1 positive polarity
17	pwm_ch0_npl	r/w	1'b1	PWM channel 0 negative polarity
16	pwm_ch0_ppl	r/w	1'b1	PWM channel 0 positive polarity
15	pwm_ch3_nsi	r/w	1'b1	PWM channel 3 negative set idle state
14	pwm_ch3_nen	r/w	1'b0	PWM channel 3 negative enable pwm out
13	pwm_ch3_psi	r/w	1'b0	PWM channel 3 positive set idle state
12	pwm_ch3_pen	r/w	1'b0	PWM channel 3 positive enable pwm out

Bits	Name	Type	Reset	Description
11	pwm_ch2_nsi	r/w	1'b1	PWM channel 2 negative set idle state
10	pwm_ch2_nen	r/w	1'b0	PWM channel 2 negative enable pwm out
9	pwm_ch2_psi	r/w	1'b0	PWM channel 2 positive set idle state
8	pwm_ch2_pen	r/w	1'b0	PWM channel 2 positive enable pwm out
7	pwm_ch1_nsi	r/w	1'b1	PWM channel 1 negative set idle state
6	pwm_ch1_nen	r/w	1'b0	PWM channel 1 negative enable pwm out
5	pwm_ch1_psi	r/w	1'b0	PWM channel 1 positive set idle state
4	pwm_ch1_pen	r/w	1'b0	PWM channel 1 positive enable pwm out
3	pwm_ch0_nsi	r/w	1'b1	PWM channel 0 negative set idle state
2	pwm_ch0_nen	r/w	1'b0	PWM channel 0 negative enable pwm out
1	pwm_ch0_psi	r/w	1'b0	PWM channel 0 positive set idle state
0	pwm_ch0_pen	r/w	1'b0	PWM channel 0 positive enable pwm out

18.4.4 pwm_mc0_period

Address: 0x2000a448

pwm_int_period_cnt

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

pwm_period

Bits	Name	Type	Reset	Description
31:16	pwm_int_period_cnt	r/w	16'd0	PWM interrupt period counter threshold
15:0	pwm_period	r/w	16'd0	PWM period setting

18.4.5 pwm_mc0_dead_time

Address: 0x2000a44c

pwm_ch3_dtg

pwm_ch2_dtg

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

pwm_ch1_dtg

pwm_ch0_dtg

Bits	Name	Type	Reset	Description
31:24	pwm_ch3_dtg	r/w	8'h0	PWM Channel 3 dead time generator (DTG) DTG[7:5]=0xx => DT = DTG[7:0]*1 (unit: divided PWM clock) DTG[7:5]=10x => DT = (64+DTG[5:0])*2 (unit: divided PWM clock) DTG[7:5]=110 => DT = (32+DTG[4:0])*8 (unit: divided PWM clock) DTG[7:5]=111 => DT = (32+DTG[4:0])*16 (unit: divided PWM clock)
23:16	pwm_ch2_dtg	r/w	8'h0	PWM Channel 2 dead time generator (DTG) DTG[7:5]=0xx => DT = DTG[7:0]*1 (unit: divided PWM clock) DTG[7:5]=10x => DT = (64+DTG[5:0])*2 (unit: divided PWM clock) DTG[7:5]=110 => DT = (32+DTG[4:0])*8 (unit: divided PWM clock) DTG[7:5]=111 => DT = (32+DTG[4:0])*16 (unit: divided PWM clock)
15:8	pwm_ch1_dtg	r/w	8'h0	PWM Channel 1 dead time generator (DTG) DTG[7:5]=0xx => DT = DTG[7:0]*1 (unit: divided PWM clock) DTG[7:5]=10x => DT = (64+DTG[5:0])*2 (unit: divided PWM clock) DTG[7:5]=110 => DT = (32+DTG[4:0])*8 (unit: divided PWM clock) DTG[7:5]=111 => DT = (32+DTG[4:0])*16 (unit: divided PWM clock)
7:0	pwm_ch0_dtg	r/w	8'h0	PWM Channel 0 dead time generator (DTG) DTG[7:5]=0xx => DT = DTG[7:0]*1 (unit: divided PWM clock) DTG[7:5]=10x => DT = (64+DTG[5:0])*2 (unit: divided PWM clock) DTG[7:5]=110 => DT = (32+DTG[4:0])*8 (unit: divided PWM clock) DTG[7:5]=111 => DT = (32+DTG[4:0])*16 (unit: divided PWM clock)

18.4.6 pwm_mc0_ch0_thre

Address: 0x2000a450

pwm_ch0_threH

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

pwm_ch0_threL

Bits	Name	Type	Reset	Description
31:16	pwm_ch0_threH	r/w	16'd0	PWM HIGH counter threshold, can't be smaller than threL
15:0	pwm_ch0_threL	r/w	16'd0	PWM LOW counter threshold, can't be larger than threH

18.4.7 pwm_mc0_ch1_thre

Address: 0x2000a454

pwm_ch1_threH

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

pwm_ch1_threL

Bits	Name	Type	Reset	Description
31:16	pwm_ch1_threH	r/w	16'd0	PWM HIGH counter threshold, can't be smaller than threL
15:0	pwm_ch1_threL	r/w	16'd0	PWM LOW counter threshold, can't be larger than threH

18.4.8 pwm_mc0_ch2_thre

Address: 0x2000a458

pwm_ch2_threH

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

pwm_ch2_threL

Bits	Name	Type	Reset	Description
31:16	pwm_ch2_threH	r/w	16'd0	PWM HIGH counter threshold, can't be smaller than threL
15:0	pwm_ch2_threL	r/w	16'd0	PWM LOW counter threshold, can't be larger than threH

18.4.9 pwm_mc0_ch3_thre

Address: 0x2000a45c

pwm_ch3_threH

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

pwm_ch3_threL

Bits	Name	Type	Reset	Description
31:16	pwm_ch3_threH	r/w	16'd0	PWM HIGH counter threshold, can't be smaller than threL
15:0	pwm_ch3_threL	r/w	16'd0	PWM LOW counter threshold, can't be larger than threH

18.4.10 pwm_mc0_int_sts

Address: 0x2000a460

RSVD															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

RSVD RSVD

Bits	Name	Type	Reset	Description
31:11	RSVD			
10	pwm_rept_int	r	1'b0	PWM repeat count interrupt status
9	pwm_brk_int	r	1'b0	PWM break interrupt status, triggered when ext_break is asserted Note: pwm_sw_break_en will NOT trigger this interrupt

Bits	Name	Type	Reset	Description
8	pwm_prde_int	r	1'b0	PWM period end interrupt status
7	pwm_ch3h_int	r	1'b0	PWM Channel 3 ThresholdH interrupt status
6	pwm_ch3l_int	r	1'b0	PWM Channel 3 ThresholdL interrupt status
5	pwm_ch2h_int	r	1'b0	PWM Channel 2 ThresholdH interrupt status
4	pwm_ch2l_int	r	1'b0	PWM Channel 2 ThresholdL interrupt status
3	pwm_ch1h_int	r	1'b0	PWM Channel 1 ThresholdH interrupt status
2	pwm_ch1l_int	r	1'b0	PWM Channel 1 ThresholdL interrupt status
1	pwm_ch0h_int	r	1'b0	PWM Channel 0 ThresholdH interrupt status
0	pwm_ch0l_int	r	1'b0	PWM Channel 0 ThresholdL interrupt status

18.4.11 pwm_mc0_int_mask

Address: 0x2000a464

RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
cr_pwm_mc0_int_mask																
cr_pwm_rept_mask																
cr_pwm_brk_mask																
cr_pwm_prde_mask																
cr_pwm_ch3h_mask																
cr_pwm_ch3l_mask																
cr_pwm_ch2h_mask																
cr_pwm_ch2l_mask																
cr_pwm_ch1h_mask																
cr_pwm_ch0h_mask																

Bits	Name	Type	Reset	Description
31:11	RSVD			
10	cr_pwm_rept_mask	r/w	1'b1	Interrupt mask of pwm_rept_int
9	cr_pwm_brk_mask	r/w	1'b1	Interrupt mask of pwm_brk_int
8	cr_pwm_prde_mask	r/w	1'b1	Interrupt mask of pwm_prde_int
7	cr_pwm_ch3h_mask	r/w	1'b1	Interrupt mask of pwm_ch3h_int
6	cr_pwm_ch3l_mask	r/w	1'b1	Interrupt mask of pwm_ch3l_int
5	cr_pwm_ch2h_mask	r/w	1'b1	Interrupt mask of pwm_ch2h_int
4	cr_pwm_ch2l_mask	r/w	1'b1	Interrupt mask of pwm_ch2l_int
3	cr_pwm_ch1h_mask	r/w	1'b1	Interrupt mask of pwm_ch1h_int

Bits	Name	Type	Reset	Description
2	cr_pwm_ch1l_mask	r/w	1'b1	Interrupt mask of pwm_ch1l_int
1	cr_pwm_ch0h_mask	r/w	1'b1	Interrupt mask of pwm_ch0h_int
0	cr_pwm_ch0l_mask	r/w	1'b1	Interrupt mask of pwm_ch0l_int

18.4.12 pwm_mc0_int_clear

Address: 0x2000a468

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

RSVD RSVD RSVD RSVD RSVD cr_pwm_rept_clr cr_pwm_brk_clr cr_pwm_prde_clr cr_pwm_ch3h_clr cr_pwm_ch3l_clr cr_pwm_ch2h_clr cr_pwm_ch2l_clr cr_pwm_ch1h_clr cr_pwm_ch1l_clr cr_pwm_ch0h_clr cr_pwm_ch0l_clr

Bits	Name	Type	Reset	Description
31:11	RSVD			
10	cr_pwm_rept_clr	w1c	1'b0	Interrupt clear of pwm_rept_int
9	cr_pwm_brk_clr	w1c	1'b0	Interrupt clear of pwm_brk_int
8	cr_pwm_prde_clr	w1c	1'b0	Interrupt clear of pwm_prde_int
7	cr_pwm_ch3h_clr	w1c	1'b0	Interrupt clear of pwm_ch3h_int
6	cr_pwm_ch3l_clr	w1c	1'b0	Interrupt clear of pwm_ch3l_int
5	cr_pwm_ch2h_clr	w1c	1'b0	Interrupt clear of pwm_ch2h_int
4	cr_pwm_ch2l_clr	w1c	1'b0	Interrupt clear of pwm_ch2l_int
3	cr_pwm_ch1h_clr	w1c	1'b0	Interrupt clear of pwm_ch1h_int
2	cr_pwm_ch1l_clr	w1c	1'b0	Interrupt clear of pwm_ch1l_int
1	cr_pwm_ch0h_clr	w1c	1'b0	Interrupt clear of pwm_ch0h_int
0	cr_pwm_ch0l_clr	w1c	1'b0	Interrupt clear of pwm_ch0l_int

18.4.13 pwm_mc0_int_en

Address: 0x2000a46c

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |

cr_pwm_rept_en cr_pwm_brk_en cr_pwm_prde_en cr_pwm_ch3h_en cr_pwm_ch3l_en cr_pwm_ch2h_en cr_pwm_ch2l_en cr_pwm_ch1h_en cr_pwm_ch1l_en cr_pwm_ch0h_en cr_pwm_ch0l_en

Bits	Name	Type	Reset	Description
31:11	RSVD			
10	cr_pwm_rept_en	r/w	1'b1	Interrupt enable of pwm_rept_int
9	cr_pwm_brk_en	r/w	1'b1	Interrupt enable of pwm_brk_int
8	cr_pwm_prde_en	r/w	1'b1	Interrupt enable of pwm_prde_int
7	cr_pwm_ch3h_en	r/w	1'b1	Interrupt enable of pwm_ch3h_int
6	cr_pwm_ch3l_en	r/w	1'b1	Interrupt enable of pwm_ch3l_int
5	cr_pwm_ch2h_en	r/w	1'b1	Interrupt enable of pwm_ch2h_int
4	cr_pwm_ch2l_en	r/w	1'b1	Interrupt enable of pwm_ch2l_int
3	cr_pwm_ch1h_en	r/w	1'b1	Interrupt enable of pwm_ch1h_int
2	cr_pwm_ch1l_en	r/w	1'b1	Interrupt enable of pwm_ch1l_int
1	cr_pwm_ch0h_en	r/w	1'b1	Interrupt enable of pwm_ch0h_int
0	cr_pwm_ch0l_en	r/w	1'b1	Interrupt enable of pwm_ch0l_int

18.4.14 pwm_mc1_config0

Address: 0x2000a480

reg_clk_sel	pwm_sts_stop	pwm_stop_mode	pwm_stop_en	pwm_ext_break_pl	pwm_ext_break_en	pwm_sw_break_en	pwm_adc_trg_src	pwm_stop_on_rept	RSVD	RSVD	RSVD
31 30	29	28	27	26	25	24	23	22	21	20	19 18 17 16
15 14	13	12	11	10	9	8	7	6	5	4	3 2 1 0

pwm_clk_div

Bits	Name	Type	Reset	Description
31:30	reg_clk_sel	r/w	2'd0	PWM clock source select, 2'b00-xclk ; 2'b01-bclk ; others-f32k_clk
29	pwm_sts_stop	r	1'b0	PWM stop status
28	pwm_stop_mode	r/w	1'b1	PWM stop mode, 1'b1 - graceful ; 1'b0 - abrupt
27	pwm_stop_en	r/w	1'b0	PWM stop enable
26	pwm_ext_break_pl	r/w	1'b0	PWM external break source polarity 1'b0: Active-LOW 1'b1: Active-HIGH
25	pwm_ext_break_en	r/w	1'b0	PWM external break source enable 1'b0: Disabled, external break signal is masked 1'b1: Enabled, external break signal is effective
24	pwm_sw_break_en	r/w	1'b0	PWM break enable 1'b0: Disabled, normal operation 1'b1: Enabled, PWM output will be determined by CxPBS/CxNBS
23:20	pwm_adc_trg_src	r/w	4'hF	Select signal of ADC triggering source 4'd0: pwm_ch0l_int (Channel 0 ThresholdL reached) 4'd1: pwm_ch0h_int (Channel 0 ThresholdH reached) 4'd2: pwm_ch1l_int (Channel 1 ThresholdL reached) 4'd3: pwm_ch1h_int (Channel 1 ThresholdH reached) 4'd4: pwm_ch2l_int (Channel 2 ThresholdL reached) 4'd5: pwm_ch2h_int (Channel 2 ThresholdH reached) 4'd6: pwm_ch3l_int (Channel 3 ThresholdL reached) 4'd7: pwm_ch3h_int (Channel 3 ThresholdH reached) 4'd8: pwm_prde_int (Period End reached) Others: Disabled

Bits	Name	Type	Reset	Description
19	pwm_stop_on_rept	r/w	1'b0	PWM stopped when rept_int is asserted 1'b0: Disabled, PWM keeps running when rept_int is asserted 1'b1: Enabled, PWM stops when rept_int is asserted. Clear rept_int to restore operation
18:16	RSVD			
15:0	pwm_clk_div	r/w	16'b0	PWM clock division

18.4.15 pwm_mc1_config1

Address: 0x2000a484

pwm_ch3_nbs	pwm_ch3_pbs	pwm_ch2_nbs	pwm_ch2_pbs	pwm_ch1_nbs	pwm_ch1_pbs	pwm_ch0_nbs	pwm_ch0_pbs	pwm_ch3_npl	pwm_ch3_ppl	pwm_ch2_npl	pwm_ch2_ppl	pwm_ch1_npl	pwm_ch1_ppl	pwm_ch0_npl	pwm_ch0_ppl
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
pwm_ch3_nsi	pwm_ch3_nen	pwm_ch3_psi	pwm_ch3_pen	pwm_ch2_nsi	pwm_ch2_nen	pwm_ch2_psi	pwm_ch2_pen	pwm_ch1_nsi	pwm_ch1_nen	pwm_ch1_psi	pwm_ch1_pen	pwm_ch0_nsi	pwm_ch0_nen	pwm_ch0_psi	pwm_ch0_pen

Bits	Name	Type	Reset	Description
31	pwm_ch3_nbs	r/w	1'b0	PWM channel 3 negative break state
30	pwm_ch3_pbs	r/w	1'b0	PWM channel 3 positive break state
29	pwm_ch2_nbs	r/w	1'b0	PWM channel 2 negative break state
28	pwm_ch2_pbs	r/w	1'b0	PWM channel 2 positive break state
27	pwm_ch1_nbs	r/w	1'b0	PWM channel 1 negative break state
26	pwm_ch1_pbs	r/w	1'b0	PWM channel 1 positive break state
25	pwm_ch0_nbs	r/w	1'b0	PWM channel 0 negative break state
24	pwm_ch0_pbs	r/w	1'b0	PWM channel 0 positive break state
23	pwm_ch3_npl	r/w	1'b1	PWM channel 3 negative polarity
22	pwm_ch3_ppl	r/w	1'b1	PWM channel 3 positive polarity
21	pwm_ch2_npl	r/w	1'b1	PWM channel 2 negative polarity

Bits	Name	Type	Reset	Description
20	pwm_ch2_ppl	r/w	1'b1	PWM channel 2 positive polarity
19	pwm_ch1_npl	r/w	1'b1	PWM channel 1 negative polarity
18	pwm_ch1_ppl	r/w	1'b1	PWM channel 1 positive polarity
17	pwm_ch0_npl	r/w	1'b1	PWM channel 0 negative polarity
16	pwm_ch0_ppl	r/w	1'b1	PWM channel 0 positive polarity
15	pwm_ch3_nsi	r/w	1'b1	PWM channel 3 negative set idle state
14	pwm_ch3_nen	r/w	1'b0	PWM channel 3 negative enable pwm out
13	pwm_ch3_psi	r/w	1'b0	PWM channel 3 positive set idle state
12	pwm_ch3_pen	r/w	1'b0	PWM channel 3 positive enable pwm out
11	pwm_ch2_nsi	r/w	1'b1	PWM channel 2 negative set idle state
10	pwm_ch2_nen	r/w	1'b0	PWM channel 2 negative enable pwm out
9	pwm_ch2_psi	r/w	1'b0	PWM channel 2 positive set idle state
8	pwm_ch2_pen	r/w	1'b0	PWM channel 2 positive enable pwm out
7	pwm_ch1_nsi	r/w	1'b1	PWM channel 1 negative set idle state
6	pwm_ch1_nen	r/w	1'b0	PWM channel 1 negative enable pwm out
5	pwm_ch1_psi	r/w	1'b0	PWM channel 1 positive set idle state
4	pwm_ch1_pen	r/w	1'b0	PWM channel 1 positive enable pwm out
3	pwm_ch0_nsi	r/w	1'b1	PWM channel 0 negative set idle state
2	pwm_ch0_nen	r/w	1'b0	PWM channel 0 negative enable pwm out
1	pwm_ch0_psi	r/w	1'b0	PWM channel 0 positive set idle state
0	pwm_ch0_pen	r/w	1'b0	PWM channel 0 positive enable pwm out

18.4.16 pwm_mc1_period

Address: 0x2000a488

pwm_int_period_cnt

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

pwm_period

Bits	Name	Type	Reset	Description
31:16	pwm_int_period_cnt	r/w	16'd0	PWM interrupt period counter threshold
15:0	pwm_period	r/w	16'd0	PWM period setting

18.4.17 pwm_mc1_dead_time

Address: 0x2000a48c

pwm_ch3_dtg								pwm_ch2_dtg							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
pwm_ch1_dtg								pwm_ch0_dtg							

Bits	Name	Type	Reset	Description
31:24	pwm_ch3_dtg	r/w	8'h0	PWM Channel 3 dead time generator (DTG) DTG[7:5]=0xx => DT = DTG[7:0]*1 (unit: divided PWM clock) DTG[7:5]=10x => DT = (64+DTG[5:0])*2 (unit: divided PWM clock) DTG[7:5]=110 => DT = (32+DTG[4:0])*8 (unit: divided PWM clock) DTG[7:5]=111 => DT = (32+DTG[4:0])*16 (unit: divided PWM clock)
23:16	pwm_ch2_dtg	r/w	8'h0	PWM Channel 2 dead time generator (DTG) DTG[7:5]=0xx => DT = DTG[7:0]*1 (unit: divided PWM clock) DTG[7:5]=10x => DT = (64+DTG[5:0])*2 (unit: divided PWM clock) DTG[7:5]=110 => DT = (32+DTG[4:0])*8 (unit: divided PWM clock) DTG[7:5]=111 => DT = (32+DTG[4:0])*16 (unit: divided PWM clock)

Bits	Name	Type	Reset	Description
15:8	pwm_ch1_dtg	r/w	8'h0	PWM Channel 1 dead time generator (DTG) DTG[7:5]=0xx => DT = DTG[7:0]*1 (unit: divided PWM clock) DTG[7:5]=10x => DT = (64+DTG[5:0])*2 (unit: divided PWM clock) DTG[7:5]=110 => DT = (32+DTG[4:0])*8 (unit: divided PWM clock) DTG[7:5]=111 => DT = (32+DTG[4:0])*16 (unit: divided PWM clock)
7:0	pwm_ch0_dtg	r/w	8'h0	PWM Channel 0 dead time generator (DTG) DTG[7:5]=0xx => DT = DTG[7:0]*1 (unit: divided PWM clock) DTG[7:5]=10x => DT = (64+DTG[5:0])*2 (unit: divided PWM clock) DTG[7:5]=110 => DT = (32+DTG[4:0])*8 (unit: divided PWM clock) DTG[7:5]=111 => DT = (32+DTG[4:0])*16 (unit: divided PWM clock)

18.4.18 pwm_mc1_ch0_thre

Address: 0x2000a490

pwm_ch0_threH

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

pwm_ch0_threL

Bits	Name	Type	Reset	Description
31:16	pwm_ch0_threH	r/w	16'd0	PWM HIGH counter threshold, can't be smaller than threL
15:0	pwm_ch0_threL	r/w	16'd0	PWM LOW counter threshold, can't be larger than threH

18.4.19 pwm_mc1_ch1_thre

Address: 0x2000a494

pwm_ch1_threH

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

pwm_ch1_threL

Bits	Name	Type	Reset	Description
31:16	pwm_ch1_threH	r/w	16'd0	PWM HIGH counter threshold, can't be smaller than threL
15:0	pwm_ch1_threL	r/w	16'd0	PWM LOW counter threshold, can't be larger than threH

18.4.20 pwm_mc1_ch2_thre

Address: 0x2000a498

pwm_ch2_threH

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

pwm_ch2_threL

Bits	Name	Type	Reset	Description
31:16	pwm_ch2_threH	r/w	16'd0	PWM HIGH counter threshold, can't be smaller than threL
15:0	pwm_ch2_threL	r/w	16'd0	PWM LOW counter threshold, can't be larger than threH

18.4.21 pwm_mc1_ch3_thre

Address: 0x2000a49c

pwm_ch3_threH


31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

pwm_ch3_threL

Bits	Name	Type	Reset	Description
31:16	pwm_ch3_threH	r/w	16'd0	PWM HIGH counter threshold, can't be smaller than threL
15:0	pwm_ch3_threL	r/w	16'd0	PWM LOW counter threshold, can't be larger than threH

18.4.22 pwm_mc1_int_sts

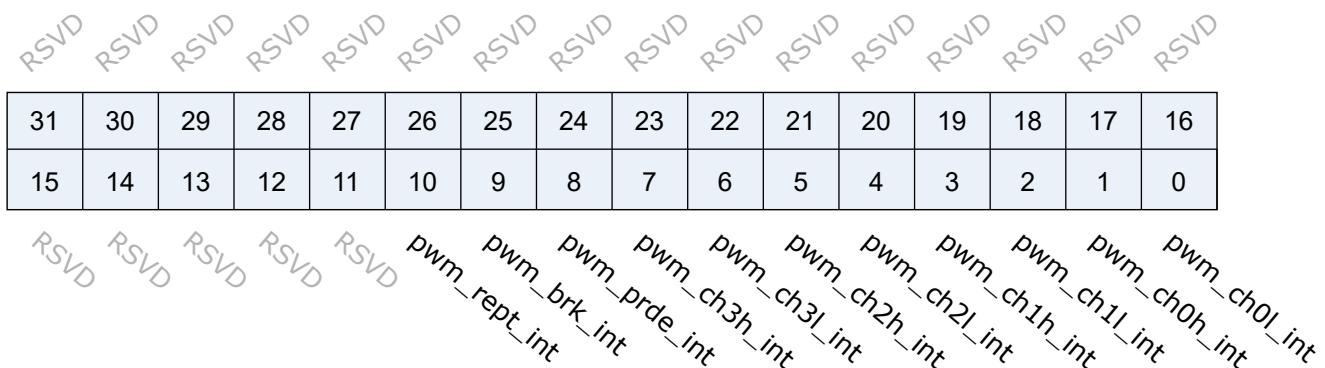
Address: 0x2000a4a0



Bits	Name	Type	Reset	Description
31:11	RSVD			
10	pwm_rept_int	r	1'b0	PWM repeat count interrupt status
9	pwm_brk_int	r	1'b0	PWM break interrupt status, triggered when ext_break is asserted Note: pwm_sw_break_en will NOT trigger this interrupt
8	pwm_prde_int	r	1'b0	PWM period end interrupt status
7	pwm_ch3h_int	r	1'b0	PWM Channel 3 ThresholdH interrupt status
6	pwm_ch3l_int	r	1'b0	PWM Channel 3 ThresholdL interrupt status
5	pwm_ch2h_int	r	1'b0	PWM Channel 2 ThresholdH interrupt status
4	pwm_ch2l_int	r	1'b0	PWM Channel 2 ThresholdL interrupt status
3	pwm_ch1h_int	r	1'b0	PWM Channel 1 ThresholdH interrupt status
2	pwm_ch1l_int	r	1'b0	PWM Channel 1 ThresholdL interrupt status
1	pwm_ch0h_int	r	1'b0	PWM Channel 0 ThresholdH interrupt status
0	pwm_ch0l_int	r	1'b0	PWM Channel 0 ThresholdL interrupt status

18.4.23 pwm_mc1_int_mask

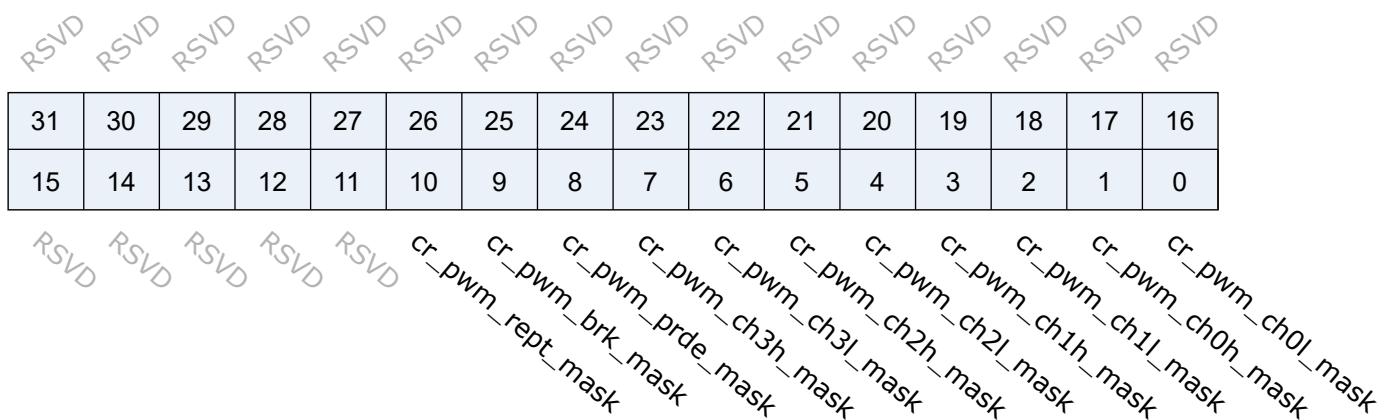
Address: 0x2000a4a4



Bits	Name	Type	Reset	Description
31:11	RSVD			
10	cr_pwm_rept_mask	r/w	1'b1	Interrupt mask of pwm_rept_int
9	cr_pwm_brk_mask	r/w	1'b1	Interrupt mask of pwm_brk_int
8	cr_pwm_prde_mask	r/w	1'b1	Interrupt mask of pwm_prde_int
7	cr_pwm_ch3h_mask	r/w	1'b1	Interrupt mask of pwm_ch3h_int
6	cr_pwm_ch3l_mask	r/w	1'b1	Interrupt mask of pwm_ch3l_int
5	cr_pwm_ch2h_mask	r/w	1'b1	Interrupt mask of pwm_ch2h_int
4	cr_pwm_ch2l_mask	r/w	1'b1	Interrupt mask of pwm_ch2l_int
3	cr_pwm_ch1h_mask	r/w	1'b1	Interrupt mask of pwm_ch1h_int
2	cr_pwm_ch1l_mask	r/w	1'b1	Interrupt mask of pwm_ch1l_int
1	cr_pwm_ch0h_mask	r/w	1'b1	Interrupt mask of pwm_ch0h_int
0	cr_pwm_ch0l_mask	r/w	1'b1	Interrupt mask of pwm_ch0l_int

18.4.24 pwm_mc1_int_clear

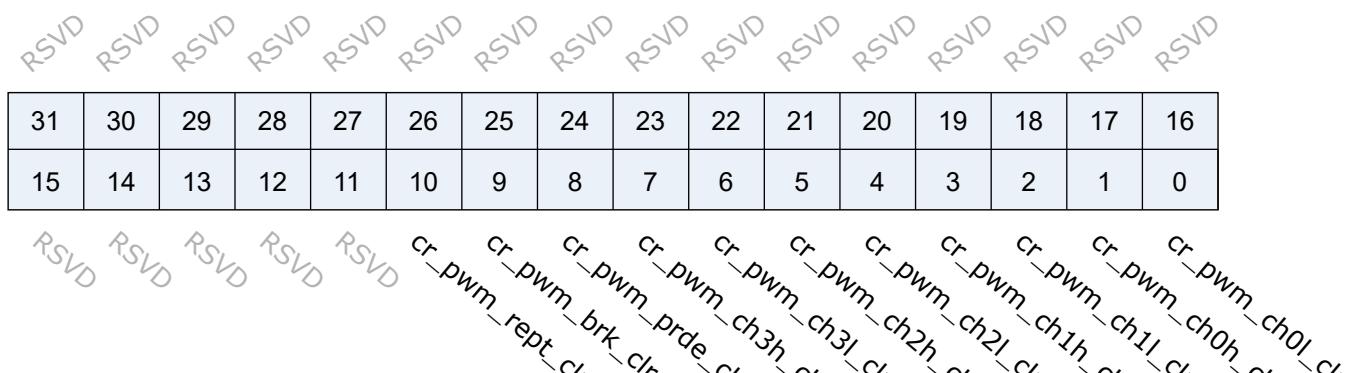Address: 0x2000a4a8



Bits	Name	Type	Reset	Description
31:11	RSVD			
10	cr_pwm_rept_clr	w1c	1'b0	Interrupt clear of pwm_rept_int
9	cr_pwm_brk_clr	w1c	1'b0	Interrupt clear of pwm_brk_int
8	cr_pwm_prde_clr	w1c	1'b0	Interrupt clear of pwm_prde_int
7	cr_pwm_ch3h_clr	w1c	1'b0	Interrupt clear of pwm_ch3h_int
6	cr_pwm_ch3l_clr	w1c	1'b0	Interrupt clear of pwm_ch3l_int
5	cr_pwm_ch2h_clr	w1c	1'b0	Interrupt clear of pwm_ch2h_int
4	cr_pwm_ch2l_clr	w1c	1'b0	Interrupt clear of pwm_ch2l_int
3	cr_pwm_ch1h_clr	w1c	1'b0	Interrupt clear of pwm_ch1h_int
2	cr_pwm_ch1l_clr	w1c	1'b0	Interrupt clear of pwm_ch1l_int
1	cr_pwm_ch0h_clr	w1c	1'b0	Interrupt clear of pwm_ch0h_int
0	cr_pwm_ch0l_clr	w1c	1'b0	Interrupt clear of pwm_ch0l_int

18.4.25 pwm_mc1_int_en

Address: 0x2000a4ac

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |

cr_pwm_rept_en cr_pwm_brk_en cr_pwm_prde_en cr_pwm_ch3h_en cr_pwm_ch3l_en cr_pwm_ch2h_en cr_pwm_ch2l_en cr_pwm_ch1h_en cr_pwm_ch1l_en cr_pwm_ch0h_en cr_pwm_ch0l_en

Bits	Name	Type	Reset	Description
31:11	RSVD			
10	cr_pwm_rept_en	r/w	1'b1	Interrupt enable of pwm_rept_int
9	cr_pwm_brk_en	r/w	1'b1	Interrupt enable of pwm_brk_int
8	cr_pwm_prde_en	r/w	1'b1	Interrupt enable of pwm_prde_int
7	cr_pwm_ch3h_en	r/w	1'b1	Interrupt enable of pwm_ch3h_int
6	cr_pwm_ch3l_en	r/w	1'b1	Interrupt enable of pwm_ch3l_int
5	cr_pwm_ch2h_en	r/w	1'b1	Interrupt enable of pwm_ch2h_int
4	cr_pwm_ch2l_en	r/w	1'b1	Interrupt enable of pwm_ch2l_int
3	cr_pwm_ch1h_en	r/w	1'b1	Interrupt enable of pwm_ch1h_int
2	cr_pwm_ch1l_en	r/w	1'b1	Interrupt enable of pwm_ch1l_int
1	cr_pwm_ch0h_en	r/w	1'b1	Interrupt enable of pwm_ch0h_int
0	cr_pwm_ch0l_en	r/w	1'b1	Interrupt enable of pwm_ch0l_int

19.1 Overview

Two 32-bit counters are built in the chip, and each can independently control and configure its parameters and clock frequency.

There is one watchdog counter in the chip. Unpredictable software or hardware behavior may cause the application to malfunction, and the watchdog timer can help recover the system. If the current stage exceeds the preset time, but the watchdog is not reset or turned off, the interrupt or system reset can be triggered as configured.

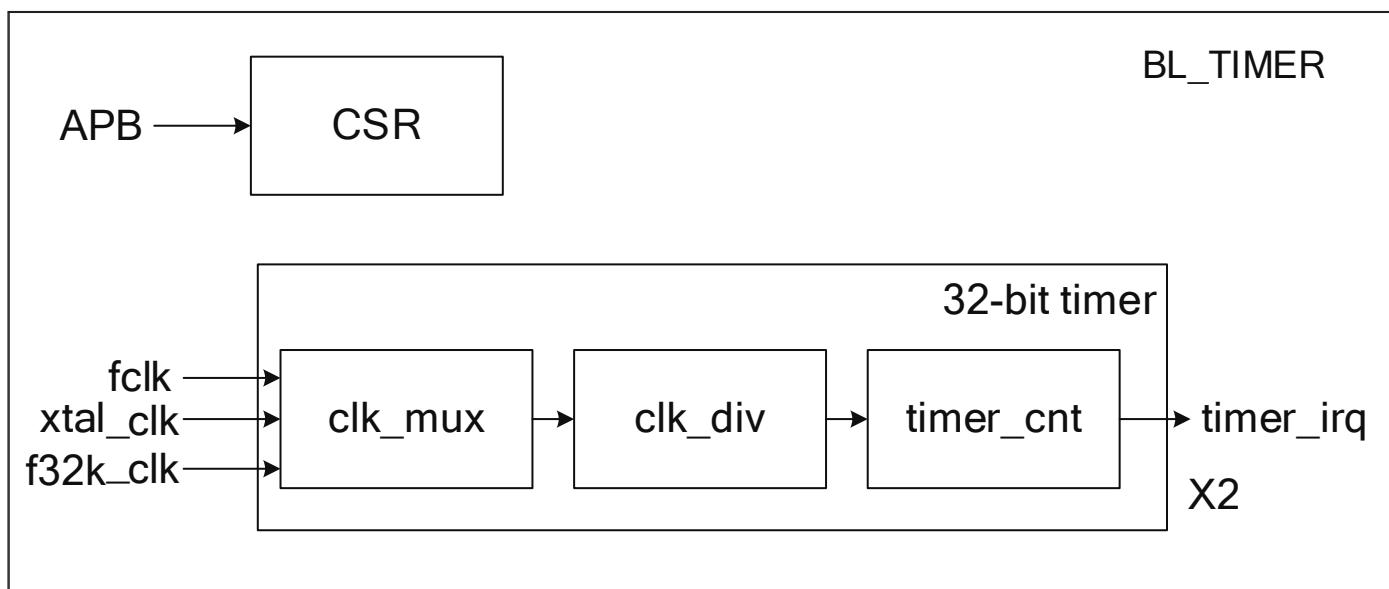


Fig. 19.1: Block diagram of timer

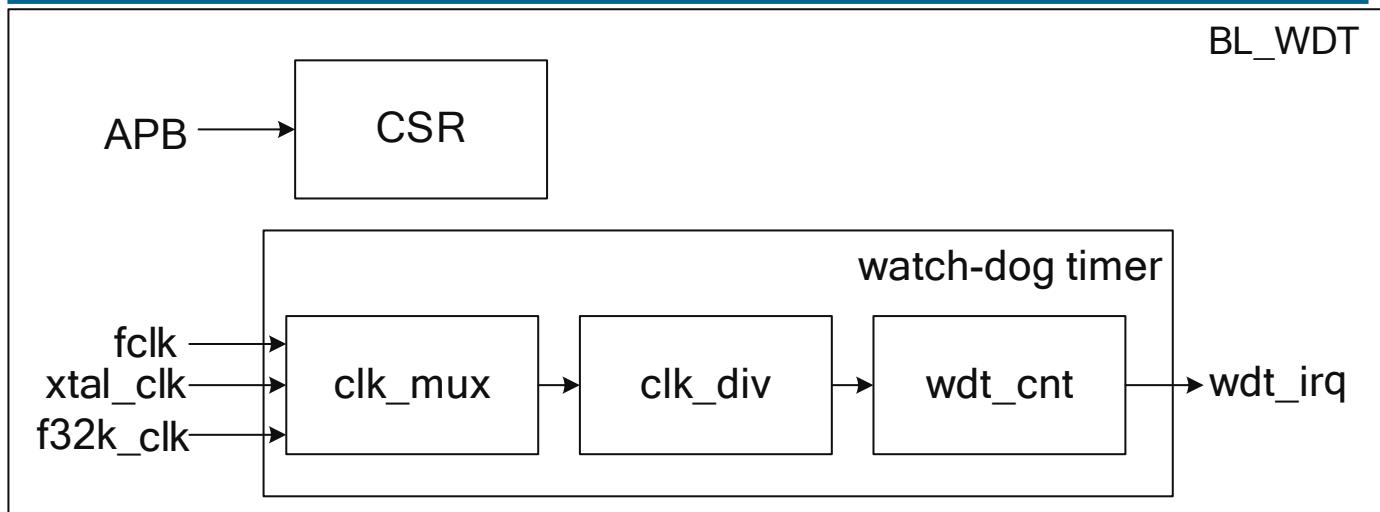


Fig. 19.2: Block diagram of watchdog timer

19.2 Features

- 32-bit timer
 - Multiple clock sources, up to 80M clock supported
 - Bit clock divider with a division factor of 1-256
 - Two 32-bit timers
 - Each timer has three alarm value settings, and the alarm when each set of alarm values overflows can be independently set.
 - Supports Free Run mode and Pre_load mode
 - Supports measuring the pulse width of external GPIO
- Watchdog timer
 - With 16-bit watchdog timer
 - Supports write password protection to prevent system error caused by wrong settings
 - Supports two watchdog overflow modes: interrupt or reset

19.3 Functional Description

There are 5 watchdog timer clock sources, which can be selected via cs_wdt in the TCCR register:

- BCLK-bus clock
- 32K-32K clock
- 1K-1K clock
- XTAL-external crystal oscillator
- GPIO-external GPIO

There are 5 types of timer clock sources, which can be selected via cs_2 and cs_3 in register TCCR:

- BCLK-bus clock
- 32K-32K clock
- 1K-1K clock(32K frequency division)
- XTAL-external crystal oscillator
- GPIO-external GPIO

Each counter has its own 8-bit frequency divider, which can divide the clock by 1-256. Specifically, when it is set to 0, it means no frequency division. When it is set to 1, it will divide the clock by 2, and so on. The maximum division factor is 256, and the counter will take the divided clock as the counting cycle unit.

19.3.1 Working Principle of General Purpose Timer

Each general purpose timer contains three comparators, one counter, and one PreLoad register. When the clock source is set and the timer is started, the counter starts to count up cumulatively. When the value of counter is equal to that of the comparator, the comparison flag is set and a comparison interrupt can be generated.

You can configure the value of channel 0 comparator 0 by setting tclr2_0, that of channel 0 comparator 1 by setting tclr2_1, and that of channel 0 comparator 2 by setting tclr2_2 in the register TICR2. The tplvr2 in the register TPLVR2 sets the channel 0 preload value.

You can configure the value of channel 1 comparator 0 by setting tclr3_0, that of channel 1 comparator 1 by setting tclr3_1, and that of channel 1 comparator 2 by setting tclr3_2 in the register TICR3. The tplvr3 in the register TPLVR3 sets the channel 1 preload value.

The timer supports two counting modes, PreLoad mode and FreeRun mode, which are selected by register TCMR. The timer2_mode in register TCMR sets the counting mode of timer0, and the timer3_mode in register TCMR sets the counting mode of timer1.

19.3.1.1 PreLoad mode

The initial value of the counter in PreLoad mode is the value of the TPLVR register (Preload Register), from which the count is accumulated upwards. Register TPLVR2 sets the preload value of timer0, and register TPLVR3 configures the preload value of timer1. The tplcr2 in register TPLCR2 configures the PreLoad trigger condition of timer0, and the tplcr3 in register TPLCR3 configures the PreLoad trigger condition of timer1. When the PreLoad trigger condition is met, the counter value will be reset to the value of PreLoad register, and then the counter will start to count up again.

During the counter counting of the timer, once the counter value matches with one of the three comparators, the comparison flag of that comparator will be set and the corresponding comparison interrupt can be generated.

If the value of the PreLoad register is 10, and the values of comparators 0, 1, and 2 are 13, 16, and 19 respectively, the working sequence of the timer in the PreLoad mode is as follows:

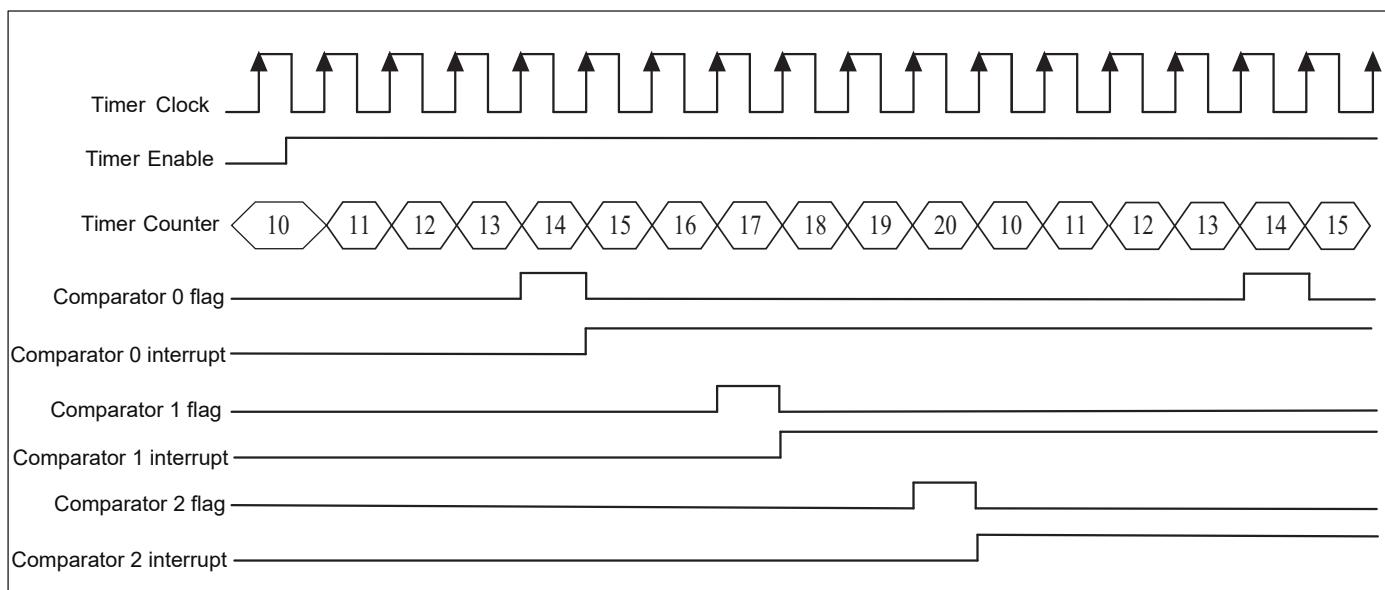


Fig. 19.3: Working sequence of timer in preLoad mode

19.3.1.2 FreeRun mode

FreeRun mode is the counter accumulation mode. In FreeRun mode, the initial value of the counter is 0. After starting the timer, the counter starts to accumulate from 0, and when the maximum value of the counter is reached, it starts to count from 0 again.

During the counter counting of the timer, once the counter value agrees with one of the three comparators. The comparison flag of that comparator will be set and the corresponding comparison interrupt can be generated.

In FreeRun mode, the timer works in the same timing as PreLoad, except that the counter will accumulate from 0 to the maximum value, and the mechanism of comparison flags and comparison interrupts generated during the period is the same as PreLoad mode.

19.3.1.3 Measuring External GPIO Pulse Width

The timer supports calculating the pulse width of external GPIOs using the internal clock source.

To configure, proceed as follows.

1. Configure the external GPIO to function as gpio_tmr_clk. This is achieved by configuring register dig_clk_cfg2 in the GLB module.

Register dig_clk_cfg2[13:12] bits for gpio_tmr_clk_sel: Selects the GPIO clock mode. A bit in register dig_clk_cfg2[11:8] is configured to 0 to indicate clock input mode. These two registers need to be used together and are configured as follows, and so on according to the GPIOs used.

Table 19.1: gpio_tmr_clk function configuration

GPIO	dig_clk_cfg2[13:12]	dig_clk_cfg2[11:8]
GPIO0	gpio_tmr_clk = 0	chip_clk_out_0_en = 0
GPIO1	gpio_tmr_clk = 1	chip_clk_out_1_en = 0
GPIO2	gpio_tmr_clk = 2	chip_clk_out_2_en = 0
GPIO3	gpio_tmr_clk = 3	chip_clk_out_3_en = 0
GPIO4	gpio_tmr_clk = 0	chip_clk_out_0_en = 0

2. The timer2_gpio_inv / timer3_gpio_inv bits in the GPIO register configure whether the external pulse width needs to be measured high or low. If this bit is 0, it means high level; if this bit is 1, it means low level.
3. configure timer2_gpio_en in GPIO register to enable GPIO measurement function
4. Configure the timer clock source and operation mode, and enable timer
5. When gpio_lat_ok in GPIO register is set to 1, get the value of GPIO_LAT2 and GPIO_LAT1 register and calculate the width.

The calculation method of the pulse width of the external gpio: (GPIO_LAT2-GPIO_LAT1)* the width of 1 cycle of the internal clock source of the timer.

For example: the internal clock source of the timer is 80M, the frequency of the external gpio is 2M, and the duty ratio is 1:1. Write 1 to the timer2_gpio_inv bit to calculate the width of the low level of the external gpio.

- Write 1 to the timer2_gpio_inv bit, which means to calculate the width of the low level of the external gpio. After the above configuration is completed, the difference between the register GPIO_LAT2 and the register GPIO_LAT1 is 20, then the low level width of the external gpio is: $20 * (1 / 80000000) = 1 / 4000000$
- Write 0 to the timer2_gpio_inv bit, which means to calculate the width of the high level of the external gpio. After the above configuration is completed, the difference between the register GPIO_LAT2 and the register GPIO_LAT1 is 20, then the high level width of the external gpio is: $20 * (1 / 80000000) = 1 / 4000000$;

19.3.2 Working Principle of Watchdog Timer

The watchdog timer integrates a counter and a comparator. The counter counts up from 0 cumulatively. If the counter is reset, it counts up again from 0. When the value of counter is equal to that of the comparator, it can generate a comparison interrupt signal or a system reset signal. Users may use one of them as required. The watchdog counter will add 1 to each counting cycle unit, and the software can reset this counter to zero through APB at any time.

The wmr in the register WMR sets the comparison value.

If the comparator value is 6, the working sequence of Watchdog is shown as follows:

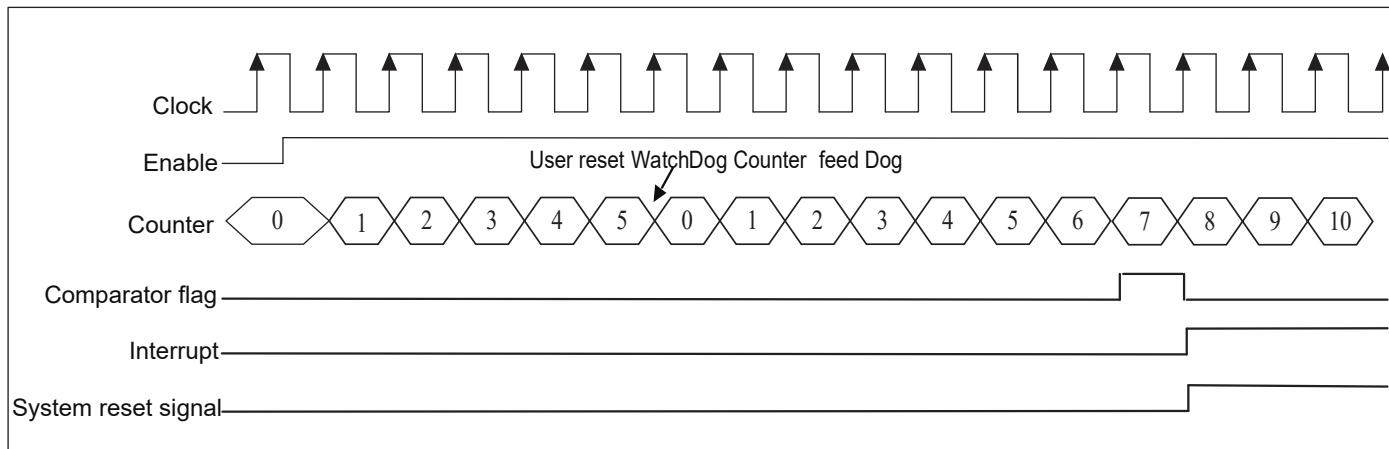


Fig. 19.4: Working sequence of watchdog

19.3.3 Alarm Setting

Each set of counter has three comparison values to provide software settings, and it can set whether each comparison value triggers an alarm interrupt. When the counter's value matches the comparison value and an alarm will be given, the counter will notify the processor through interrupts.

Through APB, the software can read whether there is an alarm at present and which comparison value triggers the alarm interrupt. When the alarm interrupt is cleared, the alarm state will also be cleared synchronously.

19.3.4 Watchdog Alarm

Each counter can be configured with one comparison value. When the watchdog counter is too late to be reset to zero due to a system error, which causes the watchdog counter to exceed the comparison value, it will trigger the watchdog alarm. There are two alarm modes. One is to notify the software to process it by generating an interrupt. The other one is to perform watchdog reset. When the watchdog reset is triggered, it will notify the system's reset controller and prepare for system reset. When everything is ready, the watchdog reset will be performed. It is worth noting that the software can read WSR register through APB to know whether watchdog reset has occurred.

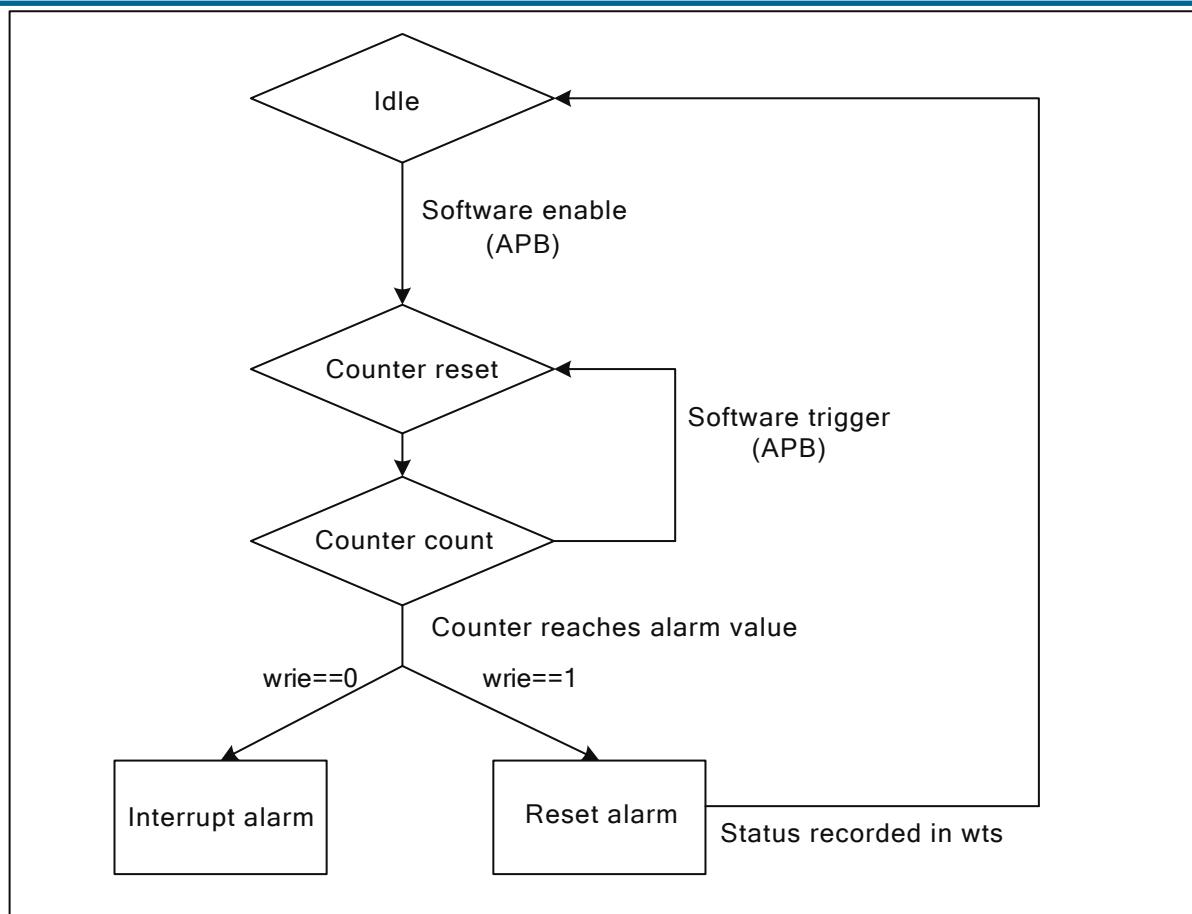


Fig. 19.5: Watchdog alarm mechanism

19.4 Register description

Name	Description
TCCR	Timer Clock Source
TMR2_0	Timer2 Match Value 0
TMR2_1	Timer2 Match Value 1
TMR2_2	Timer2 Match Value 2
TMR3_0	Timer3 Match Value 0
TMR3_1	Timer3 Match Value 1
TMR3_2	Timer3 Match Value 2
TCR2	Timer2 Counter Value
TCR3	Timer3 Counter Value
TSR2	Timer2 Match Status

Name	Description
TSR3	Timer3 Match Status
TIER2	Timer2 Match Interrupt Enable
TIER3	Timer3 Match Interrupt Enable
TPLVR2	Timer2 Pre-Load Value
TPLVR3	Timer3 Pre-Load Value
TPLCR2	Timer2 Pre-Load Control
TPLCR3	Timer3 Pre-Load Control
WMER	Watch-dog reset/interrupt Mode
WMR	Watch-dog Match Value
WVR	Watch-dog Counter Value
WSR	Watch-dog Reset Status
TICR2	Timer2 Interrupt Clear
TICR3	Timer3 Interrupt Clear
WICR	WDT Interrupt Clear
TCER	Timer Counter Enable/Clear
TCMR	Timer Counter Mode
TILR2	Timer2 Match Interrupt Mode
TILR3	Timer3 Match Interrupt Mode
WCR	WDT Counter Reset
WFAR	WDT Access Key1
WSAR	WDT Access Key2
TCVWR2	Timer2 Counter Latch Value
TCVWR3	Timer3 Counter Latch Value
TCVSYN2	Timer2 Counter Sync Value
TCVSYN3	Timer3 Counter Sync Value
TCDR	Timer Division
GPIO	GPIO Mode
GPIO_LAT1	GPIO Latch Value1
GPIO_LAT2	GPIO Latch Value2

Name	Description
TCDR_FORCE	Timer Division Force

19.4.1 TCCR

Address: 0x2000a500

ID								tmr_rsv							
31 30 29 28 27 26 25 24								23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

RSVD *RSVD* *RSVD* *RSVD* *cs_wdt* *cs_3* *cs_2*

Bits	Name	Type	Reset	Description
31:24	ID	r	8'ha5	
23:16	tmr_rsv	rsvd	0	
15:12	RSVD			
11:8	cs_wdt	r/w	4'd1	WDT 0:fclk / 1:f32k / 2:1k / 3:32M / 4:GPIO / 5:No clock
7:4	cs_3	r/w	4'd5	Timer3 0:fclk / 1:f32k / 2:1k / 3:32M / 4:GPIO / 5:No clock
3:0	cs_2	r/w	4'd5	Timer2 0:fclk / 1:f32k / 2:1k / 3:32M / 4:GPIO / 5:No clock

19.4.2 TMR2_0

Address: 0x2000a510

tmr2_0															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

tmr2_0

Bits	Name	Type	Reset	Description
31:0	tmr2_0	r/w	32'hffffffff	Timer2 Match Value 0

19.4.3 TMR2_1

Address: 0x2000a514

tmr2_1

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

tmr2_1

Bits	Name	Type	Reset	Description
31:0	tmr2_1	r/w	32'hffffffffff	Timer2 Match Value 1

19.4.4 TMR2_2

Address: 0x2000a518

tmr2_2

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

tmr2_2

Bits	Name	Type	Reset	Description
31:0	tmr2_2	r/w	32'hffffffffff	Timer2 Match Value 2

19.4.5 TMR3_0

Address: 0x2000a51c

tmr3_0

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

tmr3_0

Bits	Name	Type	Reset	Description
31:0	tmr3_0	r/w	32'hffffffffff	Timer3 Match Value 0

19.4.6 TMR3_1

Address: 0x2000a520

tmr3_1

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

tmr3_1

Bits	Name	Type	Reset	Description
31:0	tmr3_1	r/w	32'hffffffffff	Timer3 Match Value 1

19.4.7 TMR3_2

Address: 0x2000a524

tmr3_2

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

tmr3_2

Bits	Name	Type	Reset	Description
31:0	tmr3_2	r/w	32'hffffffffff	Timer3 Match Value 2

19.4.8 TCR2

Address: 0x2000a52c

tcr2_cnt

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

tcr2_cnt

Bits	Name	Type	Reset	Description
31:0	tcr2_cnt	r	0	Timer2 Counter Value

19.4.9 TCR3

Address: 0x2000a530

tcr3_cnt

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

tcr3_cnt

Bits	Name	Type	Reset	Description
31:0	tcr3_cnt	r	0	Timer3 Counter Value

19.4.10 TSR2

Address: 0x2000a538

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

RSVD tsr2_2 tsr2_1 tsr2_0

Bits	Name	Type	Reset	Description
31:3	RSVD			
2	tsr2_2	r	0	Timer2 match value 2 status/Clear interrupt would also clear this bit
1	tsr2_1	r	0	Timer2 match value 1 status/Clear interrupt would also clear this bit
0	tsr2_0	r	0	Timer2 match value 0 status/Clear interrupt would also clear this bit

19.4.11 TSR3

Address: 0x2000a53c

RSVD																	
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16		
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		

RSVD *tsr3_2* *tsr3_1* *tsr3_0*

Bits	Name	Type	Reset	Description
31:3	RSVD			
2	<i>tsr3_2</i>	r	0	Timer3 match value 2 status/Clear interrupt would also clear this bit
1	<i>tsr3_1</i>	r	0	Timer3 match value 1 status/Clear interrupt would also clear this bit
0	<i>tsr3_0</i>	r	0	Timer3 match value 0 status/Clear interrupt would also clear this bit

19.4.12 TIER2

Address: 0x2000a544

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |

RSVD *tier2_2* *tier2_1* *tier2_0*

Bits	Name	Type	Reset	Description
31:3	RSVD			
2	<i>tier2_2</i>	r/w	0	Timer2 match value 2 interrupt enable
1	<i>tier2_1</i>	r/w	0	Timer2 match value 1 interrupt enable
0	<i>tier2_0</i>	r/w	0	Timer2 match value 0 interrupt enable

19.4.13 TIER3

Address: 0x2000a548

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |

RSVD tier3_2 tier3_1 tier3_0

Bits	Name	Type	Reset	Description
31:3	RSVD			
2	tier3_2	r/w	0	Timer3 match value 2 interrupt enable
1	tier3_1	r/w	0	Timer3 match value 1 interrupt enable
0	tier3_0	r/w	0	Timer3 match value 0 interrupt enable

19.4.14 TPLVR2

Address: 0x2000a550

tplvr2

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16				
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				

tplvr2

Bits	Name	Type	Reset	Description
31:0	tplvr2	r/w	0	Timer2 Pre-Load Value

19.4.15 TPLVR3

Address: 0x2000a554

tplvr3

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16				
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				

tplvr3

Bits	Name	Type	Reset	Description
31:0	tplvr3	r/w	0	Timer3 Pre-Load Value

19.4.16 TPLCR2

Address: 0x2000a55c

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |

Bits	Name	Type	Reset	Description
31:2	RSVD			
1:0	tplcr2	r/w	0	Timer2 pre-load control 2'd0 - No pre-load 2'd1 - Pre-load with match comparator 0 2'd2 - Pre-load with match comparator 1 2'd3 - Pre-load with match comparator 2

19.4.17 TPLCR3

Address: 0x2000a560

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |

Bits	Name	Type	Reset	Description
31:2	RSVD			

Bits	Name	Type	Reset	Description
1:0	tplcr3	r/w	0	Timer3 pre-load control 2'd0 - No pre-load 2'd1 - Pre-load with match comparator 0 2'd2 - Pre-load with match comparator 1 2'd3 - Pre-load with match comparator 2

19.4.18 WMER

Address: 0x2000a564

RSVD																	
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16		
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	wrie	we

Bits	Name	Type	Reset	Description
31:2	RSVD			
1	wrie	r/w	0	WDT reset/interrupt mode 1'b0 - WDT expiration to generate interrupt 1'b1 - WDT expiration to generate reset source
0	we	r/w	0	WDT enable register

19.4.19 WMR

Address: 0x2000a568

RSVD	wdt_align																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16		
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	wmr	

Bits	Name	Type	Reset	Description
31:17	RSVD			
16	wdt_align	r/w	0	WDT compare value update align interrupt
15:0	wmr	r/w	16'hffff	WDT counter match value

19.4.20 WVR

Address: 0x2000a56c

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |

wdt_cnt

Bits	Name	Type	Reset	Description
31:16	RSVD			
15:0	wdt_cnt	r	0	WDT counter value

19.4.21 WSR

Address: 0x2000a570

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |

RSVD wts

Bits	Name	Type	Reset	Description
31:1	RSVD			
0	wts	w	0	WDT reset status Write 0 to clear the WDT reset status Read 1 indicates reset was caused by the WDT

19.4.22 TICR2

Address: 0x2000a578

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |

RSVD tclr2_2 tclr2_1 tclr2_0

Bits	Name	Type	Reset	Description
31:3	RSVD			
2	tclr2_2	w	0	Timer2 Interrupt clear for match comparator 2
1	tclr2_1	w	0	Timer2 Interrupt clear for match comparator 1
0	tclr2_0	w	0	Timer2 Interrupt clear for match comparator 0

19.4.23 TICR3

Address: 0x2000a57c

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |

RSVD tclr3_2 tclr3_1 tclr3_0

Bits	Name	Type	Reset	Description
31:3	RSVD			
2	tclr3_2	w	0	Timer3 Interrupt clear for match comparator 2
1	tclr3_1	w	0	Timer3 Interrupt clear for match comparator 1
0	tclr3_0	w	0	Timer3 Interrupt clear for match comparator 0

19.4.24 WICR

Address: 0x2000a580

RSVD	wiclr																		
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16				
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				

Bits	Name	Type	Reset	Description
31:1	RSVD			
0	wiclr	w	0	WDT Interrupt Clear

19.4.25 TCER

Address: 0x2000a584

RSVD	tcr3_cnt_clr																		
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16				
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				

Bits	Name	Type	Reset	Description
31:7	RSVD			
6	tcr3_cnt_clr	r/w	0	Timer3 count clear
5	tcr2_cnt_clr	r/w	0	Timer2 count clear
4:3	RSVD			
2	timer3_en	r/w	0	Timer3 count enable
1	timer2_en	r/w	0	Timer2 count enable
0	RSVD			

19.4.26 TCMR

Address: 0x2000a588

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |

RSVD RSVD RSVD RSVD RSVD RSVD RSVD RSVD RSVD timer3_align timer2_align RSVD RSVD RSVD timer3_mode timer2_mode RSVD

Bits	Name	Type	Reset	Description
31:7	RSVD			
6	timer3_align	r/w	0	Timer3 compare value update align interrupt
5	timer2_align	r/w	0	Timer2 compare value update align interrupt
4:3	RSVD			
2	timer3_mode	r/w	0	0:pre-load mode 1:free run mode
1	timer2_mode	r/w	0	0:pre-load mode 1:free run mode
0	RSVD			

19.4.27 TILR2

Address: 0x2000a590

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |

RSVD RSVD

Bits	Name	Type	Reset	Description
31:3	RSVD			
2	tilr2_2	r/w	0	0:level 1:edge
1	tilr2_1	r/w	0	0:level 1:edge

Bits	Name	Type	Reset	Description
0	tilr2_0	r/w	0	0:level 1:edge

19.4.28 TILR3

Address: 0x2000a594

RSVD	RSVD																	
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16			
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
																tilr3_2	tilr3_1	tilr3_0

Bits	Name	Type	Reset	Description
31:3	RSVD			
2	tilr3_2	r/w	0	0:level 1:edge
1	tilr3_1	r/w	0	0:level 1:edge
0	tilr3_0	r/w	0	0:level 1:edge

19.4.29 WCR

Address: 0x2000a598

RSVD																		
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16			
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
																wcr		

Bits	Name	Type	Reset	Description
31:1	RSVD			
0	wcr	w	0	WDT Counter Reset

19.4.30 WFAR

Address: 0x2000a59c

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |

wfar

Bits	Name	Type	Reset	Description
31:16	RSVD			
15:0	wfar	w	0	WDT access key1 - 16'hBABA

19.4.31 WSAR

Address: 0x2000a5a0

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |

wsar

Bits	Name	Type	Reset	Description
31:16	RSVD			
15:0	wsar	w	0	WDT access key2 - 16'hEB10

19.4.32 TCVWR2

Address: 0x2000a5a8

tcr2_cnt_lat

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16		
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		

tcr2_cnt_lat

Bits	Name	Type	Reset	Description
31:0	tcr2_cnt_lat	r	0	Timer2 Counter Latch Value

19.4.33 TCVWR3

Address: 0x2000a5ac

tcr3_cnt_lat

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

tcr3_cnt_lat

Bits	Name	Type	Reset	Description
31:0	tcr3_cnt_lat	r	0	Timer3 Counter Latch Value

19.4.34 TCVSYN2

Address: 0x2000a5b4

tcr2_cnt_sync

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

tcr2_cnt_sync

Bits	Name	Type	Reset	Description
31:0	tcr2_cnt_sync	r	0	Timer2 Counter Sync Value (continue readable)

19.4.35 TCVSYN3

Address: 0x2000a5b8

tcr3_cnt_sync

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

tcr3_cnt_sync

Bits	Name	Type	Reset	Description
31:0	tcr3_cnt_sync	r	0	Timer3 Counter Sync Value (continue readable)

19.4.36 TCDR

Address: 0x2000a5bc

wcdr								tcdr3							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
tcdr2								RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD

Bits	Name	Type	Reset	Description
31:24	wcdr	r/w	0	WDT clock division value register
23:16	tcdr3	r/w	0	Timer3 clock division value register
15:8	tcdr2	r/w	0	Timer2 clock division value register
7:0	RSVD			

19.4.37 GPIO

Address: 0x2000a5c0

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD
gpio_lat_ok								wdt_gpio_inv	timer3_gpio_inv	timer2_gpio_inv	RSVD	RSVD	RSVD	RSVD	RSVD
RSVD								RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD

Bits	Name	Type	Reset	Description
31	gpio_lat_ok	r	0	Latch Done. Pulse width = (GPIO_LAT2 - GPIO_LAT1) * (Timer2 Cycle)

Bits	Name	Type	Reset	Description
30:8	RSVD			
7	wdt_gpio_inv	r/w	0	WDT gpio polarity 0:pos 1:neg
6	timer3_gpio_inv	r/w	0	Timer3 gpio polarity 0:pos 1:neg
5	timer2_gpio_inv	r/w	0	Timer2 gpio polarity 0:pos 1:neg
4:2	RSVD			
1	timer2_gpio_en	r/w	0	Timer2 gpio measure enable
0	RSVD			

19.4.38 GPIO_LAT1

Address: 0x2000a5c4

gpio_lat1

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

gpio_lat1

Bits	Name	Type	Reset	Description
31:0	gpio_lat1	r	0	Pos-Edge Latch Timer2

19.4.39 GPIO_LAT2

Address: 0x2000a5c8

gpio_lat2


31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

gpio_lat2

Bits	Name	Type	Reset	Description
31:0	gpio_lat2	r	0	Neg-Edge Latch Timer2

19.4.40 TCDR_FORCE

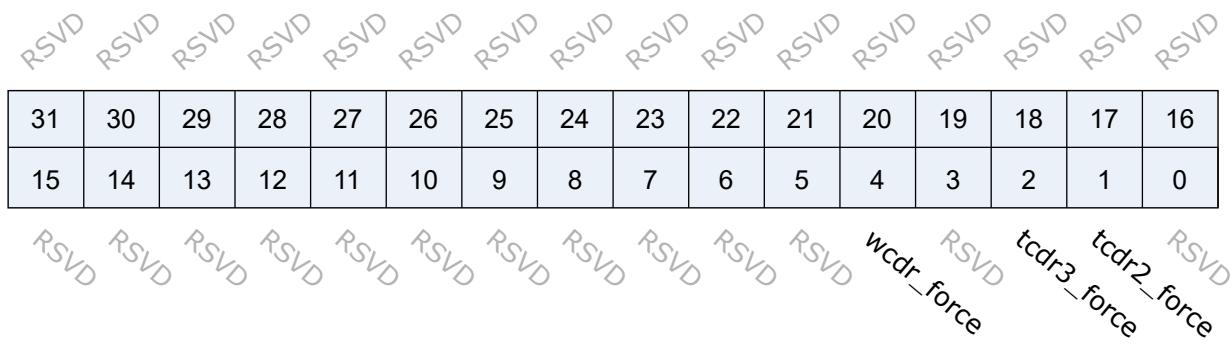Address: 0x2000a5cc



Bits	Name	Type	Reset	Description
31:5	RSVD			
4	wcdr_force	r/w	0	Force WDT clock division value to counter
3	RSVD			
2	tcdr3_force	r/w	0	Force Timer3 clock division value to counter
1	tcdr2_force	r/w	0	Force Timer2 clock division value to counter
0	RSVD			

20.1 Overview

InterIC Sound (I2S), also Integrated Interchip Sound (IIS), is a digital audio transmission specification defined by Philips in 1986 (revised in 1996) for transmitting digital audio data between internal devices of a system. I2S is a simple digital interface protocol with no address or device selection mechanism and supports full-duplex peer-to-peer transmission. In the I2S bus, the device providing the clock (BCLK and FS) is the master device. In most scenarios, there is a master device and a slave device on the I2S bus for unidirectional or bidirectional data transmission. However, in some special scenarios, only one master can provide the clock to control the data transmission between two slaves, which can precisely control the data flow.

The integrated I2S module of the chip is also compatible with the PCM/TDM format. Compared with I2S, which can only transmit two-channel audio data, the PCM/TDM interface expands the number of transmission channels through Time Division Multiplexing. The main difference between PCM/TDM and I2S lies in the position, length and frame length of the frame clock, and I2S can be considered as a special case of the PCM/TDM interface. However, PCM/TDM does not have a completely unified application standard, and different manufacturers may have slightly different applications.

20.2 Features

- Supports master and slave modes
- Supported I2S protocol
 - Normal I2S (Philips format)
 - Left-Justified
 - Right-Justified
- The channel slot and effective data width support 8/16/24/32 bits respectively, and the effective data width cannot be greater than the channel width

- Support PCM/TDM format, frame clock position and frame length can be adjusted flexibly, support up to 6 channels, compatible with most common modes
 - Support 2-channel, 3-channel, 4-channel and 6-channel modes, channel slot supports 8/16/24/32 bits
 - PCM/TDM Mode A, after the data is valid at FS, the second rising edge of BCLK is valid
 - PCM/TDM Mode B, after the data is valid at FS, the first rising edge of BCLK is valid
 - Long Frame Sync, long frame sync mode, FS pulse width is equal to the length of 1 Slot
 - Short Frame Sync, short frame sync mode, FS pulse width is equal to 1 BCLK cycle length
- Support 8/11.025/16/22.05/32/44.1/48/96/192 KHz sampling rate, and can achieve finer control by configuring clock source and frequency division coefficient
- Support playback of monaural audio copied to dual-channel mode
- Support merging of two-channel recording data below 8/16bits to improve FIFO usage efficiency
- Support dynamic mute switching function
- Support data MSB/LSB switching
- Support to directly output the clock source, which can be used as MCLK, or output MCLK with the CLK_OUT function of GLB
- Support output signal polarity inversion
- Support DMA transfer mode
- The data transmit/receive FIFO has a width of 32 bits and a depth of 16

20.3 Functional Description

20.3.1 Data formats

The signal timing format of the I2S module is highly flexible and configurable, including the mode of the FS signal, the offset from the FS signal to valid data, the slot width and the valid data width, and is compatible with most common formats. The I2S protocol is a two-channel mode, the FS signal length is equal to a slot, and the effective data length is less than or equal to the slot length. Among them, the valid data in the Normal format is left-aligned and will be offset by one bit relative to the FS signal. Therefore, set the cr_fs_ch_cnt section of the i2s_config register to be dual-channel, set the FS signal length of the cr_fs_1t_mode section to be equal to Solt, set the cr_i2s_mode section to be data left-aligned, and set the cr_ofs_en and cr_ofs_cnt sections to be one-bit data offset, and the I2S protocol Normal format can be obtained. As shown below.

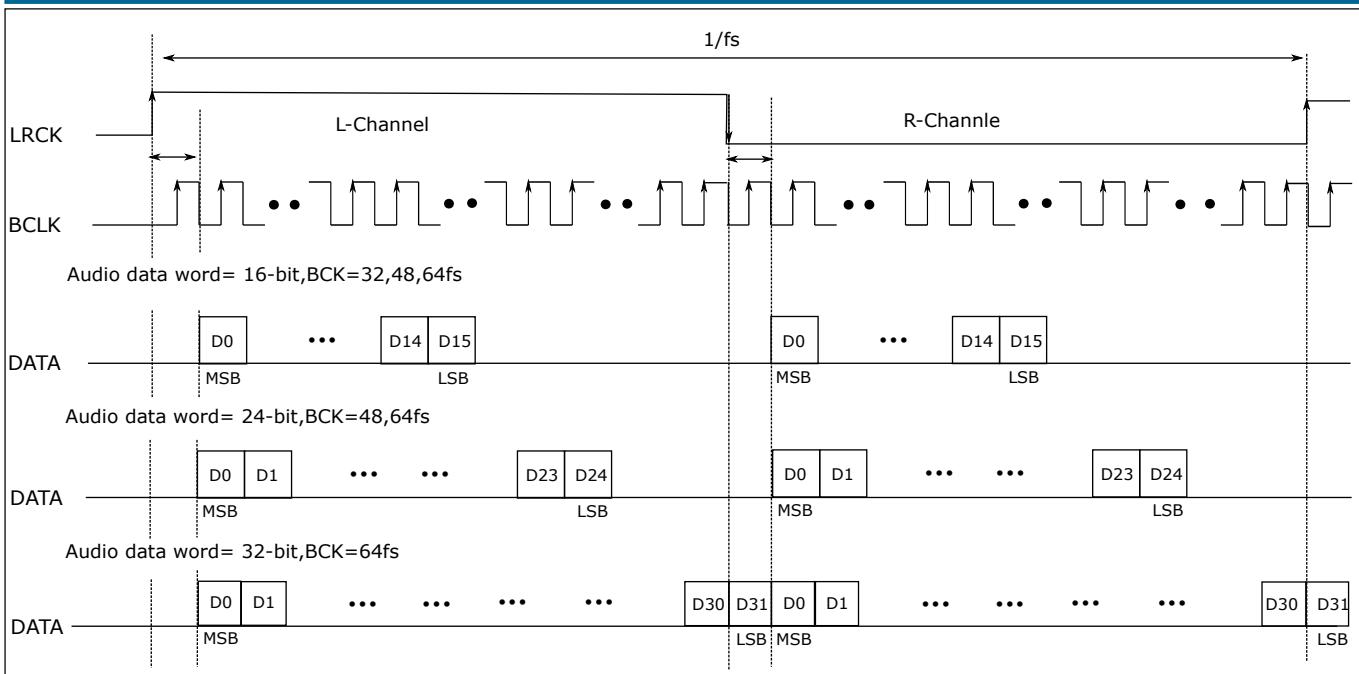


Fig. 20.1: Normal I2S

The left-justified format of the I2S protocol is similar to the Normal format, but there is no data offset. Valid data in the right-aligned format will be aligned to the right within the slot. Therefore, on the basis of the Normal format, set the `cr_ofs_en` section of the `i2s_config` register to close the data offset to obtain the Left-Justified format, and then set the `cr_i2s_mode` section to right-align the data to obtain the Right-Justified format, as shown in the figure below.

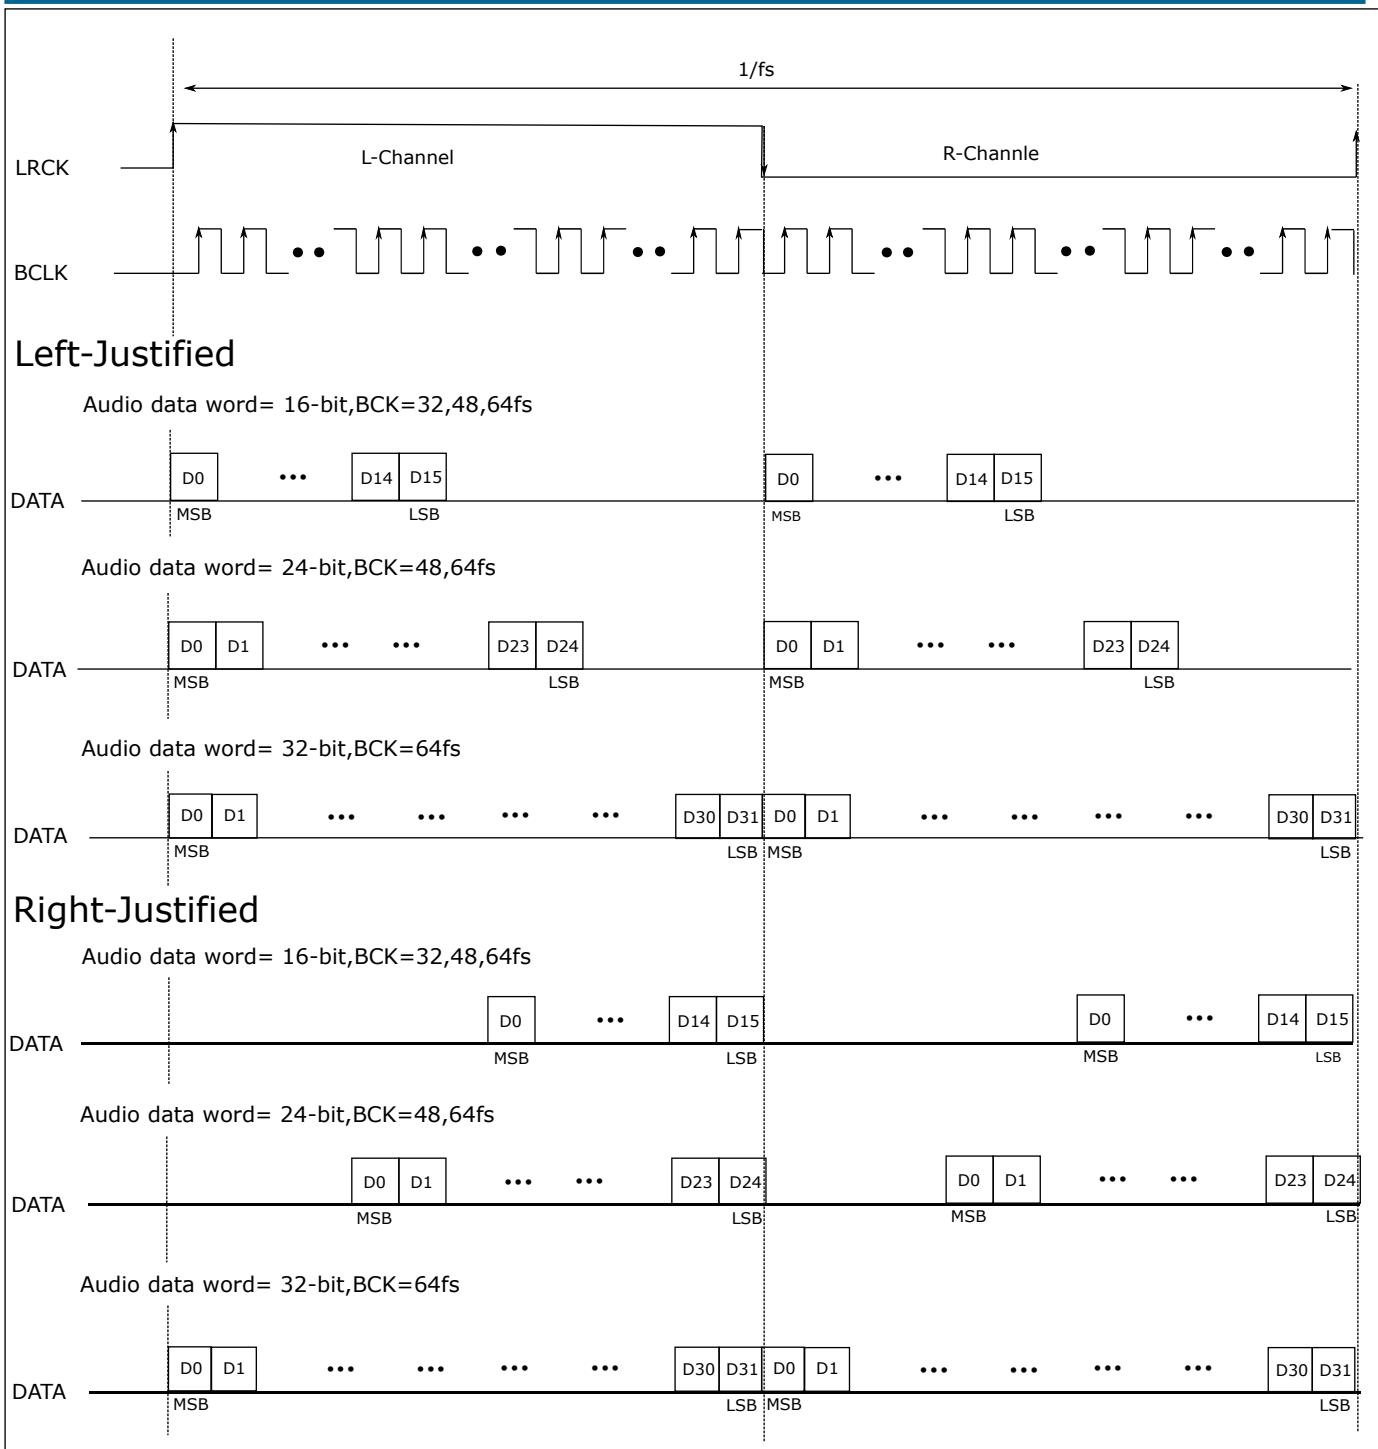


Fig. 20.2: I2S LeftJustified/RightJustified

The configuration of PCM/TDM mode is more flexible. Set the cr_i2s_mode section of the i2s_config register to 2, that is, PCM/TDM mode, set the cr_fs_ch_cnt section to select the number of channels, and set the cr_fs_1t_mode section to select long frame synchronization (FS signal length equal to Slot) or short frame synchronization (FS signal length is one BCLK cycle) mode, set cr_ofs_en section and cr_ofs_cnt section to select data offset, generally define Mode A offset by 1 bit, Mode B has no offset, but the definitions of different manufacturers may be different. The figure

below shows the timing of Mode B in Long/Short Frame Sync, shifting the data to the right by one bit is the timing of Mode A.

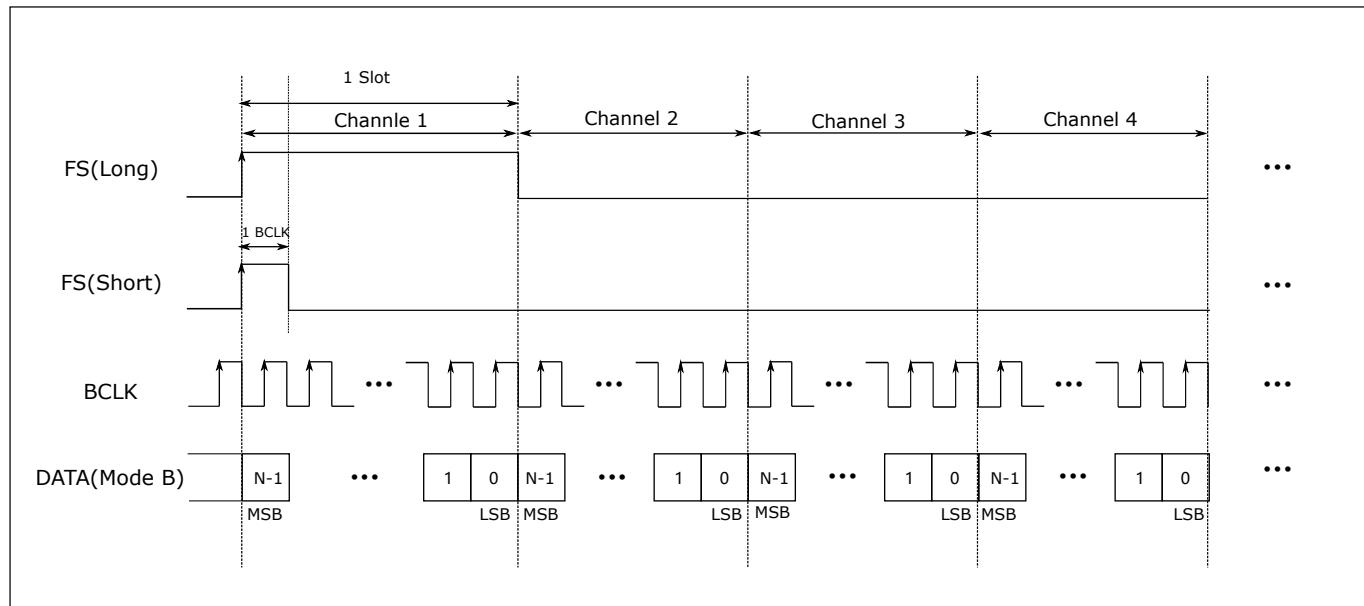


Fig. 20.3: PCM/TDM mode

20.3.2 I2S single channel mode

Usually I2S uses two-channel transmission, but there will be a waste of resources when using a single-channel device. After configuring the `cr_mono_mode` section of the `i2s_config` register as Mono mode, the mono mode will be used. It should be noted that both sending and receiving will use mono mode. At this time, the data in the TX FIFO will be placed in the left and right channels at the same time, and the data received by the left channel or the right channel can be selected through the `cr_mono_rx_ch` segment of the `i2s_config` register.

20.3.3 Data MSB/LSB justification

Usually I2S uses MSB format to transmit data, but some modes of some manufacturers' devices may use LSB format to transmit, and the format can be adjusted through the `cr_endian` bit of the `i2s_config` register.

20.3.4 Binaural data merge and exchange

When using the 8/16bit valid data of the I2S protocol, in order to increase the utilization efficiency of the FIFO, the dual-channel data can be merged through the `cr_fifo_lr_merge` section of the `i2s_fifo_config_0` register. At this time, each data in the FIFO contains both left and right channel data. [0:15] is the left channel at 16bit, [16:31] is the right channel, [0:7] is the left channel at 8bit, and [8:15] is the right channel. At this time, the data width in DMA mode also needs to be adjusted accordingly. In merge mode, the left and right channel output can be exchanged by controlling the `cr_fifo_lr_exchg` bit of the `i2s_fifo_config_0` register.

20.3.5 Silent mode

In some scenarios, it is necessary to pause the playback, but to keep the playback progress continuously changing, the silent mode can meet this requirement. Enter the mute mode through the cr_mute_mode of the i2s_config register. During the mute period, the data transmission speed in the TX FIFO remains unchanged, but the sent data will be forced to remain as the last data before each channel is muted.

20.3.6 Clock source

The clock source of I2S is provided by audio PLL, and the clock divider is used to divide the clock source and then generate the clock signal to drive I2S, as shown below:

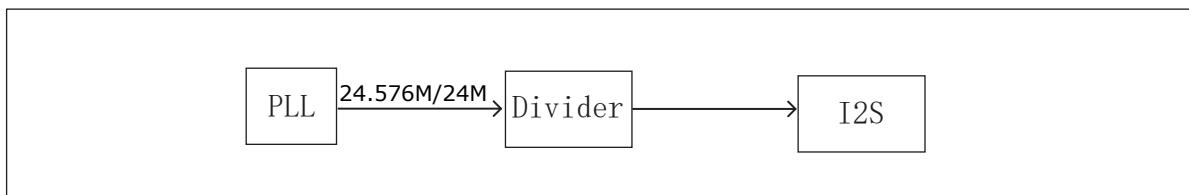


Fig. 20.4: I2S clock

20.3.7 I2S Interrupt

I2S supports the following interrupt control modes:

- TX FIFO request interrupt
 - A TX FIFO request interrupt will be generated when TX_FIFO_CNT in I2S_FIFO_CONFIG_1 is greater than TX_FIFO_TH. When the condition is not met, the interrupt flag will be cleared automatically
- RX FIFO request interrupt
 - A RX FIFO request interrupt will be generated when RX_FIFO_CNT in I2S_FIFO_CONFIG_1 is greater than RX_FIFO_TH. When the condition is not met, the interrupt flag will be cleared automatically
- Overrun/underrun error interrupt
 - If the TX/RX FIFO overflows or underflows, it will trigger the error interrupt. When the error disappears, the flag bit will be cleared automatically


All the interrupt enable bits and interrupt flag bits of I2S are in the I2S_INT_STS register.

20.4 Register description

Name	Description
i2s_config	
i2s_int_sts	
i2s_bclk_config	
i2s_fifo_config_0	
i2s_fifo_config_1	
i2s_fifo_wdata	
i2s_fifo_rdata	
i2s_io_config	

20.4.1 i2s_config

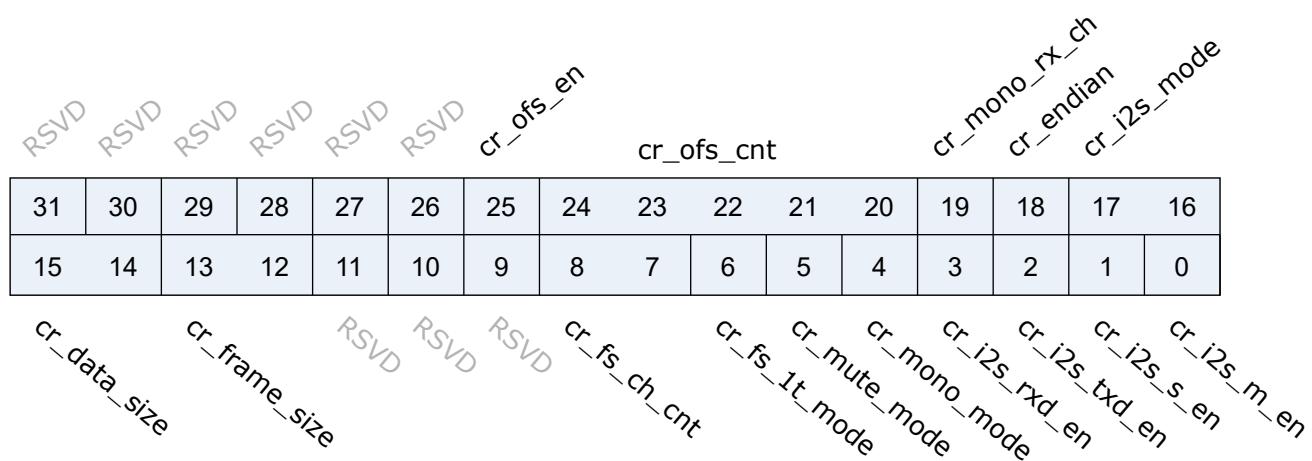Address: 0x2000ab00




Bits	Name	Type	Reset	Description
31:26	RSVD			
25	cr_ofs_en	r/w	1'b0	Offset enable 1'b0: Disabled, 1'b1: Enabled
24:20	cr_ofs_cnt	r/w	5'd0	Offset cycle count (unit: cycle of I2S BCLK) 5'd0: 1 cycle 5'd1: 2 cycles ...

Bits	Name	Type	Reset	Description
19	cr_mono_rx_ch	r/w	1'b0	RX mono mode channel select signal 1'b0: L-channel 1'b1: R-channel
18	cr_endian	r/w	1'b0	Data endian (bit reverse) 1'b0: MSB goes out first, 1'b1: LSB goes out first
17:16	cr_i2s_mode	r/w	2'd0	2'd0: Left-Justified, 2'd1: Right-Justified, 2'd2: DSP, 2'd3: Reserved
15:14	cr_data_size	r/w	2'd1	Data bit width of each channel 2'd0: 8, 2'd1: 16, 2'd2: 24, 2'd3: 32 (bits)
13:12	cr_frame_size	r/w	2'd1	Frame size of each channel 2'd0: 8, 2'd1: 16, 2'd2: 24, 2'd3: 32 (cycles)
11:9	RSVD			
8:7	cr_fs_ch_cnt	r/w	2'd0	Channel count of each frame 2'd0: FS 2-channel mode 2'd1: FS 3-channel mode (DSP mode only) 2'd2: FS 4-channel mode (DSP mode only) 2'd3: FS 6-channel mode (DSP mode only) Note: cr_mono_mode & cr_fifo_lr_merge will be invalid in 3-channel mode Note: frame_size must equal data_size in 3/4/6-channel mode
6	cr_fs_1t_mode	r/w	1'b0	1'b0: FS high/low is even, 1'b1: FS only asserts for 1 cycle
5	cr_mute_mode	r/w	1'b0	1'b0: Normal mode, 1'b1: Mute mode
4	cr_mono_mode	r/w	1'b0	1'b0: Stereo mode, 1'b1: Mono mode Note: csr_mono_mode & csr_fifo_lr_merge should NOT be enabled at the same time
3	cr_i2s_rxd_en	r/w	1'b0	Enable signal of I2S RXD signal
2	cr_i2s_txd_en	r/w	1'b0	Enable signal of I2S TXD signal
1	cr_i2s_s_en	r/w	1'b0	Enable signal of I2S Slave function, cannot enable both csr_i2s_m_en & csr_i2s_s_en
0	cr_i2s_m_en	r/w	1'b0	Enable signal of I2S Master function, cannot enable both csr_i2s_m_en & csr_i2s_s_en

20.4.2 i2s_int_sts

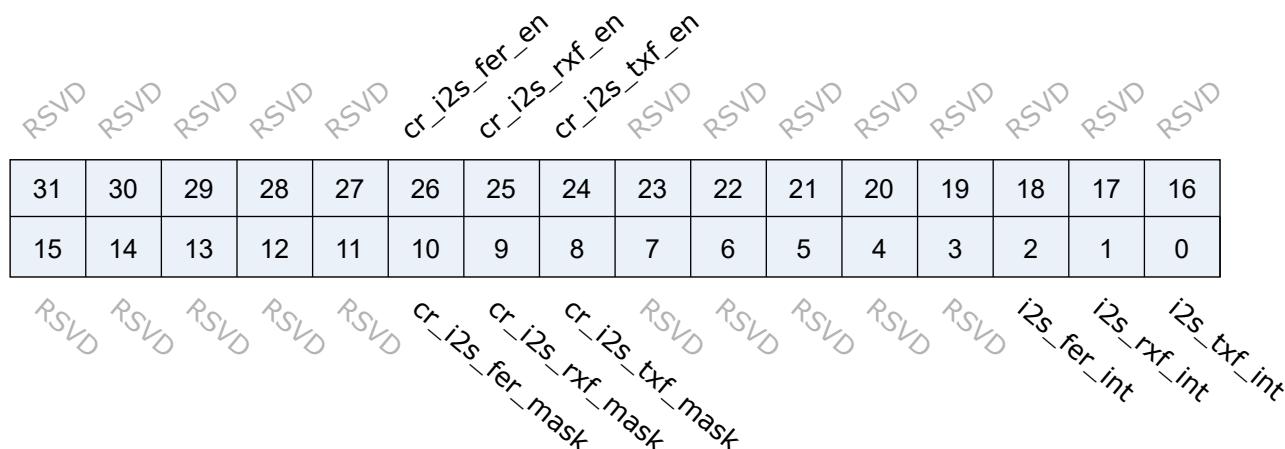Address: 0x2000ab04



Bits	Name	Type	Reset	Description
31:27	RSVD			
26	cr_i2s_fer_en	r/w	1'b1	Interrupt enable of i2s_fer_int
25	cr_i2s_rxf_en	r/w	1'b1	Interrupt enable of i2s_rxf_int
24	cr_i2s_txf_en	r/w	1'b1	Interrupt enable of i2s_txf_int
23:11	RSVD			
10	cr_i2s_fer_mask	r/w	1'b1	Interrupt mask of i2s_fer_int
9	cr_i2s_rxf_mask	r/w	1'b1	Interrupt mask of i2s_rxf_int
8	cr_i2s_txf_mask	r/w	1'b1	Interrupt mask of i2s_txf_int
7:3	RSVD			
2	i2s_fer_int	r	1'b0	I2S TX/RX FIFO error interrupt, auto-cleared when FIFO overflow/underflow error flag is cleared
1	i2s_rxf_int	r	1'b0	I2S RX FIFO ready ($rx_fifo_cnt > rx_fifo_th$) interrupt, auto-cleared when data is popped
0	i2s_txf_int	r	1'b1	I2S TX FIFO ready ($tx_fifo_cnt > tx_fifo_th$) interrupt, auto-cleared when data is pushed

20.4.3 i2s_bclk_config

Address: 0x2000ab10

cr_bclk_div_h															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

cr_bclk_div_l															
---------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Bits	Name	Type	Reset	Description
31:28	RSVD			
27:16	cr_bclk_div_h	r/w	12'd1	I2S BCLK active high period (unit: cycle of i2s_clk)
15:12	RSVD			
11:0	cr_bclk_div_l	r/w	12'd1	I2S BCLK active low period (unit: cycle of i2s_clk)

20.4.4 i2s_fifo_config_0

Address: 0x2000ab80


i2s_fifo_config_0															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD
RSVD	RSVD	RSVD	RSVD	RSVD	cr_fifo_24b_lj	cr_fifo_ir_exchg	cr_fifo_ir_merge	rx_fifo_underflow	tx_fifo_overflow	tx_fifo_clr	rx_fifo_clr	tx_fifo_clr	i2s_dma_tx_en	i2s_dma_rx_en	RSVD

Bits	Name	Type	Reset	Description
31:11	RSVD			
10	cr_fifo_24b_lj	r/w	1'b0	FIFO 24-bit data left-justified mode 1'b0: Right-justified, 8'h0, data[23:0] 1'b1: Left-justified, data[23:0], 8'h0 Note: Valid only when cr_data_size = 2'd2 (24-bit)

Bits	Name	Type	Reset	Description
9	cr_fifo_lr_exchg	r/w	1'b0	The position of L/R channel data within each entry is exchanged if this bit is enabled Can only be enabled if data size is 8 or 16 bits and csr_fifo_lr_merge is enabled
8	cr_fifo_lr_merge	r/w	1'b0	Each FIFO entry contains both L/R channel data if this bit is enabled Can only be enabled if data size is 8 or 16 bits Note: cr_fifo_lr_merge &cr_mono_mode should NOT be enabled at the same time Note: cr_fifo_lr_merge &cr_fifo_l_shift should NOT be enabled at the same time
7	rx_fifo_underflow	r	1'b0	Underflow flag of RX FIFO, can be cleared by rx_fifo_clr
6	rx_fifo_overflow	r	1'b0	Overflow flag of RX FIFO, can be cleared by rx_fifo_clr
5	tx_fifo_underflow	r	1'b0	Underflow flag of TX FIFO, can be cleared by tx_fifo_clr
4	tx_fifo_overflow	r	1'b0	Overflow flag of TX FIFO, can be cleared by tx_fifo_clr
3	rx_fifo_clr	w1c	1'b0	Clear signal of RX FIFO
2	tx_fifo_clr	w1c	1'b0	Clear signal of TX FIFO
1	i2s_dma_rx_en	r/w	1'b0	Enable signal of dma_rx_req/ack interface
0	i2s_dma_tx_en	r/w	1'b0	Enable signal of dma_tx_req/ack interface

20.4.5 i2s_fifo_config_1

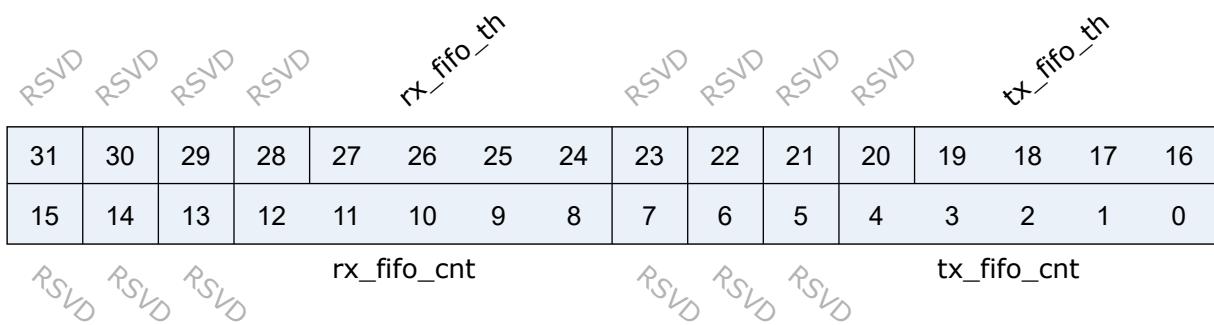Address: 0x2000ab84



Bits	Name	Type	Reset	Description
31:28	RSVD			
27:24	rx_fifo_th	r/w	4'd0	RX FIFO threshold, dma_rx_req will not be asserted if rx_fifo_cnt is less than this value

Bits	Name	Type	Reset	Description
23:20	RSVD			
19:16	tx_fifo_th	r/w	4'd0	TX FIFO threshold, dma_tx_req will not be asserted if tx_fifo_cnt is less than this value
15:13	RSVD			
12:8	rx_fifo_cnt	r	5'd0	RX FIFO available count
7:5	RSVD			
4:0	tx_fifo_cnt	r	5'd16	TX FIFO available count

20.4.6 i2s_fifo_wdata

Address: 0x2000ab88

i2s_fifo_wdata

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

i2s_fifo_wdata

Bits	Name	Type	Reset	Description
31:0	i2s_fifo_wdata	w	x	

20.4.7 i2s_fifo_rdata

Address: 0x2000ab8c

i2s_fifo_rdata


31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

i2s_fifo_rdata

Bits	Name	Type	Reset	Description
31:0	i2s_fifo_rdata	r	32'h0	

20.4.8 i2s_io_config

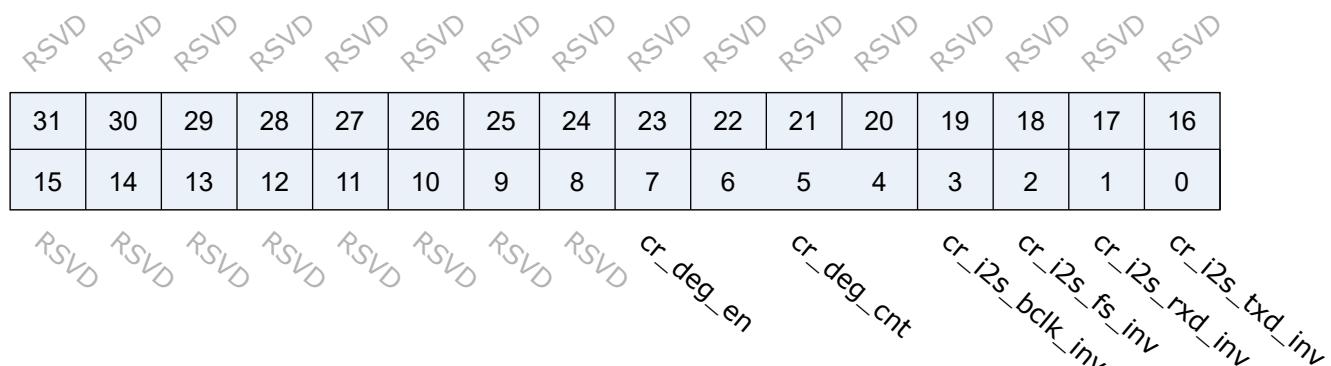Address: 0x2000abfc



Bits	Name	Type	Reset	Description
31:8	RSVD			
7	cr_deg_en	r/w	1'b0	Deglitch enable (for all th input pins) 1'b0: Disabled, 1'b1: Enabled
6:4	cr_deg_cnt	r/w	3'd0	Deglitch cycle count (unit: cycle of I2S kernel clock) 3'd0: 1 cycle 3'd1: 2 cycles ...
3	cr_i2s_bclk_inv	r/w	1'b0	Inverse BCLK signal 0: No inverse, 1: Inverse
2	cr_i2s_fs_inv	r/w	1'b0	Inverse FS signal 0: No inverse, 1: Inverse
1	cr_i2s_rxd_inv	r/w	1'b0	Inverse RXD signal 0: No inverse, 1: Inverse
0	cr_i2s_txd_inv	r/w	1'b0	Inverse TXD signal 0: No inverse, 1: Inverse

21.1 Overview

A PDM audio processing module is built in the chip, supporting recording via the PDM interface microphone.

21.2 Features

- Three 20-bit ADCs are integrated to support three digital PDM inputs.
 - Sampling rate: 8k~96k
 - Signal to noise ratio (AW): 97 dB @ 0 dB gain
 - Harmonic distortion + noise: -87dB @ 0dB gain
 - Analog pre-amplifier gain: 0dB, 6~42 dB, 3dB per gear
- Adjustable high-pass filter and independent digital volume control for ADC channel
- Supports digital PDM interface, with input GPIO multiplexed
- Independent digital volume control
- TX/RX FIFO of 32-bit width
- Supports DMA transfer mode

21.3 Functional Description

The block diagram of PDM module is shown as follows.

PDM has three PDM digital interface demodulators. It passes through the decimation and HPF filters and then goes to the volume control module. Users can control mute/unmute, volume, and audio fade-in/fade-out effect through the volume control module. The recorded data is stored in the FIFO with a depth of 32, and the storage format in FIFO is controlled by the register RX_FIFO_CTRL[25:24]. PDM_RX_FIFO_CTRL[5] configures the resolution of sampling.

PDM only supports PDM audio digital interface input.

21.3.1 PDM Interrupt

PDM supports the following interrupt control modes:

- RX FIFO request interrupt
- RX FIFO underrun interrupt
- RX FIFO overrun interrupt

A RX FIFO request interrupt is generated when RX_DRQ_CNT in RX_FIFO_CTRL is greater than RX_TRG_LEVEL. When the condition is not met, the interrupt flag is cleared automatically.

When there is no data in RX FIFO, but the user enables RX FIFO modulation through RX_CH_EN in RX_FIFO_CTRL, the RX FIFO underrun interrupt is generated.

When the user fills in data that exceeds the maximum depth of RX FIFO, it leads to RX FIFO overflow and cause a RX FIFO overrun interrupt.

21.3.2 FIFO Format Control

PDM_RX_FIFO_CTRL can control the format of the audio data to be stored in FIFO.

The user sets the resolution of audio by configuring PDM_RX_FIFO_CTRL[5].

When 16-bit resolution is selected, the FIFO controller supports the following four data storage formats, which are determined by FIFO_CTRL[25:24].

- Mode 0:

DATA[31:0] = {FIFO[19:14],16' h0}

- Mode 1:

DATA[31:0] = {8{FIFO[19]},FIFO[19:4],8' h0}

- Mode 2:

DATA[31:0] = {12{FIFO[19]},FIFO[19:4],4' h0}

- Mode 3:

DATA[31:0] = {16{FIFO[19]},FIFO[19:4]}

During recording or playing, the conversion result of 32-bit data or the digital audio source to be demodulated is on the left, denoted as DATA[31:0]. The format of data to be stored in FIFO is shown on the right. When the actual resolution of the recording is 20-bit, if the 16-bit resolution is selected, the data with 20-bit resolution must be properly cut. Thus, the high 16 bits of the data with 20-bit resolution are selected as the final result FIFO[19:14] and stored in the position of the high 16 bits, while the low 16 bits are filled with 0. Modes 1, 2, and 3 are expressed in the same

way as Mode 0. The 8{FIFO[19]} symbol indicates that the high 8 bits are padded with the value of bit[19].

Therefore, when a 16-bit resolution is selected, PDM provides four modes to store the digital results of conversion/output.

In the case of 20-bit resolution, the storage formats in the four modes are as follows:

- Mode 0:

DATA[31:0] = {FIFO[19:0],12' h0}

- Mode 1:

DATA[31:0] = {8{FIFO[19]},FIFO[19:0],4' h0}

- Mode 2:

DATA[31:0] = {12{FIFO[19]},FIFO[19:0]}

- Mode 3:

DATA[31:0] = {16{FIFO[19]},FIFO[19:4]}

Distribution of MSB

- Mode 0:

The MSB of data is 31 bits

- Mode 1:

The MSB of data is 23 bits

- Mode 2:

The MSB of data is 19 bits

- Mode 3:

The MSB of data is 15 bits

21.3.3 Startup of FIFO and DMA Transfer

The data in FIFO of the PDM module can be transferred by DMA.

The user can obtain the current amount of valid data in FIFO in real time through the register PDM_RX_FIFO_STATUS.

The FIFO count threshold (8/16/32) for initiating DMA request is selected by configuring FIFO_CTRL[15:14], or can be determined by FIFO_CTRL[22:16].

When the count value is greater than the set threshold, and the FIFO of the channel corresponding to PDM_RX_FIFO_CTRL[12:8] is enabled, a DMA transfer is initiated.

When TX FIFO is started, if there is no valid data in TX FIFO, the tx underrun error will be triggered. Therefore, the

software configuration sequence must be followed.

21.4 Register description

Name	Description
audpdm_top	
audpdm_itf	
pdm_adc_0	
pdm_adc_1	
pdm_dac_0	
pdm_pdm_0	
pdm_rsvd0	
pdm_dbg_0	
pdm_dbg_1	
pdm_dbg_2	
pdm_dbg_3	
pdm_dbg_4	
pdm_adc_s0	
pdm_adc_s1	
pdm_adc_s2	
pdm_rx_fifo_ctrl	
pdm_rx_fifo_status	
pdm_rx_fifo_data	

21.4.1 audpdm_top

Address: 0x2000ac00

RSVD	adc_rate	RSVD													
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

RSVD RSVD

pdm_itf_inv_sel adc_itf_inv_sel RSVD audio_ckg_en

Bits	Name	Type	Reset	Description
31	RSVD			
30:28	adc_rate	r/w	3'd1	adc fs 0:8kHz, 1:16kHz, 2:24kHz(22.05k), 3:32kHz, 4:48kHz(44.1k), 5:96kHz, 6:reserved, 7:manual
27	RSVD			
26:24	dac_rate	r/w	3'd4	dac fs 0:8kHz, 1:16kHz, 2:24kHz(22.05k), 3:32kHz, 4:48kHz(44.1k), 5:96kHz, 6:192kHz, 7:manual
23:4	RSVD			
3	pdm_itf_inv_sel	r/w	1'd0	1:invert clk_pdm_inf
2	adc_itf_inv_sel	r/w	1'd0	1:invert clk_adc_itf
1	dac_itf_inv_sel	r/w	1'd1	1:invert clk_dac_itf
0	audio_ckg_en	r/w	1'd0	1:enable audio clock generator

21.4.2 audpdm_itf

Address: 0x2000ac04

RSVD	adc_itf_en	RSVD													
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

RSVD RSVD

aud_rx0_sel RSVD RSVD

aud_rx1_sel aud_rx2_sel


aud_rx0_sel RSVD RSVD

adc_2_en adc_1_en adc_0_en

Bits	Name	Type	Reset	Description
31	dac_itf_en	r/w	1'd0	1:enable dac to audio dma interface
30	adc_itf_en	r/w	1'd0	1:enable adc to audio dma interface
29	aud_tx1_sel	r/w	1'd1	audio tx1 source select; 0:dac ch0, 1:dac ch1
28	aud_tx0_sel	r/w	1'd0	audio tx0 source select; 0:dac ch0, 1:dac ch1
27:25	aud_rx4_sel	r/w	3'd4	audio rx4 source select; 0:adc ch0, 1:adc ch1, 2:adc ch2, 3:aec ch0, 4:aec ch1
24:22	aud_rx3_sel	r/w	3'd3	audio rx3 source select; 0:adc ch0, 1:adc ch1, 2:adc ch2, 3:aec ch0, 4:aec ch1
21:19	aud_rx2_sel	r/w	3'd2	audio rx2 source select; 0:adc ch0, 1:adc ch1, 2:adc ch2, 3:aec ch0, 4:aec ch1
18:16	aud_rx1_sel	r/w	3'd1	audio rx1 source select; 0:adc ch0, 1:adc ch1, 2:adc ch2, 3:aec ch0, 4:aec ch1
15:13	aud_rx0_sel	r/w	3'd0	audio rx0 source select; 0:adc ch0, 1:adc ch1, 2:adc ch2, 3:aec ch0, 4:aec ch1
12:7	RSVD			
6	aec_1_en	r/w	1'd0	1:enable aec ch1
5	aec_0_en	r/w	1'd0	1:enable aec ch0
4	dac_1_en	r/w	1'd0	1:enable dac ch1
3	dac_0_en	r/w	1'd0	1:enable dac ch0
2	adc_2_en	r/w	1'd0	1:enable adc ch2
1	adc_1_en	r/w	1'd0	1:enable adc ch1
0	adc_0_en	r/w	1'd0	1:enable adc ch0

21.4.3 pdm_adc_0

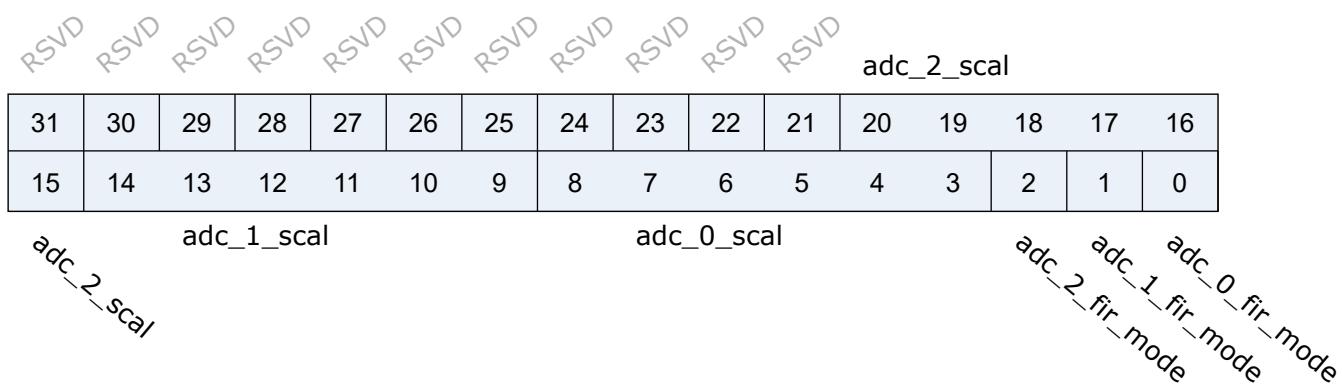
Address: 0x2000ac08



Bits	Name	Type	Reset	Description
31:30	adc_lfsr_mode	r/w	2'd0	0:LFSR32, 1:LFSR24, 2:LFSR16, 3:LFSR12
29	adc_dither_data	r	1'd1	read LFSR out
28:21	RSVD			
20:15	adc_2_scal	r/w	6'd32	adc ch2 scaling value; u6.5
14:9	adc_1_scal	r/w	6'd32	adc ch1 scaling value; u6.5
8:3	adc_0_scal	r/w	6'd32	adc ch0 scaling value; u6.5
2	adc_2_fir_mode	r/w	1'd0	adc fir mode
1	adc_1_fir_mode	r/w	1'd0	adc fir mode
0	adc_0_fir_mode	r/w	1'd0	adc fir mode

21.4.4 pdm_adc_1

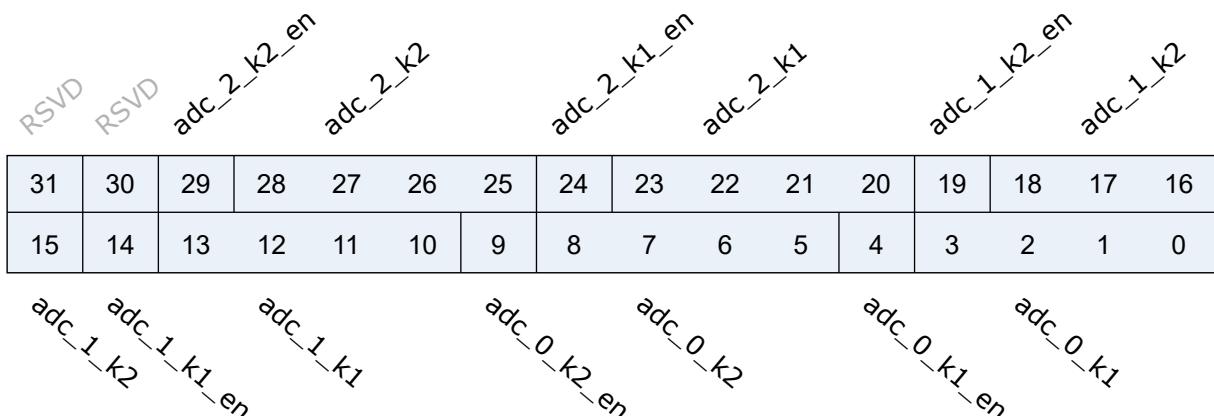Address: 0x2000ac0c




Bits	Name	Type	Reset	Description
31:30	RSVD			
29	adc_2_k2_en	r/w	1'd0	adc ch2 hpf parameter k2 enable
28:25	adc_2_k2	r/w	4'd13	adc ch2 hpf parameter k2
24	adc_2_k1_en	r/w	1'd1	adc ch2 hpf parameter k1 enable
23:20	adc_2_k1	r/w	4'd8	adc ch2 hpf parameter k1
19	adc_1_k2_en	r/w	1'd0	adc ch1 hpf parameter k2 enable
18:15	adc_1_k2	r/w	4'd13	adc ch1 hpf parameter k2
14	adc_1_k1_en	r/w	1'd1	adc ch1 hpf parameter k1 enable
13:10	adc_1_k1	r/w	4'd8	adc ch1 hpf parameter k1

Bits	Name	Type	Reset	Description
9	adc_0_k2_en	r/w	1'd0	adc ch0 hpf parameter k2 enable
8:5	adc_0_k2	r/w	4'd13	adc ch0 hpf parameter k2
4	adc_0_k1_en	r/w	1'd1	adc ch0 hpf parameter k1 enable
3:0	adc_0_k1	r/w	4'd8	adc ch0 hpf parameter k1

21.4.5 pdm_dac_0

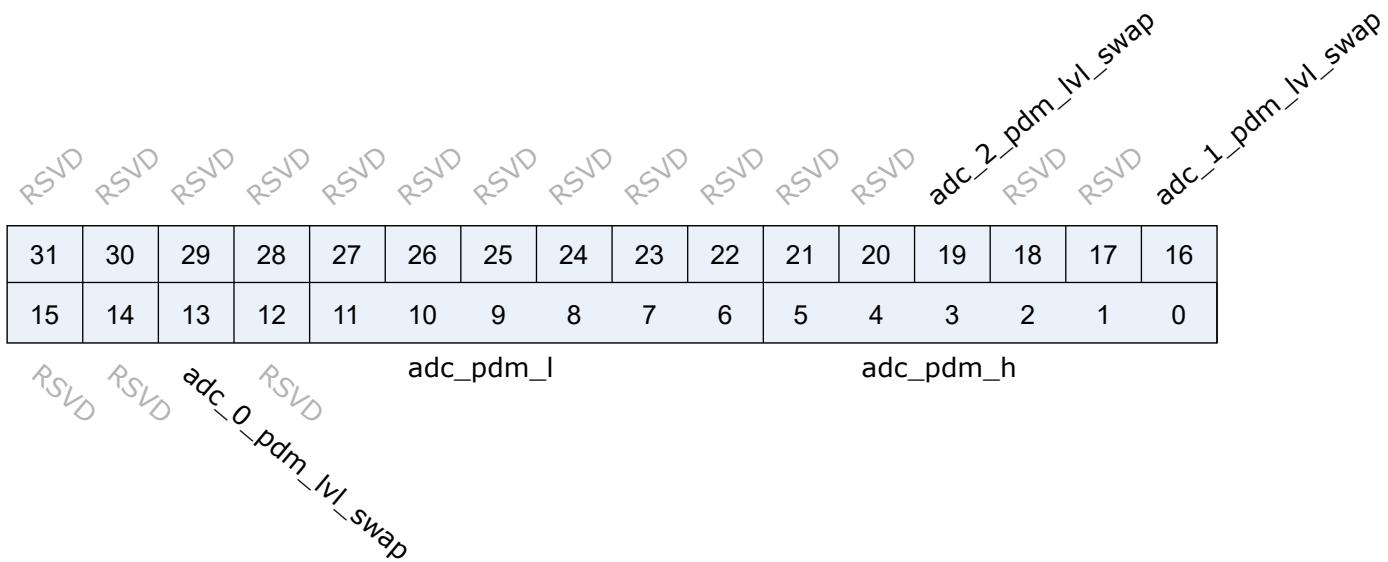Address: 0x2000ac10




Bits	Name	Type	Reset	Description
31	RSVD			
30:28	mix_0_att_mode2	r/w	3'd0	0: 0db, 1:6db, 2:12db, 3:18db, 4:36db, 5:54db, 6:72db, 7:mute
27:25	mix_0_att_mode1	r/w	3'd0	0: 0db, 1:6db, 2:12db, 3:18db, 4:36db, 5:54db, 6:72db, 7:mute
24:23	mix_0_mode	r/w	2'd0	0: no mix, 1: mix second input, 2: mix sidetone/loopback
22:21	mix_0_sel	r/w	2'd0	0: 0, 1:adc ch0, 2: adc ch1, 3:adc ch2
20	adc_2_mash_bit_swap	r/w	1'd0	1:swap adc1_do1 and adc1_do2
19	adc_2_pdm_lv1_swap	r/w	1'd0	1:invert pdm input data
18	adc_2_src	r/w	1'd0	0:adc, 1:pdm
17	adc_1_mash_bit_swap	r/w	1'd0	1:swap adc2_do1 and adc2_do2
16	adc_1_pdm_lv1_swap	r/w	1'd0	1:invert pdm input data

Bits	Name	Type	Reset	Description
15	adc_1_src	r/w	1'd0	0:adc, 1:pdm
14	adc_0_mash_bit_swap	r/w	1'd0	1:swap adc3_do1 and adc3_do2
13	adc_0_pdm_lvl_swap	r/w	1'd0	1:invert pdm input data
12	adc_0_src	r/w	1'd0	0:adc, 1:pdm
11:6	adc_pdm_l	r/w	6'h3f	pdm low value
5:0	adc_pdm_h	r/w	6'h1	pdm high value
-1:31	RSVD			
30:28	mix_1_att_mode2	r/w	3'd0	0: 0db, 1:6db, 2:12db, 3:18db, 4:36db, 5:54db, 6:72db, 7:mute
27:25	mix_1_att_mode1	r/w	3'd0	0: 0db, 1:6db, 2:12db, 3:18db, 4:36db, 5:54db, 6:72db, 7:mute
24:23	mix_1_mode	r/w	2'd0	0: no mix, 1: mix second input, 2: mix sidetone/loopback
22:21	mix_1_sel	r/w	2'd0	0: 0, 1:adc ch0, 2: adc ch1, 3:adc ch2
20:17	RSVD			
16:15	dac_dsm_dither_prbs_mode	r/w	1'd0	dac dsm dither lfsr mode: 0:LFSR32, 1:LFSR24, 2:LFSR16, 3:LFSR12
14	dac_dsm_dither_en	r/w	1'd1	1:enable dac dsm dither
13:11	dac_dsm_dither_amp	r/w	3'd0	dac dsm dither amplitude
10	dac_dsm_scaling_en	r/w	1'd1	1:enable dac dsm scaling
9:6	dac_dsm_scaling_factor	r/w	4'd15	dac dsm scaling value; u4.4
5	dac_dsm_order	r/w	1'd0	0: 2-order, 1: 3-order
4:2	RSVD			
1	dac_dem_out_swap	r/w	1'd0	1:swap dacdata and daedata
0	dac_dem_bypass	r/w	1'd0	1:bypass dac dwa
-1:14	RSVD			
13	aec_record_vld_4s_en	r/w	1'd0	0:aec record vld auto controlled by dac_rate, 1:enable aec record vld manual mode
12:11	aec_record_vld_4s_div	r/w	2'd0	aec record vld manual divide rate
10:8	aec_1_atten_mode	r/w	3'd0	aec ch1 attenuation mode: 0:no attenuation, 1:drop 1LSB, 2:drop 2LSB, 3:drop 3LSB, 4:drop 6LSB, 5:drop 9LSB, 6:drop 12LSB

Bits	Name	Type	Reset	Description
7:5	aec_0_atten_mode	r/w	3'd0	aec ch0 attenuation mode: 0:no attenuation, 1:drop 1LSB, 2:drop 2LSB, 3:drop 3LSB, 4:drop 6LSB, 5:drop 9LSB, 6:drop 12LSB
4:0	RSVD			

21.4.6 pdm_pdm_0

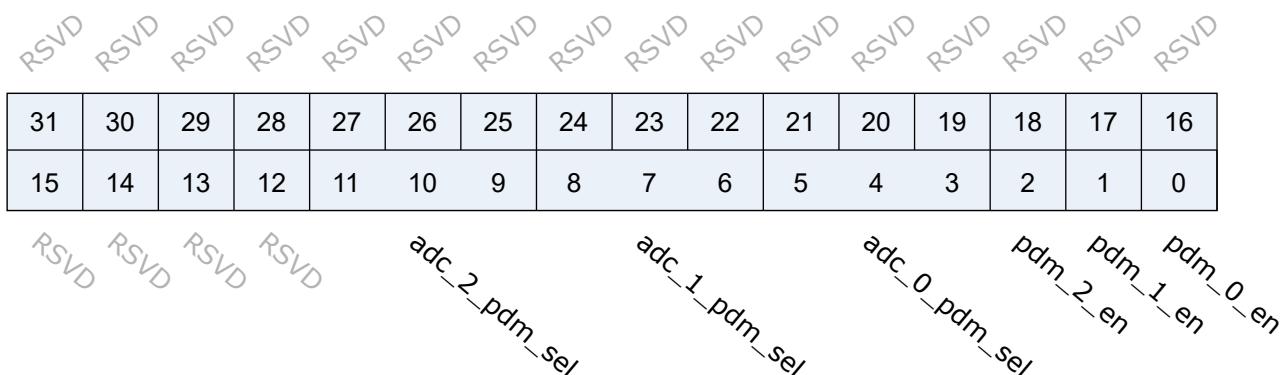Address: 0x2000ac1c



Bits	Name	Type	Reset	Description
31:12	RSVD			
11:9	adc_2_pdm_sel	r/w	3'd2	adc ch2 source select: 0:pdm_0_l, 1:pdm_0_r, 2:pdm_1_l, 3:pdm_1_r, 4:pdm_2_l, 5:pdm_2_r
8:6	adc_1_pdm_sel	r/w	3'd1	adc ch1 source select: 0:pdm_0_l, 1:pdm_0_r, 2:pdm_1_l, 3:pdm_1_r, 4:pdm_2_l, 5:pdm_2_r
5:3	adc_0_pdm_sel	r/w	3'd0	adc ch0 source select: 0:pdm_0_l, 1:pdm_0_r, 2:pdm_1_l, 3:pdm_1_r, 4:pdm_2_l, 5:pdm_2_r
2	pdm_2_en	r/w	1'd0	1:enable pdm_2
1	pdm_1_en	r/w	1'd0	1:enable pdm_1
0	pdm_0_en	r/w	1'd0	1:enable pdm_0

21.4.7 pdm_rsvo0

Address: 0x2000ac20

rsvo0

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

rsvo0

Bits	Name	Type	Reset	Description
31:0	rsvo0	r/w	32'hffff	

21.4.8 pdm_dbg_0

Address: 0x2000ac24

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

RSVD RSVD RSVD

Bits	Name	Type	Reset	Description
31:30	RSVD			
29:24	aud_test_read_sel	r/w	6'd0	select aud_test_read(0x28) test point
23	adc_test_din_en	r/w	1'd0	1:enable adc test data input from GPIO
22	dac_test_din_en	r/w	1'd0	1:enable dac test data input from GPIO
21	adc_test_clkin_en	r/w	1'd0	1:enable adc test clkok input from GPIO
20	dac_test_clkin_en	r/w	1'd0	1:enable dac test clkok input from GPIO
19:18	audio_test_out_sel	r/w	2'd0	audio test data to GPIO select: 0:no data, 1:adc ch0/1/2, 2:dac ch0 dwa, 3:dac ch1 dwa
17:4	RSVD			
3:1	aud_sin_step	r/w	3'd2	step of dac audio sin table @FS=192k 0:div1, 1:div2, 2:div4, 3:div6, 4:div8, 5:div12, 6:div24

Bits	Name	Type	Reset	Description
0	aud_sin_en	r/w	1'd0	1:enable audio dac sin generator

21.4.9 pdm_dbg_1

Address: 0x2000ac28

aud_test_read

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

aud_test_read

Bits	Name	Type	Reset	Description
31:0	aud_test_read	r	32'd0	audio test read value

21.4.10 pdm_dbg_2

Address: 0x2000ac2c

RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	adc_in_2_test_sel	adc_in_1_test_sel	adc_in_0_test_sel	adc_2_fir_4s_en	adc_1_fir_4s_en	adc_0_fir_4s_en	adc_fir_4s_val			
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

adc_fir_4s_val

Bits	Name	Type	Reset	Description
31:26	RSVD			
25	adc_in_2_test_sel	r/w	1'd0	adc ch2 test data select; 1:from adc sin generator, 0:from fir force value
24	adc_in_1_test_sel	r/w	1'd0	adc ch1 test data select; 1:from adc sin generator, 0:from fir force value
23	adc_in_0_test_sel	r/w	1'd0	adc ch0 test data select; 1:from adc sin generator, 0:from fir force value
22	adc_2_fir_4s_en	r/w	1'd0	1:force adc ch2 fir output

Bits	Name	Type	Reset	Description
21	adc_1_fir_4s_en	r/w	1'd0	1:force adc ch1 fir output
20	adc_0_fir_4s_en	r/w	1'd0	1:force adc ch0 fir output
19:0	adc_fir_4s_val	r/w	20'd0	force value of adc fir output

21.4.11 pdm_dbg_3

Address: 0x2000ac30

RSVD																	
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16		
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		

Bits	Name	Type	Reset	Description
31:24	RSVD			
23	dac_in_1_test_sel	r/w	1'd0	dac ch1 test data select; 0:from dac sin generator, 1:from dac force value
22	dac_in_0_test_sel	r/w	1'd0	dac ch0 test data select; 0:from dac sin generator, 1:from dac force value
21	dac_dwa_1_4s_en	r/w	1'd0	1:force dac ch1 dwa data from dac_4s_val[6:0]
20	dac_dwa_0_4s_en	r/w	1'd0	1:force dac ch0 dwa data from dac_4s_val[6:0]
19:0	dac_4s_val	r/w	20'd0	dac force value



21.4.12 pdm_dbg_4

Address: 0x2000ac34

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |

RSVD RSVD

adc_in_ratio_4s_val
adc_in_ch0_ratio_4s_val
adc_in_ch1_ratio_4s_val
adc_in_ch2_ratio_4s_val
pdm_in_ratio_4s_val
pdm_in_ratio_4s_val

Bits	Name	Type	Reset	Description
31:11	RSVD			
10:8	aec_fs_rate_4s_val	r/w	3'd0	
7:6	dac_out_ratio_4s_val	r/w	2'd0	
5	pdm_in_ratio_4s	r/w	1'd0	
4	pdm_in_ratio_4s_val	r/w	1'd0	
3	adc_in_ch2_ratio_4s_val	r/w	1'd0	
2	adc_in_ch1_ratio_4s_val	r/w	1'd0	
1	adc_in_ch0_ratio_4s_val	r/w	1'd0	
0	adc_in_ratio_4s_val	r/w	1'd0	

21.4.13 pdm_adc_s0

Address: 0x2000ac38

Bits	Name	Type	Reset	Description
31:9	RSVD			
8:0	adc_s0_volume	r/w	9'd0	volume s9.1, -95.5dB +18dB in 0.5dB step

21.4.14 pdm_adc_s1

Address: 0x2000ac3c

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	adc_s1_volume

Bits	Name	Type	Reset	Description
31:9	RSVD			
8:0	adc_s1_volume	r/w	9'd0	volume s9.1, -95.5dB +18dB in 0.5dB step

21.4.15 pdm_adc_s2


Address: 0x2000ac40

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	adc_s2_volume

Bits	Name	Type	Reset	Description
31:9	RSVD			
8:0	adc_s2_volume	r/w	9'd0	volume s9.1, -95.5dB +18dB in 0.5dB step

21.4.16 pdm_rx_fifo_ctrl

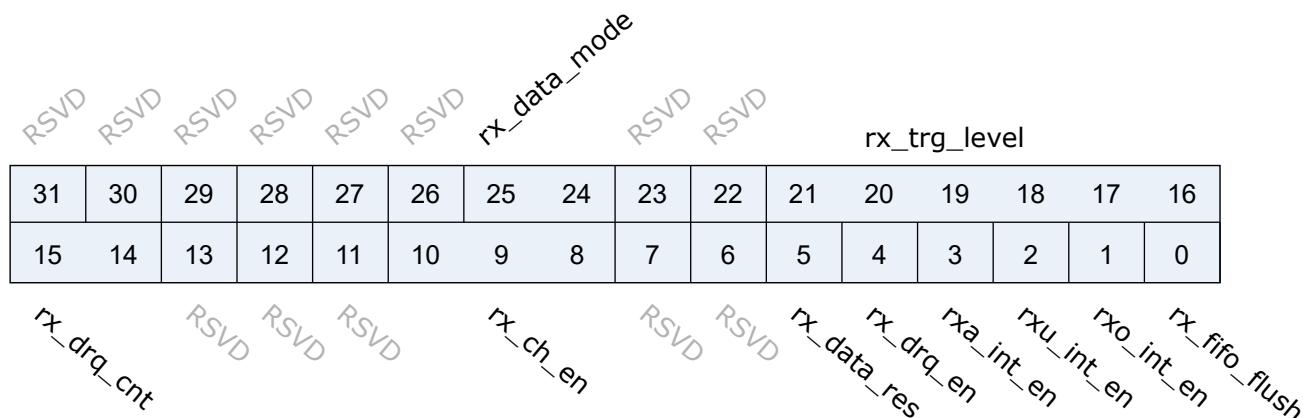Address: 0x2000ac80




Bits	Name	Type	Reset	Description
31:26	RSVD			
25:24	rx_data_mode	r/w	2'b0	RX_FIFO_DATOUT_MODE. RX FIFO DATA Output Mode (Mode 0, 1, 2, 3) Mode 0: Valid data's MSB is at [31] of RX_FIFO register Mode 1: Valid data's MSB is at [23] of RX_FIFO register Mode 2: Valid data's MSB is at [19] of RX_FIFO register Mode 3: Valid data's MSB is at [15] of RX_FIFO register Note: Expanding '0' at LSB of RX FIFO register (data invalid region) Expanding sign bit at MSB of RX FIFO register (data invalid region) For 20-bit received audio sample resolution: Mode 0: RXDATA[31:0] = FIFO_O[19:0], 12' h0 Mode 1: RXDATA[31:0] = 8FIFO_O[19], FIFO_O[19:0], 4' h0 Mode 2: RXDATA[31:0] = 12FIFO_O[19], FIFO_O[19:0] Mode 3: RXDATA[31:0] = 16FIFO_O[19], FIFO_O[19:4] For 16-bit received audio sample resolution: Mode 0: RXDATA[31:0] = FIFO_O[19:4], 16' h0 Mode 1: RXDATA[31:0] = 8FIFO_O[19], FIFO_O[19:4], 8' h0 Mode 2: RXDATA[31:0] = 12FIFO_O[19], FIFO_O[19:4], 4'h0 Mode 3: RXDATA[31:0] = 16FIFO_O[19], FIFO_O[19:4]
23:22	RSVD			

Bits	Name	Type	Reset	Description
21:16	rx_trg_level	r/w	6'd23	<p>RX_FIFO_TRG_LEVEL.</p> <p>RX FIFO Trigger Level (RXTL[5:0])</p> <p>Interrupt and DMA request trigger level for RX FIFO Data Available condition</p> <p>IRQ/DRQ Generated when WLEVEL > RXTL[5:0]</p> <p>Notes:</p> <p>WLEVEL represents the number of valid samples in the RX FIFO</p>
15:14	rx_drq_cnt	r/w	2'b0	<p>RX_DRQ_CLR_CNT.</p> <p>When RX FIFO available data less than or equal N, DRQ Request will be de-asserted. N is defined here:</p> <ul style="list-style-type: none"> 00: IRQ/DRQ de-asserted when WLEVEL <= RXTL[5:0] 01: IRQ/DRQ de-asserted when WLEVEL < 8 10: IRQ/DRQ de-asserted when WLEVEL < 16 11: IRQ/DRQ de-asserted when WLEVEL < 32 <p>WLEVEL represents the number of valid samples in the RX FIFO</p>
13:11	RSVD			
10:8	rx_ch_en	r/w	3'b0	<p>RX_FIFO_DATIN_SRC.</p> <p>RX FIFO Data Input Source Select.</p> <p>0: Disable 1: Enable</p> <p>Bit10: ADC3 data</p> <p>Bit9: ADC2 data</p> <p>Bit8: ADC1 data</p> <p>When some of the above bits set to '1' , these data are always arranged in order from low-bit to high-bit.(bit8->bit10)</p>
7:6	RSVD			
5	rx_data_res	r/w	1'b0	<p>RX_SAMPLE_BITS.</p> <p>Receiving Audio Sample Resolution</p> <p>0: 16 bits</p> <p>1: 20 bits</p>
4	rx_drq_en	r/w	1'b0	<p>ADC_DRQ_EN.</p> <p>ADC FIFO Data Available DRQ Enable.</p> <p>0: Disable</p> <p>1: Enable</p>
3	rxa_int_en	r/w	1'b0	<p>ADC_IRQ_EN.</p> <p>ADC FIFO Data Available IRQ Enable.</p> <p>0: Disable</p> <p>1: Enable</p>

Bits	Name	Type	Reset	Description
2	rxu_int_en	r/w	1'b0	ADC_UNDERRUN_IRQ_EN. ADC FIFO Under Run IRQ Enable 0: Disable 1: Enable
1	rxo_int_en	r/w	1'b0	ADC_OVERRUN_IRQ_EN. ADC FIFO Over Run IRQ Enable 0: Disable 1: Enable
0	rx_fifo_flush	w1c	1'b0	ADC_FIFO_FLUSH. ADC FIFO Flush. Write ‘1’ to flush TX FIFO, self clear to ‘0’.

21.4.17 pdm_rx_fifo_status

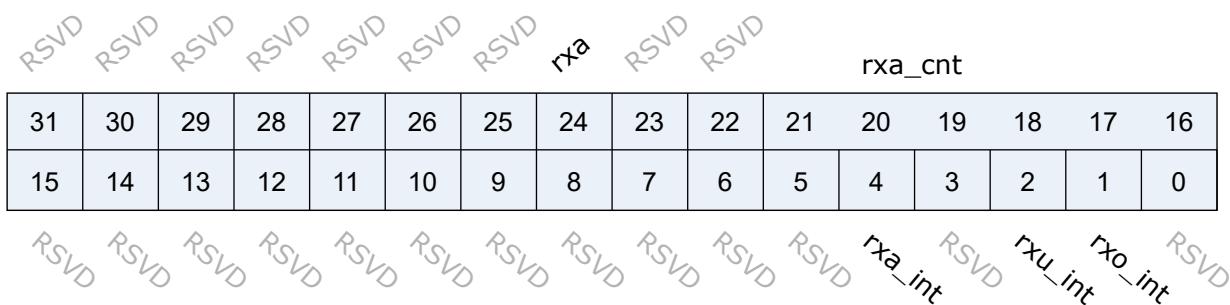Address: 0x2000ac84



Bits	Name	Type	Reset	Description
31:25	RSVD			
24	rxu_int	r	1'b0	RXA. RX FIFO Available 0: No available data in RX FIFO 1: More than one sample in RX FIFO (>= 1 word)
23:22	RSVD			
21:16	rxu_int	r	6'h0	RXA_CNT. RX FIFO Available Sample Word Counter
15:5	RSVD			

Bits	Name	Type	Reset	Description
4	rxa_int	r	1'b0	RXA_INT. RX FIFO Data Available Pending Interrupt 0: No Pending IRQ 1: Data Available Pending IRQ Automatic clear if interrupt condition fails.
3	RSVD			
2	rxu_int	r	1'b0	RXU_INT. RX FIFO Underrun Pending Interrupt 0: No Pending IRQ 1: FIFO Underrun Pending IRQ Write ‘1’ to clear this interrupt
1	rxo_int	r	1'b0	RXO_INT. RX FIFO Overrun Pending Interrupt 0: No Pending IRQ 1: FIFO Overrun Pending IRQ Write ‘1’ to clear this interrupt
0	RSVD			

21.4.18 pdm_rx_fifo_data

Address: 0x2000ac88

rx_data

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

rx_data

Bits	Name	Type	Reset	Description
31:0	rx_data	r	32'h0	RX_DATA. RX Sample Host can get one sample by reading this register. The left channel sample data is first and then the right channel sample.

22.1 Overview

An AUDIO processing module is built in the chip, supporting pdm/analog interface microphone recording and stereo playback.

22.2 Features

- Two 20-bit ADCs are integrated to support three analog mic differential inputs
 - Sampling rate: 8k~96k
 - Signal to noise ratio (AW): 97 dB @ 0 dB gain
 - Harmonic distortion + noise: -87 dB @ 0 dB gain
 - Analog pre-amplifier gain: 0 dB, 6~42 dB, 3 dB per gear
- A low-noise bias power supply with adjustable voltage supplies power to the analog MIC, and the adjustment range is 1.8 V~2.5 V
- Adjustable high-pass filter and independent digital volume control for ADC channel
- A 5-band parametric equalizer for ADC channel
- Support digital mic interface, with input GPIO multiplexed
- Integrated with one 20-bit DAC that support two analog LINEOUT differential outputs with ramp power-on function
 - Sampling rate: 8k~192k
 - Signal to noise ratio (AW): 103dB @ 0dB gain
 - Harmonic distortion + noise: -90dB @ 0dB gain
 - Analog output gain: 0 dB, 6~42 dB, 3 dB per gear

- Independent digital volume control that supports soft volume adjustment/mute, suitable for DAC playback channel
- A 10-band parametric equalizer supporting dynamic range control and flexible adjustment, suitable for DAC playback channel
- Supports voice activity detection that suits low-power voice wakeup applications
- TX/RX FIFO of 32-bit width
- Supports DMA transfer mode

22.3 Functional Description

The block diagram of AUDIO is shown as follows.

AUDIO has two ADCs, which are connected to the volume control module after performing PGA gain and passing through decimation and HPF filters. Users can control mute/unmute, volume, and audio fade-in/fade-out effect through the volume control module. The 5-band EQ filter can improve the audio performance, perform gain and attenuation in each frequency band of the audio, and thus optimize the recording timbre. AGC will adjust volume according to the amplitude of audio data, to enhance the recording performance and reduce the top distortion of recording. The built-in VAD wakeup module can distinguish the noise signal from the useful audio signal in the environment, and when a valid audio signal is detected, a VAD_INT event will be generated. The recorded data will be stored in the FIFO with a depth of 32, and the storage format in FIFO is controlled by the register RX_FIFO_CTRL[25:24]. RX_FIFO_CTRL[5] configures the resolution of sampling. The PDM digital interface or analog microphone interface can be used as the recording data interface, and the interface type is controlled by the DAC_0[12] DAC_0[15] DAC_0[18] bit.

AUDIO has one DAC. After being taken out from FIFO, processed by the audio mixer and EQ filter, undergone volume control and inserted into the filter, the data is modulated into analog signal for driving the speaker to play. The audio mixer can mix the audio data read out from FIFO with the recording data of ADC channel. The EQ filter performs gain reduction on each frequency band, thus changing the timbre of the played audio. The volume control module will control the audio volume and the fade-in/fade-out effect.

22.3.1 AUDIO Interrupt

AUDIO supports the following interrupt control modes:

- TX FIFO request interrupt
- TX FIFO underrun interrupt
- TX FIFO overrun interrupt
- RX FIFO request interrupt
- RX FIFO underrun interrupt
- RX FIFO overrun interrupt

- Recording volume adjustment interrupt
- Playback volume adjustment interrupt
- VAD interrupt

A TX FIFO request interrupt will be generated when TX_DRQ_CNT in TX_FIFO_CTRL is greater than TX_TRG_LEVEL. When the condition is not met, the interrupt flag will be cleared automatically.

When there is no data in TX FIFO, but the user enables TX FIFO modulation through TX_CH_EN in TX_FIFO_CTRL, the TX FIFO underrun interrupt will be generated.

When the user fills in data that exceeds the maximum depth of TX FIFO, it will lead to TX FIFO overflow and cause a TX FIFO overrun interrupt.

A RX FIFO request interrupt will be generated when RX_DRQ_CNT in RX_FIFO_CTRL is greater than RX_TRG_LEVEL. When the condition is not met, the interrupt flag will be cleared automatically.

When there is no data in RX FIFO, but the user enables RX FIFO modulation through RX_CH_EN in RX_FIFO_CTRL, the RX FIFO underrun interrupt will be generated.

When the user fills in data that exceeds the maximum depth of RX FIFO, it will lead to RX FIFO overflow and cause a RX FIFO overrun interrupt.

When the recording volume of ADC is completely adjusted, it will trigger the ADC volume adjustment completion interrupt. In general application scenarios, the volume adjustment of ADC is completed immediately.

When the playback volume of DAC is completely adjusted, it will trigger the DAC volume adjustment completion interrupt. As the playback of DAC supports fade-in/fade-out effect, the volume adjustment may not be completed immediately. The adjustment time depends on the register DAC_H_CTRL_MODE.

22.3.2 FIFO Format Control

TX_FIFO_CTRL and RX_FIFO_CTRL (collectively FIFO_CTRL, as they are the same) decide the format of audio data stored in FIFO.

Users select the resolution of audio by configuring FIFO_CTRL[5].

When 16-bit resolution is selected, the FIFO controller supports the following four data storage formats, which are determined by FIFO_CTRL[25:24].

- Mode 0:
 - DATA[31:0] = {FIFO[19:14],16' h0}
- Mode 1:
 - DATA[31:0] = {8{FIFO[19]},FIFO[19:4],8' h0}
- Mode 2:

- DATA[31:0] = {12{FIFO[19]}, FIFO[19:4], 4' h0}
- Mode 3:
 - DATA[31:0] = {16{FIFO[19]}, FIFO[19:4]}

During recording or playing, the conversion result of 32-bit data or the digital audio source to be demodulated is on the left, denoted as DATA[31:0]. The format of data to be stored in FIFO is shown on the right. When the actual resolution of the recording is 20-bit, if the 16-bit resolution is selected, the data with 20-bit resolution must be properly cut. Thus, the high 16 bits of the data with 20-bit resolution are selected as the final result FIFO[19:14] and stored in the position of the high 16 bits, while the low 16 bits are filled with 0. Modes 1, 2, and 3 are expressed in the same way as Mode 0. The 8{FIFO[19]} symbol indicates that the high 8 bits will be padded with the value of bit[19].

Therefore, when a 16-bit resolution is selected, AUDIO provides four modes to store the digital results of conversion/output.

In the case of 20-bit resolution, the storage formats in the four modes are as follows:

- Mode 0:
 - DATA[31:0] = {FIFO[19:0], 12' h0}
- Mode 1:
 - DATA[31:0] = {8{FIFO[19]}, FIFO[19:0], 4' h0}
- Mode 2:
 - DATA[31:0] = {12{FIFO[19]}, FIFO[19:0]}
- Mode 3:
 - DATA[31:0] = {16{FIFO[19]}, FIFO[19:4]}

Distribution of MSB

- Mode 0:
 - The MSB of data is 31 bits
- Mode 1:
 - The MSB of data is 23 bits
- Mode 2:
 - The MSB of data is 19 bits
- Mode 3:
 - The MSB of data is 15 bits

22.3.3 Startup of FIFO and DMA transfer

The data in FIFO of the AUDIO module can be transferred by DMA.

The user can obtain the current amount of valid data in FIFO in real time through the register RX_FIFO_STATUS/TX_FIFO_STATUS.

The FIFO count threshold (8/16/32) for initiating DMA request is selected by configuring FIFO_CTRL[15:14], or can be determined by FIFO_CTRL[22:16].

When the count value is greater than the set threshold, and the FIFO of the channel corresponding to TX_FIFO_CTRL[9:8] or RX_FIFO_CTRL[12:8] is enabled, a DMA transfer will be initiated.

When TX FIFO is started, if there is no valid data in TX FIFO, the tx underrun error will be triggered. Therefore, the software configuration sequence must be followed.

23.1 Overview

The chip is equipped with a PSRAM controller that can drive various types of PSRAM.

23.2 Features

- Supports up to 200 MHz PSRAM clock
- Supports linear burst and warp burst modes

23.3 Functional Description


The PSRAM controller can read and write the internal registers and memory of various types of PSRAM.

23.4 Register description

Name	Description
psram_configure	

23.4.1 psram_configure

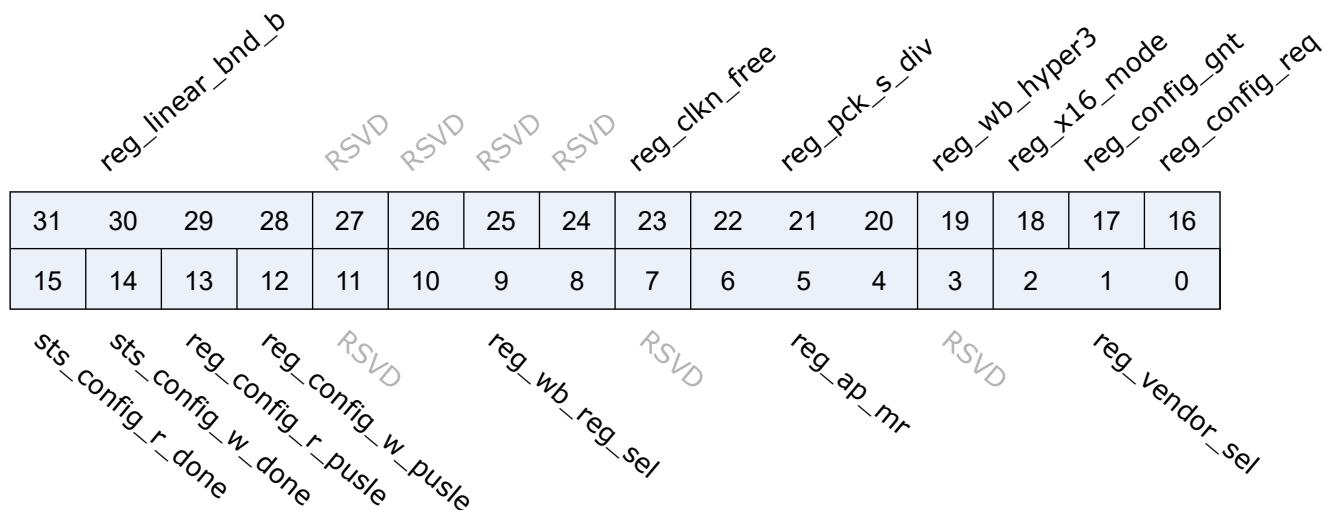Address: 0x20052000



Bits	Name	Type	Reset	Description
31:28	reg_linear_bnd_b	r/w	4'd10	Linear burst boundary shift bit
27:24	RSVD			
23	reg_clkn_free	r/w	1'b1	Clock# free run
22:20	reg_pck_s_div	r/w	3'd0	EMI AXI bus clock division from psram_ck
19	reg_wb_hyper3	r/w	1'b0	Winbond Hyper3 bus
18	reg_x16_mode	r/w	1'b0	16-bit pSRAM mode enable
17	reg_config_gnt	r	1'b0	pSRAM register configure grant
16	reg_config_req	r/w	1'b0	pSRAM register configure request
15	sts_config_r_done	r	1'b1	pSRAM register read done
14	sts_config_w_done	r	1'b1	pSRAM register write done
13	reg_config_r_pusle	w1p	1'b0	pSRAM configuration read enable
12	reg_config_w_pusle	w1p	1'b0	pSRAM configuration write enable
11	RSVD			
10:8	reg_wb_reg_sel	r/w	2'd0	Winbond pSRAM Register R/W selection 3'd0 - ID0 / 3'd1 - ID1 3'd2 - CR0 / 3'd3 - CR1 / 3'd4 - CR2 3'd5 - CR3 / 3'd6 - CR4
7	RSVD			

Bits	Name	Type	Reset	Description
6:4	reg_ap_mr	r/w	3'd0	APMemory pSRAM Mode Register R/W selection 3'd0=MA0 / 3'd1=MA1 / 3'd2=MA2 / 3'd3=MA3 / 3'd4=MA4 / 3'd6=MA6 / 3'd7=MA8
3	RSVD			
2:0	reg_vendor_sel	r/w	3'b010	pSRAM vendor selection [0] - Winbond [1] - APM_XCELLA [2] - APM_HYPER

24.1 Overview

The EMAC module is a 10/100Mbps Ethernet Media Access Controller (Ethernet MAC) compatible with IEEE 802.3. It consists of status and control register set, RX/TX module, RX/TX buffer descriptor (BD) set, master interface, MDIO interface, and physical layer chip (PHY) interface.

The status and control register set contains the status and control bits of EMAC. As the interface with the user program, it controls data sending and receiving and reports the status.

The RX/TX module obtains data frames from the specified memory according to the control words in the RX/TX descriptor, adds preamble and CRC, and expands short frames to send them through PHY. Or, it receives data from PHY, and puts them into the specified memory according to the RX/TX BD. Relevant event flags are set after sending and receiving are completed. If the event interrupt is enabled, an interrupt request will be sent to the master for processing.

MDIO and MII/RMII interfaces communicate with PHY, including reading and writing the registers of PHY and sending and receiving data packets.

24.2 Features

- Compatible with the MAC layer defined by IEEE 802.3
- PHY supporting MII/RMII interface defined by IEEE 802.3
- Interacts with PHY through MDIO interface
- Supports 10 Mbps and 100 Mbps Ethernet
- Supports half-duplex and full-duplex
- Supports automatic flow control and control frame generation in the full-duplex mode
- Supports collision detection and retransmission in the half-duplex mode

- Supports the generation and verification of CRC
- Generates and removes data frame preamble
- Supports automatic extension of short data frames when sending
- Detects too long/short data frames (length limit)
- Transmits long data frames (> standard Ethernet frame length)
- Automatically discards data packets with over-limit retransmission times or too small frame gap
- Broadcast packet filtering
- Internal RAM for storing up to 128 BDs
- Splits and configures a data packet to multiple consecutive BDs when sending
- Various event flags sent or received
- Generates a corresponding interrupt when an event occurs

24.3 Functional Description

The composition of EMAC module is as follows.

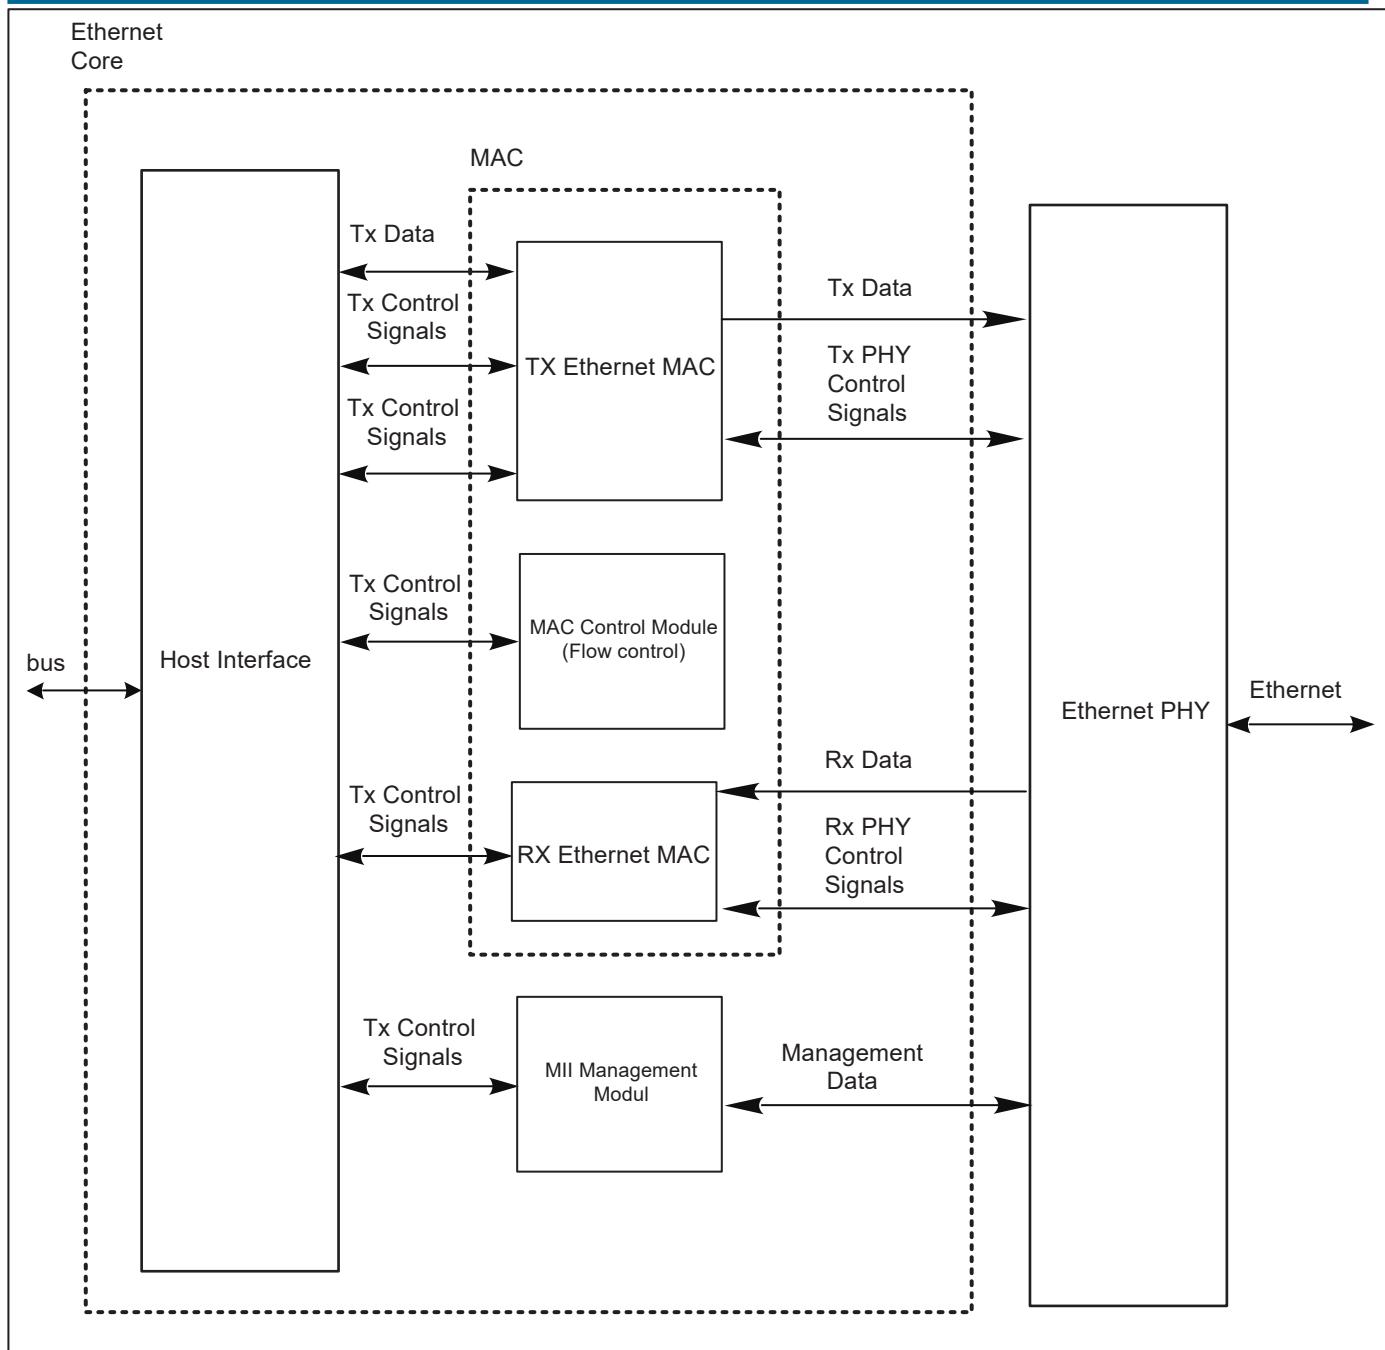


Fig. 24.1: Block diagram of EMAC

Through MDIO interface, the control register can read and write PHY's registers, to perform configuration, mode selection (half/full duplex), negotiation, and other operations. The RX module filters and checks the received data frames for a valid preamble, FCS, and length, and stores the data in the specified memory address according to the BD. The TX module gets data from the memory according to the data BD, adds preamble, FCS, and pad, and then sends them out using the CSMA/CD protocol. If CRS is detected, retry will be delayed. The RX/TX BD set is connected to the system RAM, which is used to store the sent and received Ethernet data frames. Each descriptor contains the corresponding control status word and buffer memory address. There are 128 descriptors for RX/TX, and can be allocated flexibly.

24.4 Clock

EMAC needs a clock for synchronous transmission and reception (25 MHz (MII) or 50 MHz (RMII) at 100 Mbps, and 2.5 MHz at 10 Mbps). The clock must be synchronized between EMAC and PHY.

24.5 RX/TX BD

The RX/TX BD provides the association between EAMC and data frame cache address information, controls RX/TX data frames, and gives RX/TX status prompt. Each descriptor consists of two consecutive words (1 word = 32 bits). The word with low address provides the length, control bits, and status bits of the data frames contained in this buffer. The word with high address is the memory pointer. More details of BD are presented in the register description section. It should be noted that BD must be written by word. EMAC supports 128 BDs, which are shared by the RX/TX logic and can be freely combined. But the TX BD always occupies the preceding contiguous area. The number of BD is specified by the TXBDNUM field in the register MAC_TX_BD_NUM. EMAC circularly processes the RX/TX BDs according to their order, until it finds the BDs marked WR, and goes back to the first RX/TX BD respectively.

24.6 PHY Interaction

The interactive register set of PHY provides a way to communicate commands and data needed for interaction with PHY. EMAC controls the working mode of PHY through MDIO interface, and ensures the matching of both working modes (such as rate, full/half-duplex). Data packets interact between EMAC and PHY through MII/RMII interface, which is selected by the RMII_EN bit in the EMAC's mode register (EMAC_MODE): When this bit is 1, RMII mode is selected, and otherwise the MII mode is selected. Both MII and RMII modes support the transmission rates of 10 Mbps and 100 Mbps specified in IEEE 802.3u. The transmission signals of MII and RMII are described as follows.

Table 24.1: Transmission signal

Name	MII	RMII
EXTCK_EREFCK	ETXCK: Send clock signal	EREFCK:reference clock
ECRS	ECRS: carrier detection	-
ECOL	ECOL: collision detection	-
ERXDV	ERXDV: valid data	ECRSDV: carrier detection/valid data
ERX0-ERX3	ERX0ERX3: 4-bit received data	ERX0ERX1: 2-bit received data
ERXER	ERXER: Receive error indication	ERXER: Receive error indication
ERXCK	ERXCK: Receive clock signal	-
ETXEN	ETXEN: TX enable	ETXEN: TX enable
ETX0-ETX3	ETX0ETX3: 4-bit sent data	ETX0ETX1: 2-bit sent data
ETXER	ETXER: Send error indication	-
EMDC	MDIO Clock	MDIO Clock
EMDIO	MDIO Data Input Output	MDIO Data Input Output

The RMII interface has fewer pins, and 2-bit data lines are used for transmission and reception. At 100 Mbps, a reference clock of 50 MHz is required.

24.7 Programming Flow

24.7.1 PHY initialization

- Select a proper connection mode by setting the RMII_EN bit in the register EMAC_MODE according to the PHY type.
- Set the MAC address of EMAC to EMAC_MAC_ADDR0 and EMAC_MAC_ADDR1
- Set an appropriate clock for the MDIO part by programming the CLKDIV field in the register EMAC_MIIMODE
- Set the address of the corresponding PHY to the FIAD field of the register EMAC_MIIADDRESS
- According to PHY's manual, send commands through registers EMAC_MIICOMMAND and EMAC_MIIITX_DATA
- Store the data read from PHY in the register EMAC_MIIRX_DATA
- Query the status of interaction with PHY commands through the register EMAC_MIISTATUS

After basic interaction is completed, PHY shall be switched to the auto-negotiation state. Upon negotiation completed, the mode must be programmed to the FULLD bit in the EMAC_MODE register based on the negotiation result.

24.7.2 Send Data Frame

- Configure data frame format and interval bit fields in the register EMAC_MODE
- Specify the number of TX BDs by setting the TXBDNUM field in the register EMAC_TX_BD_NUM, so that the rest is the number of RX BDs
- Prepare the data frames to be sent in the memory
- Fill in the address of data frames in the data pointer field (word 1) corresponding to the TX BDs
- Clear the status flag in the control and status fields (word 0) corresponding to the TX BDs, and set the control field (CRC enable, PAD enable, and interrupt enable)
- Write the data frame length, and set the RD field to inform EMAC that this BD data needs to be sent. If necessary, set the upper IRQ bit to enable interrupt
- Especially, if it is the last TX BD, the upper WR bit must be set. EMAC will "go back" to the first TX BD after this BD is processed
- If there are multiple BDs to be sent, repeat the steps of setting BD to pad all the TX BDs
- If one packet is contained in only one BD, set its EOF bit to 1
- If one packet is sent in multiple BDs, just mark the last BD it occupies as the end of the packet by setting the EOF

bit

- To enable the TX interrupt, configure the TX-related bits in the register EMAC_INT_MASK
- Configure the TXEN bit in the register EMAC_MODE to enable TX
- If an interrupt is enabled, in the TX interrupt, obtain the current BD through the TXBDNUM field in the register EMAC_TX_BD_NUM
- Complete processing based on the status word of the current BD
- For BDs whose data has been sent, the RD bit in its control field will be cleared by hardware and BDs will not be used for TX again. Only after new data is padded and RD is set, can this BD be used for TX again

24.7.3 Receive Data Frame


- Configure data frame format and interval bit fields in the register EMAC_MODE
- Specify the number of TX BDs by setting the TXBDNUM field in the register EMAC_TX_BD_NUM, so that the rest is the number of RX BDs
- Prepare an area in memory for receiving data
- Fill in the address of data frames in the data pointer field (word 1) corresponding to the RX BDs
- Clear the status flag in the control and status fields (word 0) corresponding to the RX BDs, and set the control field (interrupt enable)
- Write the receivable data frame length, and set the E-bit field to inform EMAC that this BD is free and can receive data. If necessary, set the upper IRQ bit to enable the interrupt
- Especially, if it is the last valid RX BD, the upper WR bit must be set. EMAC will "go back" to the first RX BD after this BD is processed
- If there are multiple BDs for receiving data, repeat the steps of setting BD to pad all the BDs
- To enable the RX interrupt, configure the RX-related bits in the register EMAC_INT_MASK
- Configure the RXEN bit in the register EMAC_MODE to enable RX
- If an interrupt is enabled, in the RX interrupt, obtain the current BD through the RXBDNUM field in the register EMAC_TX_BD_NUM
- Complete processing based on the status word of the current BD
- For BDs whose data has been received, the E bit in its control field will be cleared by hardware and BDs will not be used for RX again. Only after you take out the data and set the E bit, can this BD be used for RX again

24.8 Register description

Name	Description
MODE	
INT_SOURCE	
INT_MASK	
IPGT	
PACKETLEN	
COLLCONFIG	
TX_BD_NUM	
MIIMODE	
MIICOMMAND	
MIIADDRESS	
MIITX_DATA	
MIIRX_DATA	
MIISTATUS	
MAC_ADDR0	
MAC_ADDR1	
HASH0_ADDR	
HASH1_ADDR	
TXCTRL	

24.8.1 MODE

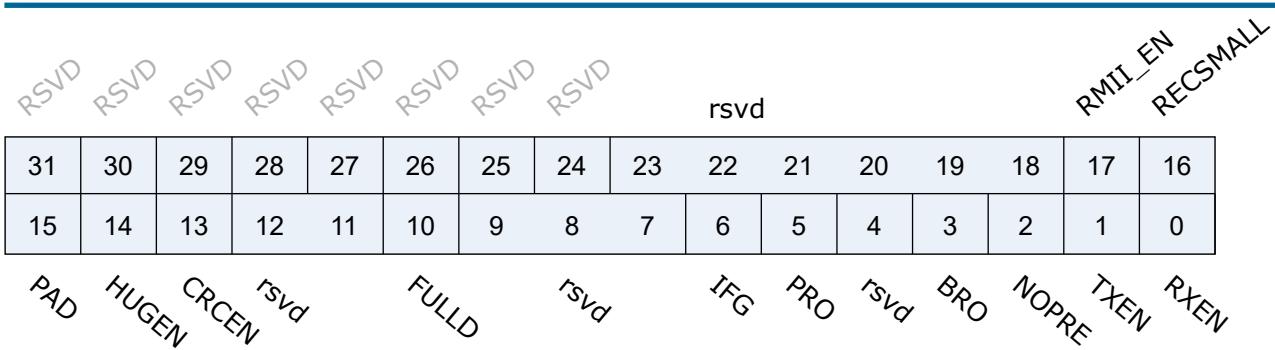Address: 0x20070000



Bits	Name	Type	Reset	Description
31:24	RSVD			
23:18	rsvd	rsvd	6'h0	Reserved
17	RMII_EN	r/w	1'b0	RMII mode enable 0: MII PHY I/F is used 1: RMII PHY I/F is used
16	RECSMALL	r/w	1'b0	Receive small frame enable 0: Frames smaller than MINFL are ignored. 1: Frames smaller than MINFL are accepted.
15	PAD	r/w	1'b1	Padding enable 0: Do not add pads to frames shorter than MINFL. 1: Add pads to short frames, until the length equals MINFL.
14	HUGEN	r/w	1'b0	Huge frames enable 0: The maximum frame length is MAXFL. All additional bytes are dropped. 1: Frame size is not limited by MAXFL and can be up to 64K bytes.
13	CRCEN	r/w	1'b1	CRC Enable 0: TX MAC does not append CRC field. 1: TX MAC will append CRC field to every frame.
12:11	rsvd	rsvd	2'b0	Reserved
10	FULLD	r/w	1'b0	Full duplex 0: Half duplex mode. 1: Full duplex mode.
9:7	rsvd	rsvd	3'b0	Reserved
6	IFG	r/w	1'b0	Inter frame gap check 0: IFG is verified before each frame be received. 1: All frames are received regardless to IFG requirement.

Bits	Name	Type	Reset	Description
5	PRO	r/w	1'b0	Promiscuous mode enable 0: The destination address is checked before receiving. 1: All frames received regardless of the address.
4	rsvd	rsvd	1'b0	Reserved
3	BRO	r/w	1'b1	Broadcast address enable 0: Reject all frames containing the broadcast address unless the PRO bit is asserted. 1: Receive all frames containing broadcast address.
2	NOPRE	r/w	1'b0	No preamble mode 0: 7-byte preamble will be sent. 1: No preamble will be sent.
1	TXEN	r/w	1'b0	Transmit enable 0: Transmitter is disabled. 1: Transmitter is enabled. If TX_BD_NUM equals 0x0 (zero buffer descriptors are used), then the transmitter is disabled regardless of TXEN.
0	RXEN	r/w	1'b0	Receiver enable 0: Receiver is disabled. 1: Receiver is enabled. If TX_BD_NUM equals 0x80 (all buffer descriptors are used for TX), then the receiver is disabled regardless of RXEN.

24.8.2 INT_SOURCE

Address: 0x20070004

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | |


RSVD	TXC	BUSY	RXE	RXB	TXE	TXB									
------	------	------	------	------	------	------	------	------	------	-----	------	-----	-----	-----	-----

Bits	Name	Type	Reset	Description
31:7	RSVD			

Bits	Name	Type	Reset	Description
6	RXC	r/w	1'b0	<p>Receive control frame</p> <p>This bit indicates that the control frame was received. It is cleared by writing 1 to it.</p> <p>Bit RXFLOW in the CTRLMODE register must be set to 1 in order to get the RXC bit set.</p>
5	TXC	r/w	1'b0	<p>Transmit control frame</p> <p>This bit indicates that a control frame was transmitted. It is cleared by writing 1 to it.</p> <p>Bit TXFLOW in the CTRLMODE register must be set to 1 in order to get the TXC bit set.</p>
4	BUSY	r/w	1'b0	<p>Busy</p> <p>This bit indicates that RX packet is being received and there is no empty buffer descriptor to use. It is cleared by writing 1 to it.</p> <p>This bit appears regardless to the IRQ bits in the Receive Buffer Descriptor.</p>
3	RXE	r/w	1'b0	<p>Receive error</p> <p>This bit indicates that an error occurred while receiving data (overrun, receiver error, dribble nibble, too long, >64K, CRC error, bus error or late collision. It is cleared by writing 1 to it.</p> <p>This bit appears only when IRQ bit is set in the Receive Buffer Descriptor.</p>
2	RXB	r/w	1'b0	<p>Receive frame</p> <p>This bit indicates that a frame was received. It is cleared by writing 1 to it.</p> <p>This bit appears only when IRQ bit is set in the Receive Buffer Descriptor.</p>
1	TXE	r/w	1'b0	<p>Transmit error</p> <p>This bit indicates that a buffer was not transmitted due to a transmit error (underrun, retransmission limit, late collision, bus error or defer time-out). It is cleared by writing 1 to it.</p> <p>This bit appears only when IRQ bit is set in the Transmit Buffer Descriptor.</p>
0	TXB	r/w	1'b0	<p>Transmit buffer</p> <p>This bit indicates that a buffer has been transmitted. It is cleared by writing 1 to it.</p> <p>This bit appears only when IRQ bit is set in the Transmit Buffer Descriptor.</p>

24.8.3 INT_MASK

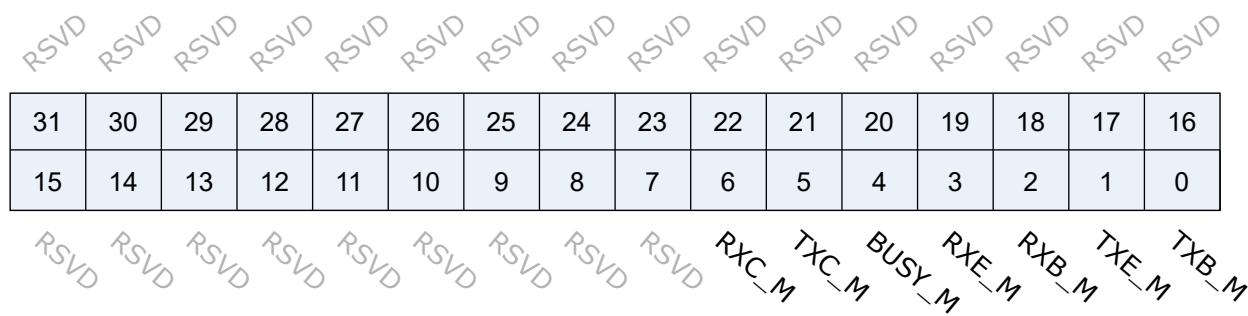Address: 0x20070008



Bits	Name	Type	Reset	Description
31:7	RSVD			
6	RXC_M	r/w	1'b1	Receive control frame mask ENABLE 0: Interrupt is un-masked 1: Interrupt is masked
5	TXC_M	r/w	1'b1	Transmit control frame mask ENABLE 0: Interrupt is un-masked 1: Interrupt is masked
4	BUSY_M	r/w	1'b1	Busy mask ENABLE 0: Interrupt is un-masked 1: Interrupt is masked
3	RXE_M	r/w	1'b1	Receive error mask ENABLE 0: Interrupt is un-masked 1: Interrupt is masked
2	RXB_M	r/w	1'b1	Receive frame mask ENABLE 0: Interrupt is un-masked 1: Interrupt is masked
1	TXE_M	r/w	1'b1	Transmit error mask ENABLE 0: Interrupt is un-masked 1: Interrupt is masked
0	TXB_M	r/w	1'b1	Transmit buffer mask ENABLE 0: Interrupt is un-masked 1: Interrupt is masked

24.8.4 IPGT

Address: 0x2007000c

RSVD															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

IPGT

Bits	Name	Type	Reset	Description
31:7	RSVD			
6:0	IPGT	r/w	7'h18	Inter packet gap The recommended value is 0x18 (24 clock cycles), which equals 9.6 us for 10 Mbps and 0.96 us for 100 Mbps mode

24.8.5 PACKETLEN

Address: 0x20070018

MINFL

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0


MAXFL

Bits	Name	Type	Reset	Description
31:16	MINFL	r/w	16'h40	Minimum frame length The minimum Ethernet packet is 64 bytes long (0x40). To receive small packets, assert the RECSMALL bit or change the MINFL value. To transmit small packets, assert the PAD bit or change the MINFL value.

Bits	Name	Type	Reset	Description
15:0	MAXFL	r/w	16'h600	<p>Maximum frame length</p> <p>The maximum Ethernet packet is 1518 bytes long. To support this and to have some additional space for tags, a default maximum packet length equals to 1536 bytes (0x600).</p> <p>For bigger packets, you can assert the HUGEN bit or increase the value of MAXFL field.</p>

24.8.6 COLLCONFIG

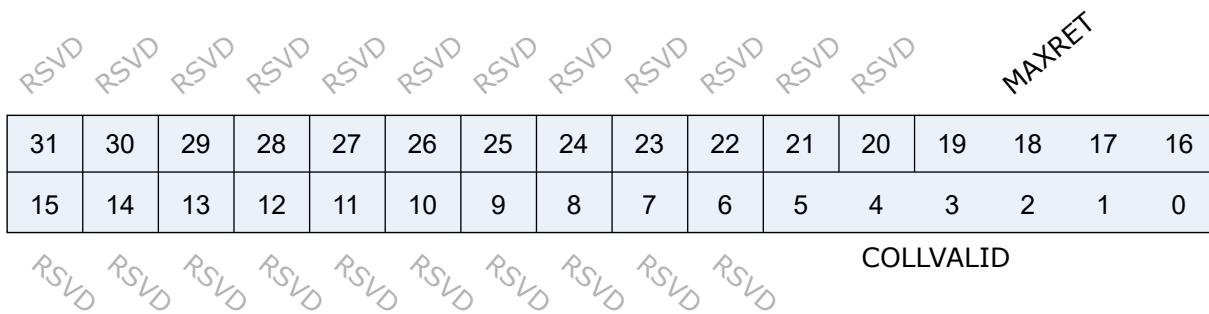Address: 0x2007001c



Bits	Name	Type	Reset	Description
31:20	RSVD			
19:16	MAXRET	r/w	4'hF	<p>Maximum retry</p> <p>This field specifies the maximum number of consequential retransmission attempts after the collision is detected.</p> <p>When the maximum number has been reached, the TX MAC reports an error and stops transmitting the current packet.</p> <p>According to the Ethernet standard, the MAXRET default value is set to 0xf (15).</p>
15:6	RSVD			
5:0	COLLVALID	r/w	6'h3F	<p>Collision valid</p> <p>This field specifies a collision time window. A collision that occurs later than the time window is reported as a "Late Collisions" and transmission of the current packet is aborted.</p>

24.8.7 TX_BD_NUM

Address: 0x20070020

Bits	Name	Type	Reset	Description
31	RSVD			
30:24	RXBDPTR	r	7'h0	RX buffer descriptors (BD) pointer, pointing at the RXBD currently being used
23	RSVD			
22:16	TXBDPTR	r	7'h0	TX buffer descriptors (BD) pointer, pointing at the TXBD currently being used
15:8	RSVD			
7:0	TXBDNUM	r/w	8'h40	TX buffer descriptors (BD) number Number of TX BD. TX and RX share 128 (0x80) descriptors, so the number of RX BD equals 0x80 - TXBDNUM. The maximum number of TXBDNUM is 0x80. Values greater than 0x80 cannot be written into this register.

24.8.8 MIIMODE


Address: 0x20070028

RSVD	RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16		
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	CLKDIV	MIINOPRE

Bits	Name	Type	Reset	Description
31:9	RSVD			
8	MIINOPRE	r/w	1'b0	No preamble for Management Data (MD) 0: 32-bit preamble will be sent. 1: No preamble will be sent.
7:0	CLKDIV	r/w	8'h64	Clock divider for Management Data Clock (MDC) The source clock is bus clock and can be divided by any even number.

24.8.9 MIICOMMAND

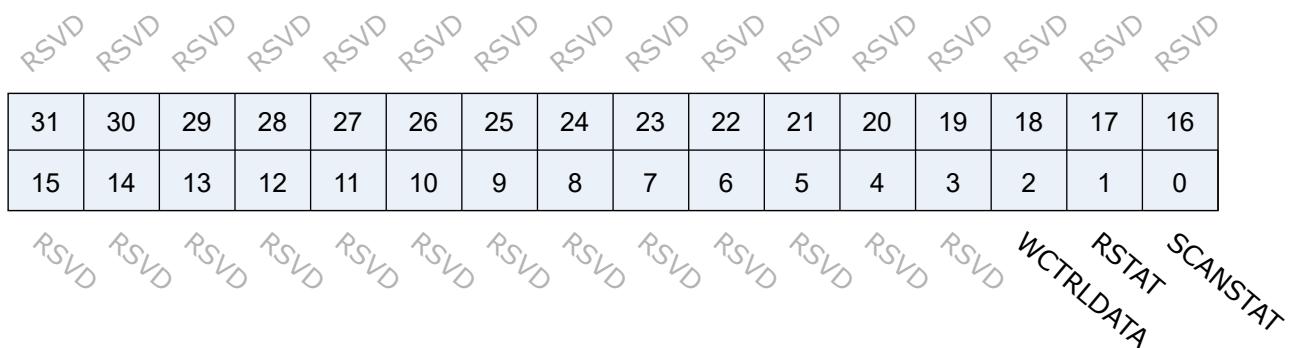Address: 0x2007002c



Bits	Name	Type	Reset	Description
31:3	RSVD			
2	WCTRLDATA	r/w	1'b0	Write control data, setting this bit to 1 will trigger the command (auto cleared) Note: [2]/[1]/[0] cannot be asserted at the same time, execute one command at a time
1	RSTAT	r/w	1'b0	Read status, setting this bit to 1 will trigger the command (auto cleared) Note: [2]/[1]/[0] cannot be asserted at the same time, execute one command at a time
0	SCANSTAT	r/w	1'b0	Scan status, setting this bit to 1 will trigger the command (auto cleared) Note: [2]/[1]/[0] cannot be asserted at the same time, execute one command at a time

24.8.10 MIIADDRESS

Address: 0x20070030

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |

Bits	Name	Type	Reset	Description
31:13	RSVD			
12:8	RGAD	r/w	5'h0	Register Address
7:5	RSVD			
4:0	FIAD	r/w	5'h0	PHY Address

24.8.11 MIITX DATA

Address: 0x20070034

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |

CTRLDATA

Bits	Name	Type	Reset	Description
31:16	RSVD			
15:0	CTRLDATA	r/w	16'h0	Control Data to be written to PHY

24.8.12 MIIRX_DATA

Address: 0x20070038

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |

PRSD

Bits	Name	Type	Reset	Description
31:16	RSVD			
15:0	PRSD	r	16'h0	Received Data from PHY

24.8.13 MIISTATUS

Address: 0x2007003c

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |
| RSVD |

MIIM_BUSY
MIIM_LINKFAIL

Bits	Name	Type	Reset	Description
31:2	RSVD			
1	MIIM_BUSY	r	1'b0	MIIM I/F busy signal 0: The MIIM I/F is ready. 1: The MIIM I/F is busy.
0	MIIM_LINKFAIL	r	1'b0	MIIM I/F link fail signal

24.8.14 MAC_ADDR0

Address: 0x20070040

MAC_B2								MAC_B3										
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16			
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
MAC_B4								MAC_B5										

Bits	Name	Type	Reset	Description
31:24	MAC_B2	r/w	8'd0	Ethernet MAC address byte 2
23:16	MAC_B3	r/w	8'd0	Ethernet MAC address byte 3
15:8	MAC_B4	r/w	8'd0	Ethernet MAC address byte 4
7:0	MAC_B5	r/w	8'd0	Ethernet MAC address byte 5

24.8.15 MAC_ADDR1

Address: 0x20070044

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

MAC_B0 MAC_B1

Bits	Name	Type	Reset	Description
31:16	RSVD			
15:8	MAC_B0	r/w	8'd0	Ethernet MAC address byte 0
7:0	MAC_B1	r/w	8'd0	Ethernet MAC address byte 1

24.8.16 HASH0_ADDR

Address: 0x20070048

HASH0																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

HASH0

Bits	Name	Type	Reset	Description
31:0	HASH0	r/w	32'h0	Lower 32-bit of HASH register

24.8.17 HASH1_ADDR

Address: 0x2007004c

HASH1

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

HASH1

Bits	Name	Type	Reset	Description
31:0	HASH1	r/w	32'h0	Upper 32-bit of HASH register

24.8.18 TXCTRL

Address: 0x20070050

RSVD	TXPAUSERQ														
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

TXPAUSETV

Bits	Name	Type	Reset	Description
31:17	RSVD			
16	TXPAUSERQ	r/w	1'b0	TX Pause Request Writing 1 to this bit starts sending control frame and is automatically cleared to zero.
15:0	TXPAUSETV	r/w	16'h0	TX Pause Timer Value The value that is sent in the pause control frame.

25.1 Overview

Universal Serial Bus (USB) is an external bus standard that establishes specifications for the connection and communication between computers and external devices. xx supports USB 2.0 (HighSpeed + FullSpeed) and can be used as a host controller (Host) or a peripheral controller (Device). As a Host, it contains a USB Host that supports all-speed transactions. Without software intervention, the Host can handle the transaction-based data structure by itself to reduce the load of CPU, and automatically send and receive data on the USB bus. As a Device, each endpoint except endpoint 0 supports the transfer types in the USB specification to adapt to various applications. In addition, xx's USB controller complies with the OTG standard and supports the session request protocol (SRP) and host negotiation protocol (HNP).

25.2 Features

- Compatible with USB 2.0 (HighSpeed + FullSpeed)
- Compatible with OTG revision1.3
- UTMI + Level 3
- OTG SRP and HNP protocols
- Host, OTG, and Device modes
- Supports LPM
- Compatible with EHCI data structure (FSTN and SITD unsupported)
- Nine endpoints (EP0: control endpoint EP1EP8: interrupt/isolation/bulk endpoint)
- One dedicated FIFO for control transmission and four general FIFOs (control FIFO: 64 bytes; general FIFO: 512 bytes)
- Supports 2-FIFO and 3-FIFO modes

- Supports DMA
- Supports VDMA

25.3 Functional Description

25.3.1 Operating Steps of USB

1. Configure internal transceiver
2. Configure USB controller
3. Configure USB interrupt
4. Configure USB DMA/VDMA (direct reading and writing of FIFO by CPU is unsupported)
5. Finish

25.3.2 Partial Register Configuration and Functional Description

25.3.3 Interrupt Processing Flow for USB Enumeration Phase

26.1 Overview

The SD Host Controller (SDH) is used to control the communication with SDIO or SD card, and all accesses are set through standard control registers.

26.2 Features

- Comply with the SD Host Controller Specification defined by the SD Association
- Suitable for SDIO/SD memory card
- Supports the standard register settings for the SDH
- Supports the DMA operation for high-speed data transfer
- Supports interrupt
- Supports data block transmission

26.3 Functional Description

26.3.1 SDH Overall Structure

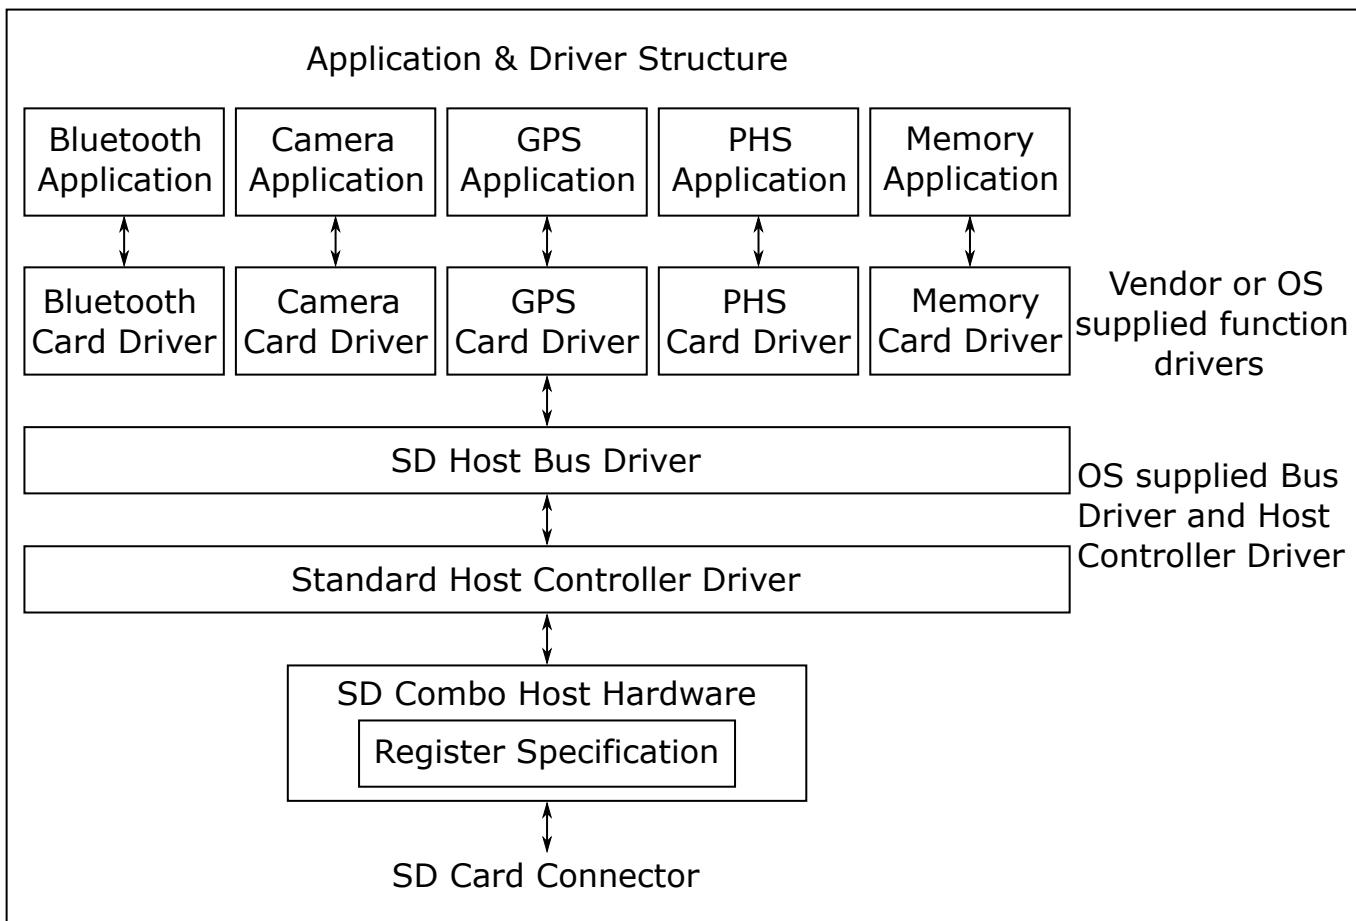


Fig. 26.1: SDH Hardware and Driver Structure

26.3.2 Register Mapping

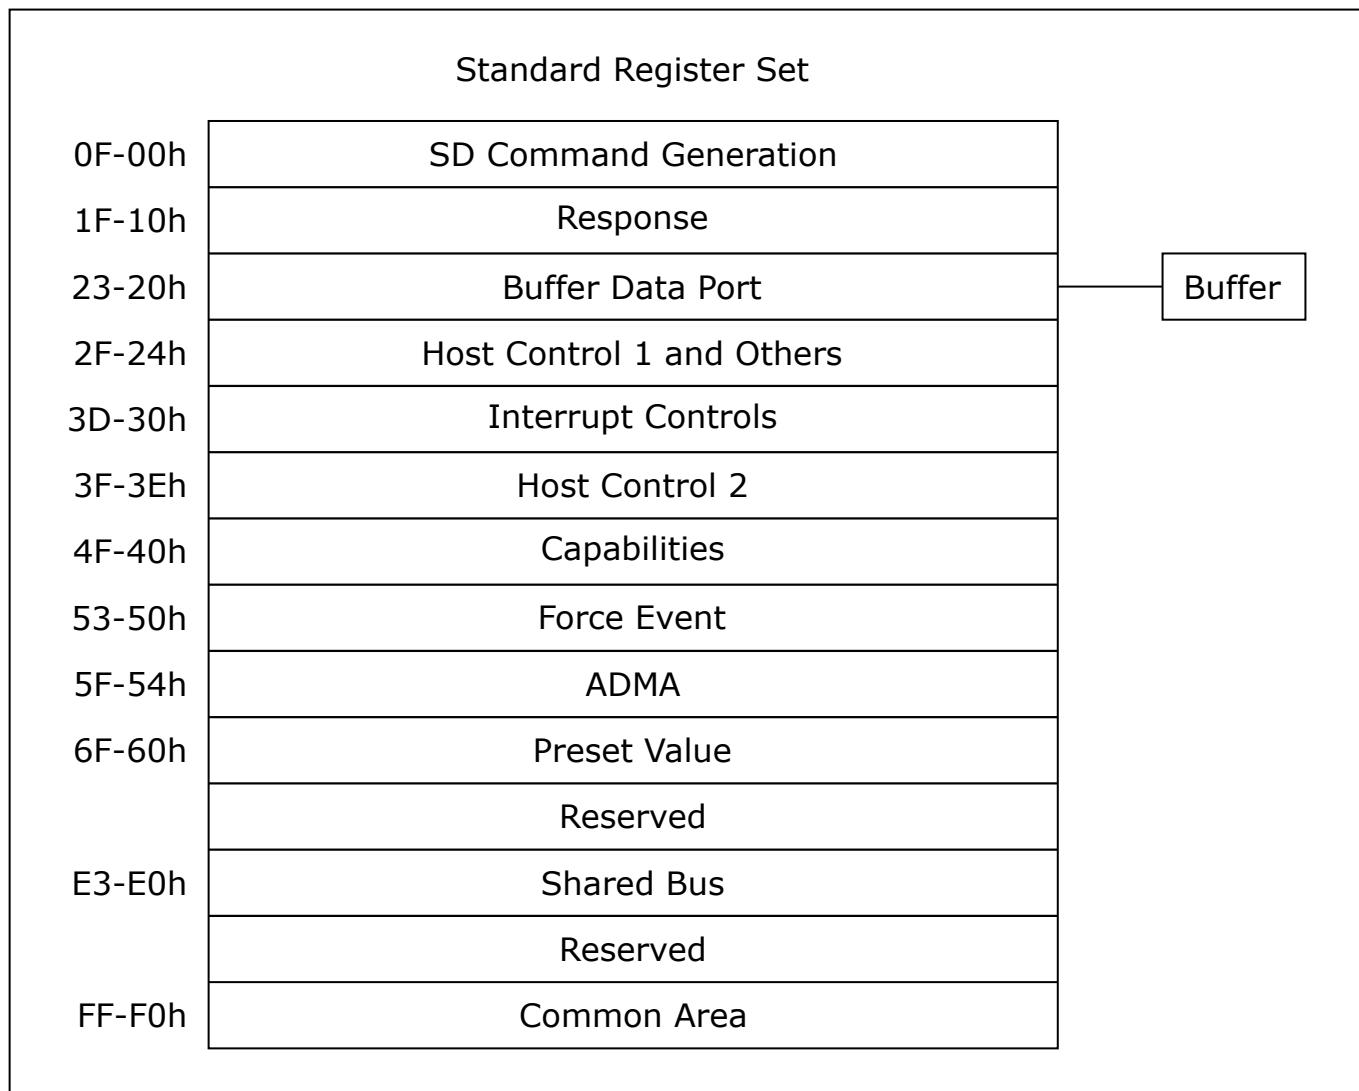


Fig. 26.2: Standard Register Mapping Classification

- SD Command Generation: parameter used to generate SD command
- Response: the response value from the card
- Buffer Data Port: the data access port of the internal buffer
- Host Control 1 and Others: current status, SD bus control, host reset, etc.
- Interrupt Controls: Interrupt Status and Interrupt Enable
- Host Control 2: vendor-specific host controller support information
- Capabilities: expansion of host control register
- Force Event: a test register that generates events through software

- ADMA: advanced DMA register
- Preset Value: preset values for clock frequency selection and driving strength selection
- Shared Bus: device control of shared bus system
- Common Area: public information area

26.3.3 Support for Multiple Card Slots

A standard register set is defined for each card slot. If the host controller has two card slots, two register sets are required. Each card slot is independently controlled. This makes it possible to support the combination of bus interface voltage, bus timing and SD clock frequency.

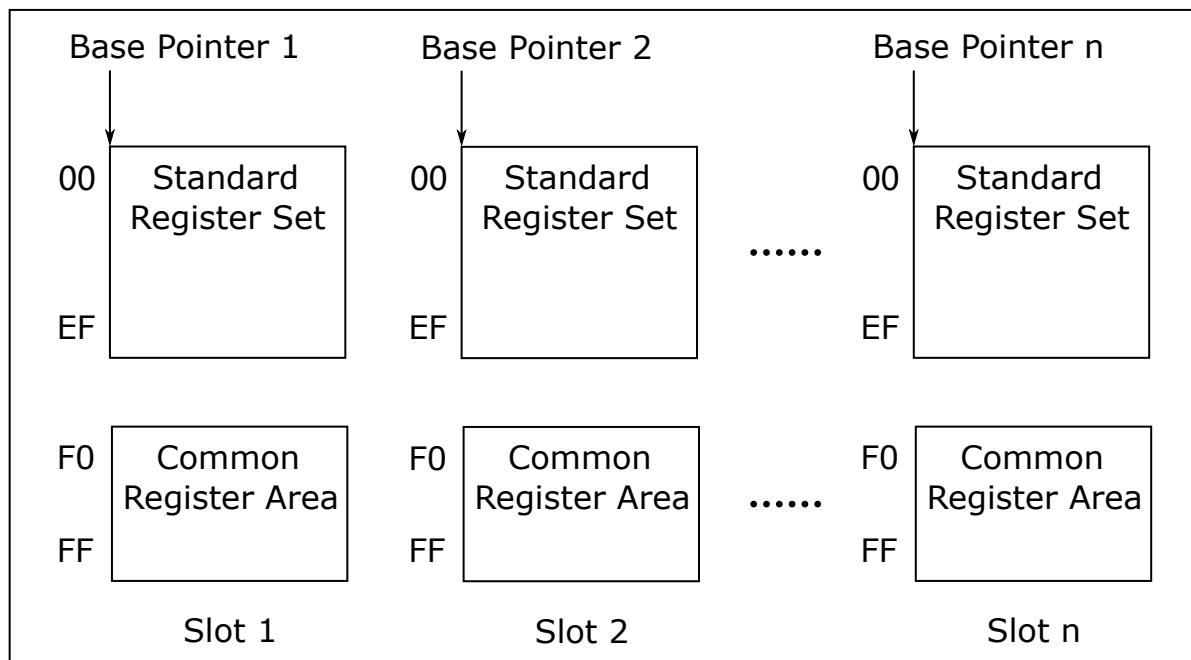


Fig. 26.3: Register Mapping of Multi-Card Slot Controller

The above figure shows the register mapping of the multi-card slot host controller. The host driver shall use PCI configuration registers or the vendor-specific methods to determine the number of card slots and the base pointer to the standard register set of each card slot. The offset from 0F0h to 0FFh is reserved for the common register area, which defines the information of card slot control and public state. The common register area can be accessed from the register set of any card slot. This allows the software to control each card slot independently, because it can access the Card Slot Interrupt Status register and the Host Controller Version register from each register set.

26.3.4 Supporting DMA

The host controller provides a “programmed I/O” method for the host driver to transfer data using the Buffer Data Port register. Optionally, host controller implementers may support data transfer using DMA. Prior to using DMA, the host driver shall confirm that both the host controller and the system bus support it (PCI bus can support DMA). DMA shall support both single block and multiple-block transfers. The host controller registers shall remain accessible for issuing non-DAT line commands during a DMA transfer execution. The result of a DMA transfer shall be the same regardless of the system bus data transfer method. The host driver can stop and restart a DMA operation by the control bits in the block gap control register. By setting Stop At Block Gap Request, a DMA operation can be stopped at block gap. By setting Continue Request, DMA operation can be restarted. If an error occurs, DMA operation shall be stopped. To abort DMA transfer, the host driver shall reset the host controller through the “Software Reset” of DAT line in the software reset register, and issue CMD12 when executing read/write commands on multiple blocks.

26.3.5 SD Command Generation

	SDMA Command	ADMA Command	CPU Data Transfer	Non-DAT Transfer
SDMA System Address /Argument 2	Yes /No	No /Auto CMD23	No /Auto CMD23	No /No
Block Size	Yes	Yes	Yes	No (Protected)
Block Count	Yes	Yes	Yes	No (Protected)
Argument 1	Yes	Yes	Yes	Yes
Transfer Mode	Yes	Yes	Yes	No (Protected)
Command	Yes	Yes	Yes	Yes

Fig. 26.4: Register for Generating SD Commands

The table above shows the register settings (offset from 000h to 00Fh in a register set) required for three types of transactions: DMA-generated transfer (SDMA or ADMA), CPU data transfer (using “programmed I/O”) and non-DAT transfer. When starting a transaction, the host driver shall program these registers from 000h to 00Fh. The offset of the starting register can be calculated based on the transaction type. The last written offset shall always be 00Fh, because the high byte written to the command register will trigger the SD command. During a data transaction, the host driver shall not read the SDMA system address, block size and block count registers, unless transfer is stopped or suspended because the values are changing and unstable. To prevent data transfer from damaging registers when commands are issued, the block size, block count and transfer mode registers shall be write-protected by the host controller, and the command disable (DAT) shall be set to 1 in the current status register (this signal cannot protect the SDMA system address). When command disable (CMD) is set to 1, the host driver must not write parameter 1

and command register.

26.3.6 Suspend and Resume Mechanism

Support for Suspend/Resume can be determined by checking Suspend/Resume Support in the Capabilities register. When the SD card accepts a suspend request, the host driver saves information in the first 14 bytes registers (that is, offsets 000h-00dh) before issuing other SD commands. On resuming, the host driver restores these registers and then issues the Resume command to continue suspended operation. The SDIO card sets the DF (Resume Data Flag) in the response to the Resume command. (Since the Suspend and Resume commands are CMD52 operations, the response data is actually the Function Select Register in the CCCR.) If DF is set to 0, it means that the SDIO card cannot continue data transfer while suspended. This bit can be used to control data transfers and interrupt cycles. If the Resume Data Flag is set to 0, no more data is transferred and an interrupt cycle is started if the transaction being resumed is in 4-bit mode. If DF is set to 1, data transfers continue. It is worth noting that to use Suspend/Resume function, the SDIO card must support Suspend and Resume commands and Read Wait control.

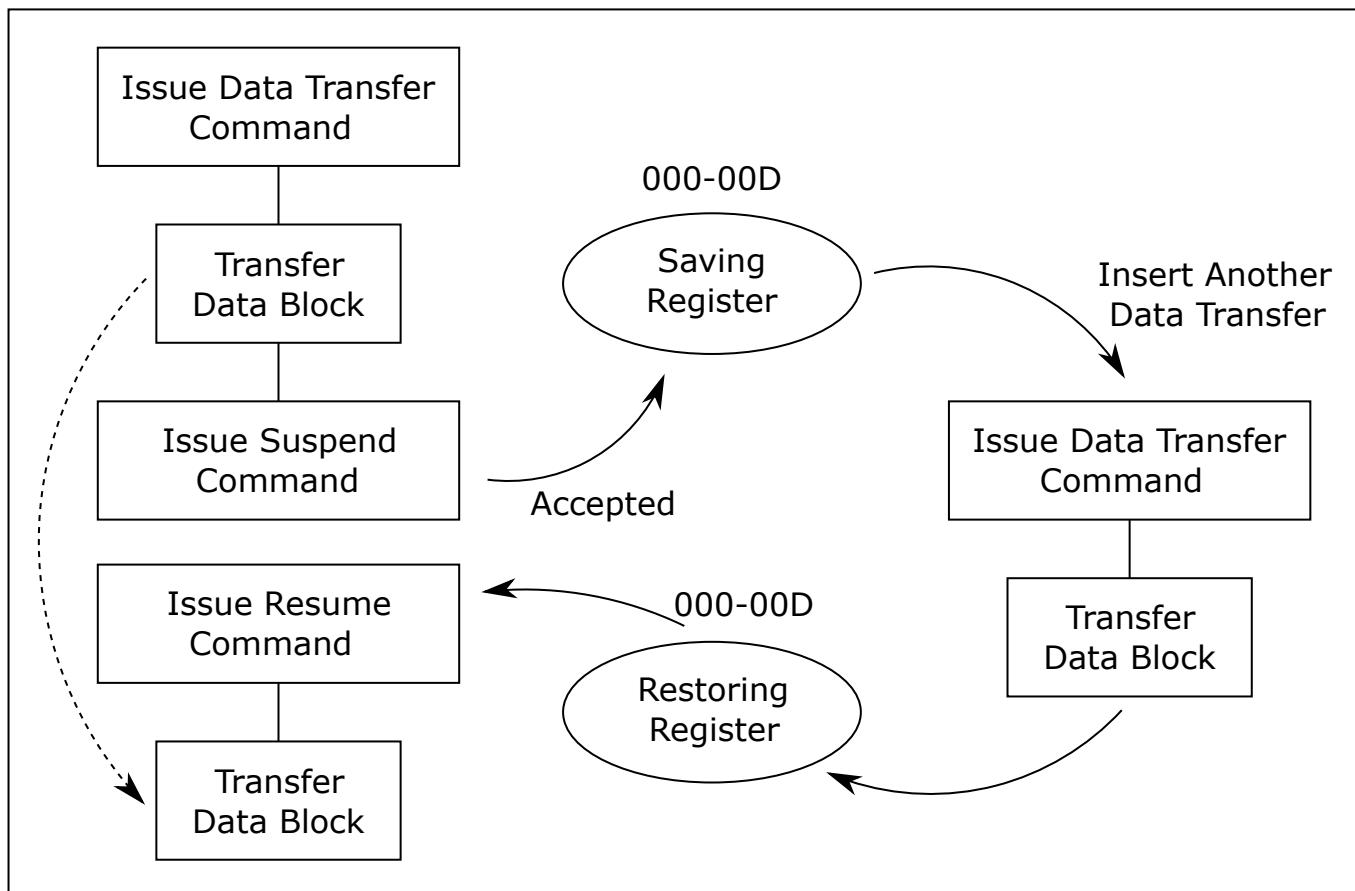


Fig. 26.5: Suspend and Resume Mechanism

26.3.7 Buffer Control

The host controller has a data buffer for data transfer. The host driver accesses internal buffer through the 32-bit Buffer Data Port register. Here are some rules for accessing the buffer.

26.3.7.1 Control of Buffer Pointer

Internally, the host controller maintains a pointer to control the data buffer. The pointer is not directly accessible by the host driver. Every time the Buffer Data Port register is accessed, the pointer is incremented depending on amount of data written to the buffer. In order to accommodate a variety of system buses, this pointer shall be implemented regardless of system bus width (8/16/32/64-bit system bus width can be supported).

26.3.7.2 Determination of Buffer Block Length

To transfer data blocks at a burst, the relationship between host controller and SD card buffer sizes is very important. The host driver shall use the same data block length for both host controller and SD card. If the controller and card buffer sizes are different, the host driver shall use the smaller one. The maximum host controller buffer size is defined by the Max Block Length field in the Capabilities register.

26.3.7.3 Dividing Large Data Transfer

The SDIO command CMD53 defines the maximum data size for transfer according to the following formula: Maximum data size = block size x block count. For example, the block size is specified by the buffer size, and the maximum value of block count is 512 (9-bit count), as specified in the command parameter CMD53. In the worst case, if the card only has a 1-byte buffer, CMD53 can be used to transfer 512 bytes of data at most (block size = 1, block count = 512). If the card does not support the multi-block mode, only one byte can be transferred. If an application or card driver wants to transfer data with a larger size, the host driver shall divide the large-size data into multiple CMD53 blocks.

26.3.8 Relationship Between Interrupt Control Registers

The host controller implements a number of interrupt sources. Interrupt sources can be enabled as interrupts or as system wakeup signals. If the interrupt source's corresponding bit in the Normal Interrupt Status Enable or Error Interrupt Status Enable register is 1 and the interrupt becomes active, its active state is latched and made available to the host driver in the Normal Interrupt Status register or the Error Interrupt Status register. Interrupt Status shall be cleared when Interrupt Status Enable is cleared. An interrupt source with its bit set in an Interrupt Status register shall assert a system interrupt signal if its corresponding bit is also set in the Normal Interrupt Signal Enable register or the Error Interrupt Signal Enable register. Once signaled, most interrupts are cleared by writing a 1 to the associated bit in the Interrupt Status register. Card interrupts, however, shall be cleared by the card driver. If a card interrupt is generated, the host driver may clear Card Interrupt Status Enable to disable card interrupts while the card driver is

processing them. After all interrupt sources are cleared, the host driver sets it again to enable another card interrupt. Disabling the Card Interrupt Status Enable avoids generating multiple interrupts during interrupt service processing. The Wakeup Control register enables Card Interrupt, Card Insertion, or Card Removal status changes to be configured to generate a system wakeup signal. These interrupts are enabled or masked independently of the Normal Interrupt Signal Enable register. The kind of wakeup event can be read from the Normal Interrupt Status register. The interrupt signal and wakeup signal are logical ORed and shall be read from the Slot Interrupt Status register.

26.3.9 Hardware Block Diagram and Timing Part

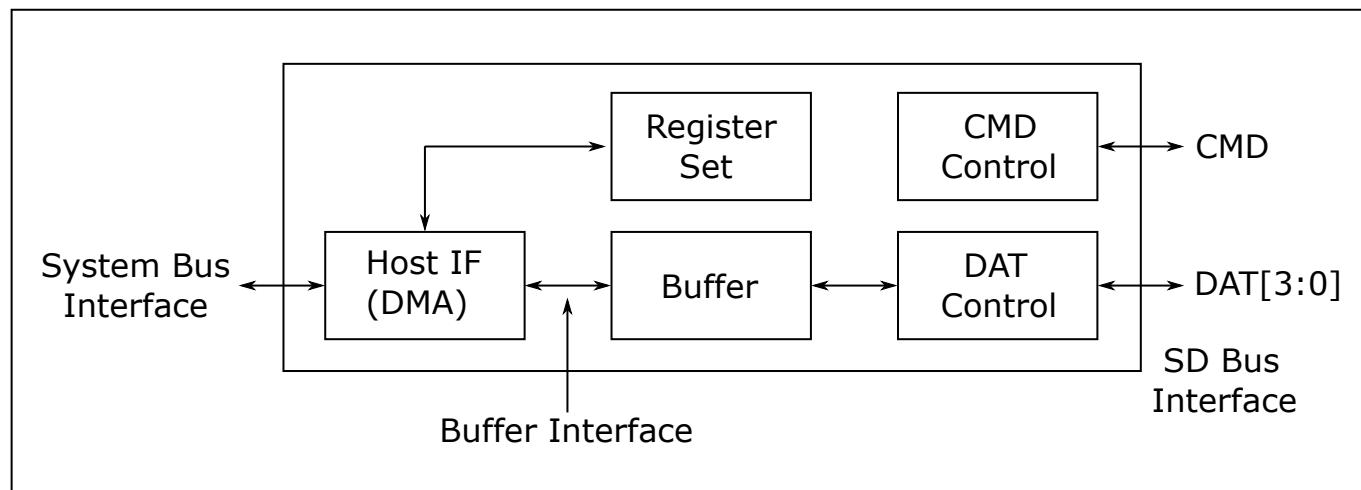


Fig. 26.6: Block Diagram of Host Controller

The host controller has two bus interfaces, the system bus interface and the SD bus interface. The host controller assumes that these interfaces are asynchronous, that is, working at different clock frequencies. The host driver is on system bus time, because it is software executed by the host controller CPU on its system clock. The SD card is on SD bus time. That is, its operation is synchronized by SDCLK. The host controller shall synchronize signals to communicate between these interfaces. Data blocks shall be synchronized at the buffer module. All status registers shall be synchronized by the system clock and maintain synchronization during output to the system interface. Control registers, which trigger SD bus transactions, shall be synchronized by SDCLK. Therefore, there will be a timing delay when propagating signals between the two interfaces. This means that the host driver cannot do real time control of the SD bus and needs to rely on the host controller to control the SD bus according to register settings. The buffer interface enables internal read and write buffers. The transfer complete interrupt status indicates completion of the read/write transfer for both DMA and non-DMA transfers. However, this timing is different between reads and writes. Read transfers shall be completed after all valid data have been transferred to the host system and are ready for the host driver to access. Write transfers shall be completed after all valid data have been transferred to the SD card and the busy state is over.

26.3.10 Auto CMD12

Multiple block transfers for SD memory require CMD12 to stop the transactions. The host controller automatically issues CMD12 when the last block transfer is completed. This feature of the host controller is called Auto CMD12. The host driver shall set Auto CMD12 Enable in the Transfer Mode register when issuing a multiple block transfer command. Auto CMD12 timing synchronization with the last data block shall be done by hardware in the host controller. Commands that do not use the DAT line can be issued during multiple block transfers. These commands are referred to using the notation CMD_wo_DAT. To prevent DAT line commands and CMD_wo_DAT commands from conflicting, the host controller shall arbitrate the timing by which each command is issued on the SD Bus. Therefore, a command might not immediately be issued after the host driver writes to the Command register. The command may be issued before or after Auto CMD12, depending on the timing. To be able to distinguish the responses of DAT line and CMD_wo_DAT commands, the Auto CMD12 response can be determined from the upper four bytes of the Response register (at offset 01Ch in the standard register set). If errors related to Auto CMD12 are detected, the host controller shall issue an Auto CMD error interrupt. The host driver can check the Auto CMD12 error status (Command Index/End bit/CRC/Timeout Error) by reading the Auto CMD Error Status register. If the Auto CMD12 was not executed, the host driver needs to recover from the CMD_wo_DAT error and issue CMD12 to stop the multiple block transfer. If the CMD_wo_DAT was not executed, the host driver can issue it again after recovering from the Auto CMD12 error. In UHS mode SDR104, the host driver shall use Auto CMD23 to stop multiple block read/write operation instead of using Auto CMD12. In other bus speed modes, if the card supports CMD23, the host driver shall use Auto CMD23 instead of using CMD12.

26.3.11 Controlling SDCLK

This table shows how SDCLK is controlled by the SD Bus Power in the Power Control register and the SD Clock Enable in the Clock Control register.

SD Bus Power	SD Clock Enable	State of SDCLK
Change 0 to 1	0	Drive Low
	1	Start Clock With Specified Period Of High
Change 1 to 0	0	Drive Low
	1	Drive Low Immediately
0	Don't Care	Drive Low
1	Change 0 to 1	Start Clock With Specified Period Of High
	Change 1 to 0	Maintains Period Of High And Then Stops Clock And Drive Low

Fig. 26.7: Controlling SDCLK by the SD Bus Power and SD Clock Enable

The clock period of SDCLK is specified by the SDCLK Frequency Select in the Clock Control register and the Base Clock Frequency For SD Clock in the Capabilities register. Since the SD card may use both clock edges, the duty

ratio of SD clock shall be average 50% (scattering within 45-55%) and the Period of High should be half of the clock period. The oscillation of SDCLK starts from driving specified Period of High. When SDCLK is stopped by the SD Clock Enable, the host controller shall stop SDCLK after driving Period of High to maintain the duty ratio of clock. When SDCLK is stopped by the SD Bus Power, the host controller shall stop SDCLK immediately (drive Low) and SD Clock Enable shall be cleared.

26.3.12 Advanced DMA

The SD Host Controller Standard Specification Version 2.00 defines the advanced DMA (ADMA) transfer algorithm. The DMA algorithm defined in the SD Host Controller Standard Specification Version 1.00 is called single DMA (SDMA). The disadvantage of SDMA is that the DMA interrupt generated at every page boundary disturbs CPU to reprogram the new system address. This SDMA algorithm develops a performance bottleneck by interrupting at each page boundary. ADMA adopts the scatter gather DMA algorithm so that higher data transfer speed is available. Before executing ADMA, the host driver can program a list of data transfers between system memory and SD card to the descriptor table. It enables ADMA to run without interrupting the host driver. In addition, ADMA supports both 32-bit system memory addressing and 64-bit system memory addressing. The 32-bit system memory addressing uses the lower 32-bit field of the 64-bit address register. ADMA is divided into ADMA1 and ADMA2. ADMA1 only supports the transfer of 4KB aligned data in the system memory. ADMA2 optimizes this restriction, so that the data of any size at any location can be transferred in the system memory. The formats of descriptor tables are different among them. In this document, the term “ADMA” refers to ADMA2.

26.3.12.1 Block Diagram of ADMA2

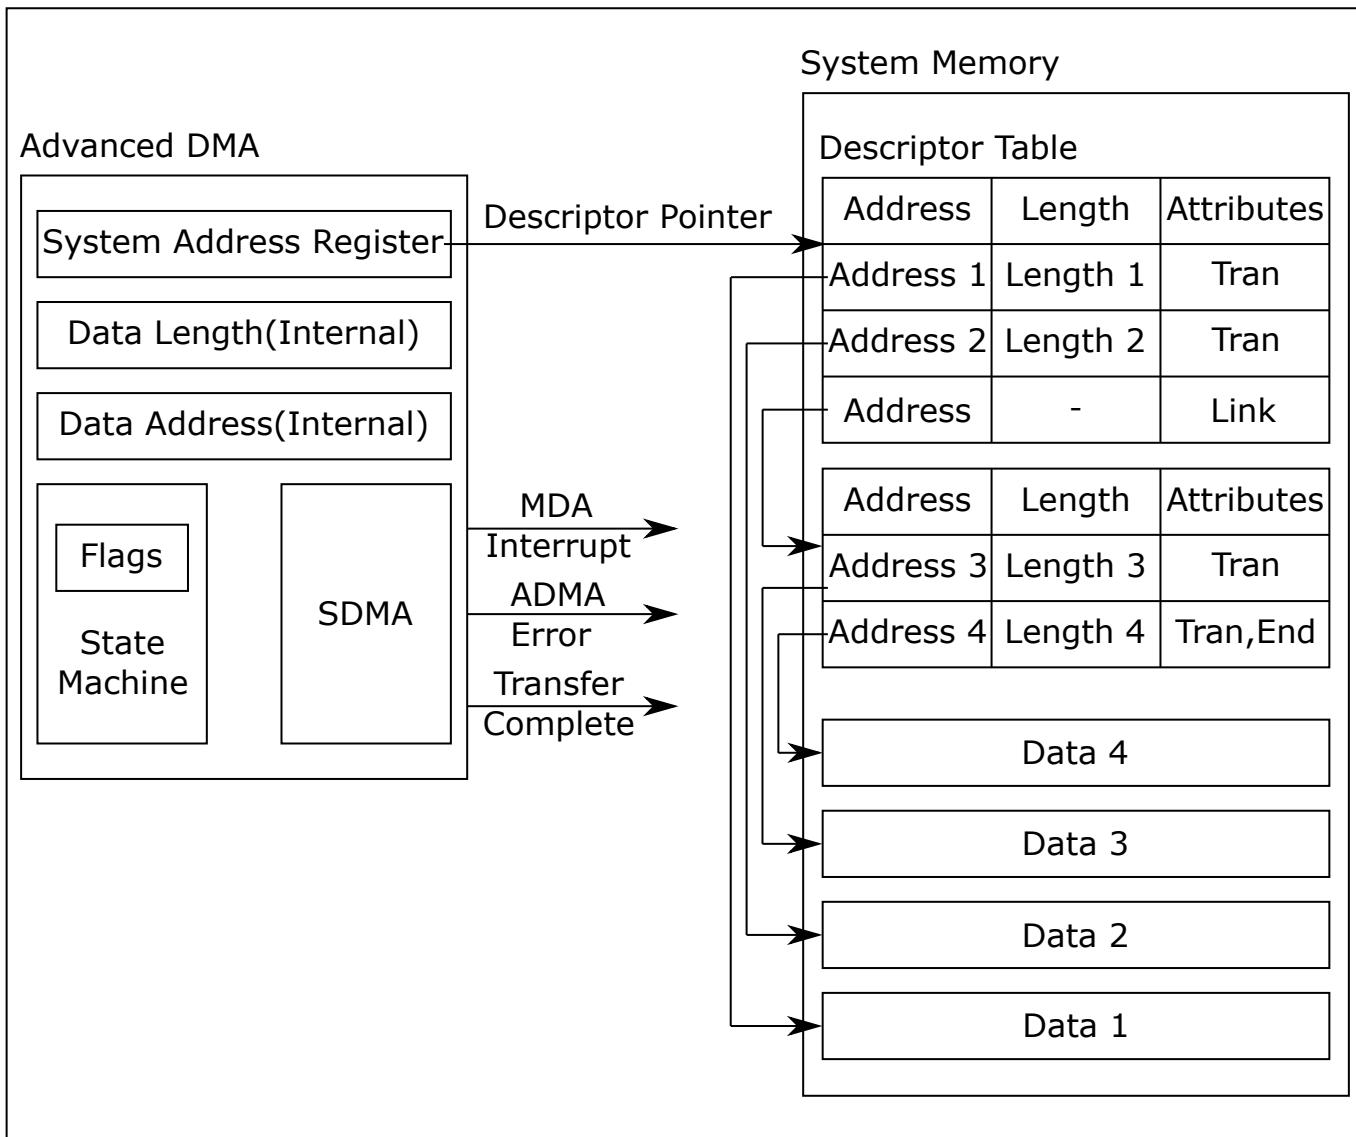


Fig. 26.8: Block Diagram of ADMA2

The descriptor table is created by the host driver in the system memory. The 32-bit address descriptor table is used for the 32-bit addressing system, and 64-bit address descriptor table is used for the 64-bit addressing system. Each descriptor line (one executable unit) consists of address, length and attribute fields. This attribute specifies the operation of the descriptor line. ADMA2 consists of SDMA, state machine and register circuit. ADMA2 uses the 64-bit advanced DMA system address register (offset 058h) as the descriptor pointer, instead of the 32-bit SDMA system address register (offset 0). Writing to the command register triggers the termination of ADMA2 transfer. ADMA2 takes a descriptor line and executes it. This process is repeated until the end of the descriptor (the attribute “end” equals to 1) is found.

26.3.12.2 Data Address and Data Length Requirements

There are three requirements for programming descriptors:

- The minimum unit of address is 4 bytes.
- The maximum data length of each descriptor line is less than 64 KB.
- Total length = length 1 + length 2 + length 3 + ⋯ + length n = multiple of block size.

If the total length of the descriptor is not a multiple of the block size, the ADMA2 transfer may not be terminated. In this case, the transfer shall be terminated by data timeout. The block count register allows the transfer of maximum 65,535 blocks. If the ADMA2 operation is less than or equal to the transfer of 65,535 blocks, the block count register can be used. In this case, the total length of the descriptor table shall be equal to the product of the block size and the block count. If the ADMA2 operation exceeds the transfer of 65,535 blocks, the block count register shall be disabled by setting Block Count Enable to 0 in the transfer mode register. In this case, the length of data transfer is not specified by the block count but by the descriptor table. Thus, the timing of detecting the last block on the SD bus may be different, and it affects the control of read transfer activity, write transfer activity and DAT line activity in the current status register. In the case of a read operation, multiple blocks may be read. If the read operation is for the last memory area, the host driver shall ignore the OUT_OF_RANGE error.

26.3.12.3 Descriptor Table


Address Field		Length		Reserved		Attribute																																																																	
63	32	31	16	15	06	05	04	03	02	01	00																																																												
32-bit Address		16-bit Length		000000		Act2	Act1	0	Int	End	Valid																																																												
 <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Valid</td> <td>Valid=1 indicates this line of descriptor is effective. If Valid=0 generate ADMA Error Interrupt and stop ADMA to prevent runaway.</td> </tr> <tr> <td>End</td> <td>End=1 indicates end of descriptor. The Transfer Complete Interrupt is generated when the operation of the descriptor line is completed.</td> </tr> <tr> <td>Int</td> <td>INT=1 generates DMA Interrupt when the operation of the descriptor line is completed.</td> </tr> </table>												Valid	Valid=1 indicates this line of descriptor is effective. If Valid=0 generate ADMA Error Interrupt and stop ADMA to prevent runaway.	End	End=1 indicates end of descriptor. The Transfer Complete Interrupt is generated when the operation of the descriptor line is completed.	Int	INT=1 generates DMA Interrupt when the operation of the descriptor line is completed.																																																						
Valid	Valid=1 indicates this line of descriptor is effective. If Valid=0 generate ADMA Error Interrupt and stop ADMA to prevent runaway.																																																																						
End	End=1 indicates end of descriptor. The Transfer Complete Interrupt is generated when the operation of the descriptor line is completed.																																																																						
Int	INT=1 generates DMA Interrupt when the operation of the descriptor line is completed.																																																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Act2</th> <th>Act1</th> <th>Symbol</th> <th>Comment</th> <th colspan="8">Operation</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>Nop</td> <td>No Operation</td> <td colspan="8">Do not execute current line and go to next line.</td> </tr> <tr> <td>0</td> <td>1</td> <td>Rsv</td> <td>Reserved</td> <td colspan="8">Do not execute current line and go to next line.</td> </tr> <tr> <td>1</td> <td>0</td> <td>Tran</td> <td>Transfer Data</td> <td colspan="8">Transfer data of one descriptor line.</td> </tr> <tr> <td>1</td> <td>1</td> <td>Link</td> <td>Link Descriptor</td> <td colspan="8">Link to another descriptor.</td> </tr> </tbody> </table>												Act2	Act1	Symbol	Comment	Operation								0	0	Nop	No Operation	Do not execute current line and go to next line.								0	1	Rsv	Reserved	Do not execute current line and go to next line.								1	0	Tran	Transfer Data	Transfer data of one descriptor line.								1	1	Link	Link Descriptor	Link to another descriptor.							
Act2	Act1	Symbol	Comment	Operation																																																																			
0	0	Nop	No Operation	Do not execute current line and go to next line.																																																																			
0	1	Rsv	Reserved	Do not execute current line and go to next line.																																																																			
1	0	Tran	Transfer Data	Transfer data of one descriptor line.																																																																			
1	1	Link	Link Descriptor	Link to another descriptor.																																																																			

Fig. 26.9: 32-Bit Address Descriptor Table

The above figure shows the definition of the 32-bit address descriptor table. One descriptor line consumes 64 bits (8 bytes) of memory space. The attribute is used to control descriptors. Three action symbols are specified here. The “Nop” operation skips the current descriptor line and goes to the next line. The “Tran” operation transfers the data specified by the address and length fields. The “Link” operation is used to link two separate descriptors. The link address field points to the next descriptor table. The combination of Act2=0 and Act1=1 is reserved and defined as the same operation as “Nop”. Future versions of the controller may use this field and redefine new operations. The 32-bit address is stored in the lower 32 bits of the 64-bit address register. For a 32-bit address descriptor table, the address field shall be set on the 32-bit boundary (the lower 2 bits are always set to 0).

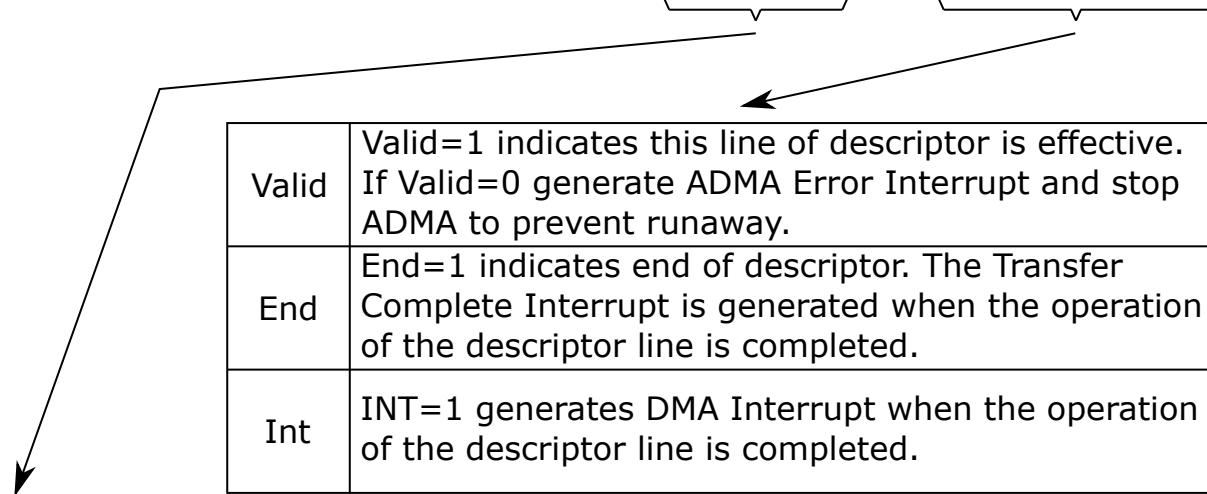26.3.12.4 ADMA2 State

This figure illustrates the four states of ADMA2: fetch descriptor state, change address state, transfer data state and stop ADMA state:

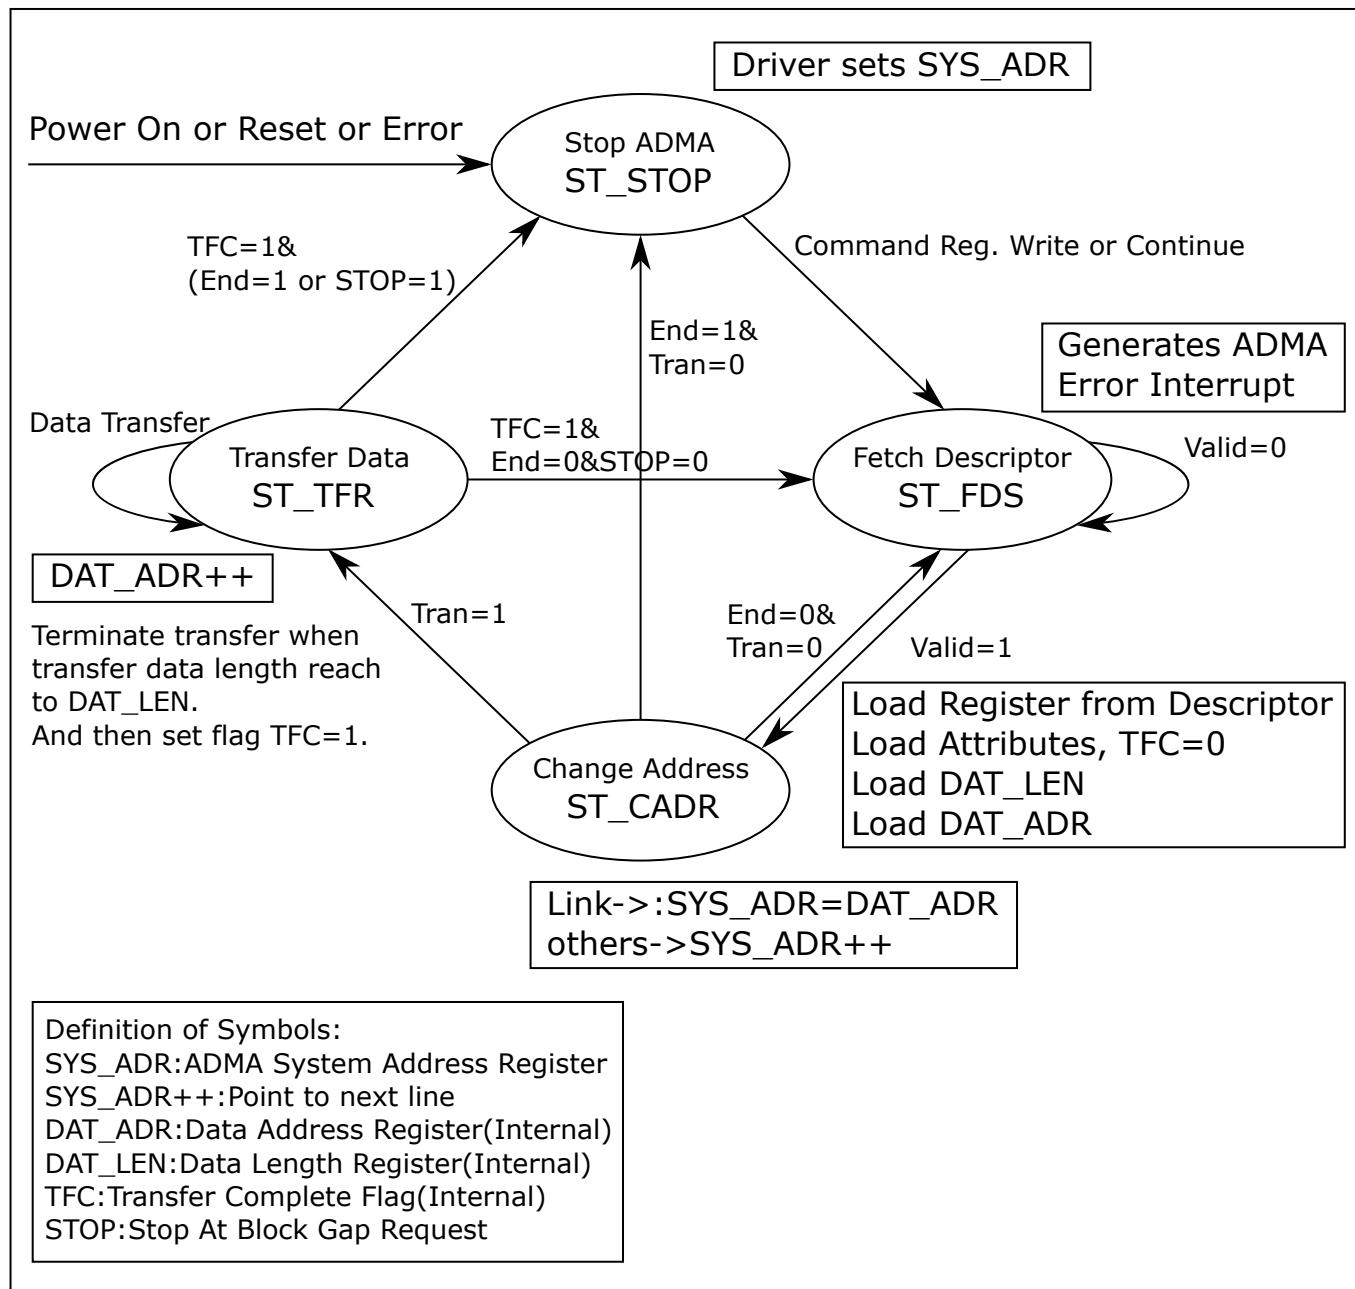


Fig. 26.10: ADMA2 States

- ST_FDS (fetch descriptor): ADMA2 fetches the descriptor line and sets the parameters in the internal register, and then switches to the ST_CADR state.
- ST_CADR (change address): The “Link” operation loads another descriptor address into the ADMA system address register. In other operations, the ADMA system address register is incremented to the next descriptor

line. If End=0, it switches to the ST_TFR state. Even if some errors occur, ADMA2 must not stop in this state.

- ST_TFR (transfer data): The data of one descriptor line is transferred between system memory and SD card. If data transfer continues (End=0), it switches to the ST_FDS state. If data transfer is completed, it switches to the ST_STOP state.
- ST_STOP (stop DMA): ADMA2 will remain in this state in these cases: after power-on reset or software reset; all the descriptor data has been transferred. It switches to the ST_FDS state if a new ADMA2 operation is started by writing to the command register.

ADMA2 does not support the Suspend/Resume function, but can use the Stop and Resume functions. When the block gap stop request in the block gap control register is set during ADMA2 operation, the block gap event interrupt will be generated when ADMA2 stops at the block gap. The host controller shall use the Read Wait or Stop SD Clock to stop the ADMA2 read operation. When ADMA2 is stopped, no SD command can be issued. Errors occurred during ADMA2 transfer may stop ADMA2 operation and generate an ADMA error interrupt. The ADMA Error Status field in the ADMA Error Status register stores the status that ADMA2 has stopped. The host driver can identify the location of the error descriptor in two ways. That is, if ADMA stops in the ST_FDS state, the ADMA system address register will point to the error descriptor line. If ADMA stops in the ST_TFR or ST_STOP state, the ADMA system address register will point to the next line of the error descriptor line. Therefore, ADMA2 must not stop in the ST_CADR state.

26.3.13 Test Register

The test register is defined for the purpose of testing. When it is difficult to intentionally generate some interrupts, you may use this function to manually generate such interrupts for driver debugging. To that end, a force event register is defined to control the Error Interrupt Status and the automatic CMD error status. It is also difficult to control card insertion and removal intentionally. The card detection signal selection and card detection test level in the host control 1 register make it possible to manually control the card inserted in the current status register and generate card insertion and card removal interrupts in the Normal Interrupt Status register.

26.3.14 Block Count

The block count command (CMD23) provides an untimed method to stop multi-block operations. The block count is set in the parameter of CMD23 to specify the transfer length of CMD18 or CMD25 after that. Automatic CMD23 is the function of automatically sending CMD23 before sending CMD18 or CMD25. This function aims to avoid performance degradation during memory access by deleting the interrupt service of CMD23. The offset 008h parameter 1 register is used for CMD18 or CMD25. Then an offset of 000h is assigned to the parameter 2 register of CMD23. The host controller does not use the parameter 2 register to calculate the data transfer length. There are two cases of data length of the host-side data transfer operation: non-ADMA and ADMA. The total length of AMDA descriptor refers to the sum of all the 16-bit data length of each ADMA descriptor line. The “block count enable” shall be disabled for ADMA. It is worth noting that the total data transfer length of the host controller shall be equal to the transfer length of the card.

26.3.15 Sampling Clock Tuning

In UHSI mode, the SD bus can run in the high clock frequency mode, and then the data window of cards on CMD and DAT[3:0] lines becomes smaller. The position of the data window varies with the implementation of the card and host system. Hence, when SDR104 or SDR50 is supported by executing the tuning program and adjusting the sampling clock (if the usage tuning of SDR50 is set to 1 in the capability register), the host controller shall support the tuning circuit. The execution tuning and sampling clock selection in the host control 2 register is used to control the tuning circuit.

26.3.16 SD Host Standard Register

26.3.16.1 SD Host Control Register Mapping

The following table summarizes the standard SD host controller register sets. The host driver needs to determine the base address of the register set by the host system specific method. The size of the register set is 256 bytes. For multiple card slot controllers, one register set is assigned to each card slot, but the register at the offset 0F0h0FFh is assigned as a common area, and these registers contain the same value from each card slot register set.

Offset	15-08 bit	07-00 bit	Offset	15-08 bit	07-00 bit
002h	SDMA System Address(High),Argument 2(High)		000h	SDMA System Address(Low),Argument 2(Low)	
006h	Block Count		004h	Block Size	
00Ah	Argument 1(High)		008h	Argument 1(Low)	
00Eh	Command		00Ch	Transfer Mode	
012h	Response1		010h	Response0	
016h	Response3		014h	Response2	
01Ah	Response5		018h	Response4	
01Eh	Response7		01Ch	Response6	
022h	Buffer Data Port1		020h	Buffer Data Port0	
026h	Present State		024h	Present State	
02Ah	Wakeup Control	Block Gap Control	028h	Power Control	Host Control 1
02Eh	Software Reset	Timeout Control	02Ch	Clock Control	
032h	Error Interrupt Status		030h	Normal Interrupt Status	
036h	Error Interrupt Status Enable		034h	Normal Interrupt Status Enable	
03Ah	Error Interrupt Signal Enable		038h	Normal Interrupt Signal Enable	
03Eh	Host Control 2		03Ch	Auto CMD Error Status	
042h	Capabilities		040h	Capabilities	
046h	Capabilities		044h	Capabilities	
04Ah	Maximum Current Capabilities		048h	Maximum Current Capabilities	
04Eh	Maximum Current Capabilities(Reserved)		04Ch	Maximum Current Capabilities(Reserved)	
052h	Force Event for Error Interrupt Status		050h	Force Event for Auto CMD Error Status	
056h	---		054h	---	ADMA Error Status
05Ah	ADMA System Address [31:16]		058h	ADMA System Address [15:00]	
05Eh	ADMA System Address [63:48]		05Ch	ADMA System Address [47:32]	
062h	Preset Value		060h	Preset Value	
066h	Preset Value		064h	Preset Value	
06Ah	Preset Value		068h	Preset Value	
06Eh	Preset Value		06Ch	Preset Value	
---	---		---	---	
0E2h	Shared Bus Control(High)		0E0h	Shared Bus Control(Low)	
---	---		---	---	
0F2h	---		0F0h	---	
---	---		---	---	
0FEh	Host Controller Version		0FCh	Slot Interrupt Status	

Fig. 26.11: SD Host Control Register Mapping

26.3.16.2 Configuration of Register Type

The configuration register field is assigned an attribute described in the following table:

Register Attribute	Description
RO	Read-only register: Register bits are read-only and cannot be altered by software or any reset operation. Writes to these bits are ignored.
ROC	Read-only status: These bits are initialized to zero at reset. Writes to these bits are ignored.
RW	Read-Write register: Register bits are read-write and may be either set or cleared by software to the desired state.
RW1C	Read-only status, Write-1-to-clear status: Register bits indicate status when read, a set bit indicating a status event may be cleared by writing a 1. Writing a 0 to RW1C bits has no effect.
RWAC	Read-Write, automatic clear register: The Host Driver requests a Host Controller operation by setting the bit. The Host Controllers shall clear the bit automatically when the operation is complete. Writing a 0 to RWAC bits has no effect.
HwInit	Hardware Initialized: Register bits are initialized by firmware or hardware mechanisms such as pin strapping or serial EEPROM. Bits are read-only after initialization, and writes to these bits are ignored.
Rsvd	Reserved. These bits are initialized to zero, and writes to them are ignored.
WO	Write-only register. It is not physically implemented register. Rather, it is an address at which registers can be written.

Fig. 26.12: Types of Registers and Register Bit Fields

26.3.16.3 Initial Value of Register

The host controller sets all registers to their initial values at power-on reset, and the default values of all other registers shall be all bits that are set to zero. The values of the capability register and the maximum current capability register depend on the host controller, and the value of the host controller version register also depends on the host controller.

26.3.16.4 Reserved Bits of a Register

“Reserved” means that this bit can be defined for future use, and it is currently set to 0. These bits shall be set to 0.

26.4 寄存器描述

Name	Description
SDMA_System_Address_Argument_2	
Block_Size	
Block_Count	
Argument_1	
Transfer_Mode	
Command	
Response_1	
Response_2	
Response_3	
Response_4	
Buffer_Data_Port	
Present_State	
Host_Control_1	
Power_Control	
Block_Gap_Control	
Wakeup_Control	
Clock_Control	
Timeout_Control	
Software_Reset	

Name	Description
Normal_Interrupt_Status	
Error_Interrupt_Status	
Normal_Interrupt_Status_Enable	
Error_Interrupt_Status_Enable	
Normal_Interrupt_Signal_Enable	
Error_Interrupt_Signal_Enable	
Auto_CMD_Error_Status	
Host_Control_2	
Capabilities_1	
Capabilities_2	
Maximum_Current_Capabilities	
Force_Event_Register_for_Auto_CMD_Error_Status	
Force_Event_Register_for_Error_Interrupt_Status	
ADMA_Error_Status	
Shared_Bus_Control	
Slot_Interrupt_Status	
Host_Controller_Version	

26.4.1 SDMA_System_Address_Argument_2

地址: 0x20060000

SDMA System Address / Argument 2


31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

SDMA System Address / Argument 2

Bits	Name	Type	Reset	Description
31:0	SDMASystem	r/w	32'd0	<p>SDMA System Address / Argument 2</p> <p>This register contains the physical system memory address used for DMA transfers or the second argument for the Auto CMD23.</p> <p>(1) SDMA System Address</p> <p>This register contains the system memory address for a SDMA transfer. When the Host Controller stops a SDMA transfer, this register shall point to the system address of the next contiguous data position. It can be accessed only if no transaction is executing (i.e., after a transaction has stopped). Read operations during transfers may return an invalid value.</p> <p>(2) Argument 2</p> <p>This register is used with the Auto CMD23 to set a 32-bit block count value to the argument of the CMD23 while executing Auto CMD23.</p>

26.4.2 Block_Size

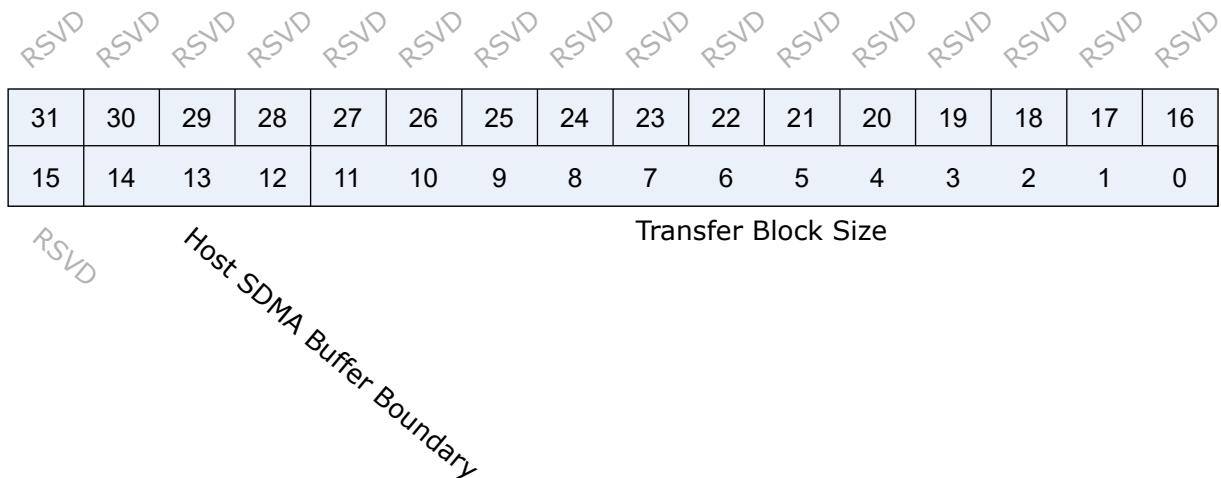地址: 0x20060004



Bits	Name	Type	Reset	Description
31:15	RSVD			

Bits	Name	Type	Reset	Description
14:12	HostSDMA	r/w	3'd0	<p>Host SDMA Buffer Boundary</p> <p>The large contiguous memory space may not be available in the virtual memory system. To perform long SDMA transfer, SDMA System Address register shall be updated at every system memory boundary during SDMA transfer.</p> <p>These bits specify the size of contiguous buffer in the system memory. The SDMA transfer shall wait at the every boundary specified by these fields and the Host Controller generates the DMA Interrupt to request the Host Driver to update the SDMA System Address register. At the end of transfer, the Host Controller may issue or may not issue DMA Interrupt. In particular, DMA Interrupt shall not be issued after Transfer Complete Interrupt is issued.</p> <p>In case of this register is set to 0 (buffer size = 4K bytes), lower 12-bit of byte address points data in the contiguous buffer and the upper 20-bit points the location of the buffer in the system memory. The SDMA transfer stops when the Host Controller detects carry out of the address from bit 11 to 12.</p> <p>These bits shall be supported when the SDMA Support in the Capabilities register is set to 1 and this function is active when the DMA Enable in the Transfer Mode register is set to 1. ADMA does not use this register.</p>

Bits	Name	Type	Reset	Description
11:0	TransferBlock	r/w	12'b0	<p>Transfer Block Size</p> <p>This register specifies the block size of data transfers for CMD17, CMD18, CMD24, CMD25, and CMD53. Values ranging from 1 up to the maximum buffer size can be set. In case of memory, it shall be set up to 512 bytes (Refer to Implementation Note in Section 1.7.2). It can be accessed only if no transaction is executing (i.e., after a transaction has stopped). Read operations during transfers may return an invalid value, and write operations shall be ignored.</p>

26.4.3 Block_Count

地址: 0x20060006

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |

Blocks Count For Current Transfer

Bits	Name	Type	Reset	Description
31:16	RSVD			

Bits	Name	Type	Reset	Description
15:0	BlocksCount	r/w	16'd0	<p>Blocks Count For Current Transfer</p> <p>This register is enabled when Block Count Enable in the Transfer Mode register is set to 1 and is valid only for multiple block transfers. The Host Driver shall set this register to a value between 1 and the maximum block count. The Host Controller decrements the block count after each block transfer and stops when the count reaches zero. Setting the block count to 0 results in no data blocks transferred.</p> <p>This register should be accessed only when no transaction is executing (i.e., after transactions are stopped). During data transfer, read operations on this register may return an invalid value and write operations are ignored.</p> <p>When a suspend command is completed, the number of blocks yet to be transferred can be determined by reading this register. Before issuing a resume command, the Host Driver shall restore the previously saved block count.</p>

26.4.4 Argument_1

地址: 0x20060008

Command Argument


31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

Command Argument

Bits	Name	Type	Reset	Description
31:0	CommandArgument	r/w	32'h0	<p>Command Argument 1</p> <p>The SD command argument is specified as bit39-8 of Command-Format in the Physical Layer Specification.</p>

26.4.5 Transfer_Mode

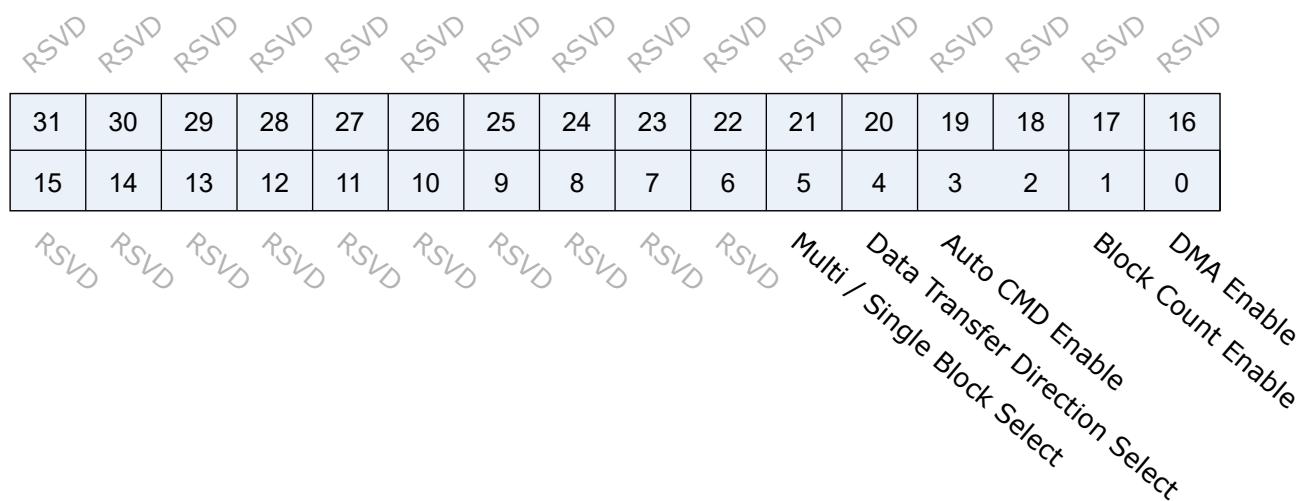地址: 0x20006000c




Bits	Name	Type	Reset	Description
31:6	RSVD			
5	Multi/	r/w	1'b0	Multi / Single Block Select This bit is set when issuing multiple-block transfer commands using DAT line. For any other commands, this bit shall be set to 0. If this bit is 0, it is not necessary to set the Block Count register. (Refer to Table 2-8)
4	DataTransfer	r/w	1'b0	Data Transfer Direction Select This bit defines the direction of DAT line data transfers. The bit is set to 1 by the Host Driver to transfer data from the SD card to the SD Host Controller and it is set to 0 for all other commands.
3:2	AutoCMD	r/w	2'd0	Auto CMD Enable This field determines use of auto command functions. (1) Auto CMD12 Enable (2) Auto CMD23 Enable

Bits	Name	Type	Reset	Description
1	BlockCount	r/w	1'b0	This bit is used to enable the Block Count register, which is only relevant for multiple block transfers. When this bit is 0, the Block Count register is disabled, which is useful in executing an infinite transfer. If ADMA2 data transfer is more than 65535 blocks, this bit shall be set to 0. In this case, data transfer length is designated by Descriptor Table.
0	DMAEnable	r/w	1'b0	This bit enables DMA functionality as described in section 1.4. DMA can be enabled only if it is supported as indicated in the Capabilities register. One of the DMA modes can be selected by DMA Select in the Host Control 1 register. If DMA is not supported, this bit is meaningless and shall always read 0. If this bit is set to 1, a DMA operation shall begin when the Host Driver writes to the upper byte of Command register (00Fh).

26.4.6 Command

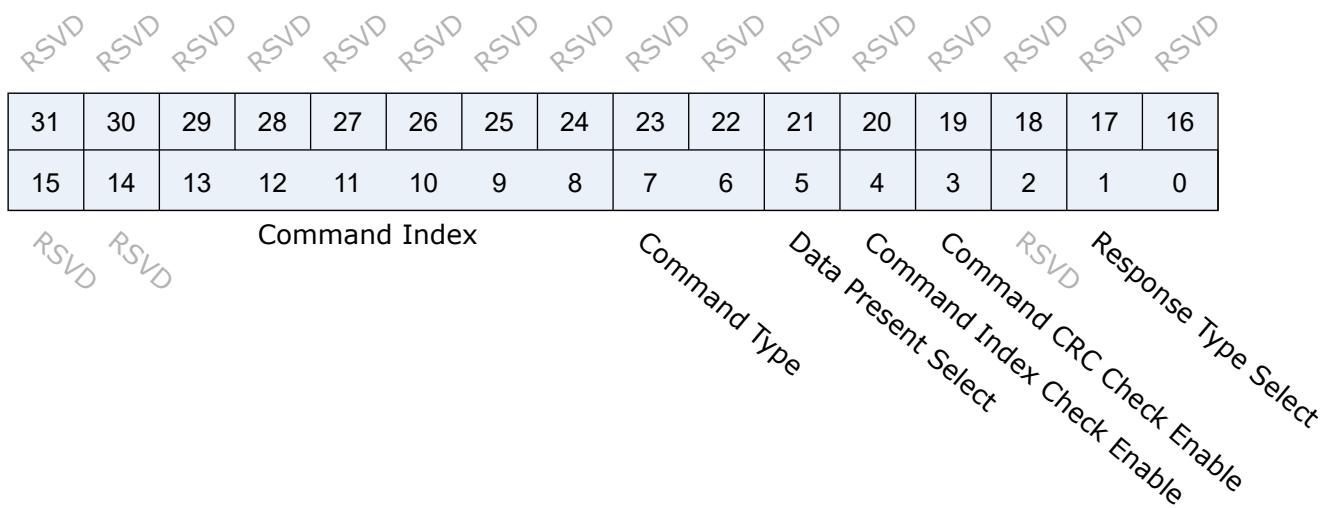地址: 0x2006000e



Bits	Name	Type	Reset	Description
31:14	RSVD			

Bits	Name	Type	Reset	Description
13:8	CommandIndex	r/w	6'd0	These bits shall be set to the command number (CMD0-63, ACMD0-63) that is specified in bits 45-40 of the Command-Format in the Physical Layer Specification and SDIO Card Specification.
7:6	CommandType	r/w	2'd0	<p>There are three types of special commands: Suspend, Resume and Abort.</p> <p>These bits shall be set to 00b for all other commands.</p> <p>(1) Suspend Command (2) Resume Command (3) Abort Command</p>
5	DataPresent	r/w	1'b0	<p>This bit is set to 1 to indicate that data is present and shall be transferred using the DAT line. It is set to 0 for the following:</p> <p>(1) Commands using only CMD line (ex. CMD52). (2) Commands with no data transfer but using busy signal on DAT[0] line (R1b or R5b ex. CMD38) (3) Resume command</p>
4	CommandIndex	r/w	1'b0	If this bit is set to 1, the Host Controller shall check the Index field in the response to see if it has the same value as the command index. If it is not, it is reported as a Command Index Error. If this bit is set to 0, the Index field is not checked.
3	CommandCRC	r/w	1'b0	If this bit is set to 1, the Host Controller shall check the CRC field in the response. If an error is detected, it is reported as a Command CRC Error. If this bit is set to 0, the CRC field is not checked. The position of CRC field is determined according to the length of the response. (Refer to definition in D01-00 and Table 2-10 below.)
2	RSVD			
1:0	ResponseType	r/w	2'd0	<p>00: No Response 01: Response Length 136 10: Response Length 48 11: Response Length 48 check Busy after response</p>

26.4.7 Response_1

地址: 0x20060010

Command Response 0 – 31

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

Command Response 0 – 31

Bits	Name	Type	Reset	Description
31:0	CommandResponse	r/w	32'h0	Command Response

26.4.8 Response_2

地址: 0x20060014

Command Response 32 – 63

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

Command Response 32 – 63

Bits	Name	Type	Reset	Description
31:0	CommandResponse	r/w	32'h0	Command Response

26.4.9 Response_3

地址: 0x20060018

Command Response 64 – 95

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

Command Response 64 – 95

Bits	Name	Type	Reset	Description
31:0	CommandResponse	r/w	32'h0	Command Response

26.4.10 Response_4

地址: 0x2006001c

Command Response 96 – 127

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

Command Response 96 – 127

Bits	Name	Type	Reset	Description
31:0	CommandResponse	r/w	32'h0	Command Response

26.4.11 Buffer_Data_Port

地址: 0x20060020

Buffer Data


31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

Buffer Data

Bits	Name	Type	Reset	Description
31:0	BufferData	r/w	32'h0	BufferData The Host Controller buffer can be accessed through this 32-bit Data Port register.

26.4.12 Present_State

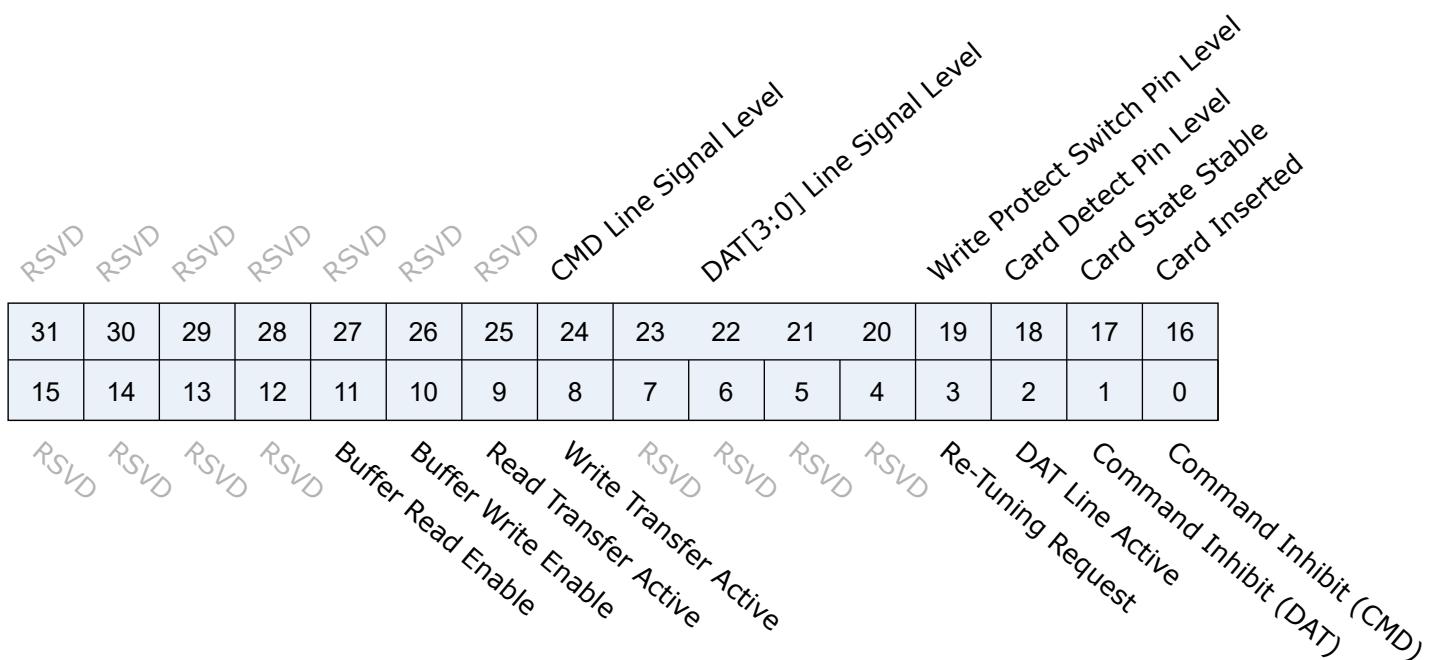地址: 0x20060024



Bits	Name	Type	Reset	Description
31:25	RSVD			
24	CMDLine	r	1'b0	CMD Line Signal Level This status is used to check the CMD line level to recover from errors, and for debugging.
23:20	DAT[3:0]Line	r	4'd0	DAT[3:0] Line Signal Level This status is used to check the DAT line level to recover from errors, and for debugging. This is especially useful in detecting the busy signal level from DAT[0].
19	WriteProtect	r	1'b0	The Write Protect Switch is supported for memory and combo cards. This bit reflects the SDWP# pin.

Bits	Name	Type	Reset	Description
18	CardDetect	r	1'b0	<p>This bit reflects the inverse value of the SDCD# pin. Debouncing is not performed on this bit. This bit may be valid when Card State Stable is set to 1, but it is not guaranteed because of propagation delay. Use of this bit is limited to testing since it must be debounced by software.</p>
17	CardState	r	1'b0	<p>This bit is used for testing. If it is 0, the Card Detect Pin Level is not stable. If this bit is set to 1, it means the Card Detect Pin Level is stable. No Card state can be detected by this bit is set to 1 and Card Inserted is set to 0. The Software Reset For All in the Software Reset register shall not affect this bit.</p>
16	CardInserted	r	1'b0	<p>This bit indicates whether a card has been inserted. The Host Controller shall debounce this signal so that the Host Driver will not need to wait for it to stabilize. Changing from 0 to 1 generates a Card Insertion interrupt in the Normal Interrupt Status register and changing from 1 to 0 generates a Card Removal interrupt in the Normal Interrupt Status register. The Software Reset For All in the Software Reset register shall not affect this bit. If a card is removed while its power is on and its clock is oscillating, the Host Controller shall clear SD Bus Power in the Power Control register and SD Clock Enable in the Clock Control register. When this bit is changed from 1 to 0, the Host Controller shall immediately stop driving CMD and DAT[3:0] (tri-state). In addition, the Host Driver should clear the Host Controller by the Software. Reset For All in Software Reset register. The card detect is active regardless of the SD Bus Power.</p>
15:12	RSVD			

Bits	Name	Type	Reset	Description
11	BufferRead	roc	1'b0	<p>Buffer Read Enable</p> <p>This status is used for non-DMA read transfers.</p> <p>The Host Controller may implement multiple buffers to transfer data efficiently. This read only flag indicates that valid data exists in the host side buffer. If this bit is 1, readable data exists in the buffer. A change of this bit from 1 to 0 occurs when all the block data is read from the buffer. A change of this bit from 0 to 1 occurs when block data is ready in the buffer and generates the Buffer Read Ready interrupt.</p>
10	BufferWrite	roc	1'b0	<p>Buffer Write Enable</p> <p>This status is used for non-DMA write transfers.</p> <p>The Host Controller can implement multiple buffers to transfer data efficiently. This read only flag indicates if space is available for write data. If this bit is 1, data can be written to the buffer. A change of this bit from 1 to 0 occurs when all the block data is written to the buffer. A change of this bit from 0 to 1 occurs when top of block data can be written to the buffer and generates the Buffer Write Ready interrupt. The Host Controller should neither set Buffer Write Enable nor generate Buffer Write Ready Interrupt after the last block data is written to the Buffer Data Port Register.</p>

Bits	Name	Type	Reset	Description
9	ReadTransfer	roc	1'b0	<p>Read Transfer Active</p> <p>This status is used for detecting completion of a read transfer.</p> <p>This bit is set to 1 for either of the following conditions:</p> <ul style="list-style-type: none"> (1) After the end bit of the read command. (2) When read operation is restarted by writing a 1 to Continue Request in the Block Gap Control register. <p>This bit is cleared to 0 for either of the following conditions::</p> <ul style="list-style-type: none"> (1) When the last data block as specified by block length is transferred to the System. (2) In case of ADMA2, end of read operation is designated by Descriptor Table. (3) When all valid data blocks in the Host Controller have been transferred to the System and no current block transfers are being sent as a result of the Stop At Block Gap Request being set to 1. <p>A Transfer Complete interrupt is generated when this bit changes to 0.</p>


Bits	Name	Type	Reset	Description
8	WriteTransfer	roc	1'b0	<p>Write Transfer Active</p> <p>This status indicates a write transfer is active. If this bit is 0, it means no valid write data exists in the Host Controller. Refer to Section 3.12.4 for more details on the sequence of events.</p> <p>This bit is set in either of the following cases:</p> <ul style="list-style-type: none"> (1) After the end bit of the write command. (2) When write operation is restarted by writing a 1 to Continue Request in the Block Gap Control register. <p>This bit is cleared in either of the following cases:</p> <ul style="list-style-type: none"> (1) After getting the CRC status of the last data block as specified by the transfer count (Single and Multiple) In case of ADMA2, transfer count is designated by Descriptor Table. (2) After getting the CRC status of any block where data transmission is about to be stopped by a Stop At Block Gap Request. <p>During a write transaction, a Block Gap Event interrupt is generated when this bit is changed to 0, as the result of the Stop At Block Gap Request being set. This status is useful for the Host Driver in determining non DAT line commands can be issued during write busy.</p>
7:4	RSVD			

Bits	Name	Type	Reset	Description
3	Re-TuningRequest	roc	1'b0	<p>Re-Tuning Request</p> <p>Host Controller may request Host Driver to execute re-tuning sequence by setting this bit when the data window is shifted by temperature drift and a tuned sampling point does not have a good margin to receive correct data.</p> <p>This bit is cleared when a command is issued with setting Execute Tuning in the Host Control 2 register.</p> <p>Changing of this bit from 0 to 1 generates Re-Tuning Event. Refer to Normal Interrupt Status registers for more detail.</p> <p>This bit isn't set to 1 if Sampling Clock Select in the Host Control 2 register is set to 0 (using fixed sampling clock). Refer to Re-Tuning Modes in the Capabilities register for more detail.</p>
2	DATLine	roc	1'b0	<p>DAT Line Active</p> <p>This bit indicates whether one of the DAT line on SD Bus is in use.</p>
1	CommandInhibit	roc	1'b0	<p>This status bit is generated if either the DAT Line Active or the Read Transfer Active is set to 1. If this bit is 0, it indicates the Host Controller can issue the next SD Command. Commands with busy signal belong to Command Inhibit (DAT) (ex. R1b, R5b type). Changing from 1 to 0 generates a Transfer Complete interrupt in the Normal Interrupt Status register.</p> <p>Note: The SD Host Driver can save registers in the range of 000-00Dh for a suspend transaction after this bit has changed from 1 to 0.</p>

Bits	Name	Type	Reset	Description
0	CommandInhibit	roc	1'b0	<p>If this bit is 0, it indicates the CMD line is not in use and the Host Controller can issue a SD Command using the CMD line.</p> <p>This bit is set immediately after the Command register (00Fh) is written. This bit is cleared when the command response is received. Auto CMD12 and Auto CMD23 consist of two responses. In this case, this bit is not cleared by the response of CMD12 or CMD23 but cleared by the response of a read/write command.</p> <p>Status issuing Auto CMD12 is not read from this bit. So if a command is issued during Auto CMD12 operation, Host Controller shall manage to issue two commands: CMD12 and a command set by Command register.</p> <p>Even if the Command Inhibit (DAT) is set to 1, commands using only the CMD line can be issued if this bit is 0. Changing from 1 to 0 generates a Command Complete Interrupt in the Normal Interrupt Status register. If the Host Controller cannot issue the command because of a command conflict error or because of Command Not Issued By Auto CMD12 Error, this bit shall remain 1 and the Command Complete is not set.</p>

26.4.13 Host_Control_1

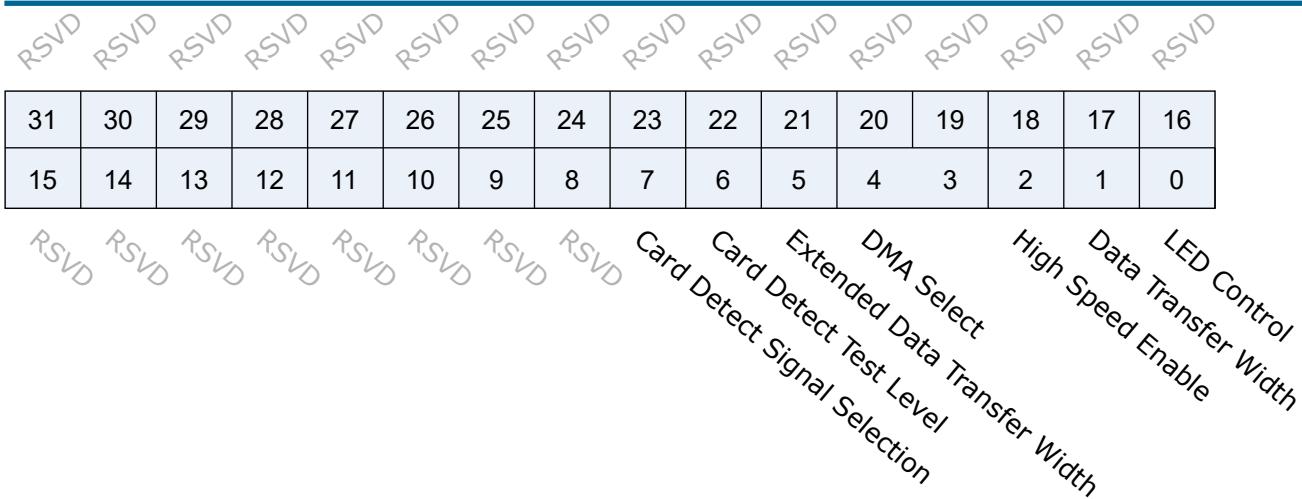地址: 0x20060028




Bits	Name	Type	Reset	Description
31:8	RSVD			
7	CardDetect	r/w	1'b0	<p>This bit selects source for the card detection.</p> <p>1: The Card Detect Test Level is selected (for test purpose)</p> <p>0: SDCD# is selected (for normal use)</p> <p>When the source for the card detection is switched, the interrupt should be disabled during the switching period by clearing the Interrupt Status/Signal Enable register in order to mask unexpected interrupt being caused by the glitch.</p> <p>The Interrupt Status/Signal Enable should be disabled during over the period of debouncing.</p>
6	CardDetect	r/w	1'b0	<p>This bit is enabled while the Card Detect Signal Selection is set to 1 and it indicates card inserted or not.</p> <p>1 Card Inserted</p> <p>0 No Card</p>

Bits	Name	Type	Reset	Description
5	ExtendedData	r/w	1'b0	<p>This bit controls 8-bit bus width mode for embedded device. Support of this function is indicated in 8-bit Support for Embedded Device in the Capabilities register. If a device supports 8-bit bus mode, this bit may be set to 1. If this bit is 0, bus width is controlled by Data Transfer Width in the Host Control 1 register.</p> <p>This bit is not effective when multiple devices are installed on a bus slot (Slot Type is set to 10b in the Capabilities register). In this case, each device bus width is controlled by Bus Width Preset field in the Shared Bus Control register.</p> <p>1: 8-bit Bus Width 0 :Bus Width is Selected by Data Transfer Width</p>
4:3	DMASelect	r/w	2'd0	<p>One of supported DMA modes can be selected. The host driver shall check support of DMA modes by referring the Capabilities register. Use of selected DMA is determined by DMA Enable of the Transfer Mode register.</p> <p>00 SDMA is selected 01 Reserved (New assignment is not allowed) 10 32-bit Address ADMA2 is selected 11 Reserved (will be modified by Version 4.00)</p>

Bits	Name	Type	Reset	Description
2	HighSpeed	r/w	1'b0	<p>This bit is optional. Before setting this bit, the Host Driver shall check the High Speed Support in the Capabilities register. If this bit is set to 0 (default), the Host Controller outputs CMD line and DAT lines at the falling edge of the SD Clock (up to 25MHz). If this bit is set to 1, the Host Controller outputs CMD line and DAT lines at the rising edge of the SD Clock (up to 50MHz).</p> <p>If Preset Value Enable in the Host Control 2 register is set to 1, Host Driver needs to reset SD Clock Enable before changing this field to avoid generating clock glitches. After setting this field, the Host Driver sets SD Clock Enable again.</p> <p>1 :High Speed mode 0 :Normal Speed mode</p>
1	DataTransfer	r/w	1'b0	<p>This bit selects the data width of the Host Controller. The Host Driver shall set it to match the data width of the SD card.</p> <p>1: 4-bit mode 0 :1-bit mode</p>
0	LEDControl	r/w	1'b0	<p>This bit is used to caution the user not to remove the card while the SD card is being accessed. If the software is going to issue multiple SD commands, this bit can be set during all these transactions. It is not necessary to change for each transaction.</p> <p>1 :LED on 0 :LED off</p>

26.4.14 Power_Control

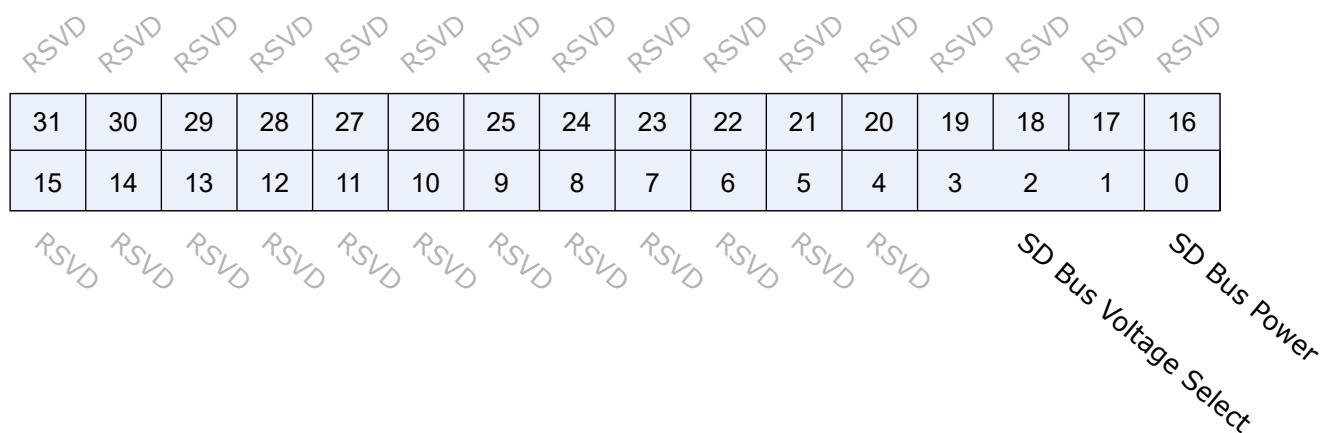
地址: 0x20060029



Bits	Name	Type	Reset	Description
31:4	RSVD			
3:1	SDBus	r/w	2'd0	<p>SD Bus Voltage Select</p> <p>By setting these bits, the Host Driver selects the voltage level for the SD card.</p> <p>Before setting this register, the Host Driver shall check the Voltage Support bits in the Capabilities register. If an unsupported voltage is selected, the Host System shall not supply SD Bus voltage.</p> <ul style="list-style-type: none"> 111b 3.3V (Typ.) 110b 3.0V (Typ.) 101b 1.8V (Typ.) 100b -000b Reserved
0	SDBus	r/w	1'b0	<p>SD Bus Power</p> <p>Before setting this bit, the SD Host Driver shall set SD Bus Voltage Select. If the Host Controller detects the No Card state, this bit shall be cleared.</p> <p>If this bit is cleared, the Host Controller shall immediately stop driving CMD and DAT[3:0] (tri-state) and drive SDCLK to low level .</p>

26.4.15 Block_Gap_Control

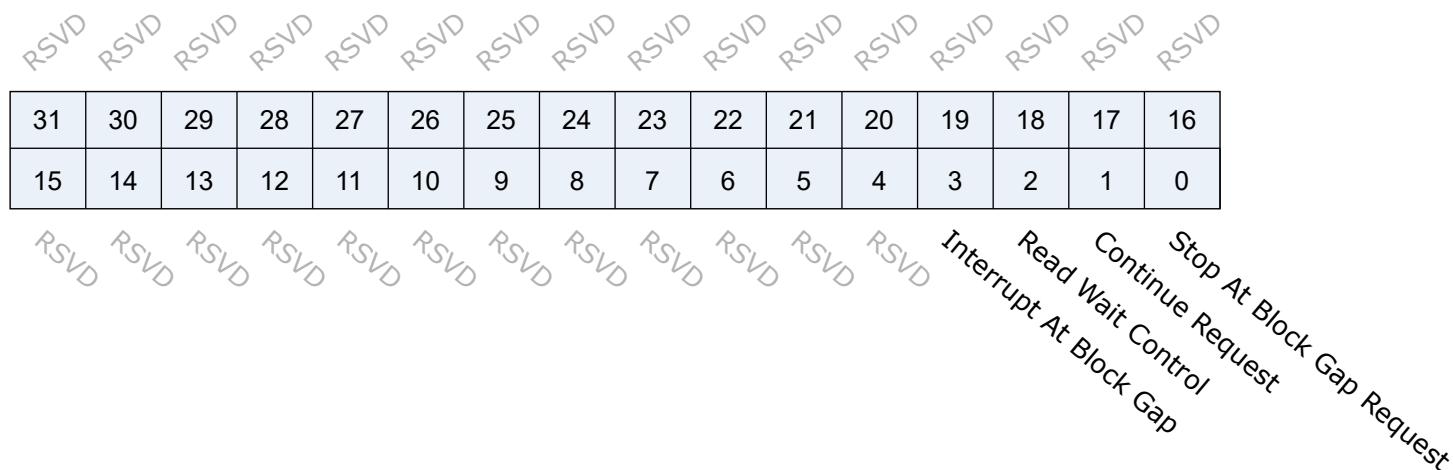地址: 0x2006002a



Bits	Name	Type	Reset	Description
31:4	RSVD			
3	InterruptAt	r/w	1'b0	<p>Interrupt At Block Gap</p> <p>This bit is valid only in 4-bit mode of the SDIO card and selects a sample point in the interrupt cycle. Setting to 1 enables interrupt detection at the block gap for a multiple block transfer. Setting to 0 disables interrupt detection during a multiple block transfer. If the SD card cannot signal an interrupt during a multiple block transfer, this bit should be set to 0. When the Host Driver detects an SD card insertion, it shall set this bit according to the CCCR of the SDIO card.</p>

Bits	Name	Type	Reset	Description
2	ReadWait	r/w	1'b0	<p>Read Wait Control</p> <p>The read wait function is optional for SDIO cards. If the card supports read wait,</p> <p>set this bit to enable use of the read wait protocol to stop read data using the DAT[2] line. Otherwise, the Host Controller has to stop the SD Clock to hold read data, which restricts commands generation. When the Host Driver detects an SD card insertion, it shall set this bit according to the CCCR of the SDIO card. If the card does not support read wait, this bit shall never be set to 1 otherwise DAT line conflict may occur. If this bit is set to 0, Suspend/Resume cannot be supported.</p>
1	ContinueRequest	r/w	1'b0	<p>This bit is used to restart a transaction, which was stopped using the Stop At Block Gap Request. To cancel stop at the block gap, set Stop At Block Gap Request to 0 and set this bit 1 to restart the transfer.</p> <p>The Host Controller automatically clears this bit in either of the following cases:</p> <p>(1) In the case of a read transaction, the DAT Line Active changes from 0 to 1 as a read transaction restarts.</p> <p>(2) In the case of a write transaction, the Write Transfer Active changes from 0 to 1 as the write transaction restarts.</p> <p>Therefore, it is not necessary for Host Driver to set this bit to 0. If Stop At Block Gap Request is set to 1, any write to this bit is ignored.</p>

Bits	Name	Type	Reset	Description
0	StopAt	r/w	1'b0	<p>This bit is used to stop executing read and write transaction at the next block gap</p> <p>for non-DMA, SDMA and ADMA transfers. The Host Driver shall leave this bit set</p> <p>to 1 until the Transfer Complete is set to 1. Clearing both Stop At Block Gap</p> <p>Request and Continue Request shall not cause the transaction to restart. When</p> <p>Host Controller version is 1.00, the Host Driver can set this bit if the card supports</p> <p>Read Wait Control. When Host Controller version is 2.00 or later, the Host Driver</p> <p>can set this bit regardless of the card supports Read Wait Control. The Host</p> <p>Controller shall stop read transfer by using Read Wait or stopping SD clock. In</p> <p>case of write transfers in which the Host Driver writes data to the Buffer Data Port</p> <p>register, the Host Driver shall set this bit after all block data is written. If this bit is</p> <p>set to 1, the Host Driver shall not write data to Buffer Data Port register.</p> <p>This bit affects Read Transfer Active, Write Transfer Active, DAT Line Active</p> <p>and Command Inhibit (DAT) in the Present State register.</p>

26.4.16 Wakeup_Control

地址: 0x2006002b

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |

RSVD Wakeup Event Enable On Card Removal Wakeup Event Enable On SD Card Insertion Wakeup Event Enable On SD Card Removal

Bits	Name	Type	Reset	Description
31:3	RSVD			
2	WakeupEvent	r/w	1'b0	Wakeup Event Enable On SD Card Removal This bit enables wakeup event via Card Removal assertion in the Normal Interrupt Status register. FN_WUS (Wake Up Support) in CIS does not affect this bit.
1	WakeupEvent	r/w	1'b0	Wakeup Event Enable On SD Card Insertion This bit enables wakeup event via Card Insertion assertion in the Normal Interrupt Status register. FN_WUS (Wake Up Support) in CIS does not affect this bit.
0	WakeupEvent	r/w	1'b0	Wakeup Event Enable On Card Interrupt This bit enables wakeup event via Card Interrupt assertion in the Normal Interrupt Status register. This bit can be set to 1 if FN_WUS (Wake Up Support) in CIS is set to 1.

26.4.17 Clock_Control

地址: 0x2006002c

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |

SDCLK Frequency Select Upper Bits of SDCLK Frequency Select Clock Generator Select RSVD RSVD SD Clock Enable Internal Clock Stable RSVD


Bits	Name	Type	Reset	Description
31:16	RSVD			
15:8	SDCLKFrequency	r/w	8'd0	<p>SDCLK Frequency Select</p> <p>This register is used to select the frequency of SDCLK pin.</p> <p>The definition of this field is dependent on the Host Controller Version.</p>
7:6	UpperBits	roc/rw	2'd0	<p>Upper Bits of SDCLK Frequency Select</p> <p>Host Controller Version 1.00 and 2.00 do not support these bits and they are treated as 00b fixed value (ROC).</p> <p>Host Controller Version 3.00 shall support these bits to expand SDCLK Frequency Select to 10-bit. Bit 07-06 is assigned to bit 09-08 of clock divider in SDCLK Frequency Select.</p>

Bits	Name	Type	Reset	Description
5	ClockGenerator	roc/rw	1'b0	<p>Clock Generator Select</p> <p>Host Controller Version 3.00 supports this bit. This bit is used to select the clock generator mode in SDCLK Frequency Select.</p> <p>If the Programmable Clock Mode is supported (non-zero value is set to Clock Multiplier in the Capabilities register), this bit attribute is RW, and if not supported, this bit attribute is RO and zero is read.</p> <p>This bit depends on the setting of Preset Value Enable in the Host Control 2 register.</p> <p>If the Preset Value Enable = 0, this bit is set by Host Driver.</p> <p>If the Preset Value Enable = 1, this bit is automatically set to a value specified in one of Preset Value registers.</p> <p>1 Programmable Clock Mode 0 Divided Clock Mode</p>
4:3	RSVD			
2	SDClock	rw	1'b0	<p>SD Clock Enable</p> <p>The Host Controller shall stop SDCLK when writing this bit to 0. SDCLK Frequency Select can be changed when this bit is 0. Then, the Host Controller shall maintain the same clock frequency until SDCLK is stopped (Stop at SDCLK=0). If the Card Inserted in the Present State register is cleared, this bit shall be cleared.</p>
1	InternalClock	roc	1'b0	<p>Internal Clock Stable</p> <p>This bit is set to 1 when SD Clock is stable after writing to Internal Clock</p> <p>Enable in this register to 1. The SD Host Driver shall wait to set SD Clock</p> <p>Enable until this bit is set to 1.</p> <p>Note: This is useful when using PLL for a clock oscillator that requires setup time.</p>

Bits	Name	Type	Reset	Description
0	InternalClock	r/w	1'b0	<p>Internal Clock Enable</p> <p>This bit is set to 0 when the Host Driver is not using the Host Controller or the Host Controller awaits a wakeup interrupt. The Host Controller should stop its internal clock to go very low power state. Still, registers shall be able to be read and written. Clock starts to oscillate when this bit is set to 1. When clock oscillation is stable, the Host Controller shall set Internal Clock Stable in this register to 1. This bit shall not affect card detection.</p>

26.4.18 Timeout_Control

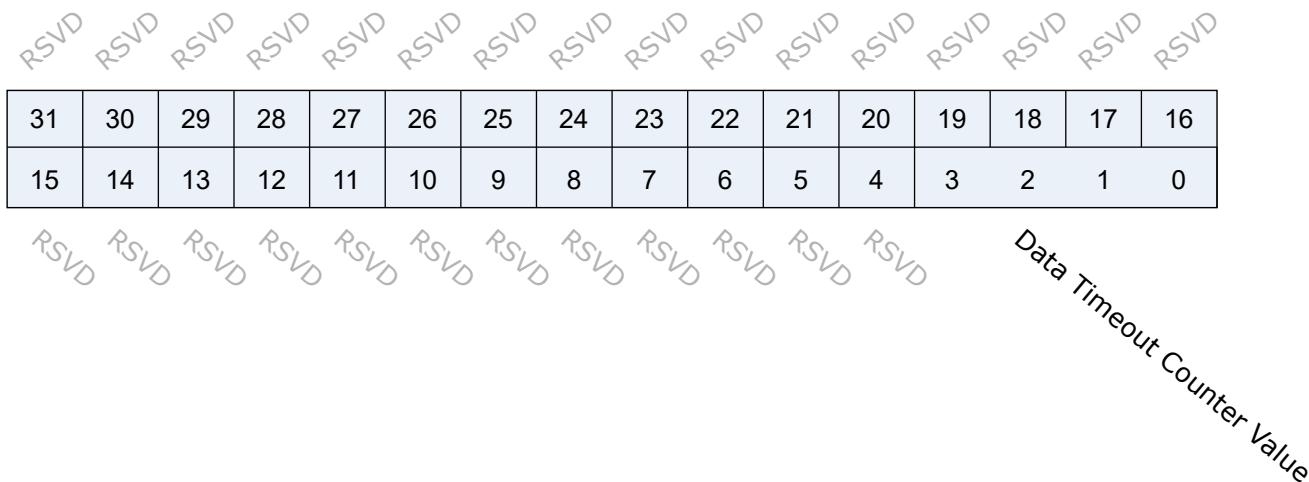地址: 0x2006002e



Bits	Name	Type	Reset	Description
31:4	RSVD			

Bits	Name	Type	Reset	Description
3:0	DateTimeout	r/w	4'd0	<p>Data Timeout Counter Value</p> <p>This value determines the interval by which DAT line timeouts are detected. For more information about timeout generation, refer to the Data Timeout Error in the Error Interrupt Status register. Timeout clock frequency will be generated by dividing the base clock TMCLK value by this value. When setting this register, prevent inadvertent timeout events by clearing the Data Timeout Error Status Enable (in the Error Interrupt Status Enable register)</p>

26.4.19 Software_Reset

地址: 0x2006002f

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

RSVD RSVD


Software Reset For All
 Software Reset For CMD Line
 Software Reset For DAT Line

Bits	Name	Type	Reset	Description
31:3	RSVD			
2	SoftwareReset	rwac	1'b0	<p>Software Reset For DAT Line</p> <p>Only part of data circuit is reset. DMA circuit is also reset.</p>

Bits	Name	Type	Reset	Description
1	SoftwareReset	rwac	1'b0	<p>Software Reset For CMD Line</p> <p>Only part of command circuit is reset.</p> <p>The following registers and bits are cleared by this bit:</p> <ul style="list-style-type: none"> Present State register Command Inhibit (CMD) Normal Interrupt Status register Command Complete
0	SoftwareReset	rwac	1'b0	<p>Software Reset For All</p> <p>This reset affects the entire Host Controller except for the card detection circuit.</p> <p>Register bits of type ROC, RW, RW1C, RWAC are cleared to 0. During its initialization, the Host Driver shall set this bit to 1 to reset the Host Controller. The Host Controller shall reset this bit to 0 when Capabilities registers are valid and the Host Driver can read them. Additional use of Software Reset For All may not affect the value of the Capabilities registers. If this bit is set to 1, the host driver should issue reset command and reinitialize the SD card.</p>

26.4.20 Normal Interrupt Status

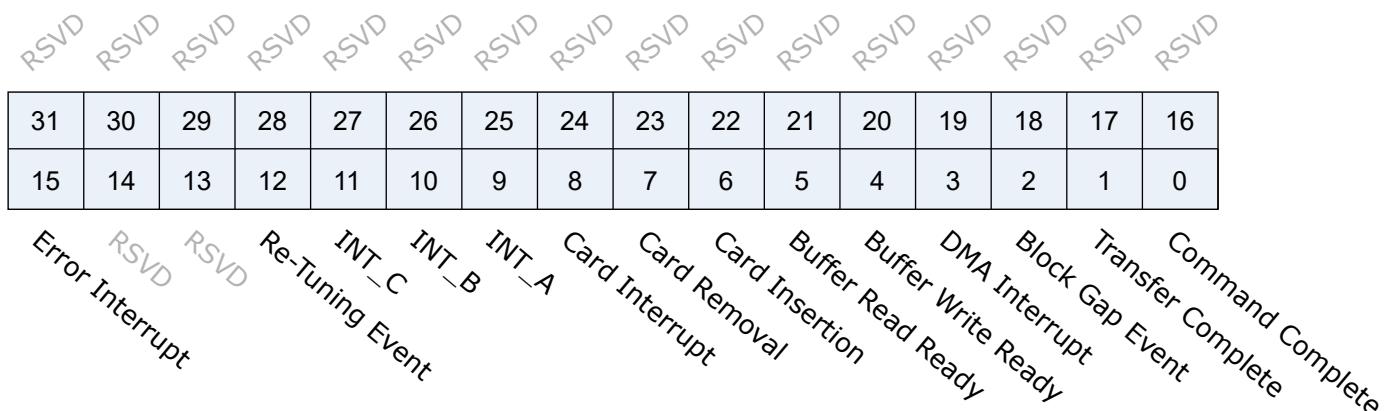地址: 0x20060030



Bits	Name	Type	Reset	Description
31:16	RSVD			

Bits	Name	Type	Reset	Description
15	ErrorInterrupt	roc	1'b0	Error Interrupt If any of the bits in the Error Interrupt Status register are set, then this bit is set. Therefore the Host Driver can efficiently test for an error by checking this bit first. This bit is read only.
14:13	RSVD			
12	Re-TuningEvent	roc	1'b0	Re-Tuning Event This status is set if Re-Tuning Request in the Present State register changes from 0 to 1. Host Controller requests Host Driver to perform re-tuning for next data transfer. Current data transfer (not large block count) can be completed without re-tuning.
11	INT_C	roc	1'b0	INT_C This status is set if INT_C is enabled and INT_C# pin is in low level. Writing this bit to 1 does not clear this bit. It is cleared by resetting the INT_C interrupt factor. Refer to the Shared Bus Control register.
10	INT_B	roc	1'b0	INT_B This status is set if INT_B is enabled and INT_B# pin is in low level. Writing this bit to 1 does not clear this bit. It is cleared by resetting the INT_B interrupt factor. Refer to the Shared Bus Control register.
9	INT_A	roc	1'b0	INT_A This status is set if INT_A is enabled and INT_A# pin is in low level. Writing this bit to 1 does not clear this bit. It is cleared by resetting the INT_A interrupt factor. Refer to the Shared Bus Control register.

Bits	Name	Type	Reset	Description
8	CardInterrupt	roc	1'b0	<p>Card Interrupt</p> <p>Writing this bit to 1 does not clear this bit. It is cleared by resetting the SD card interrupt factor. In 1-bit mode, the Host Controller shall detect the Card</p> <p>Interrupt without SD Clock to support wakeup. In 4-bit mode, the card interrupt signal is sampled during the interrupt cycle, so there are some sample delays between the interrupt signal from the SD card and the interrupt to the Host System.</p> <p>When this status has been set and the Host Driver needs to start this interrupt service, Card Interrupt Status Enable in the Normal Interrupt</p> <p>Status Enable register may be set to 0 in order to clear the card interrupt statuses latched in the Host Controller and to stop driving the interrupt signal to the Host System. After completion of the card interrupt service (It should reset interrupt factors in the SD card and the interrupt signal may not be asserted), set Card Interrupt Status Enable to 1 and start sampling the interrupt signal again.</p> <p>Interrupt detected by DAT[1] is supported when there is a card per slot. In case of shared bus, interrupt pins are used to detect interrupts. If 000b is set to Interrupt Pin Select in the Shared Bus Control register, this status is effective. Non-zero value is set to Interrupt Pin Select, INT_A, INT_B or INT_C is then used to device interrupts.</p>

Bits	Name	Type	Reset	Description
7	CardRemoval	rw1c	1'b0	<p>Card Removal</p> <p>This status is set if the Card Inserted in the Present State register changes from 1 to 0.</p> <p>When the Host Driver writes this bit to 1 to clear this status, the status of the Card Inserted in the Present State register should be confirmed. Because the card detect state may possibly be changed when the Host Driver clear this bit and interrupt event may not be generated.</p>
6	CardInsertion	rw1c	1'b0	<p>Card Insertion</p> <p>This status is set if the Card Inserted in the Present State register changes from 0 to 1.</p> <p>When the Host Driver writes this bit to 1 to clear this status, the status of the Card Inserted in the Present State register should be confirmed. Because the card detect state may possibly be changed when the Host Driver clear this bit and interrupt event may not be generated.</p>
5	BufferRead	rw1c	1'b0	<p>Buffer Read Ready</p> <p>This status is set if the Buffer Read Enable changes from 0 to 1. Refer to the Buffer Read Enable in the Present State register. While performing tuning procedure (Execute Tuning is set to 1), Buffer Read Ready is set to 1 for every CMD19 execution.</p>
4	BufferWrite	rw1c	1'b0	<p>Buffer Write Ready</p> <p>This status is set if the Buffer Write Enable changes from 0 to 1. Refer to the Buffer Write Enable in the Present State register.</p>


Bits	Name	Type	Reset	Description
3	DMAInterrupt	rw1c	1'b0	<p>DMA Interrupt</p> <p>This status is set if the Host Controller detects the Host SDMA Buffer boundary during transfer. Refer to the Host SDMA Buffer Boundary in the Block Size register.</p> <p>Other DMA interrupt factors may be added in the future.</p> <p>In case of ADMA, by setting Int field in the descriptor table, Host Controller generates this interrupt. Suppose that it is used for debugging.</p> <p>This interrupt shall not be generated after the Transfer Complete.</p>
2	BlockGap	rw1c	1'b0	<p>Block Gap Event</p> <p>If the Stop At Block Gap Request in the Block Gap Control register is set,</p> <p>this bit is set when both a read / write transaction is stopped at a block gap.</p> <p>If Stop At Block Gap Request is not set to 1, this bit is not set to 1.</p> <p>(1) In the case of a Read Transaction</p> <p>This bit is set at the falling edge of the DAT Line Active Status (When the transaction is stopped at SD Bus timing. The Read Wait shall be supported in order to use this function. Refer to Section 3.12.3 about the detail timing.</p> <p>(2) Case of Write Transaction</p> <p>This bit is set at the falling edge of Write Transfer Active Status (After getting CRC status at SD Bus timing). Refer to Section 3.12.4 for more details on the sequence of events.</p>

Bits	Name	Type	Reset	Description
1	TransferComplete	rw1c	1'b0	<p>Transfer Complete</p> <p>This bit is set when a read / write transfer and a command with busy is completed.</p> <p>(1) In the case of a Read Transaction</p> <p>This bit is set at the falling edge of Read Transfer Active Status.</p> <p>This interrupt is generated in two cases. The first is when a data transfer is completed as specified by data length (After the last data has been read to the Host System). The second is when data has stopped at the block gap and completed the data transfer by setting the Stop At Block Gap Request in the Block Gap Control register (After valid data has been read to the Host System).</p> <p>(2) In the case of a Write Transaction</p> <p>This bit is set at the falling edge of the DAT Line Active Status. This interrupt is generated in two cases. The first is when the last data is written to the SD card as specified by data length and the busy signal released. The second is when data transfers are stopped at the block gap by setting Stop At Block Gap Request in the Block Gap Control register and data transfers completed. (After valid data is written to the SD card and the busy signal released).</p> <p>(3) In the case of a command with busy</p> <p>This bit is set when busy is de-asserted. Refer to DAT Line Active and Command Inhibit (DAT) in the Present State register.</p>

Bits	Name	Type	Reset	Description
0	CommandComplete	rw1c	1'b0	<p>Command Complete</p> <p>This bit is set when get the end bit of the command response. Auto CMD12 and Auto CMD23 consist of two responses. Command Complete is not generated by the response of CMD12 or CMD23 but generated by the response of a read/write command.</p> <p>Refer to Command Inhibit (CMD) in the Present State register for how to control this bit.</p> <p>The table below shows that Command Timeout Error has higher priority than Command Complete. If both bits are set to 1, it can be considered that the response was not received correctly.</p>

26.4.21 Error_Interrupt_Status

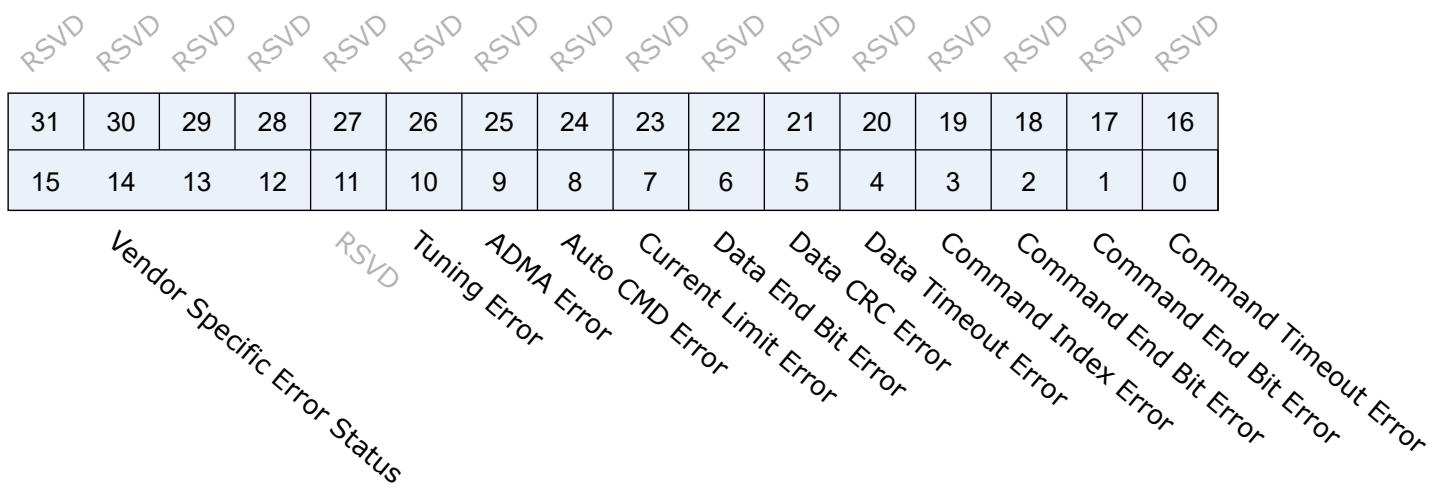地址: 0x20060032



Bits	Name	Type	Reset	Description
31:16	RSVD			
15:12	VendorSpecific	rw1c	4'd0	<p>Vendor Specific Error Status</p> <p>Additional status bits can be defined in this register by the vendor.</p>
11	RSVD			

Bits	Name	Type	Reset	Description
10	TuningError	rw1c	1'b0	<p>Tuning Error</p> <p>This bit is set when an unrecoverable error is detected in a tuning circuit</p> <p>except during tuning procedure (Occurrence of an error during tuning</p> <p>procedure is indicated by Sampling Select). By detecting Tuning Error, Host</p> <p>Driver needs to abort a command executing and perform tuning. To reset</p> <p>tuning circuit, Sampling Clock shall be set to 0 before executing tuning</p> <p>procedure . The Tuning Error is higher priority than the other error interrupts generated during data transfer. By detecting Tuning</p> <p>Error, the Host Driver should discard data transferred by a current read/write</p> <p>command and retry data transfer after the Host Controller retrieved from</p> <p>tuning circuit error.</p>
9	ADMAError	rw1c	1'b0	<p>ADMA Error</p> <p>This bit is set when the Host Controller detects errors during ADMA based data</p> <p>transfer. The state of the ADMA at an error occurrence is saved in the ADMA</p> <p>Error Status Register,</p> <p>In addition, the Host Controller generates this Interrupt when it detects invalid</p> <p>descriptor data (Valid=0) at the ST_FDS state. ADMA Error State in the</p> <p>ADMA Error Status indicates that an error occurs in ST_FDS state. The Host</p> <p>Driver may find that Valid bit is not set at the error descriptor.</p>

Bits	Name	Type	Reset	Description
8	AutoCMD	rw1c	1'b0	<p>Auto CMD Error</p> <p>Auto CMD12 and Auto CMD23 use this error status. This bit is set when detecting that one of the bits D00-D04 in Auto CMD Error Status register has changed from 0 to 1. In case of Auto CMD12, this bit is set to 1, not only when the errors in Auto CMD12 occur but also when Auto CMD12 is not executed due to the previous command error.</p>
7	CurrentLimit	rw1c	1'b0	<p>Current Limit Error</p> <p>By setting the SD Bus Power bit in the Power Control register, the Host Controller is requested to supply power for the SD Bus. If the Host Controller supports the Current Limit function, it can be protected from an illegal card by stopping power supply to the card in which case this bit indicates a failure status. Reading 1 means the Host Controller is not supplying power to SD card due to some failure. Reading 0 means that the Host Controller is supplying power and no error has occurred. The Host Controller may require some sampling time to detect the current limit. If the Host Controller does not support this function, this bit shall always be set to 0.</p>
6	DataEnd	rw1c	1'b0	<p>Data End Bit Error</p> <p>Occurs either when detecting 0 at the end bit position of read data which uses the DAT line or at the end bit position of the CRC Status.</p>
5	DataCRC	rw1c	1'b0	<p>Data CRC Error</p> <p>Occurs when detecting CRC error when transferring read data which uses the DAT line or when detecting the Write CRC status having a value of other than "010".</p>

Bits	Name	Type	Reset	Description
4	DateTimeout	rw1c	1'b0	<p>Data Timeout Error</p> <p>This bit is set when detecting one of following timeout conditions.</p> <ul style="list-style-type: none"> (1) Busy timeout for R1b,R5b type (2) Busy timeout after Write CRC status (3) Write CRC Status timeout (4) Read Data timeout.
3	CommandIndex	rw1c	1'b0	<p>Command Index Error</p> <p>This bit is set if a Command Index error occurs in the command response.</p>
2	CommandEnd	rw1c	1'b0	<p>Command End Bit Error</p> <p>This bit is set when detecting that the end bit of a command response is 0.</p>
1	CommandEnd	rw1c	1'b0	<p>Command CRC Error</p> <p>Command CRC Error is generated in two cases.</p> <p>If a response is returned and the Command Timeout Error is set to 0 (indicating no timeout), this bit is set to 1 when detecting a CRC error in the command response.</p> <p>The Host Controller detects a CMD line conflict by monitoring the CMD line when a command is issued. If the Host Controller drives the CMD line to 1 level, but detects 0 level on the CMD line at the next SD clock edge, then the Host Controller shall abort the command (Stop driving CMD line) and set this bit to 1. The Command Timeout Error shall also be set to 1 to distinguish CMD line conflict .</p>
0	CommandTimeout	rw1c	1'b0	<p>Command Timeout Error</p> <p>This bit is set only if no response is returned within 64 SD clock cycles from the end bit of the command.</p>

26.4.22 Normal_Interrupt_Status_Enable


地址: 0x20060034

Bits	Name	Type	Reset	Description
31:16	RSVD			
15	Fixedto	r	1'b0	Fixed to 0 The Host Driver shall control error interrupts using the Error Interrupt Status Enable register.
14:13	RSVD			
12	Re-TuningEvent	r/w	1'b0	Re-Tuning Event Status Enable 1 Enabled 0 Masked
11	INT_CStatus	r/w	1'b0	INT_C Status Enable If this bit is set to 0, the Host Controller shall clear the interrupt request to the System. The Host Driver may clear this bit before servicing the INT_C and may set this bit again after all interrupt requests to INT_C pin are cleared to prevent inadvertent interrupts.

Bits	Name	Type	Reset	Description
10	INT_BStatus	r/w	1'b0	INT_B Status Enable If this bit is set to 0, the Host Controller shall clear the interrupt request to the System. The Host Driver may clear this bit before servicing the INT_B and may set this bit again after all interrupt requests to INT_B pin are cleared to prevent inadvertent interrupts.
9	INT_AStatus	r/w	1'b0	INT_A Status Enable If this bit is set to 0, the Host Controller shall clear the interrupt request to the System. The Host Driver may clear this bit before servicing the INT_A and may set this bit again after all interrupt requests to INT_A pin are cleared to prevent inadvertent interrupts.
8	CardInterrupt	r/w	1'b0	If this bit is set to 0, the Host Controller shall clear interrupt request to the System. The Card Interrupt detection is stopped when this bit is cleared and restarted when this bit is set to 1. The Host Driver may clear the Card Interrupt Status Enable before servicing the Card Interrupt and may set this bit again after all interrupt requests from the card are cleared to prevent inadvertent interrupts.
7	CardRemoval	r/w	1'b0	Card Removal Status Enable
6	CardInsertion	r/w	1'b0	Card Insertion Status Enable
5	BufferRead	r/w	1'b0	Buffer Read Ready Status Enable
4	BufferWrite	r/w	1'b0	Buffer Write Ready Status Enable
3	DMAInterrupt	r/w	1'b0	DMA Interrupt Status Enable
2	BlockGap	r/w	1'b0	Block Gap Event Status Enable
1	TransferComplete	r/w	1'b0	Transfer Complete Status Enable
0	CommandComplete	r/w	1'b0	Command Complete Status Enable

26.4.23 Error_Interrupt_Status_Enable

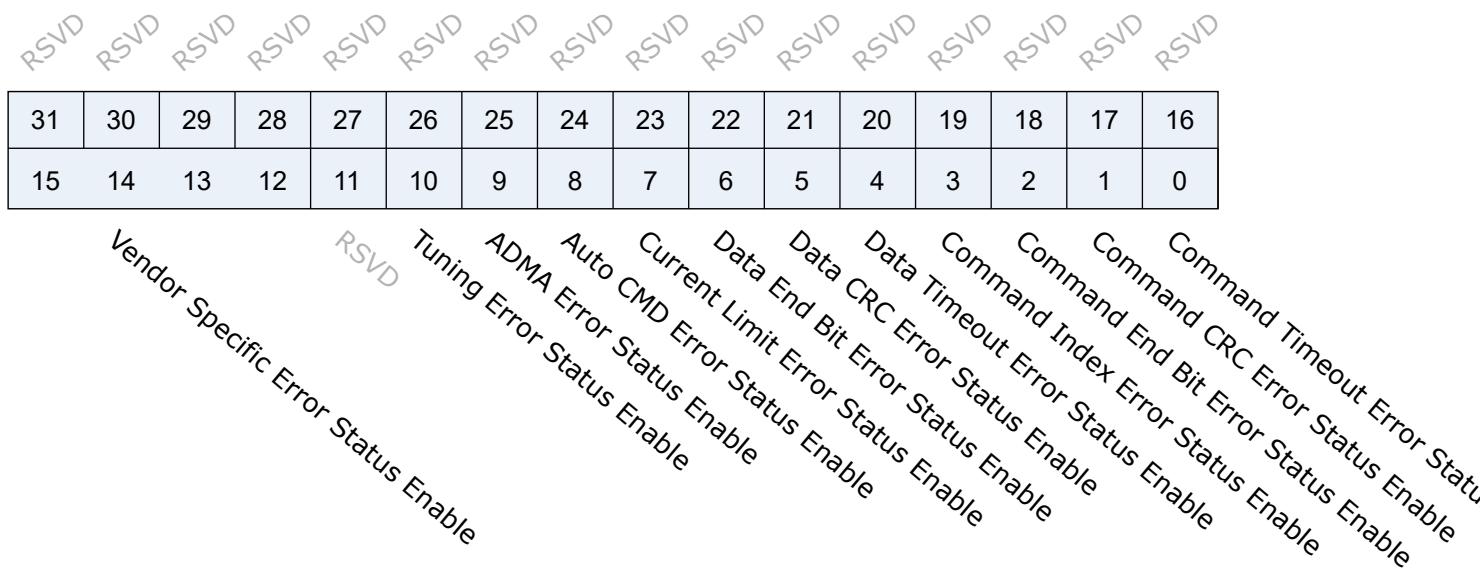
地址: 0x20060036



Bits	Name	Type	Reset	Description
31:16	RSVD			
15:12	VendorSpecific	r/w	4'd0	Vendor Specific Error Status Enable
11	RSVD			
10	TuningError	r/w	1'b0	Tuning Error Status Enable
9	ADMAError	r/w	1'b0	ADMA Error Status Enable
8	AutoCMD	r/w	1'b0	Auto CMD Error Status Enable
7	CurrentLimit	r/w	1'b0	Current Limit Error Status Enable
6	DataEnd	r/w	1'b0	Data End Bit Error Status Enable
5	DataCRC	r/w	1'b0	Data CRC Error Status Enable
4	DataTimeout	r/w	1'b0	Data Timeout Error Status Enable
3	CommandIndex	r/w	1'b0	Command Index Error Status Enable
2	CommandEnd	r/w	1'b0	Command End Bit Error Status Enable
1	CommandCRC	r/w	1'b0	Command CRC Error Status Enable
0	CommandTimeout	r/w	1'b0	Command Timeout Error Status Enable

26.4.24 Normal_Interrupt_Signal_Enable

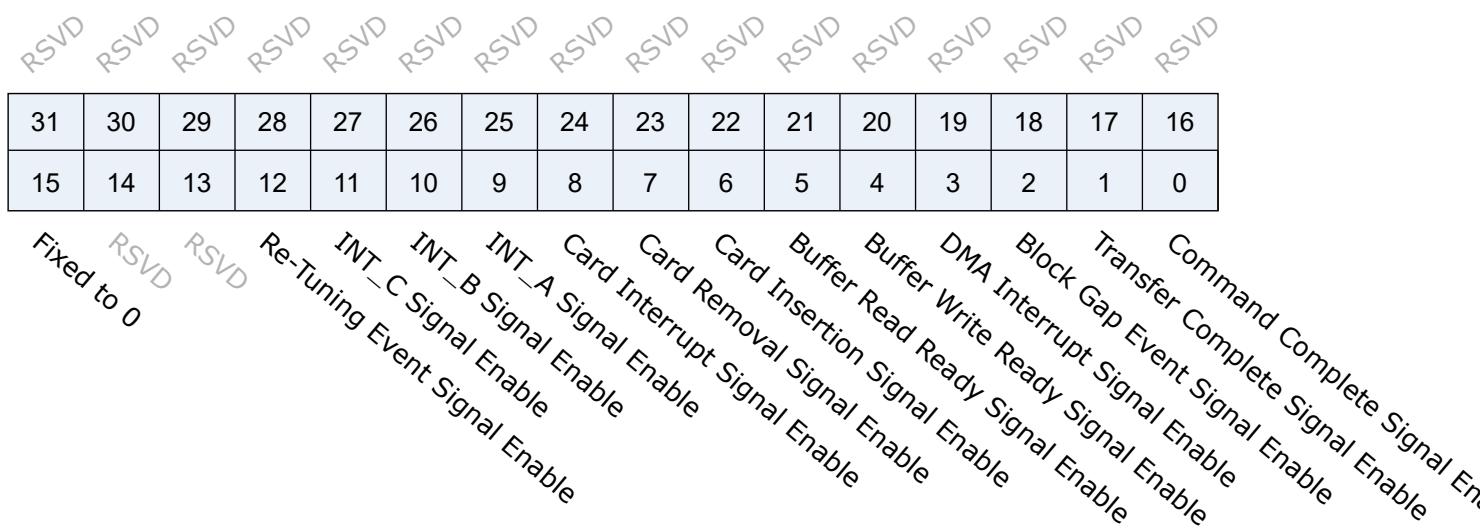
地址: 0x20060038



Bits	Name	Type	Reset	Description
31:16	RSVD			
15	Fixedto	r	1'b0	Fixed to 0 The Host Driver shall control error interrupts using the Error Interrupt Signal Enable register.
14:13	RSVD			
12	Re-TuningEvent	r/w	1'b0	Re-Tuning Event Signal Enable
11	INT_CSignal	r/w	1'b0	INT_C Signal Enable
10	INT_BSignal	r/w	1'b0	INT_B Signal Enable
9	INT_ASignal	r/w	1'b0	INT_A Signal Enable
8	CardInterrupt	r/w	1'b0	Card Interrupt Signal Enable
7	CardRemoval	r/w	1'b0	Card Removal Signal Enable
6	CardInsertion	r/w	1'b0	Card Insertion Signal Enable
5	BufferRead	r/w	1'b0	Buffer Read Ready Signal Enable
4	BufferWrite	r/w	1'b0	Buffer Write Ready Signal Enable
3	DMAInterrupt	r/w	1'b0	DMA Interrupt Signal Enable
2	BlockGap	r/w	1'b0	Block Gap Event Signal Enable
1	TransferComplete	r/w	1'b0	Transfer Complete Signal Enable
0	CommandComplete	r/w	1'b0	Command Complete Signal Enable

26.4.25 Error_Interrupt_Signal_Enable

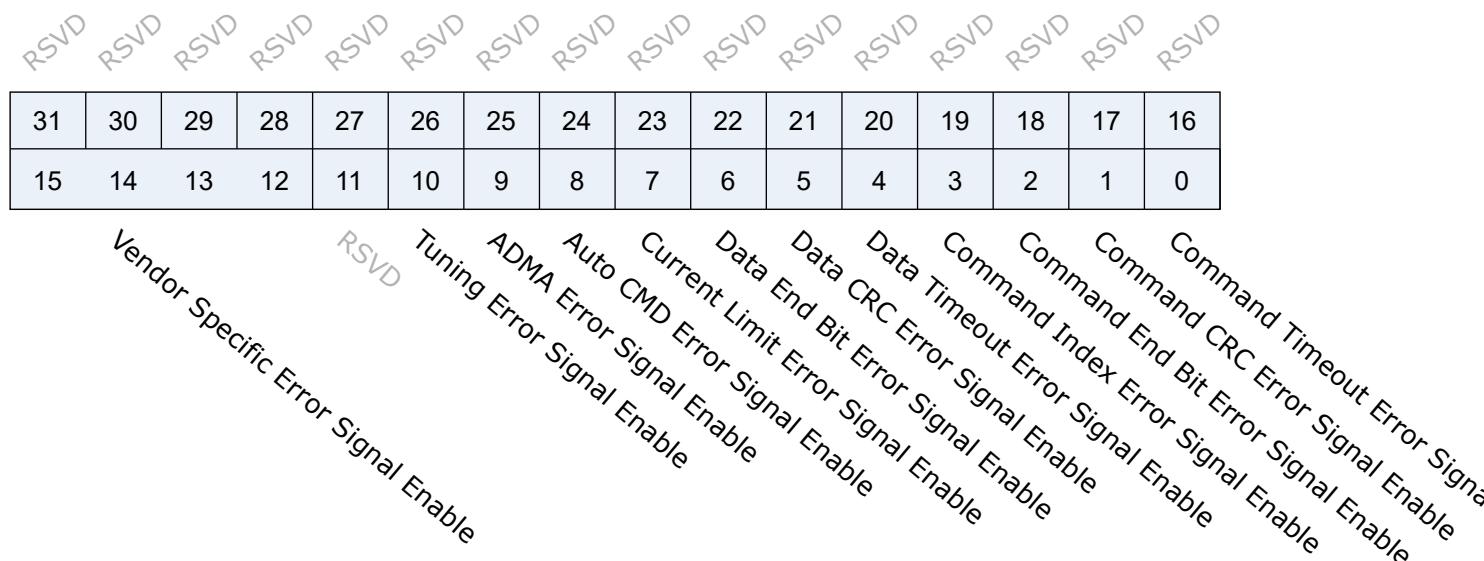
地址: 0x2006003a



Bits	Name	Type	Reset	Description
31:16	RSVD			
15:12	VendorSpecific	r/w	4'd0	Vendor Specific Error Signal Enable
11	RSVD			
10	TuningError	r/w	1'b0	Tuning Error Signal Enable
9	ADMAError	r/w	1'b0	ADMA Error Signal Enable
8	AutoCMD	r/w	1'b0	Auto CMD Error Signal Enable
7	CurrentLimit	r/w	1'b0	Current Limit Error Signal Enable
6	DataEnd	r/w	1'b0	Data End Bit Error Signal Enable
5	DataCRC	r/w	1'b0	Data CRC Error Signal Enable
4	DataTimeout	r/w	1'b0	Data Timeout Error Signal Enable
3	CommandIndex	r/w	1'b0	Command Index Error Signal Enable
2	CommandEnd	r/w	1'b0	Command End Bit Error Signal Enable
1	CommandCRC	r/w	1'b0	Command CRC Error Signal Enable
0	CommandTimeout	r/w	1'b0	Command Timeout Error Signal Enable

26.4.26 Auto_CMD_Error_Status

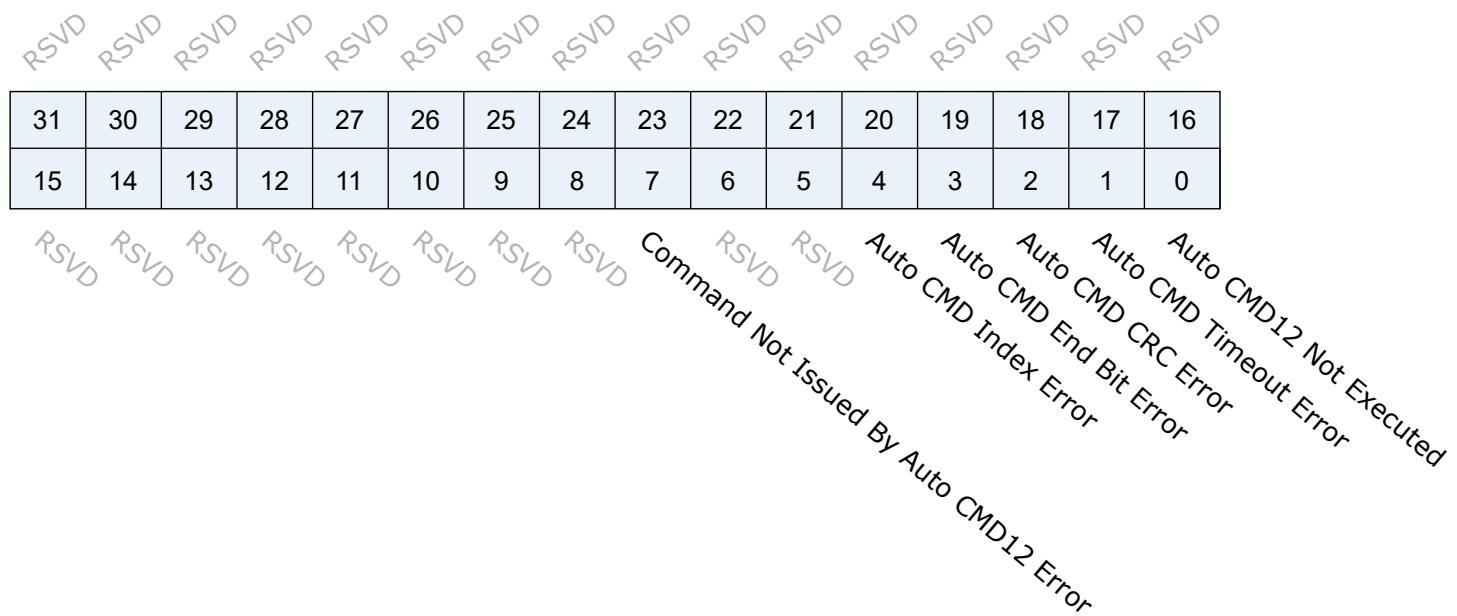地址: 0x2006003c



Bits	Name	Type	Reset	Description
31:8	RSVD			
7	CommandNot	roc	1'b0	Command Not Issued By Auto CMD12 Error Setting this bit to 1 means CMD_wo_DAT is not executed due to an Auto CMD12 Error (D04-D01) in this register. This bit is set to 0 when Auto CMD Error is generated by Auto CMD23.
6:5	RSVD			
4	AutoCMD	roc	1'b0	Auto CMD Index Error This bit is set if the Command Index error occurs in response to a command.
3	AutoCMD	roc	1'b0	Auto CMD End Bit Error This bit is set when detecting that the end bit of command response is 0.
2	AutoCMD	roc	1'b0	Auto CMD CRC Error
1	AutoCMD	roc	1'b0	Auto CMD Timeout Error
0	AutoCMD12	roc	1'b0	Auto CMD12 Not Executed

26.4.27 Host_Control_2

地址: 0x2006003e

Bits	Name	Type	Reset	Description
31:16	RSVD			
15	PresetValue	r/w	1'b0	<p>Preset Value Enable</p> <p>Host Controller Version 3.00 supports this bit.</p> <p>As the operating SDCLK frequency and I/O driver strength depend on the Host System implementation, it is difficult to determine these parameters in the Standard Host Driver. When Preset Value Enable is set, automatic SDCLK frequency generation and driver strength selection is performed without considering system specific conditions. This bit enables the functions defined in the Preset Value registers.</p>


Bits	Name	Type	Reset	Description
14	AsynchronousInterrupt	r/w	1'b0	<p>Asynchronous Interrupt Enable</p> <p>This bit can be set to 1 if a card supports asynchronous interrupts and</p> <p>Asynchronous Interrupt Support is set to 1 in the Capabilities register.</p> <p>Asynchronous interrupt is effective when DAT[1] interrupt is used in 4-bit SD mode (and zero is set to Interrupt Pin Select in the Shared Bus Control register). If this bit is set to 1, the Host Driver can stop the SDCLK during asynchronous interrupt period to save power. During this period, the Host Controller continues to deliver the Card Interrupt to the host when it is asserted by the Card.</p>
13:8	RSVD			
7	SamplingClock	r/w	1'b0	<p>Sampling Clock Select</p> <p>Host Controller uses this bit to select sampling clock to receive CMD and DAT. This bit is set by tuning procedure and valid after the completion of tuning (when Execute Tuning is cleared). Setting 1 means that tuning is completed successfully and setting 0 means that tuning is failed. Writing 1 to this bit is meaningless and ignored. A tuning circuit is reset by writing to 0.</p> <p>This bit can be cleared with setting Execute Tuning. Once the tuning circuit is reset, it will take time to complete tuning sequence. Therefore, Host Driver should keep this bit to 1 to perform re-tuning sequence to compete re-tuning sequence in a short time. Change of this bit is not allowed while the Host Controller is receiving response or a read data block.</p>

Bits	Name	Type	Reset	Description
6	ExecuteTuning	rwac	1'b0	<p>Execute Tuning</p> <p>This bit is set to 1 to start tuning procedure and automatically cleared when tuning procedure is completed. The result of tuning is indicated to Sampling</p> <p>Clock Select. Tuning procedure is aborted by writing 0. Refer to Figure 2-29 for more detail about tuning procedure.</p>
5:4	DriverStrength	r/w	2'd0	<p>Driver Strength Select</p> <p>Host Controller output driver in 1.8V signaling is selected by this bit. In 3.3V signaling, this field is not effective. This field can be set depends on Driver</p> <p>Type A, C and D support bits in the Capabilities register. This bit depends on setting of Preset Value Enable.</p> <p>If Preset Value Enable = 0, this field is set by Host Driver.</p> <p>If Preset Value Enable = 1, this field is automatically set by a value specified in the one of Preset Value registers.</p>
3	1.8VSignaling	r/w	1'b0	<p>1.8V Signaling Enable</p> <p>This bit controls voltage regulator for I/O cell. 3.3V is supplied to the card regardless of signaling voltage.</p> <p>Setting this bit from 0 to 1 starts changing signal voltage from 3.3V to 1.8V.</p> <p>1.8V regulator output shall be stable within 5ms. Host Controller clears this bit if switching to 1.8V signaling fails.</p> <p>Clearing this bit from 1 to 0 starts changing signal voltage from 1.8V to 3.3V.</p> <p>3.3V regulator output shall be stable within 5ms.</p> <p>Host Driver can set this bit to 1 when Host Controller supports 1.8V signaling</p> <p>(One of support bits is set to 1: SDR50, SDR104 or DDR50 in the Capabilities register) and the card or device supports UHS-I (S18A=1. Refer to Bus Signal Voltage Switch Sequence in the Physical Layer Specification Version 3.0x).</p>

Bits	Name	Type	Reset	Description
2:0	UHSMode	r/w	3'd0	UHS Mode Select This field is used to select one of UHS-I modes and effective when 1.8V Signaling Enable is set to 1.

26.4.28 Capabilities_1

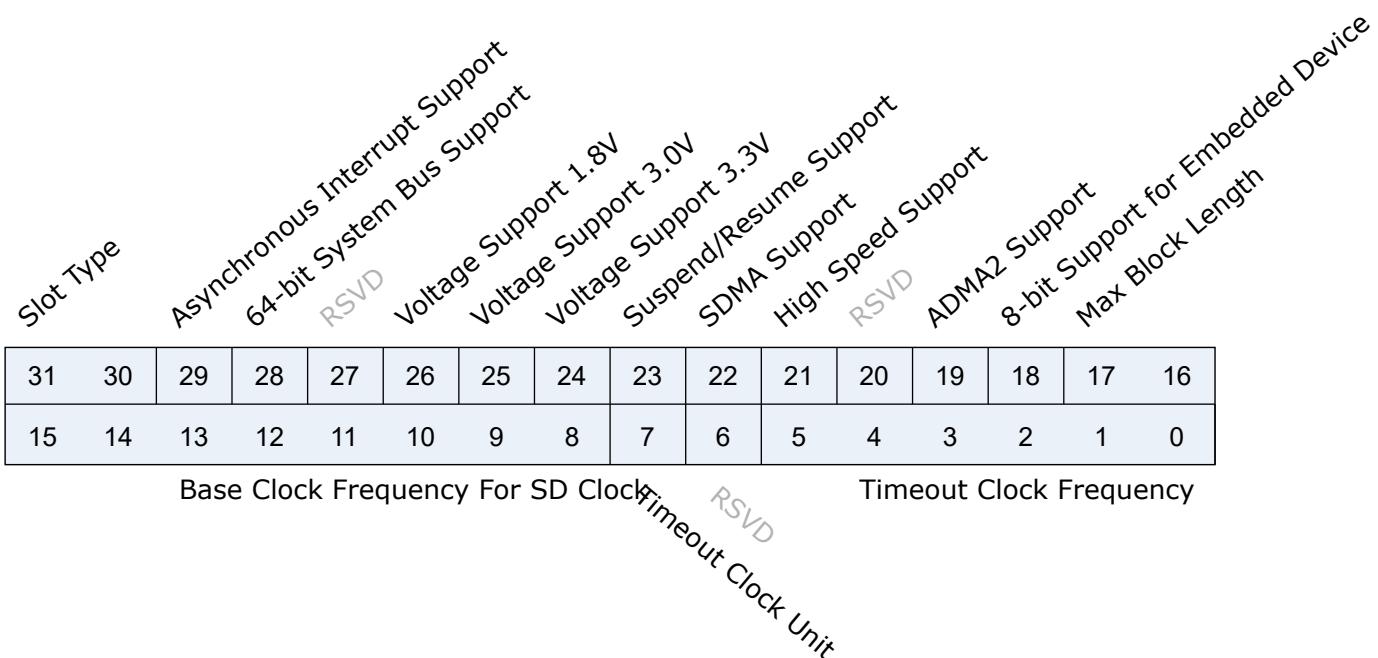地址: 0x20060040




Bits	Name	Type	Reset	Description
31:30	SlotType	HwInit	2'd0	<p>Slot Type</p> <p>This field indicates usage of a slot by a specific Host System. (A host controller register set is defined per slot.) Embedded Slot for One Device</p> <p>(01b) means that only one non-removable device is connected to a SD bus slot. Shared Bus Slot (10b) can be set if Host Controller supports Shared Bus Control register.</p> <p>The Standard Host Driver controls only a removable card or one embedded device connected to a SD bus slot. If a slot is configured for shared bus (10b), the Standard Host Driver does not control embedded devices connected to a shared bus. Shared bus slot is controlled by a specific host driver developed by a Host System.</p> <p>00b Removable Card Slot</p> <p>01b Embedded Slot for One Device</p> <p>10b Shared Bus Slot</p> <p>11b Reserved</p>
29	AsynchronousInterrupt	HwInit	1'b0	<p>Asynchronous Interrupt Support</p> <p>Refer to SDIO Specification Version 3.00 about asynchronous interrupt.</p>
28	64-bitSystem	HwInit	1'b0	<p>64-bit System Bus Support</p> <p>Setting 1 to this bit indicates that the Host Controller supports 64-bit address descriptor mode and is connected to 64-bit address system bus.</p>
27	RSVD			
26	VoltageSupport	HwInit	1'b0	<p>Voltage Support 1.8V</p> <p>Embedded system can use 1.8V power supply.</p>
25	VoltageSupport	HwInit	1'b0	<p>Voltage Support 3.0V</p> <p>1 :3.0V Supported</p> <p>0 :3.0V Not Supported</p>
24	VoltageSupport	HwInit	1'b0	Voltage Support 3.3V

Bits	Name	Type	Reset	Description
23	Suspend/ResumeSupport	HwInit	1'b0	<p>Suspend/Resume Support</p> <p>This bit indicates whether the Host Controller supports Suspend / Resume functionality. If this bit is 0, the Host Driver shall not issue either Suspend or Resume commands because the Suspend and Resume mechanism is not supported.</p>
22	SDMASupport	HwInit	1'b0	<p>SDMA Support</p> <p>This bit indicates whether the Host Controller is capable of using SDMA to transfer data between system memory and the Host Controller directly.</p>
21	HighSpeed	HwInit	1'b0	<p>High Speed Support</p> <p>This bit indicates whether the Host Controller and the Host System support High Speed mode and they can supply SD Clock frequency from 25MHz to 50MHz.</p>
20	RSVD			
19	ADMA2Support	HwInit	1'b0	<p>ADMA2 Support</p> <p>This bit indicates whether the Host Controller is capable of using ADMA2.</p>
18	8-bitSupport	HwInit	1'b0	<p>8-bit Support for Embedded Device</p> <p>This bit indicates whether the Host Controller is capable of using 8-bit bus width mode. This bit is not effective when Slot Type is set to 10b. In this case, refer to Bus Width Preset in the Shared Bus register.</p>
17:16	MaxBlock	HwInit	2'd0	<p>Max Block Length</p> <p>This value indicates the maximum block size that the Host Driver can read and write to the buffer in the Host Controller. The buffer shall transfer this block size without wait cycles. Three sizes can be defined as indicated below. It is noted that transfer block length shall be always 512 bytes for SD Memory Cards regardless this field.</p>

Bits	Name	Type	Reset	Description
15:8	BaseClock	HwInit	8'd0	Base Clock Frequency For SD Clock This value indicates the base (maximum) clock frequency for the SD Clock. Definition of this field depends on Host Controller Version.
7	TimeoutClock	HwInit	1'b0	Timeout Clock Unit This bit shows the unit of base clock frequency used to detect Data Timeout Error.
6	RSVD			
5:0	TimeoutClock	HwInit	6'd0	Timeout Clock Frequency This bit shows the base clock frequency used to detect Data Timeout Error. The Timeout Clock Unit defines the unit of this field's value.

26.4.29 Capabilities_2

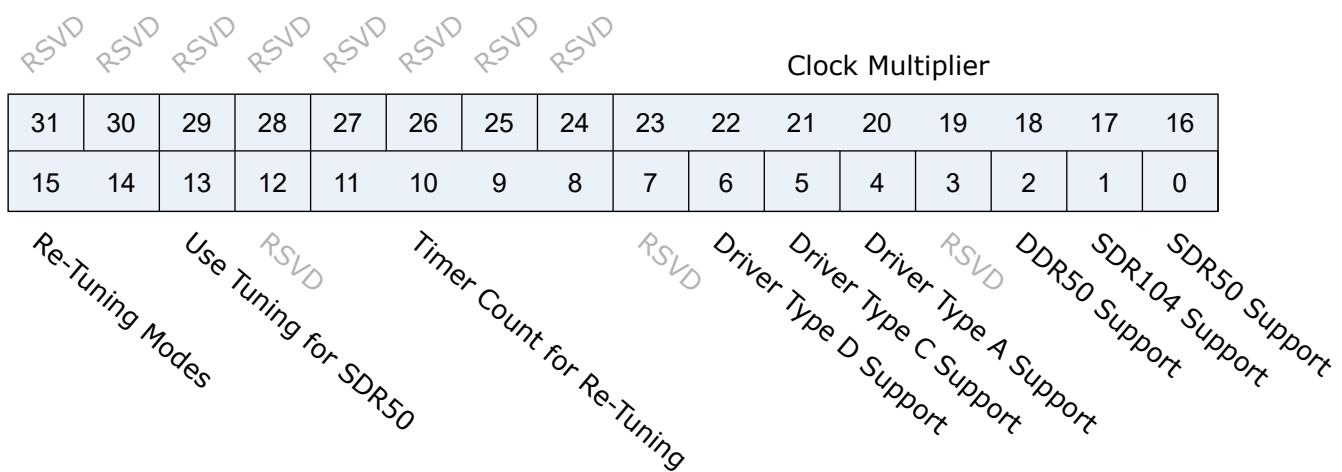地址: 0x20060044



Bits	Name	Type	Reset	Description
31:24	RSVD			
23:16	ClockMultiplier	HwInit	8'd0	Clock Multiplier This field indicates clock multiplier value of programmable clock generator. Refer to Clock Control register. Setting 00h means that Host Controller does not support programmable clock generator.

Bits	Name	Type	Reset	Description
15:14	Re-TuningModes	HwInit	2'd0	Re-Tuning Modes This field selects re-tuning method and limits the maximum data length.
13	UseTuning	HwInit	1'b0	Use Tuning for SDR50 If this bit is set to 1, this Host Controller requires tuning to operate SDR50. (Tuning is always required to operate SDR104.)
12	RSVD			
11:8	TimerCount	HwInit	4'd0	Timer Count for Re-Tuning This field indicates an initial value of the Re-Tuning Timer for Re-Tuning Mode 1 to 3. Setting to 0 disables Re-Tuning Timer.
7	RSVD			
6	DriverType	HwInit	1'b0	Driver Type D Support This bit indicates support of Driver Type D for 1.8 Signaling.
5	DriverType	HwInit	1'b0	Driver Type C Support This bit indicates support of Driver Type C for 1.8 Signaling.
4	DriverType	HwInit	1'b0	Driver Type A Support This bit indicates support of Driver Type A for 1.8 Signaling.
3	RSVD			
2	DDR50Support	HwInit	1'b0	DDR50 Support
1	SDR104Support	HwInit	1'b0	SDR104 Support SDR104 requires tuning.
0	SDR50Support	HwInit	1'b0	SDR50 Support If SDR104 is supported, this bit shall be set to 1. Bit 45 indicates whether SDR50 requires tuning or not.

26.4.30 Maximum_Current_Capabilities

地址: 0x20060048

Maximum Current for 1.8V															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0


Maximum Current for 3.0V

Maximum Current for 3.3V

Bits	Name	Type	Reset	Description
31:24	RSVD			
23:16	MaximumCurrent	HwInit	8'd0	Maximum Current for 1.8V
15:8	MaximumCurrent	HwInit	8'd0	Maximum Current for 3.0V
7:0	MaximumCurrent	HwInit	8'd0	Maximum Current for 3.3V

26.4.31 Force_Event_Register_for_Auto_CMD_Error_Status

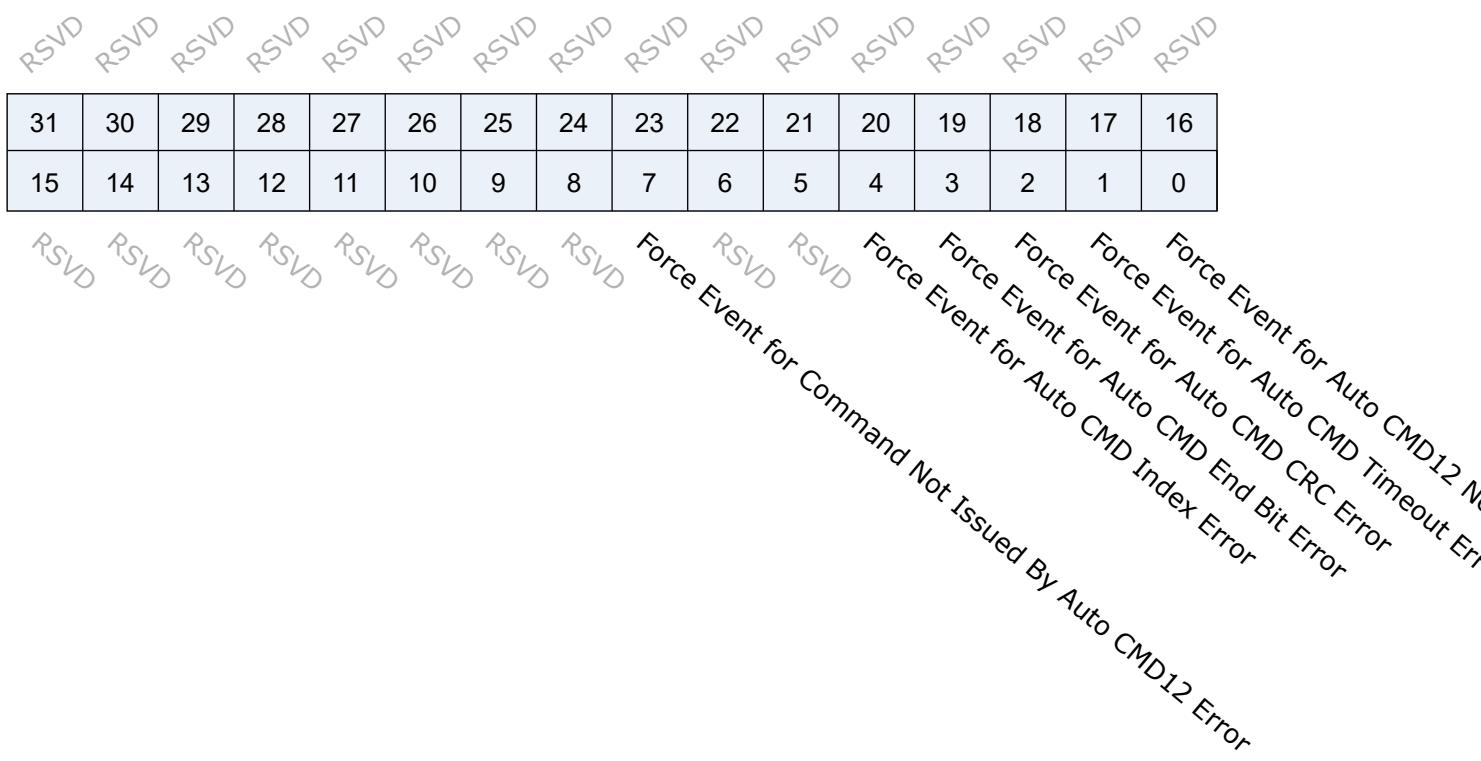地址: 0x20060050




Bits	Name	Type	Reset	Description
31:8	RSVD			
7	ForceEvent	w	x	Force Event for Command Not Issued By Auto CMD12 Error
6:5	RSVD			
4	ForceEvent	w	x	Force Event for Auto CMD Index Error
3	ForceEvent	w	x	Force Event for Auto CMD End Bit Error
2	ForceEvent	w	x	Force Event for Auto CMD CRC Error
1	ForceEvent	w	x	Force Event for Auto CMD Timeout Error

Bits	Name	Type	Reset	Description
0	ForceEvent	w	x	Force Event for Auto CMD12 Not Executed

26.4.32 Force_Event_Register_for_Error_Interrupt_Status

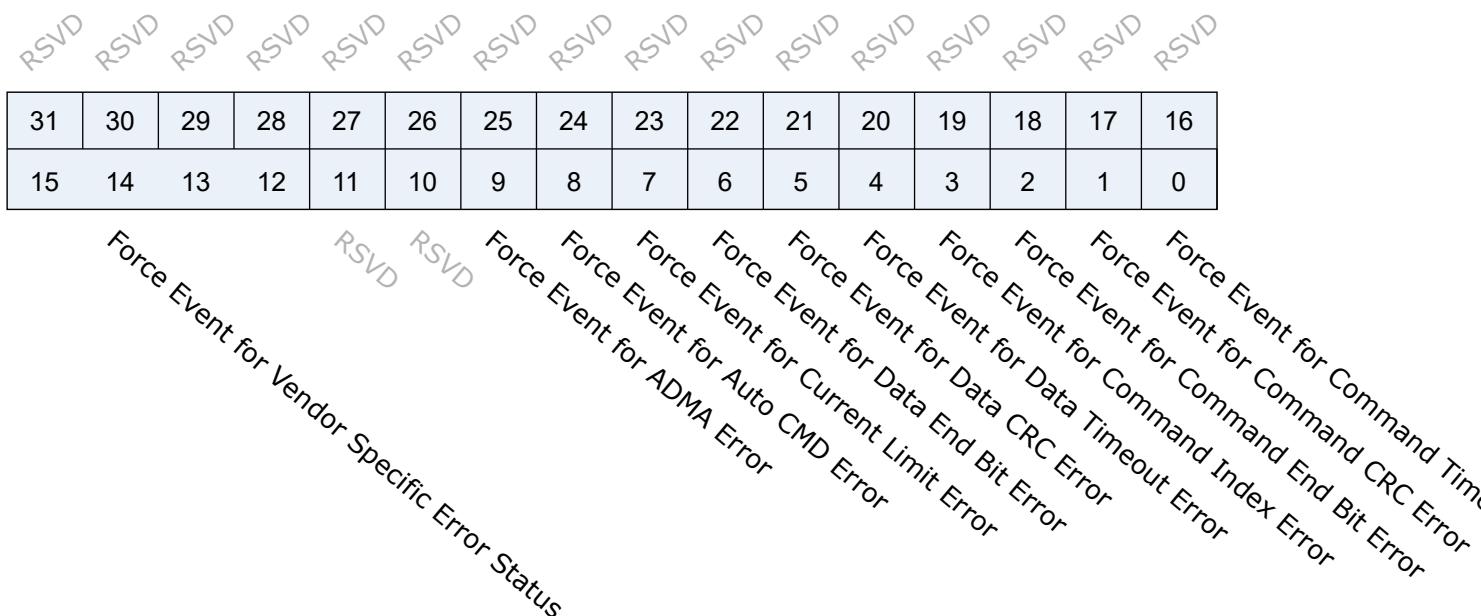地址: 0x20060052




Bits	Name	Type	Reset	Description
31:16	RSVD			
15:12	ForceEvent	w	x	Force Event for Vendor Specific Error Status Additional status bits can be defined in this register by the vendor.
11:10	RSVD			
9	ForceEvent	w	x	Force Event for ADMA Error
8	ForceEvent	w	x	Force Event for Auto CMD Error
7	ForceEvent	w	x	Force Event for Current Limit Error
6	ForceEvent	w	x	Force Event for Data End Bit Error
5	ForceEvent	w	x	Force Event for Data CRC Error
4	ForceEvent	w	x	Force Event for Data Timeout Error
3	ForceEvent	w	x	Force Event for Command Index Error
2	ForceEvent	w	x	Force Event for Command End Bit Error

Bits	Name	Type	Reset	Description
1	ForceEvent	w	x	Force Event for Command CRC Error
0	ForceEvent	w	x	Force Event for Command Timeout Error

26.4.33 ADMA_Error_Status

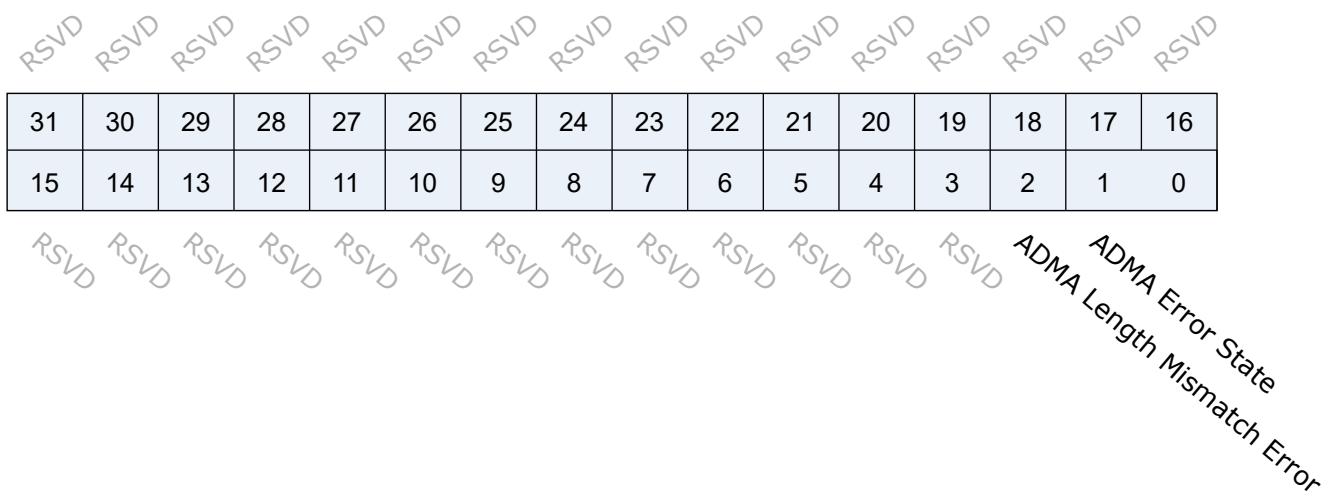
地址: 0x20060054



Bits	Name	Type	Reset	Description
31:3	RSVD			
2	ADMALength	roc	1'b0	<p>ADMA Length Mismatch Error</p> <p>This error occurs in the following 2 cases.</p> <p>(1) While Block Count Enable being set, the total data length specified by the Descriptor table is different from that specified by the Block Count and Block Length.</p> <p>(2) Total data length can not be divided by the block length.</p>
1:0	ADMAError	roc	1'b0	<p>ADMA Error State</p> <p>This field indicates the state of ADMA when error is occurred during ADMA data transfer. This field never indicates "10" because ADMA never stops in this state.</p>

26.4.34 Shared_Bus_Control

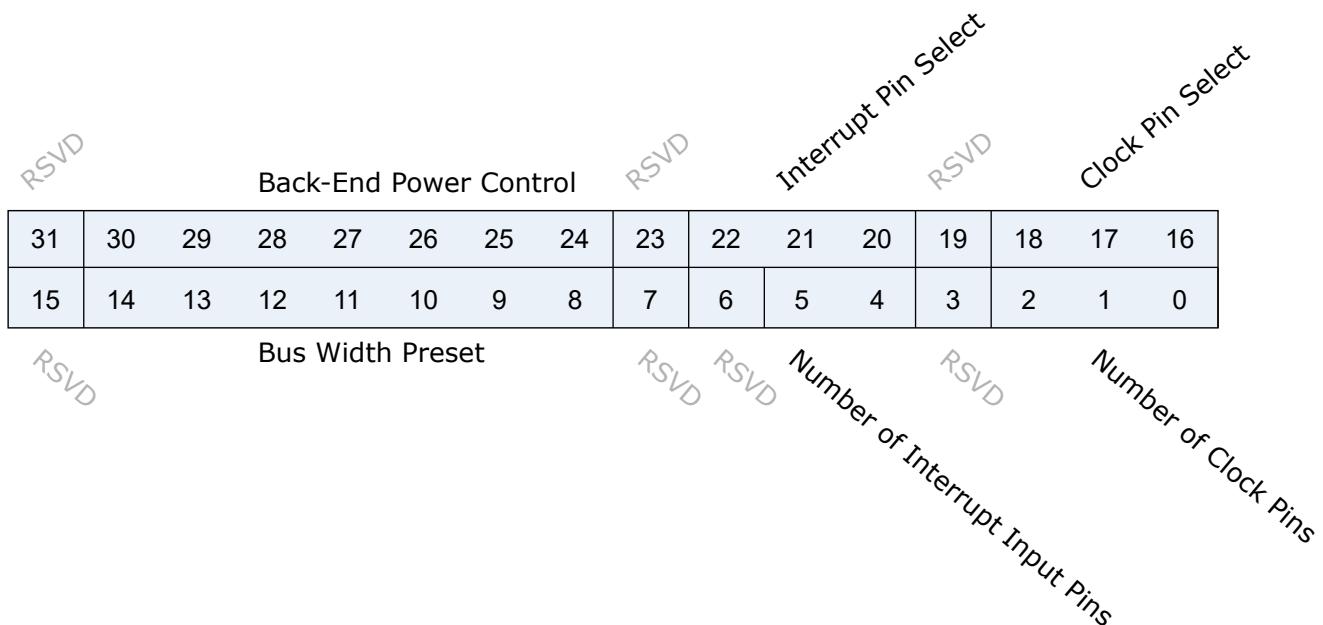地址: 0x200600e0



Bits	Name	Type	Reset	Description
31	RSVD			
30:24	Back-EndPower	r/w	7'd0	Back-End Power Control Each bit of this field controls back-end power supply for an embedded device. Host interface voltage (VDDH) is not controlled by this field. The number of devices supported is specified by Number of Clock Pins and a maximum of 7 devices can be controlled.
23	RSVD			
22:20	InterruptPin	r/w	3'd0	Interrupt Pin Select Interrupt pin inputs are enabled by this field. Enable of unsupported interrupt pin is meaningless.
19	RSVD			
18:16	ClockPin	r/w	3'd0	Clock Pin Select One of clock pin outputs is selected by this field. Select of unsupported clock pin is meaningless. Refer to Figure 2-38 for the timing of clock outputs.

Bits	Name	Type	Reset	Description
15	RSVD			
14:8	BusWidth	r/w	7'd0	<p>Bus Width Preset</p> <p>Shared bus supports mixing of 4-bit and 8-bit bus width devices.</p> <p>Each bit of this field specifies the bus width for each embedded device. The number of devices supported is specified by Number of Clock Pins and a maximum of 7 devices are supported.</p> <p>This field is effective when multiple devices are connected to a shared bus</p> <p>(Slot Type is set to 10b in the Capabilities register). In the other case,</p> <p>Extended Data Transfer Width in the Host Control 1 register is used to select 8-bit bus width. As use of 1-bit mode is not intended for shared bus,</p> <p>Data Transfer Width in the Host Control 1 register should be set to 1.</p>
7:6	RSVD			
5:4	Numberof	r/w	2'd0	<p>Number of Interrupt Input Pins</p> <p>This field indicates support of interrupt input pins for shared bus system.</p> <p>Three asynchronous interrupt pins are defined, INT_A#, INT_B# and INT_C#. Which interrupt pin is used is determined by the system. Each one is driven by open drain and then wired or connection is possible.</p>
3	RSVD			
2:0	Numberof	HwInit	3'd0	<p>Number of Clock Pins</p> <p>This field indicates support of clock pins to select one of devices for shared bus system. Up to 7 clock pins can be supported.</p> <p>Shared bus is supported by specific system. Then Standard Host Driver does not support control of these clock pins.</p>

26.4.35 Slot Interrupt Status

地址: 0x200600fc

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | | | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | |

Interrupt Signal For Each Slot

Bits	Name	Type	Reset	Description
31:8	RSVD			
7:0	InterruptSignal	roc	8'd0	<p>Interrupt Signal For Each Slot</p> <p>These status bits indicate the logical OR of Interrupt Signal and Wakeup</p> <p>Signal for each slot. A maximum of 8 slots can be defined.</p> <p>If one interrupt</p> <p>signal is associated with multiple slots, the Host Driver can know which</p> <p>interrupt is generated by reading these status bits. By a power on reset or by</p> <p>setting Software Reset For All, the interrupt signal shall be de-asserted</p> <p>and this status shall read 00h.</p>

26.4.36 Host Controller Version

地址: 0x200600fe

RSVD																								
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16									
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0									

Vendor Version Number

Specification Version Number

Bits	Name	Type	Reset	Description
31:16	RSVD			

Bits	Name	Type	Reset	Description
15:8	VendorVersion	HwInit	8'd0	<p>Vendor Version Number</p> <p>This status is reserved for the vendor version number. The Host Driver should not use this status.</p>
7:0	SpecificationVersion	HwInit	8'd0	<p>Specification Version Number</p> <p>This status indicates the Host Controller Spec. Version. The upper and lower 4-bits indicate the version.</p> <p>00h SD Host Specification Version 1.00</p> <p>01h SD Host Specification Version 2.00</p> <p>Including the feature of the ADMA and Test Register,</p> <p>02h SD Host Specification Version 3.00</p> <p>others Reserved</p>

27.1 Overview

Motion Joint Photographic Experts Group (MJPEG), a video encoding format, can be accurate to frame editing and multi-layer image processing. The motion video sequence is treated as continuous still images, and this compression format compresses each frame separately and completely. Compressing the original data in the YCbCr format can greatly save the memory space occupied by a frame of image.

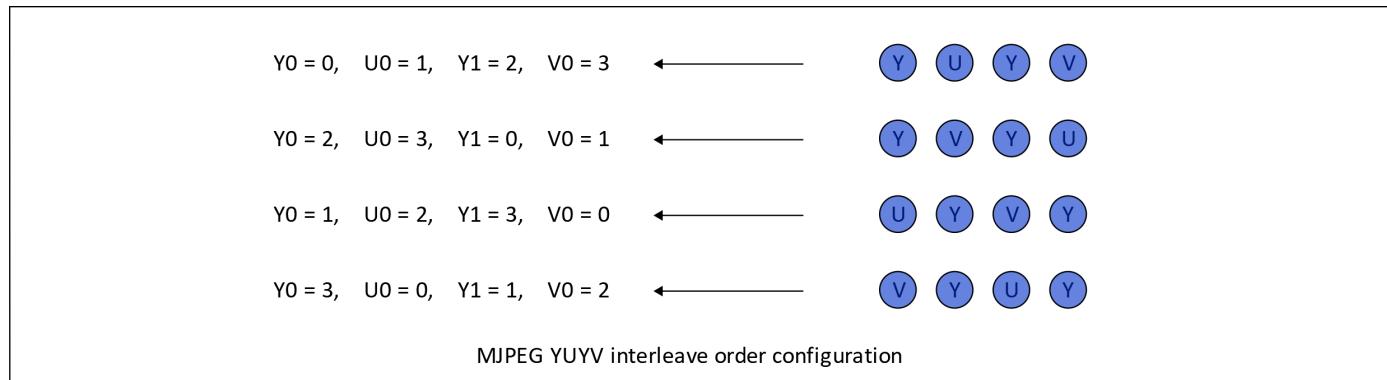
27.2 Features

- Configurable input formats:
 - YCbCr 4:2:2 planar or packed format
 - YCbCr 4:2:0 planar format
 - YCbCr 4:0:0
- Configurable arrangement order of Y, Cb and Cr input data
- Free configuration of quantization coefficient table
- Supports software and linked modes
- Supports swap mode
- Supports kick mode
- Reserves jpg header space and automatically adds jpg tail
- Caches up to 4 images continuously
- Multiple application interrupts are beneficial to flexible use and error prompt

27.3 Functional Description

27.3.1 Input Configuration

You can select the YCbCr format of input data by setting the <REG_YUV_MODE> bit in the register MJPEG_CONTROL_1, including YCbCr 4:2:2 planar or packed format, YCbCr 4:2:0 planar format, and YCbCr 4:0:0 grayscale image. When the YCbCr 4:2:2 packed format is selected, the order of Y, Cb and Cr can be configured by the high 8 bits of the register MJPEG_HEADER_BYTE. When other formats are selected, the order of Cb and Cr can be set by the <REG_ORDER_U_EVEN> bit in the register MJPEG_CONTROL_1. The configuration is shown as follows.



27.3.2 Quantization Coefficient Table

The quantization coefficient table can be freely configured by the user. <reg_q_0_00> to <reg_q_0_3F> represents the quantization table of grayscale Y component, while <reg_q_1_00> to <reg_q_1_3F> represents the quantization table of chrominance information Cb and Cr. In the quantization table, the first column is followed by the second column in descending order from the upper left corner. That is, reg_q_0_00 represents the quantized values of the first column on the first row of Y component, reg_q_0_01 represents that of the first column on the second row of the same, reg_q_0_07 represents that of the first column on the eighth row of the same, reg_q_0_08 represents that of the second column on the first row of the same, and so on.

27.3.3 Software Mode and Linked Mode

Setting the <REG_MJPEG_SW_MODE> bit in the register MJPEG_CONTROL_2 to 1 will enable the software mode. In this mode, MJPEG will read the specified frames of original image data from the memory for compression, but the image data must be prepared in advance.

When the <REG_MJPEG_SW_MODE> bit in the register MJPEG_CONTROL_2 is cleared to 0, the linked mode is enabled. In this mode, MJPEG will process the output of CAM as its input by taking 8*8 data blocks as a unit. After CAM writes 8 lines of data into the memory, MJPEG will start to work. The memory space processed by MJPEG will be released to CAM for reuse, so that CAM can link with MJPEG using the storage space that is less than the size of an image.

27.3.4 Swap Mode

In the swap mode, MJPEG's storage space will be evenly divided into two blocks. When the space of one block is used up, an interrupt will be generated to inform the software to read out the data, and then MJPEG will write data into the other block. Two blocks are used alternatively, so that you can process data with the storage space that is less than the size of a frame of image.

27.3.5 Kick Mode

When the <REG_SW_KICK_MODE> bit in the register MJPEG_CONTROL_2 is set to 1, the kick mode is enabled. In this mode, every time one "1" is written to the <REG_SW_KICK> bit in the register MJPEG_CONTROL_2, one compression will be performed. The number of compressed rows is determined by the <REG_SW_KICK_HBLK> bit in the register MJPEG_YUV_MEM_SW. It should be noted that the kick mode can only be used in the software mode, but not in the linked mode.

27.3.6 Jpg Function

The jpg function will automatically leave some bytes of space at the beginning of each frame of data and fill in zeros. The size of this space is set by the low 12 bits of the register MJPEG_HEADER_BYTE. If automatic padding of jpg tail is enabled, two bytes of data will be added at the end of each frame of data, and the value of the two bytes is 0xFFD9.

27.3.7 Cached Image Information

The module contains four FIFOs to record the image address, image size, and quantization coefficient. Every time this module completely writes a frame into the memory, it will record the start address, image size, and quantization coefficient of this frame of image in FIFO. However, when the memory is insufficient or four FIFOs are full, the module will automatically discard the information of the incoming image. In the part where the image information has been taken out, the oldest image information will be removed by performing the pop operation through APB. Then, FIFO will automatically push data to ensure the timing of the image information in FIFO.

27.3.8 Multiple Interrupts (Separately Configured)

- A. Normal interrupt: You can set to generate an interrupt after a fixed number of images are written
- B. Camera interrupt: When CAM overflows as MJPEG's processing speed cannot keep up with the speed of writing in CAM, an interrupt will be generated
- C. Memory interrupt: When the memory is rewritten, an interrupt will be generated
- D. Frame interrupt: When there are more than 4 unprocessed images, an interrupt will be generated
- E. Swap interrupt: When a memory block is full in the swap mode, an interrupt will be generated

28.1 Overview

JDEC can decode the JPG compressed images in memory into the original images, and then convert them into RGB format for display through the YUV2RGB module.

28.2 Features

- Supports YUV400/YUV420/YUV422 formats.
- Adjustable quantization coefficient: 1–75, 100.
- Supports swap mode
- Supports Skip Mode, where the JPG header is automatically skipped.
- Buffer with up to 16 JPG images.
- Supports flexible interrupt configuration mode, which can set an interrupt at the specified number of images or all complete interrupt.

28.3 Functional Description

28.3.1 Output Configuration

You can select the YCbCr format of output data by setting the <REG_YUV_MODE> bit in the register JDEC_CONTROL_1, including YCbCr4:2:2 planar format, YCbCr4:2:0 planar format, and YCbCr4:0:0 grayscale image. The start address of the output image data is determined by the registers JDEC_YY_FRAME_ADDR and JDEC_UV_FRAME_ADDR. The resolution of the output image data is determined by the register JDEC_FRAME_SIZE, in which the <REG_FRAME_HBLK> bit represents the number of 8×8 blocks in the vertical direction and the <REG_FRAME_WBLK> bit represents the number of 8×8 blocks in the horizontal direction.

28.3.2 Quantization Coefficient

The quantization coefficient can be set by the <REG_Q_MODE> bit in the register JDEC_CONTROL_1. When the set value does not exceed 75, the quantization coefficient is the set value. When that exceeds 75, the quantization coefficient is 100.

28.3.3 Swap Mode

In Swap Mode, a space with a size of two frames of output images is used as a buffer. When one frame of space is full, the decompressed image data continues to be stored in another frame of space buffer. The two frames of space are used alternately back and forth. This mode can be linked with the Display Module to improve efficiency.

28.3.4 Skip Mode

When the <REG_HDER_SKIP> bit in the register JDEC_HEADER_SKIP is set to 1, the Skip Mode is enabled. Then, the JDEC Module takes the value that equals to the start address of JPG image set by the <REG_JP_ADDR> bit in the register JDEC_FRAM_PUSH plus the number of byte offset set by the <REG_HDER_SKIP_BYT> bit in the register JDEC_HEADER_SKIP as the final actual start address for decompressing JPG images. This applies to the scenario of skipping JPG header information.

28.3.5 Buffer

The JDEC input buffer can store the information of up to 16 JPG images. Every time one “1” is written to the <REG_JP_PUSH> bit in the register JDEC_FRAM_PUSH, the free space of the buffer decreases. Every time JDEC decompresses a JPG image, this free space increases. The number of JPG images to be decompressed in the current buffer can be obtained by reading the <JP_FRAME_CNT> bit in the register JDEC_FRAM_STS. The <FRAME_VALID_CNT> bit in the register JDEC_CONTROL_3 indicates the number of decompressed images yet not processed.

28.3.6 Operating Process

- Disable the JDEC Module and clear the REG_MJ_DEC_ENABLE bit in the register JDEC_CONTROL_1.
- Set the formats of output image data as YUV422/YUV420/YUV400/…
- Choose whether to enable Swap Mode according to the application scenario.
- Set the quantization coefficient of images.
- Set the start addresses of Y and UV components of the output image in memory respectively.
- Set the numbers of horizontal and vertical 8×8 blocks according to the resolution of image data.
- If you need to enable Skip Mode, set the number of bytes to skip.
- Enable the JDEC Module and set the REG_MJ_DEC_ENABLE bit in the register JDEC_CONTROL_1 to “1” .
- Write the start address of the input JPG images and the command to cache in the buffer synchronously, that is,

writing the start address of JPG images into the register JDEC_FRAM_PUSH and setting its <REG_JP_PUSH> bit to “1” .

28.4 Precautions

- The start address of JPG image in memory shall be 8-byte aligned.
- The resolution of JPG images must be an integer multiple of 8.
- Currently, only the standard Huffman coding is supported.

29.1 Overview

VENC follows the H264 video coding standard, which mainly compresses objects by prediction and motion compensation, and improves image quality by a loop filter, while meeting the requirements of stream transmission and image quality.

29.2 Features

- 1920x1080p@30fps + 640x480@30fps, BP/MP
- Input: Semi-Planar YCbCr 4:2:0
- Output: NALU(Network Abstract Layer Uint) in byte stream format
- CBR/VBR mode
- Up to 8 ROI
- Up to 16 OSD coding areas
- Supports software and linked modes
- Dynamically configurable max/min quantization parameters
- Dynamically configurable I/P-frame target bit
- Dynamically configurable I-frame distance

29.3 Functional Description

29.3.1 Software Mode and Linked Mode

Software Mode: The hardware interacts with the software in the unit of frame. The software sets that the hardware compresses one frame only after one frame is started, and a frame interrupt is returned after compression is completed. The input frame memory shall contain at least one frame.

Linked Mode: The software sets the <CFG_S_ENC_SEQ_EN> or <CFG_ENC_SEQ_EN> bit in H264_ENCODER_CTRL to enable sequence encoding. The hardware automatically detects the state of the input frame and compresses it. Until software pulls down Sequence Enable, the hardware stops compression (ending at a complete frame) and the sequence interrupt is returned. When each frame in the sequence is finished, a frame interrupt is returned.

29.3.2 CBR/VBR Mode

If <NUM_IMB_BITS> or <S_NUM_IMB_BITS> in CORE_REG23 is set to 0, the stream is in VBR Mode. If it is not 0, it is in CBR Mode. In VBR Mode, I/P-frame fixed quantization parameters (CORE_REG3/CORE_REG5) shall be set. It is not recommended to switch modes when hardware is working.

29.3.3 Dual-Stream

The frame enable, frame interrupt, sequence enable, and sequence interrupt of the two streams are configured separately. Essentially, the frame rate of two streams shall be the same, but the resolution and other compression parameters can be different.

29.3.4 Region of Interest (ROI)

A single stream supports up to 8 ROI areas, and each area has its own enabling and start/end macroblock position settings. It is necessary to set the <CFG_ROI_UPD> bit in H264_ROI_MODE or the <CFG_S_ROI_UPD> bit in H264_S_ROI_MODE to “1”, to make the new settings take effect. The hardware synchronizes ROI settings for each frame.

29.3.5 OSD Coding Area

The hardware supports up to 16 OSD areas, and H264 OSD EN decides the OSD area of each stream as configured in the software. The OSD area is represented by the start/end macroblock position.

29.3.6 Dynamically Configurable Max/Min Quantization Parameters

To provide a better control stream, after the software sets CORE_REG31, it is necessary to set H264_ENCODER_CTRL (the <CFG_QR_UPD> and <CFG_S_QR_UPD> bits set two streams respectively) to make the new setting value take effect. The hardware will synchronize the new setting value in the unit of GOP to adjust the quantization parameters dynamically.

29.3.7 Dynamically Configurable I/P-Frame Target Bit

The software can set CORE_REG23/CORE_REG24 to adjust the target bit of I/P-frame. After CORE_REG23/CORE_REG24 is set, it is necessary to set H264_ENCODER_CTRL (the <CFG_QR_UPD> and <CFG_S_QR_UPD> bits set two streams respectively) to make the new setting value take effect. The hardware will synchronize the new setting value in the unit of GOP (CBR Mode).

29.3.8 Dynamically Configurable I-Frame Distance

After the software sets CORE_REG8, it is necessary to set H264_ENCODER_CTRL (the <CFG_QR_UPD> and <CFG_S_QR_UPD> bits set two streams respectively) to make the new setting value take effect. The hardware will synchronize the new setting value in the unit of GOP (CBR/VBR available).

29.3.9 Video Sequence Interrupt

In Linked Mode, when software pulls down Sequence Enable, the hardware generates sequence interrupt after processing the current frame (<S_SEQ_DONE_INT> or <SEQ_DONE_INT> bit in VDO_INT), and this interrupt requires the software to set the interrupt clear (<S_SEQ_DONE_INT_CLR> or <SEQ_DONE_INT_CLR> bit in VDO_INT_CLR). This interrupt can be ignored by masking (<S_SEQ_DONE_INT_MASK> or <SEQ_DONE_INT_MASK> bit in VDO_INT_MASK).

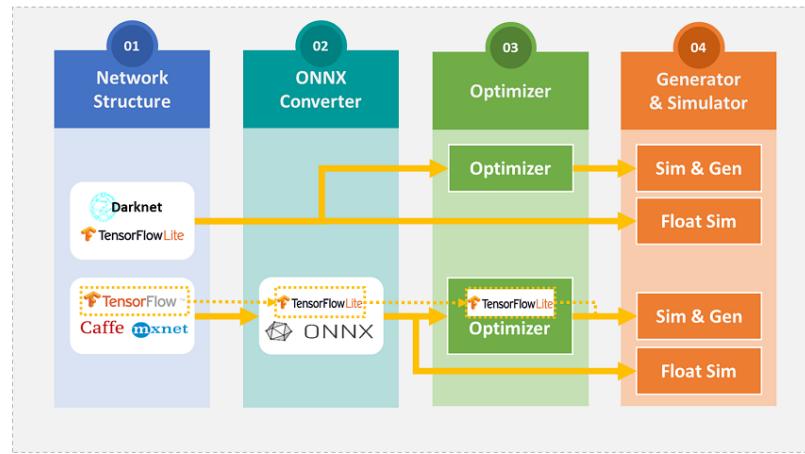
29.3.10 Frame Interrupt

In Software Mode and Linked Mode, the frame interrupt (<S_FRM_DONE_INT> or <FRM_DONE_INT> in VDO_INT) will be generated as soon as the hardware compresses one frame. This interrupt requires the software to set the interrupt clear (<S_FRM_DONE_INT_CLR> or <FRM_DONE_INT_CLR> bit in VDO_INT_CLR). This interrupt can be ignored by masking (<S_FRM_DONE_INT_MASK> or <FRM_DONE_INT_MASK> bit in VDO_INT_MASK).

29.3.11 Input Cache Overflow Alert

If the video compression speed is much lower than the camera pixel, buffer overflow will occur at output. The software can detect that through the status register VDO_SRC_R_DBG (<SRC_WR_OV_RD> bit) or VDO_S_SRC_R_DBG (<S_SRC_WR_OV_RD> bit).

30.1 GUI Flow chart




30.2 Network Structure

To display model structure via Netron on GUI, you have to choose a platform and a config file that you want to display.

Platform:

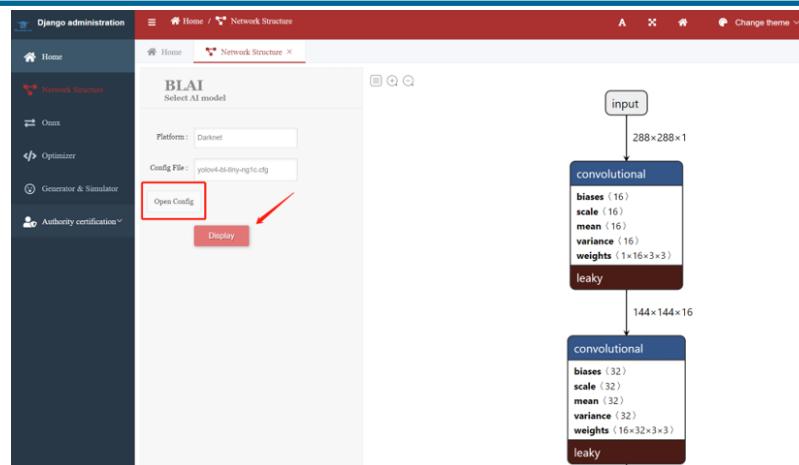Darknet, Tensorflow, Caffe, Mxnet, ONNX




30.3 ONNX Converter

To convert your platform into ONNX, you have to choose a platform and name the ONNX file.


Platform:

Tensorflow, Caffe, Mxnet

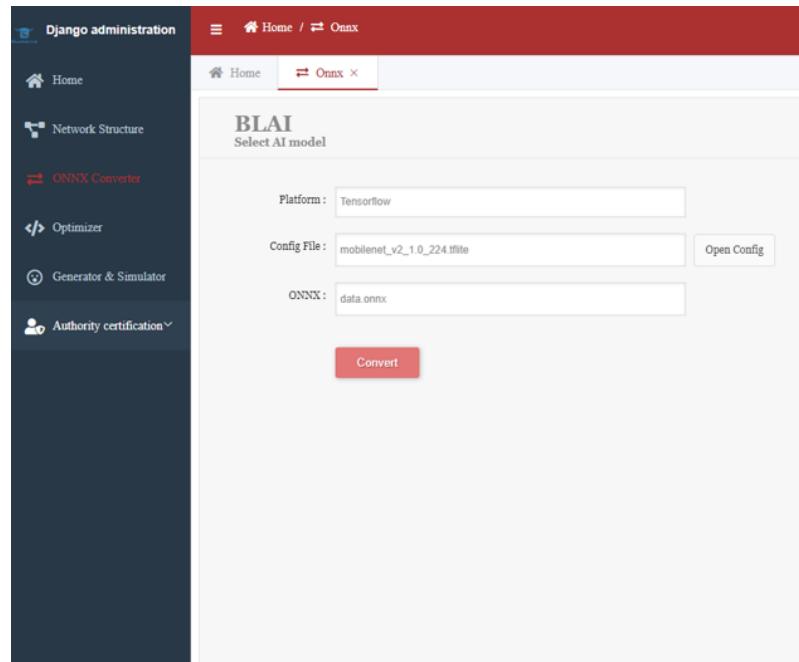(DarkNet, Tensorflow Lite is supported directly.)



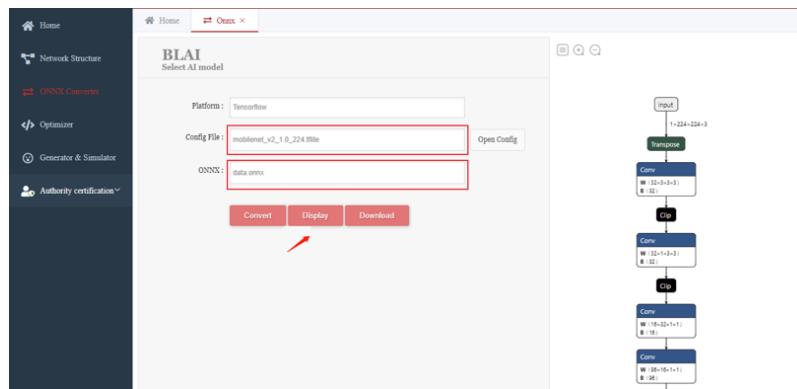After you press “convert” on ONNX Converter, the screen will show two more buttons which you can choose to “display” it on GUI or “download” it.



30.4 Optimizer

The optimizer section allows you to quantize float to fixed points.

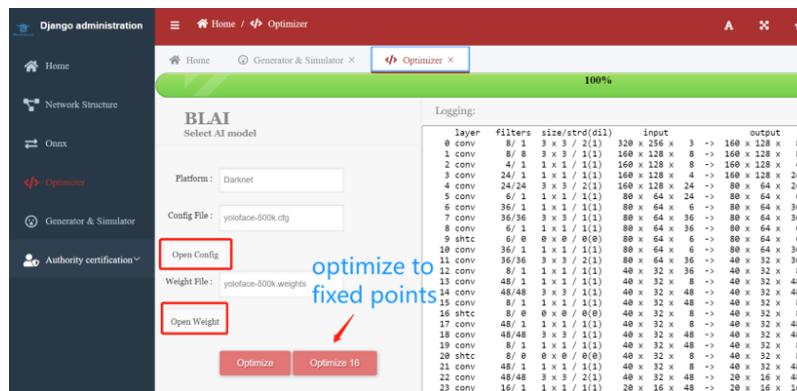
“Optimize” : spend more time, high accuracy

“Fast Optimize” : spend less time, more accuracy loss

Platform:

Darknet, Tensorflow, ONNX

(BLAI NPU also support optimizer format on Tensorflow Lite)



30.5 Generator & Simulator

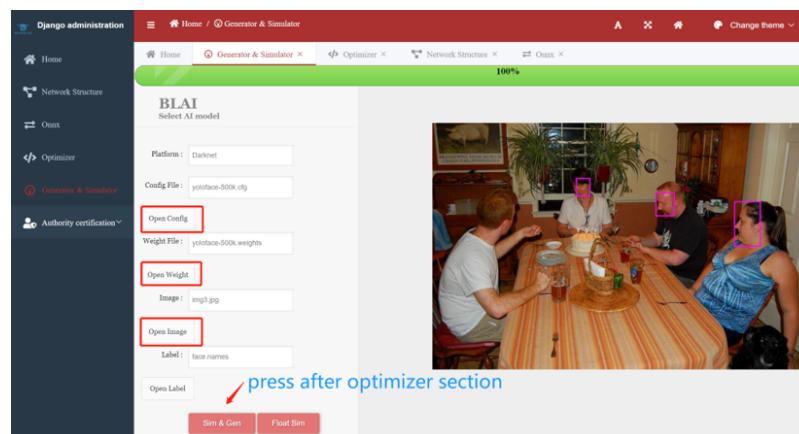
“**Sim&Gen**” will predict the image with 8 bits quantized weights after you have done the Optimizer section, and generate BLAI NPU instruction

“**Float Sim**” will predict the image with 32 bits unquantized weights.

Platform:

Darknet, Tensorflow, ONNX

(BLAI NPU also support optimizer format on Tensorflow Lite)



31.1 Overview

The Neural Processing Unit (NPU), also called AI accelerator, is an electronic circuit dedicated to deep learning algorithms. It can implement all the control and arithmetic logic necessary to execute machine learning algorithms, usually with a separate data memory and special instruction set architecture. NPU aims to provide higher efficiency and performance for deep learning algorithms than the general central processing unit (CPU). NPU uses a large number of computing modules to utilize high data-level parallelism, a relatively large buffer/memory to apply the data reuse patterns, and a finite data width operator for deep learning fault tolerance.

31.2 Features

- AI computing power: strong:0.1 TOPS
- Supports 8-bit operation
- Compatible with TensorFlowlite/ONNX/Caffe/Mxnet/Darknet/Pytorch model, and multiple frameworks
- Provide PC-side easy-to-use development tools, including model conversion, model quantification, performance prediction, and accuracy verification
- Supports single-layer instruction mode and multi-layer instruction mode
- Supports the maximum feature graph $4096 \times 4096 \times 4096$ (width \times height \times depth)

31.3 Feature List

Type	Operators	Applicable Subset Spec.	Processor
Convolution	Conv	1x1 up to 7x7	NPU
	Depthwise Conv	1x1 up to 7x7	NPU
	Pad	same	NPU
	Deconvolution	use Upsample + Conv	NPU

Type	Operators	Applicable Subset Spec.	Processor
Pooling	MaxPool(2x2)	Stride 2	NPU
	MaxPool(3x3)	3x3	NPU
	AveragePool	Stride 1, 2	DSP
	GlobalAveragePool		DSP
	GlobalMaxPool		DSP
Activation	Relu		NPU
	LeakyRelu		NPU
	Relu-n	$n > 0$ (Relu6)	NPU
	Mish	Look up table	NPU
	ELU	Look up table	NPU
	PReLU		DSP
	Sigmoid		DSP
Other processing	BatchNormalization		DSP
	Add (shortcut)		NPU
	Concat (route)		NPU
	Fully Connected		NPU
	Mul		NPU
	Slice		DSP

31.4 API Reference

```
void gen_npu_inst_layer(npu_layer* l, bool use_tflite, bool unsgn_input, bool img_in)
```

```
/**
 * function      Generate NPU instructions
 * @param[in]    l: NPU layer data structure indicators
 * @param[in]    use_tflite: whether to use tflite data format
 * @param[in]    unsgn_input: whether the input data is uint8
 * @param[in]    img_in: whether the input data is YUV400
 * @return       Null
 **/
```

```
bool check_BLAI_NPU_RUN(int type, int size, int stride, int dilation)
```

```
/**
 * function      Confirm whether the layer is eligible for NPU acceleration
 * @param[in]    type: The layer type (enum LAYER_TYPE)
 * @param[in]    size: convolution kernel size
```

(continues on next page)

(continued from previous page)

```
* @param[in]    stride: step size
* @param[in]    dilation: Atrous convolution kernel size
* @return       true: NPU acceleration conditions are met, false: NPU acceleration conditions are not met
**/
```

```
bool BLAI_MEM_alloc(npu_layer l, PSRAM_ctrl *ctrl)
```

```
/*
* function      Automatically generate NPU related memory configuration
* @param[in]    l: NPU layer data structure indicators
* @param[in]    ctrl: memory configuration parameter structure
* @return       true: memory configuration succeeded, false: memory configuration failed
**/
```

```
void fetch_BLAI_data_general(npu_layer l, PSRAM_ctrl ctrl, bool use_tflite, bool img_in)
```

```
/*
* function      Automatically generate NPU instructions (the maximum number of input layers is 2)
* @param[in]    l: NPU layer data structure indicators
* @param[in]    ctrl: memory configuration parameter structure
* @param[in]    use_tflite: whether to use tflite data format
* @param[in]    img_in: whether the input data is YUV400
* @return       null
**/
```

```
void fetch_BLAI_data_route(npu_layer l, PSRAM_ctrl ctrl, bool use_tflite, bool img_in)
```

```
/*
* function      For ROUTE layers with more than two input layers, NPU commands are automatically generated
* @param[in]    l: NPU layer data structure indicators
* @param[in]    ctrl: memory configuration parameter structure
* @param[in]    use_tflite: whether to use tflite data format
* @param[in]    img_in: whether the input data is YUV400
* @return       null
**/
```

```
bool BLAI_encode(npu_layer l, PSRAM_ctrl ctrl, int use_tflite, bool img_in)
```

```
/*
* function      Automatically generate NPU instructions, NPU-related memory configuration
* @param[in]    l: NPU layer data structure indicators
* @param[in]    ctrl: memory configuration parameter structure
* @param[in]    use_tflite: whether to use tflite data format
**/
```

(continues on next page)

(continued from previous page)

```
* @param[in] img_in: whether the input data is YUV400
* @return true: NPU acceleration conditions are met and memory configuration is successful, false: NPU
acceleration conditions are not met or memory configuration fails
**/
```

```
void Load_NPU_weights(npu_layer l, int8_t* WEI_buf, int* BIAS_buf, bool use_tflite)
```

```
/***
* function The convolution parameters of this layer are stored in the NPU-specific parameter memory in
the way specified by the NPU.
* @param[in] l: NPU layer data structure indicators
* @param[in] WEI_buf: NPU dedicated parameter memory
* @param[in] BIAS_buf: NPU dedicated parameter memory
* @param[in] use_tflite: whether to use tflite data format
* @return null
**/
```

```
void Store_tensor_data_to_NPU(npu_layer l, fixed_point_t* DATA_buf)
```

```
/***
* function Store the tensor data in the operation graph into the dedicated data memory of the NPU
* @param[in] l: NPU layer data structure indicators
* @param[in] DATA_buf: NPU dedicated data memory
* @return null
**/
```

```
void Load_NPU_data_to_tensor(npu_layer l, fixed_point_t* DATA_buf)
```

```
/***
* function Read tensor data from NPU dedicated data memory
* @param[in] l: NPU layer data structure indicators
* @param[in] DATA_buf: NPU dedicated data memory
* @return null
**/
```

```
void forward_NPU(npu_layer l, int8_t* DATA_buf, bool use_tflite)
```

```
/***
* function Use the command to run the NPU (you need to use gen_npu_inst_layer to generate the command)
first
* @param[in] l: NPU layer data structure indicators
* @param[in] DATA_buf: NPU dedicated data memory
* @param[in] use_tflite: whether to use tflite data format
**/
```

(continues on next page)

(continued from previous page)

```
* @return      null  
**/
```

31.5 Data Structure Reference

npu_layer data structure:

```
/** NPU layer information of dynamic fixed point format(CMSIS/NMSIS) */  
  
struct npu_layer {  
  
    /////////////////////////////////  
    //// Begin of user define region ////  
    /////////////////////////////////  
  
    /** operation type (enum LAYER_TYPE)*/  
    uint8_t type;  
  
    /** activation type (enum ACTIVATION)*/  
    uint8_t activation;  
  
    /** layer width */  
    uint16_t w;  
  
    /** layer height */  
    uint16_t h;  
  
    /** layer channel (1) */  
    uint16_t c;  
  
    /** extra layer channel (2-8) */  
    uint16_t cn[7];  
  
    /** layer output width */  
    uint16_t out_w;  
  
    /** layer output height */  
    uint16_t out_h;  
  
    /** layer output channel */  
    uint16_t out_c;
```

(continues on next page)

(continued from previous page)

```
/** number of input layers*/
uint8_t input_num;

/** CONV kernel size */
uint8_t size;

/** CONV groups size */
uint16_t groups;

/** CONV dilation size */
uint8_t dilation;

/** stride size */
uint8_t stride;

/** input tensor type*/
uint8_t input_type;

/** True: combined layer need to keep output data */
bool mid_out;

/** True: input image is 1-channel */
bool img_in;

/** dynamic fixed point format(CMSIS/NMSIS) for input data */
int8_t fdata;

/** dynamic fixed point format(CMSIS/NMSIS) for weight */
int8_t fweight;

/** dynamic fixed point format(CMSIS/NMSIS) for bias */
int8_t fbias;

/** dynamic fixed point format(CMSIS/NMSIS) for output data */
int8_t fout;

/** dynamic fixed point format(CMSIS/NMSIS) for route input data (1) */
int8_t froute1;

/** dynamic fixed point format(CMSIS/NMSIS) for route input data (2) */
int8_t froute2;

/** dynamic fixed point format(CMSIS/NMSIS) for route input data (3-8) */
```

(continues on next page)

(continued from previous page)

```
int8_t frouten[6];  
  
/** Tensorflow-Lite input offset (1) */  
uint8_t tf_input1_offset;  
  
/** Tensorflow-Lite input offset (2) */  
uint8_t tf_input2_offset;  
  
/** Tensorflow-Lite input offset (3-8) */  
uint8_t tf_input_offset_extra[6];  
  
/** Tensorflow-Lite output offset */  
uint8_t tf_output_offset;  
  
/** Tensorflow-Lite input shift (1) */  
int8_t tf_input1_shift;  
  
/** Tensorflow-Lite input shift (2) */  
int8_t tf_input2_shift;  
  
/** Tensorflow-Lite input shift (3-8) */  
int8_t tf_input_shift_extra[6];  
  
/** Tensorflow-Lite output shift */  
int8_t tf_output_shift;  
  
/** Tensorflow-Lite quantized_activation_min */  
int16_t quantized_activation_min;  
  
/** Tensorflow-Lite quantized_activation_max */  
int16_t quantized_activation_max;  
  
/** Tensorflow-Lite input multiplier (1) */  
int tf_input1_multiplier;  
  
/** Tensorflow-Lite input multiplier (2) */  
int tf_input2_multiplier;  
  
/** Tensorflow-Lite input multiplier (3-8) */  
int tf_input_multiplier_extra[6];  
  
/** Tensorflow-Lite output multiplier */  
int tf_output_multiplier;
```

(continues on next page)

(continued from previous page)

```
/** Tensorflow-Lite route input multiplier */
int tf_route_input_multiplier;

/** Tensorflow-Lite route input multiplier */
int tf_route_input_shift;

/** Tensorflow-Lite left shift */
int8_t tf_left_shift;

/** pointer of input data buffers */
int8_t* input_i8[8];

/** pointer of output data buffer */
int8_t* output_i8;

/** pointer of combined layer output data buffer */
int8_t* mid_output_i8;

/** pointer of weight buffer */
int* weights;

/** pointer of bias buffer */
int* biases;

///////////////////////////////
////// End of user define region /////
///////////////////////////////

/** pointer of NPU instruction buffer */
uint8_t* NPU_inst;

/** flag of NPU processor */
bool NPU_on;

/** memory patch size*/
uint32_t DRAM_patch_size;

/** memory patch location for input data */
uint16_t DRAM_in[8];

/** memory patch location for output data */
uint16_t DRAM_out[8];
```

(continues on next page)

(continued from previous page)

```
/** memory patch location for mid output data */
uint16_t DRAM_mid_out;

/** memory patch location for weight data */
uint16_t DRAM_weight;

/** size of weight data */
int DRAM_nweight;

/** memory patch location for bias data */
uint16_t DRAM_bias;

/** size of bias data */
int DRAM_nbias;

/** uint8_t input data */
bool unsgn_input;

/** number of instruction */
uint8_t inst_cnt;
};
```

32.1 Overview

The Interprocessor Communication (IPC) is a communication mechanism between multi-core processors. BL808 has three heterogeneous cores, and any two cores can communicate with each other through IPC.

32.2 Features

- Each core has an independent 32-bit IPC channel
- Any two cores can communicate with each other

32.3 Functional Description

32.3.1 Basic Principle

Each core has six IPC registers: IPCx_TRI, IPCx_STS, IPCx_ACK, IPCx_IEN, IPCx_IDIS and IPCx_ISTS. The length of each register is 32-bit, and each bit corresponds to one channel of IPC. The cores M0, LP and D0 correspond to IPC0, IPC1 and IPC2 respectively. When one core needs to issue a notification to another, it only needs to write “1” to the corresponding channel of IPCx_TRI of the receiving core. At this time, the corresponding channel of IPCx_STS of the receiving core is set to “1”. If the interrupt of the corresponding IPC channel of the receiving core is also enabled, an interrupt will be received, indicating that the receiving core receives the notification from the other core.

32.3.2 Operating Process

For example, the core x sends a notification to the core Y, and the channel z is used. The operation flow is as follows:

- The core y enables the interrupt of channel z. That is, the core y performs operation $\text{IPCy_IEN} = 1 \ll z$
- The core x writes 1 to the bit z in the register IPCy_TRI. That is, core x performs operation $\text{IPCy_TRI} = 1 \ll z$
- Upon receiving the interrupt, the core y responds to the core x. That is, the core y performs operation $\text{IPCy_ACK} = 1 \ll z$

- The core y performs the notified application layer related operation

The operation flow is as follows:

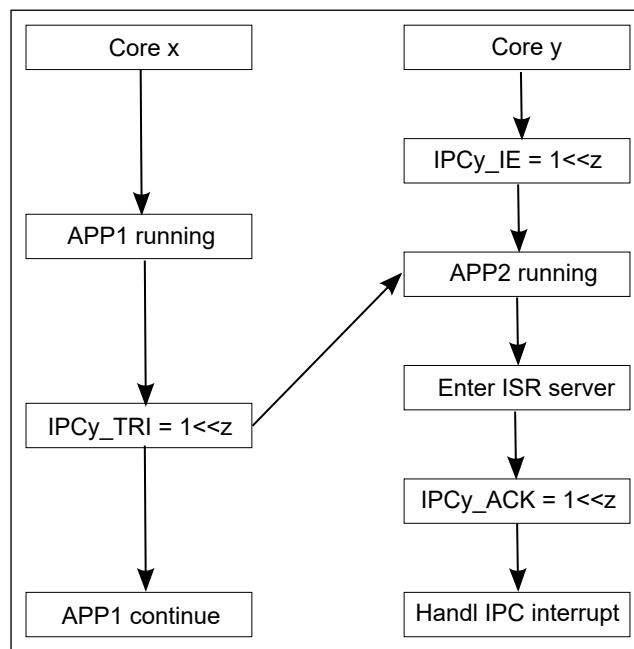


Fig. 32.1: IPC Flow

33.1 Overview

Low power consumption is an important indicator of IoT applications. The chip's CPU supports the working mode, idle power saving mode, and sleep mode. You can select a proper mode according to the current application scenario to reduce the chip's power consumption and prolong the battery life.

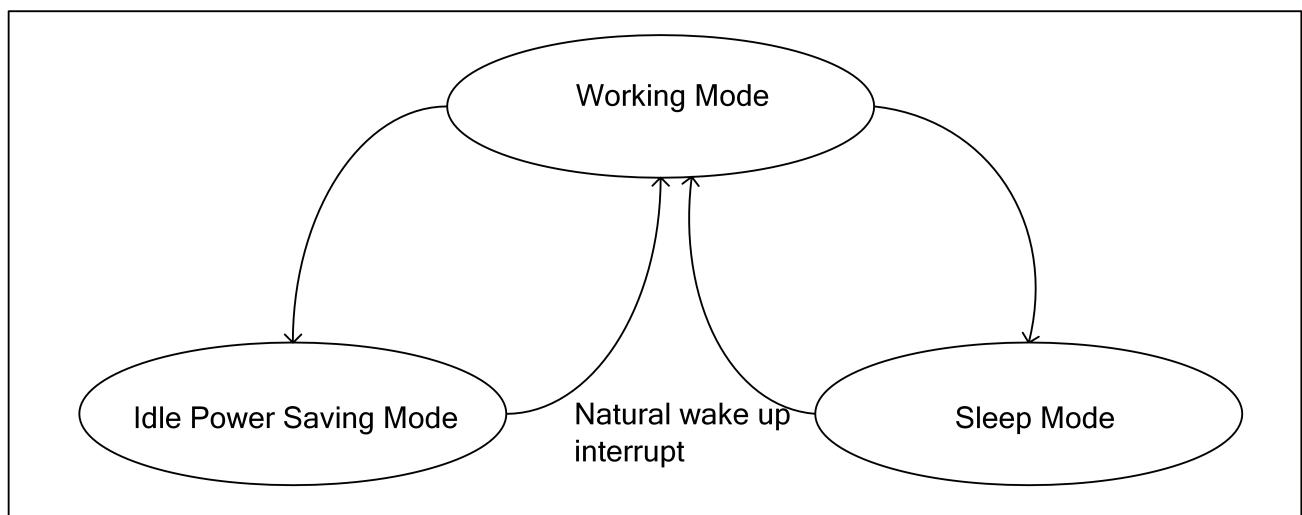


Fig. 33.1: Low power modes

33.2 Features

- Clock control: clock control of peripherals in GLB, small-scale power saving, and fast response speed
- Sleep control (PDS): 4 levels (PDS 1/2/3/7), large-scale power saving, moderate response speed
- Deep sleep control (HBN): 4 levels (HBN 0/1/2/3), global power saving, and long response time

33.3 Functional Description

33.3.1 Power Domain

There are 7 power domains in the BL808 chip, with main functions as follows:

- PD_AON_RTC
 - RC32K/XTAL32K control register is reserved
 - RTC Counter clock source selection function
 - RTC can be used for wake-up or LED flashing
- PD_AON
 - HBN state machine controls power supply/isolation/reset/clock
 - Maintain internal voltage output selection
 - AON_PIN (GPIO9/10/11/12/13/40/41) pin wake-up control
 - HBN_OUT0_PIR (Acomp0/Acomp1/bor/pir) wake-up mask, enable register, and interrupt status register
 - BOR (Brown Out Reset) function
- PD_AON_HBNCore
 - Partial power control register
 - 4 KB HBN_RAM, which is used to save program data before the PDS/HBN mode is enabled, so that data will not disappear in these modes
 - PIR digital control: PIR is a Passive Infra-Red (PIR) sensor, a peripheral in HBN area, which can be used as HBN wake-up source
 - AON_PIN control and IO retention function in HBN/PDS mode
 - Acomp0 and Acomp1 configuration, GPADC clock source selection and configuration
- PD_CORE
 - HBN state machine controls power supply/isolation/reset/clock
 - Reserved 64 KB RAM
 - WIFI/BLE timer control
 - 160KB WRAM/EM
- PD_CORE_MISC_DIG
 - M0 CPU and its peripherals

- Chip's global register
- PD_USB
 - USB digital controller
- PD_MM
 - D0 CPU and its peripherals, PSRAM
 - Codec
 - VRAM 32~96KB
 - BLAI

Each power domain is controlled by 9 different power modes as shown below:

Table 33.1: Power mode

NO.	Scenario	Power Domain						
		PD_AON_-RTC	PD_AON	PD_AON_HBN-CORE	PD_-CORE	PD_CORE_MISC_-DIG	PD_USB	PD_MM
1	Normal	ON	ON	ON	ON	ON	ON	ON
2	PDS1	ON	ON	ON	ON	ON	ON	OFF
3	PDS2	ON	ON	ON	ON	ON	OFF	ON
4	PDS3	ON	ON	ON	ON	ON	OFF	OFF
5	PDS7	ON	ON	ON	ON	OFF	OFF	OFF
6	HBN0	ON	ON	ON	OFF	OFF	OFF	OFF
7	HBN1	ON	ON	OFF	OFF	OFF	OFF	OFF
8	HBN2	ON	OFF	OFF	OFF	OFF	OFF	OFF
9	HBN3	OFF	OFF	OFF	OFF	OFF	OFF	OFF

Note:

- To enter the HBN2 mode, the chip needs to enter the HBN1 mode first, and then turn VDDIO2 off
- In the HBN2 mode, only RTC_Timer is kept, but no wake-up is provided. To quit the HBN2 mode, you only need to resupply power to VDDIO2.
- VDD33_RTC/VDDIO2(AON) share pin encapsulation (QFN88 Type2, QFN68), without HBN2 mode
- The pu_chip must be powered off before entering the HBN3 mode. In this mode, most devices will be powered off, but you can set whether to power RTC off through rtc_pu_chip_sel.

If `rtc_pu_chip_sel` is 1, the RTC power supply is always maintained. If that is 0, it is controlled by `pu_chip`. The value of `rtc_pu_chip_sel` is determined at encapsulation.

33.3.2 Wake-up Source

The chip supports multiple wake-up sources, which can wake up the chip from different power modes.

PDS 1/2/3 can be wake up in the following ways:

- HBN wake-up source
- All GPIO wake-up
- Infrared receiver
- BLE wake-up event
- WIFI wake-up event
- PDS timer

The wake-up sources of other power modes are shown as follows:

Table 33.2: Wakeup source

Power Mode	Wake-up Source
PDS7	PDS timer/PSD_PIN/RTC/AON_PIN/BOR/Pir/Acomp0/Acomp1
HBN0	RTC/AON_PIN/BOR/Pir/Acomp0/Acomp1
HBN1	RTC/AON_PIN
HBN2	Resupply power to VDDIO2
HBN3	Resupply power to pu_chip

33.3.3 Power Modes

Operating mode

The chip provides independent clock control between CPU and peripherals. The GLB and clock sections detail the clock control of each module. The software can perform clock control over CPUs or peripherals that are not in use according to the current application scenario. The clock control provides real-time response, so there is no need to worry about the response time in this working mode.

Power-down sleep mode

The power-down mode consumes less power than the working mode. In the PDS mode, the clocks other than RTC will be controlled and switched to the internal low-speed clocks, and the external crystal oscillator and PLL will be turned off to save more power, so there will be a time delay when entering and exiting this low-power mode. After the

power-down sleep mode is enabled, the data in the OCRAM area can automatically switch to the “retention” state and remain, and automatically exit this state after wake-up.

1. Enter Idle Power Saving Mode

The software can make this module enter the power-down mode through PDS configuration, waiting for processing. After entering the wait for interrupt (WFI) mode, PDS will trigger the clock control module to perform the gate clock operation, and notify the analog circuit to turn off the PLL and external crystal oscillator

2. Exit Idle Power Saving Mode

There are two ways to exit the idle power saving mode. One is that a specific interrupt or event stops the idle state. The other is that the time in PDS_TIM set by the software is met. Both will trigger PDS to exit the power-down mode. Considering that it takes about 1 ms to turn on the crystal oscillator, PDS allows software to turn on the crystal oscillator in advance, to wake up PDS faster. When PDS is ready to wake up, it will notify CPU to exit the WFI mode through interrupt.

HBN

In the sleep mode, most of the chip logic is powered off (Vcore) while the AON power is kept ON, and the internal circuit will not wake up until an external event is received. This mode can achieve ultimate power saving, but it takes the longest response time compared with the first two modes, so it suits the case where the chip does not need to work for a long time, to prolong the battery life. As most circuits will be powered off in this mode, the corresponding register values and memory data will disappear. Therefore, there is a 4 KB HBN_RAM reserved in HBN that will not be powered off in the HBN0 mode. The data or state that the software needs to save can be copied to this memory before the chip enters the sleep mode. When recovering from the sleep mode, the chip can access data directly from RAM, which can usually be used as a record of state or a quick data recovery.

33.3.4 IO Retention

IO retention includes AON_IO retention and PDS_IO retention. In the PDS 0/1/2/3 mode, for the chip’s MISC domain is still powered, GPIO can be controlled by the glb register. After the glb register is powered off, AON_CTRL and PDS can control the IE/PD/PU of AON_IO and PDS_IO.

AON_IO

AON_IO refers to GPIO9/10/11/12/13/14/15/40/41. GPIO40/41 is used as the input and output of XTAL32K by default (it can only be used as AON_IO if it is changed to other pinmux purposes). When the IE/OE of GPIO40/41 is all set to 0, GPIO40/41 multiplexes the analog function XTAL32K_INXTAL32K_OUT. Contrarily, when that is not all set to 0, GPIO40/41 is used as a normal IO function. For example, when GPIO40 is used as a general IO function, reg_en_aon_ctrl_gpio[7] and reg_aon_pad_oe[7] are set to 0, and reg_aon_pad_ie_smt[7] is set to 1.

1. Hardware’s IO retention: HBN can control the IE/PD/PU/OE/O of AON_IO, thus achieving IO retention. When reg_en_aon_ctrl_gpio is 1, reg_aon_gpio_pu controls the pull-up enable of AON_IO and reg_aon_gpio_pd controls the pull-down enable. The reg_aon_gpio_oe controls OE, and aon_led_out[0], [1], and [2] control AON PAD O, respectively. Whereas, IE/SMT can be controlled by reg_aon_gpio_ie_smt no matter the value of reg_en_-

aon_ctrl_gpio is 0 or 1. For example, when reg_en_aon_ctrl_gpio is 0, even if reg_aon_pad_pu is 1, it cannot enable pull-up. But setting reg_aon_gpio_ie_smt to 1 can enable the IE function.

2. Software IO retention: After reg_aon_gpio_iso_mode is set to 1, AON PAD can retain OEO, but PUPD cannot be retained when entering the HBN mode. After HBN wake-up, the AON PAD state will still be retained, and you need to clear reg_aon_gpio_iso_mode before exiting IO retention state. For example, GPIO40 keeps high level in the HBN mode, so you need to configure it as a normal IO function first, then configure it to output high level through the glb register, and finally set reg_aon_gpio_iso_mode to 1 before entering the HBN mode.

PDS_IO

PDS_IO refers to other 32 GPIOs except AON_IO, and they are divided into 3 groups by the physical location of PAD:

- Left: GPIO0–8
- Right: GPIO16–23
- Top: GPIO24–39

1. Hardware IO retention: The IE/PD/PU of PDS_IO can be controlled by the register pds_gpio_i_set, and the same group of GPIOs must hold the same level. For example, if GPIO0 is configured to pull-up, GPIO8 is also configured to pull-up.
2. Software IO retention: When cr_pds_gpio_iso_mode is 1, if cr_pds_gpio_kee_en[0], [1], and [2] is 1 in the PDS7 mode, GPIO0–8, GPIO16–23, and GPIO24–38 enter the GPIO retention state respectively. After PDS7 is woke up, the PDS_IO state will still be retained, so you need to clear cr_pds_gpio_iso_mode to 0 before existing IO retention. The advantage of this IO retention is that the same group of GPIOs can hold different levels.

34.1 Overview

34.1.1 AES

Advanced Encryption Standard (AES) is the most common type of symmetric encryption algorithm. Also known as Rijndael encryption algorithm in cryptography, it is a block encryption standard adopted by the U.S. federal government.

34.1.2 MD5

Message Digest Algorithm 5 (MD5), a widely used cryptographic hash function, can generate a 128-bit (16-byte) hash value, to ensure the integrity and consistency of information transmission.

34.1.3 SHA

SHA256 is a variant of Secure Hash Algorithm 2 (SHA2). SHA2, the successor of SHA1, is a cryptographic hash function algorithm standard designed by the United States National Security Agency. SHA2 has six different variants: SHA224, SHA256, SHA384, SHA512, SHA512/224, and SHA512/256. SHA-512/224 means that the result takes the first 224 bits of SHA-512, and SHA-512/256 means that the result takes the first 256 bits of SHA-512.

34.1.4 CRC

Cyclic Redundancy Check (CRC) is a channel coding technique that generates short fixed-digit check codes based on data including network packets or computer files. It is mainly used to detect or check possible errors after data transfer or storage. It detects errors based on the principle of division and remainder.

34.1.5 GMAC

GMAC is to use Galois Field (GF, finite field) multiplication to calculate the MAC value of a message.

34.2 Features

- Encryption and decryption of aes128, aes192, and aes256
- Crc16, crc32, md5, sha256, and sha512
- Trng
- Gmac

34.3 Principle

AES means that the same key is used for encryption and decryption, with encryption process as follows:

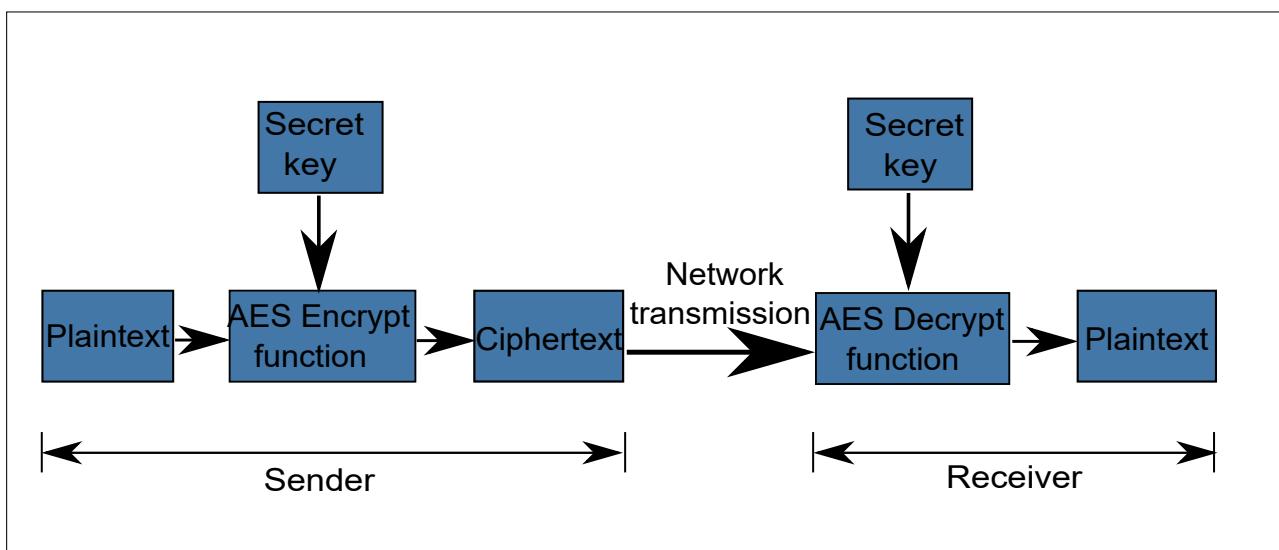


Fig. 34.1: AES Encryption Process

The following briefs the functions and significance of each part:

- Plaintext (P): unencrypted data.
- Key (K): The key used to encrypt plaintext. In symmetric encryption algorithm, encryption and decryption share one key. The key is generated by negotiation between the receiver and the sender, but it cannot be directly transmitted over network. Otherwise it will leak the key. Usually, the key is encrypted by an asymmetric encryption algorithm, and then transmitted to the other side over network, or the key is discussed face to face. The key must not be leaked. Otherwise the attacker will restore the ciphertext and steal confidential data.
- AES encryption function: Let this function be E, then $C = E(K, P)$, where P, K and C denote plaintext, key, and ciphertext, respectively. That is, if plaintext (P) and key (K) are input as the parameters of function, this function

will output ciphertext (C).

- Ciphertext (C): data processed by encryption function.
- AES decryption function: Let this function be D, then $P = D(K, C)$, where C, K, and P denote ciphertext, key, and plaintext, respectively. That is, if ciphertext (C) and key (K) are input as the parameters of function, this function will output plaintext (P).

34.3.1 Implementation of MD5

MD5 can be regarded as a block-based algorithm, as it requires that the length of data processed each time is 512 bits. However, the length of plaintext to be actually processed is not always an integer multiple of 512, so data padding is required. Assuming that the length of the original plaintext message is K, the padding of MD5 is further divided into 2 steps:

1. Append padding bits: 100... are padded after the K bits of the original plaintext message until $512-64 = 448$ bits. The padding rule is that only the first bit is 1, followed by all zeros.
2. Append length: The length of the original message is filled after the result of the first step, and the available storage length is 64 bits. The whole padding process is as follows:

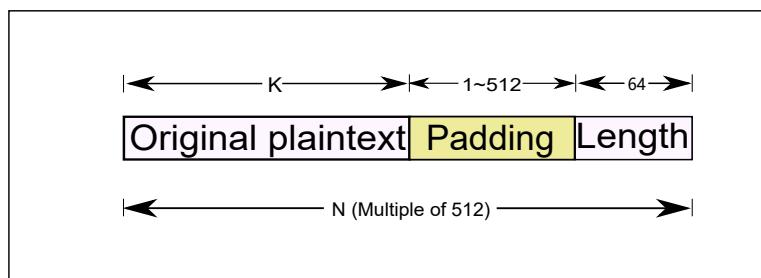


Fig. 34.2: MD5 Padding

Data to be used:

- Four constants: A = 0x67452301, B = 0x0EFCDAB89, C = 0x98BADCFC, D = 0x10325476;
- Four functions: F(X,Y,Z)=(X & Y) | ((~X) & Z); G(X,Y,Z)=(X & Z) | (Y & (~Z)); H(X,Y,Z)=X ^ Y ^ Z; I(X,Y,Z)=Y ^ (X | (~Z));

The message is divided into 512-bit groups for processing. Each group undergoes 4 rounds of transformation. The above 4 constants are used as the initial variables for calculation, to re-output 4 variables, based on which the next group is calculated. For the last group, the 4 variables are the final result, namely MD5 value.

34.3.2 Implementation of SHA256

It is implemented in a way similar to that of MD5. Its rule of data padding is the same as that of MD5. SHA256 uses 8 initial hash values and 64 hash constants.

The 8 initial hash values are as follows:

- $h_0 = 0x6a09e667$
- $h_1 = 0xbb67ae85$
- $h_2 = 0x3c6ef372$
- $h_3 = 0xa54ff53a$
- $h_4 = 0x510e527f$
- $h_5 = 0x9b05688c$
- $h_6 = 0x1f83d9ab$
- $h_7 = 0x5be0cd19$

These initial values are obtained by taking the first 32 bits from the decimal part of the square root of the first 8 prime numbers (2, 3, 5, 7, 11, 13, 17, and 19) in natural numbers.

The 64 constants are as follows:

- 428a2f98 71374491 b5c0fbef e9b5dba5
- 3956c25b 59f111f1 923f82a4 ab1c5ed5
- d807aa98 12835b01 243185be 550c7dc3
- 72be5d74 80deb1fe 9bdc06a7 c19bf174
- e49b69c1 efbe4786 0fc19dc6 240ca1cc
- 2de92c6f 4a7484aa 5cb0a9dc 76f988da
- 983e5152 a831c66d b00327c8 bf597fc7
- c6e00bf3 d5a79147 06ca6351 14292967
- 27b70a85 2e1b2138 4d2c6dfc 53380d13
- 650a7354 766a0abb 81c2c92e 92722c85
- a2bfe8a1 a81a664b c24b8b70 c76c51a3
- d192e819 d6990624 f40e3585 106aa070
- 19a4c116 1e376c08 2748774c 34b0bcb5

- 391c0cb3 4ed8aa4a 5b9cca4f 682e6ff3
- 748f82ee 78a5636f 84c87814 8cc70208
- 90beffa a4506ceb bef9a3f7 c67178f2

Similarly, these constants are obtained by taking the first 32 bits from the decimal part of the cube root of the first 64 prime numbers (2, 3, 5, 7, 11, 13, 17, 19, 23, 29, 31, 37, 41, 43, 47, 53, 59, 61, 67, 71, 73, 79, 83, 89, 97...) in natural numbers.

SHA256 hash function:

- $\text{Ch}(x,y,z) = (x \square y) \square (\neg x \square z)$
- $\text{Ma}(x,y,z) = (x \square y) \square (x \square z) \square (y \square z)$
- $\Sigma_0(x) = S^2(x) \square S^{13}(x) \square S^{22}(x)$
- $\Sigma_1(x) = S^6(x) \square S^{11}(x) \square S^{25}(x)$
- $\sigma_0(x) = S^7(x) \square S^{18}(x) \square R^3(x)$
- $\sigma_1(x) = S^{17}(x) \square S^{19}(x) \square R^{10}(x)$

Where:

- \square : bitwise “AND”
- \neg : bitwise “Padding”
- \square : bitwise “Exclusive OR”
- S^n : Circularly shift right by n bits
- R^n : Shift right by n bits

34.3.3 Principle of GMAC

Authentication is actually a redundant message generated against the message itself, that is, the message authentication code (MAC). MAC is a technique for authenticating the integrity of a message. In cryptography, MAC refers to a verification mechanism used by both communication entities and a tool to ensure the integrity of message data. MAC is a hash function with a key. But why does it need a key? The reason is that the message can be tampered with during transmission, so can the hash value. Therefore, to ensure a valid hash value, the hash value is protected by encryption, so that the receiver can judge the integrity of the whole message through the hash value upon reception, thus completing information transfer.

The MAC process is shown as follows:

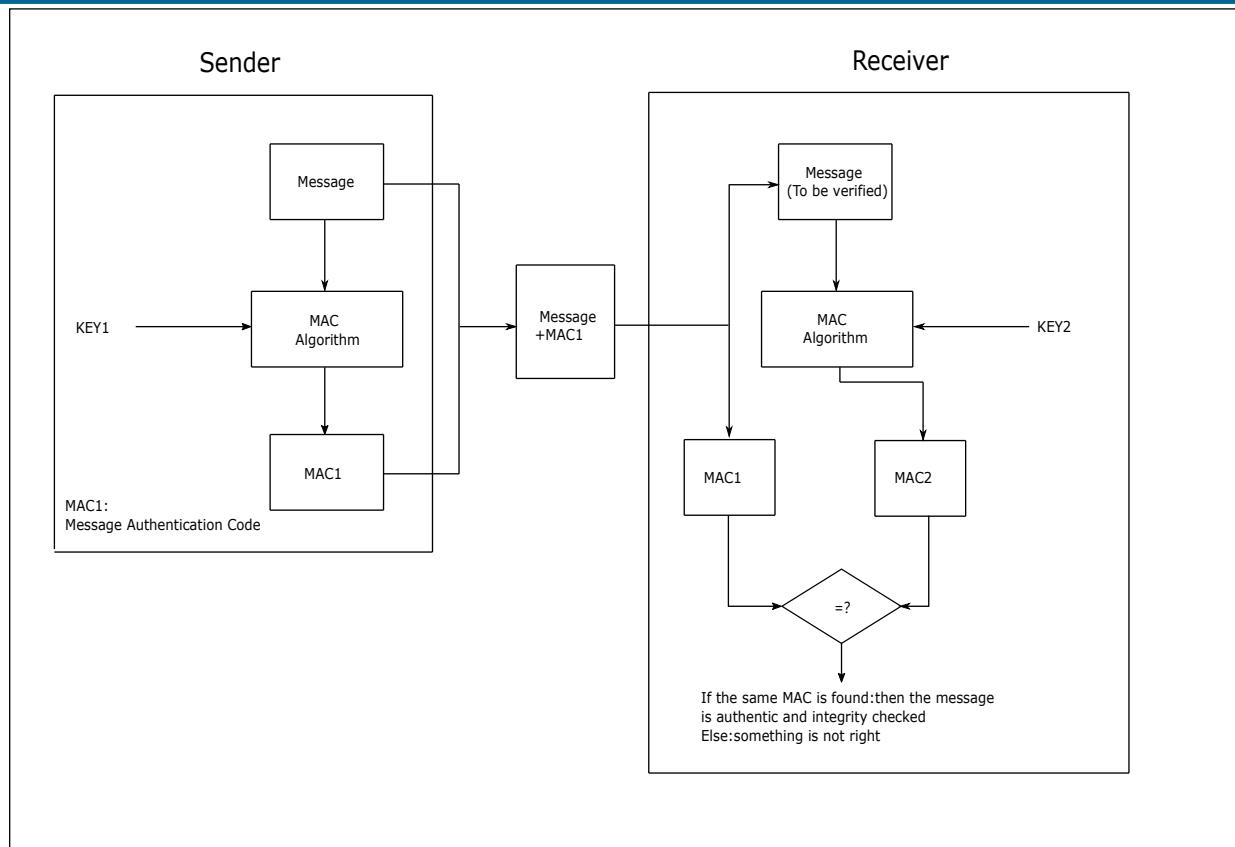


Fig. 34.3: MAC Flow Chart

1. The sender and the receiver share the key K in advance (keep KEY1 and KEY2 values in the above figure consistent).
2. The sender calculates the MAC value based on the message (KEY1 is used to calculate the MAC1 for the original message).
3. The sender sends the original message and MAC1 to the receiver.
4. The receiver calculates MAC2 using KEY2 based on the received original message .
5. The receiver compares the calculated MAC2 with the MAC1 received from the sender.
6. If the MAC is consistent, the receiver can judge that the message is indeed from the sender (authentication succeeded) and has not been tampered with or there is a transmission error. If not, the message is not from the sender (authentication failed).

Note: It is recommended that the sender and the receiver store the KEY in the hardware security module, and the MAC value also shall be calculated in that module, to ensure the security of KEY, for example, in the encrypted chip.

GMAC is to use Galois Field (GF, finite field) multiplication to calculate the MAC value of a message.

34.4 Functional Description

34.4.1 AES Accelerator

1. AES accelerator supports AES128/192/256 encryption and decryption.
 - Configure se_aes_0_mode and se_aes_0_dec_en in the register se_aes_0_ctrlL, as shown below:

amode	adec en	运算
0	0	AES-128 加密
1	0	AES-256 加密
2	0	AES-192 加密
0	1	AES-128 解密
1	1	AES-256 解密
2	1	AES-192 解密

Fig. 34.4: AES Operation Modes

Configure se_aes_0_block_mode in the register se_aes_0_ctrlL to select among different encryption modes including ECB, CTR, CBC, and XTS.

2. Key, plaintext, ciphertext, and initialization vector

- The register se_aes_0_msa stores the address of plaintext or ciphertext.
- The register se_aes_0_msa stores the address of ciphertext or plaintext.
- The register se_aes_0_iv_0~se_aes_0_iv_3 stores IV.
- The register se_aes_0_key_0~se_aes_0_key_7 stores the key.

3. Software and hardware encryption process

- Configure the register se_aes_0_endian, including se_aes_0_dout_endian, se_aes_0_din_endian, se_aes_0_key_endian, se_aes_0_iv_endian, and se_aes_0_twk_endian

Note: 0: littleendian 1: bigendian

- Configure se_aes_0_block_mode in the register se_aes_0_ctrlL
- Configure se_aes_0_mode in the register se_aes_0_ctrlL
- Configure se_aes_0_dec_en in the register se_aes_0_ctrlL
- Configure se_aes_0_dec_key_sel 0:new key 1:same key as last one in the register se_aes_0_ctrlL

- Configure se_aes_0_iv_sel 0:new iv 1:same iv as last one in the register se_aes_0_ctrlL
- Configure se_aes_0_en enable aes in the register se_aes_0_ctrlL
- Configure the register se_aes_0_iv_0~se_aes_0_iv_3 set IV.

Sequence of filling: MSB: se_aes_0_iv_0~se_aes_0_iv_3; LSB: se_aes_0_iv_3~se_aes_0_iv_0

- Configure the register se_aes_0_key_0~se_aes_0_key_7 set key.

Sequence of filling: MSB: se_aes_0_key_0~se_aes_0_key_7; LSB: se_aes_0_key_7~se_aes_0_key_0.

Bits for filling: first 4 bits for AES128; first 6 bits for AES196, and first 8 bits for AES256.

- Configure the register se_aes_0_msa set msa addr
- Configure the register se_aes_0_msa set mda addr
- Configure se_aes_0_msg_len set msg len in the register se_aes_0_ctrlL
- Configure se_aes_0_trig_1t Trigger AES Engine in the register se_aes_0_ctrlL
- The output result is stored in the address corresponding to the register se_aes_0_mda

34.4.2 SHA Accelerator

- SHA accelerator supports 7 standard operations:

- SHA-1、SHA-224、SHA-256、SHA-512、SHA-384、SHA-512/224、SHA-512/256, 同时还支持 MD5、CRC16、CRC32。

The se_sha_0_mode in the register se_sha_0_ctrl: 0:SHA-256 1:SHA-224 2:SHA-1 3:SHA-1 4:SHA-512 5:SHA-384 6:SHA-512/224 7:SHA-512/256

The se_sha_0_mode_ext in the register se_sha_0_ctrl: hash mode extention; 0:SHA 1:MD5 2:CRC-16 3:CRC-32

Configure se_sha_0_mode in the register se_sha_0_ctrl to select among different SHA operations, and configure se_sha_0_mode_ext in the register se_sha_0_ctrl to select among MD5, CRC16, and CRC32

- The se_sha_0_mode is valid when se_sha_0_mode_ext is 0.
- The se_sha_0_mode is invalid when se_sha_0_mode_ext is not 0.

- Plaintext and ciphertext

- The register se_sha_0_msa stores the plaintext address.
- The register se_sha_0_hash_l_0~se_sha_0_hash_l_7 stores the ciphertext.

Sequence: MSB: se_sha_0_hash_l_0~se_sha_0_hash_l_7; LSB: se_sha_0_hash_l_7~se_sha_0_hash_l_0

- Operation flow

- Configure se_sha_0_mode set SHA operation type in the register se_sha_0_ctrl
- Configure se_sha_0_en enable sha in the register se_sha_0_ctrl
- Configure se_sha_0_hash_sel 0:new hash 1:accumulate last hash in the register se_sha_0_ctrl
- Configure the register se_sha_0_msa set mda addr
- Configure se_sha_0_msg_len set msg len in the register se_sha_0_ctrl
- Configure se_sha_0_trig_1t Trigger SHA Engine in the register se_sha_0_ctrl
- **The output result is stored in se_sha_0_hash_l_0~se_sha_0_hash_l_7 MSB:se_sha_0_hash_l_0~se_sha_0_hash_l_7 LSB:se_sha_0_hash_l_7~se_sha_0_hash_l_0**

34.4.3 Random Number Generator (RNG)

1. The random numbers generated by the built-in true RNG can be used as the basis for encryption and other operations.
 - True random numbers: They are generated through physical phenomena, such as coin tossup, dicing, wheel rotation, noise from using electronic components, and nuclear fission. Such RNGs are called physical RNGs, and their weaknesses are high technical requirements.
 - Pseudo-random numbers: Truly random numbers (or random events) are randomly generated in a generation process according to the distribution probability shown in the experimental process, and the result is unpredictable and invisible. The random function in the computer is simulated according to a specified algorithm, and its result is deterministic and visible. We can think that the probability of this foreseeable result is 100%. Hence the “random number” generated by computer random function is not truly random, but pseudo-random.
2. Output
 - The register SE_TRNG_0_DOUT_0~SE_TRNG_0_DOUT_7 stores the output random number.
3. Usage process
 - Configure se_trng_0_en enable trng in the register se_trng_0_ctrl_0
 - Configure se_trng_0_trig_1t trigger trng engine in the register se_trng_0_ctrl_0
 - The output result is stored in se_trng_0_dout_0~se_trng_0_dout_7

34.4.4 GMAC(link Mode)

1. Definition of GMAC_link_Table Structure

- Word0:
 - [9]:se_gmac_0_int_clr_1t
 - [10]:se_gmac_0_int_set_1t
 - [31:16]:se_gmac_0_msg_len
- Word1:se_gmac_0_msa
- Word2、Word3、Word4、Word5: se_gmac_0_h
- Word6、Word7、Word8、Word9: se_gmac_0_tag

2. Usage process

- Configure se_gmac_0_x_endian, se_gmac_0_h_endian, and se_gmac_0_t_endian 0:littleendian 1:bigendian in the register se_gmac_0_ctrl_0
- Write the start address of the GMAC_link_Table structure into the register se_gmac_0_lca
- Assign the original message address to se_gmac_0_msa in Word1 in GMAC_link_Table structure
- Assign the original message length to se_gmac_0_msg_len in Word0 in GMAC_link_Table structure, where the 128-bit message length corresponds to 1 in se_gmac_0_msg_len
- Configure se_gmac_0_trig_1t trigger gmac engine in the register se_gmac_0_ctrl_0
- The output result is stored in Word6~Word9 in the GMAC_link_Table structure

34.5 Register description

Name	Description
se_sha_0_ctrl	
se_sha_0_msa	
se_sha_0_status	
se_sha_0_endian	
se_sha_0_hash_l_0	
se_sha_0_hash_l_1	
se_sha_0_hash_l_2	
se_sha_0_hash_l_3	


Name	Description
se_sha_0_hash_l_4	
se_sha_0_hash_l_5	
se_sha_0_hash_l_6	
se_sha_0_hash_l_7	
se_sha_0_hash_h_0	
se_sha_0_hash_h_1	
se_sha_0_hash_h_2	
se_sha_0_hash_h_3	
se_sha_0_hash_h_4	
se_sha_0_hash_h_5	
se_sha_0_hash_h_6	
se_sha_0_hash_h_7	
se_sha_0_link	
se_sha_0_ctrl_prot	
se_aes_0_ctrl	
se_aes_0_msa	
se_aes_0_mda	
se_aes_0_status	
se_aes_0_iv_0	
se_aes_0_iv_1	
se_aes_0_iv_2	
se_aes_0_iv_3	
se_aes_0_key_0	
se_aes_0_key_1	
se_aes_0_key_2	
se_aes_0_key_3	
se_aes_0_key_4	
se_aes_0_key_5	
se_aes_0_key_6	

Name	Description
se_aes_0_key_7	
se_aes_0_key_sel	
se_aes_1_key_sel	
se_aes_0_endian	
se_aes_sboot	
se_aes_0_link	
se_aes_0_ctrl_prot	
se_trng_0_ctrl_0	
se_trng_0_status	
se_trng_0_dout_0	
se_trng_0_dout_1	
se_trng_0_dout_2	
se_trng_0_dout_3	
se_trng_0_dout_4	
se_trng_0_dout_5	
se_trng_0_dout_6	
se_trng_0_dout_7	
se_trng_0_test	
se_trng_0_ctrl_1	
se_trng_0_ctrl_2	
se_trng_0_ctrl_3	
se_trng_0_test_out_0	
se_trng_0_test_out_1	
se_trng_0_test_out_2	
se_trng_0_test_out_3	
se_trng_0_ctrl_prot	
se_pka_0_ctrl_0	
se_pka_0_seed	
se_pka_0_ctrl_1	

Name	Description
se_pka_0_rw	
se_pka_0_rw_burst	
se_pka_0_ctrl_prot	
se_cdet_0_ctrl_0	
se_cdet_0_ctrl_1	
se_cdet_0_ctrl_prot	
se_gmac_0_ctrl_0	
se_gmac_0_lca	
se_gmac_0_status	
se_gmac_0_ctrl_prot	
se_ctrl_prot_rd	

34.5.1 se_sha_0_ctrl

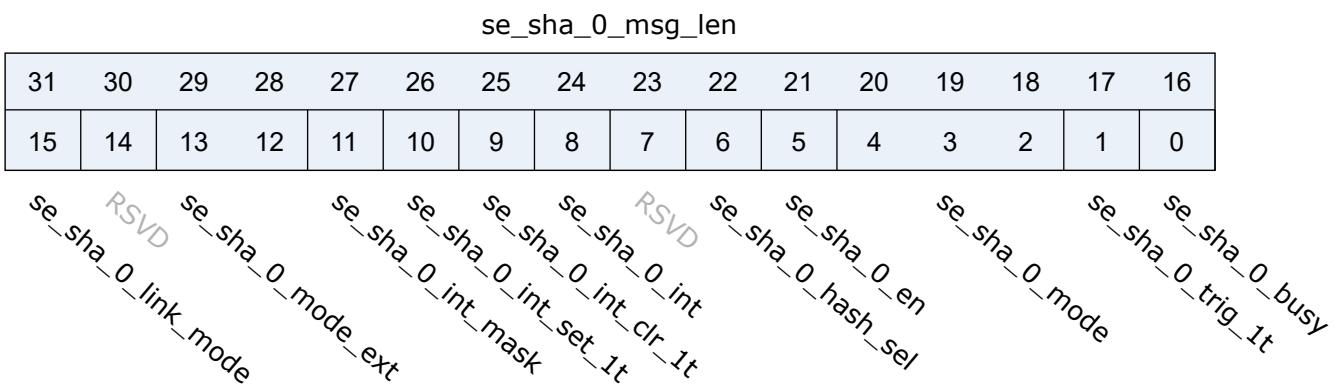Address: 0x20004000



Bits	Name	Type	Reset	Description
31:16	se_sha_0_msg_len	r/w	0	number of 512-bit block
15	se_sha_0_link_mode	r/w	0	1:enable sha link mode
14	RSVD			
13:12	se_sha_0_mode_ext	r/w	0	hash mode extention; 0:SHA 1:MD5 2:CRC-16 3:CRC-32
11	se_sha_0_int_mask	r/w	0	

Bits	Name	Type	Reset	Description
10	se_sha_0_int_set_1t	w1p	0	1:set interrupt
9	se_sha_0_int_clr_1t	w1p	0	1:clear interrupt
8	se_sha_0_int	r	0	interrupt value
7	RSVD			
6	se_sha_0_hash_sel	r/w	0	0:new hash 1:accumulate last hash
5	se_sha_0_en	r/w	0	1:enable sha engine
4:2	se_sha_0_mode	r/w	0	0:SHA-256 1:SHA-224 2:SHA-1 3:SHA-1 4:SHA-512 5:SHA-384 6:SHA-512/224 7:SHA-512/256
1	se_sha_0_trig_1t	w1p	0	1:trigger sha engine
0	se_sha_0_busy	r	0	1:sha engine busy

34.5.2 se_sha_0_msa

Address: 0x20004004

se_sha_0_msa

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_msa

Bits	Name	Type	Reset	Description
31:0	se_sha_0_msa	r/w	0	message source address

34.5.3 se_sha_0_status

Address: 0x20004008

se_sha_0_status

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_status

Bits	Name	Type	Reset	Description
31:0	se_sha_0_status	r	32'h41	

34.5.4 se_sha_0_endian

Address: 0x2000400c

RSVD																	
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16		
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		

se_sha_0_dout_endian

Bits	Name	Type	Reset	Description
31:1	RSVD			
0	se_sha_0_dout_endian	r/w	1	0:little-endian 1:big-endian

34.5.5 se_sha_0_hash_l_0

Address: 0x20004010

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_l_0

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_l_0	r	0	big-endian hash 0 (MSB)

34.5.6 se_sha_0_hash_l_1

Address: 0x20004014

se_sha_0_hash_l_1

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_l_1

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_l_1	r	0	big-endian hash 1

34.5.7 se_sha_0_hash_l_2

Address: 0x20004018

se_sha_0_hash_l_2

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_l_2

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_l_2	r	0	big-endian hash 2

34.5.8 se_sha_0_hash_l_3

Address: 0x2000401c

se_sha_0_hash_l_3

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_l_3

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_l_3	r	0	big-endian hash 3

34.5.9 se_sha_0_hash_l_4

Address: 0x20004020

se_sha_0_hash_l_4

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_l_4

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_l_4	r	0	big-endian hash 4

34.5.10 se_sha_0_hash_l_5

Address: 0x20004024

se_sha_0_hash_l_5

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_l_5

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_l_5	r	0	big-endian hash 5

34.5.11 se_sha_0_hash_l_6

Address: 0x20004028

se_sha_0_hash_l_6

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_l_6

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_l_6	r	0	big-endian hash 6

34.5.12 se_sha_0_hash_l_7

Address: 0x2000402c

se_sha_0_hash_l_7

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_l_7

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_l_7	r	0	big-endian hash 7 (LSB)

34.5.13 se_sha_0_hash_h_0

Address: 0x20004030

se_sha_0_hash_h_0

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_h_0

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_h_0	r	0	big-endian hash 0 (MSB)

34.5.14 se_sha_0_hash_h_1

Address: 0x20004034

se_sha_0_hash_h_1

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_h_1

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_h_1	r	0	big-endian hash 1

34.5.15 se_sha_0_hash_h_2

Address: 0x20004038

se_sha_0_hash_h_2

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_h_2

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_h_2	r	0	big-endian hash 2

34.5.16 se_sha_0_hash_h_3

Address: 0x2000403c

se_sha_0_hash_h_3

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_h_3

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_h_3	r	0	big-endian hash 3

34.5.17 se_sha_0_hash_h_4

Address: 0x20004040

se_sha_0_hash_h_4

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_h_4

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_h_4	r	0	big-endian hash 4

34.5.18 se_sha_0_hash_h_5

Address: 0x20004044

se_sha_0_hash_h_5

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_h_5

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_h_5	r	0	big-endian hash 5

34.5.19 se_sha_0_hash_h_6

Address: 0x20004048

se_sha_0_hash_h_6

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_h_6

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_h_6	r	0	big-endian hash 6

34.5.20 se_sha_0_hash_h_7

Address: 0x2000404c

se_sha_0_hash_h_7

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_hash_h_7

Bits	Name	Type	Reset	Description
31:0	se_sha_0_hash_h_7	r	0	big-endian hash 7 (LSB)

34.5.21 se_sha_0_link

Address: 0x20004050

se_sha_0_lca

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_sha_0_lca

Bits	Name	Type	Reset	Description
31:0	se_sha_0_lca	r/w	0	aes link config address(word align)

34.5.22 se_sha_0_ctrl_prot

Address: 0x200040fc

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

RSVD RSVD


se_sha_id1_en

Bits	Name	Type	Reset	Description
31:3	RSVD			
2	se_sha_id1_en	r/w	1	id1 access right
1	se_sha_id0_en	r/w	1	id0 access right
0	RSVD			

34.5.23 se_aes_0_ctrl

Address: 0x20004100

se_aes_0_msg_len															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

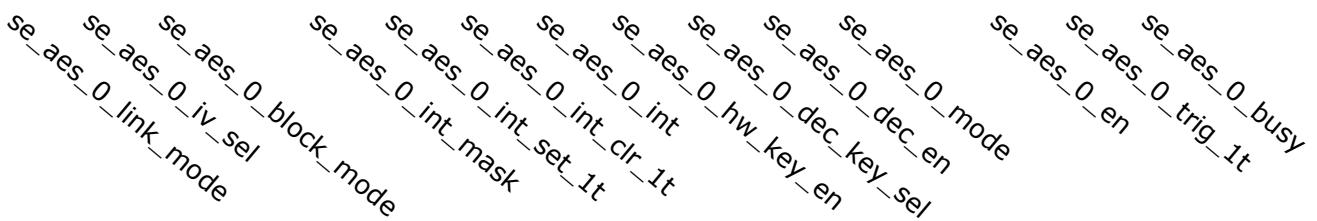

Bits	Name	Type	Reset	Description
31:16	se_aes_0_msg_len	r/w	0	number of 128-bit block
15	se_aes_0_link_mode	r/w	0	1:enable aes link mode
14	se_aes_0_iv_sel	r/w	0	0:new iv 1:same iv as last one
13:12	se_aes_0_block_mode	r/w	0	0:ECB mode 1:CTR mode 2:CBC mode 3:XTS mode
11	se_aes_0_int_mask	r/w	0	
10	se_aes_0_int_set_1t	w1p	0	1:set interrupt
9	se_aes_0_int_clr_1t	w1p	0	1:clear interrupt
8	se_aes_0_int	r	0	interrupt value
7	se_aes_0_hw_key_en	r/w	0	0:sw key 1:hw key
6	se_aes_0_dec_key_sel	r/w	0	0:new key 1:same key as last one
5	se_aes_0_dec_en	r/w	0	0:encode 1:decode
4:3	se_aes_0_mode	r/w	0	0:128-bit mode 1:256-bit mode 2:192-bit mode 3:128-bit double key mode
2	se_aes_0_en	r/w	0	0:disable 1:enable aes
1	se_aes_0_trig_1t	w1p	0	1:trigger aes engine
0	se_aes_0_busy	r	0	1:aes engine busy

34.5.24 se_aes_0_msa

Address: 0x20004104

se_aes_0_msa															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_msa

Bits	Name	Type	Reset	Description
31:0	se_aes_0_msa	r/w	0	message source address

34.5.25 se_aes_0_mda

Address: 0x20004108

se_aes_0_mda

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_mda

Bits	Name	Type	Reset	Description
31:0	se_aes_0_mda	r/w	0	message destination address

34.5.26 se_aes_0_status

Address: 0x2000410c

se_aes_0_status

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_status

Bits	Name	Type	Reset	Description
31:0	se_aes_0_status	r	32'h4100	

34.5.27 se_aes_0_iv_0

Address: 0x20004110

se_aes_0_iv_0

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_iv_0

Bits	Name	Type	Reset	Description
31:0	se_aes_0_iv_0	r/w	0	big endian initial vector (MSB)

34.5.28 se_aes_0_iv_1

Address: 0x20004114

se_aes_0_iv_1

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_iv_1

Bits	Name	Type	Reset	Description
31:0	se_aes_0_iv_1	r/w	0	big endian initial vector

34.5.29 se_aes_0_iv_2

Address: 0x20004118

se_aes_0_iv_2

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_iv_2

Bits	Name	Type	Reset	Description
31:0	se_aes_0_iv_2	r/w	0	big endian initial vector

34.5.30 se_aes_0_iv_3

Address: 0x2000411c

se_aes_0_iv_3

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_iv_3

Bits	Name	Type	Reset	Description
31:0	se_aes_0_iv_3	r/w	0	big endian initial vector (LSB) (CTR mode: 32-bit counter initial value)

34.5.31 se_aes_0_key_0

Address: 0x20004120

se_aes_0_key_0

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_key_0

Bits	Name	Type	Reset	Description
31:0	se_aes_0_key_0	r/w	0	big endian aes key (aes-128/256 key MSB)

34.5.32 se_aes_0_key_1

Address: 0x20004124

se_aes_0_key_1

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_key_1

Bits	Name	Type	Reset	Description
31:0	se_aes_0_key_1	r/w	0	big endian aes key

34.5.33 se_aes_0_key_2

Address: 0x20004128

se_aes_0_key_2

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_key_2

Bits	Name	Type	Reset	Description
31:0	se_aes_0_key_2	r/w	0	big endian aes key

34.5.34 se_aes_0_key_3

Address: 0x2000412c

se_aes_0_key_3

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_key_3

Bits	Name	Type	Reset	Description
31:0	se_aes_0_key_3	r/w	0	big endian aes key (aes-128 key LSB)

34.5.35 se_aes_0_key_4

Address: 0x20004130

se_aes_0_key_4

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_key_4

Bits	Name	Type	Reset	Description
31:0	se_aes_0_key_4	r/w	0	big endian aes key

34.5.36 se_aes_0_key_5

Address: 0x20004134

se_aes_0_key_5

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_key_5

Bits	Name	Type	Reset	Description
31:0	se_aes_0_key_5	r/w	0	big endian aes key

34.5.37 se_aes_0_key_6

Address: 0x20004138

se_aes_0_key_6

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_key_6

Bits	Name	Type	Reset	Description
31:0	se_aes_0_key_6	r/w	0	big endian aes key

34.5.38 se_aes_0_key_7

Address: 0x2000413c

se_aes_0_key_7

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_key_7

Bits	Name	Type	Reset	Description
31:0	se_aes_0_key_7	r/w	0	big endian aes key (aes-256 key LSB)

34.5.39 se_aes_0_key_sel

Address: 0x20004140

RSVD															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

RSVD se_aes_0_key_sel

Bits	Name	Type	Reset	Description
31:2	RSVD			
1:0	se_aes_0_key_sel	r/w	0	

34.5.40 se_aes_1_key_sel

Address: 0x20004144


RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

RSVD se_aes_1_key_sel

Bits	Name	Type	Reset	Description
31:2	RSVD			
1:0	se_aes_1_key_sel	r/w	0	

34.5.41 se_aes_0_endian

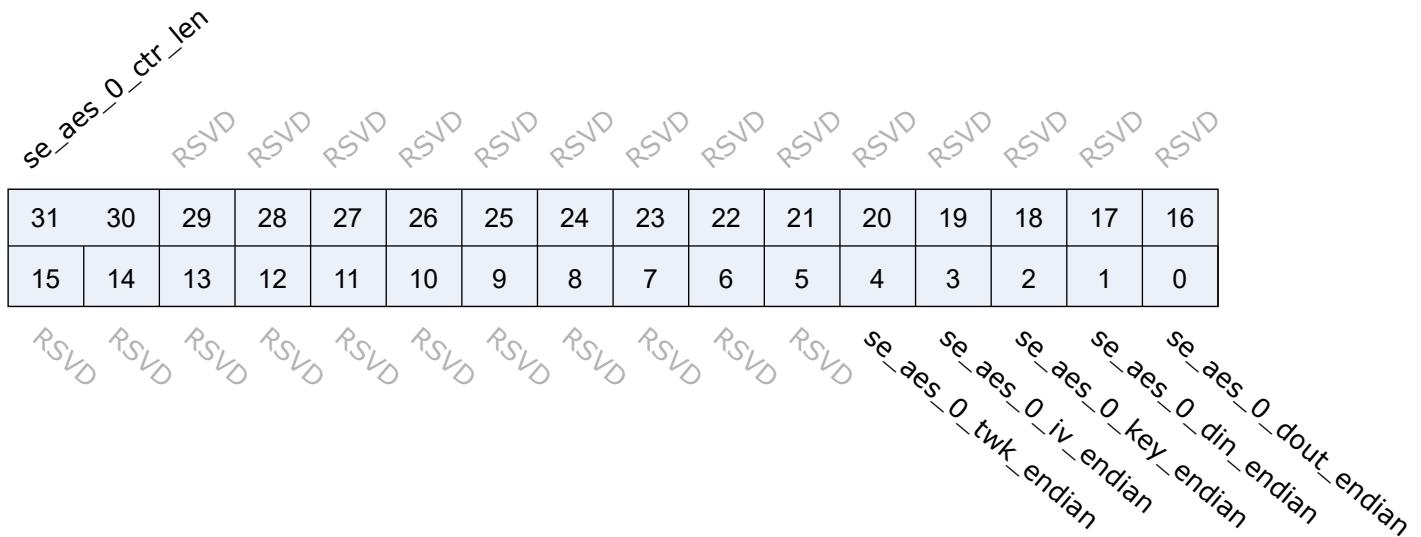
Address: 0x20004148



Bits	Name	Type	Reset	Description
31:30	se_aes_0_ctr_len	r/w	0	2'd0:4-byte counter, 2'd1:1-byte counter, 2'd2:2-byte counter, 2'd3:3-byte counter
29:5	RSVD			
4	se_aes_0_twk_endian	r/w	1	0:little-endian 1:big-endian, default 1 for XTS
3	se_aes_0_iv_endian	r/w	1	0:little-endian 1:big-endian
2	se_aes_0_key_endian	r/w	1	0:little-endian 1:big-endian
1	se_aes_0_din_endian	r/w	1	0:little-endian 1:big-endian
0	se_aes_0_dout_endian	r/w	1	0:little-endian 1:big-endian

34.5.42 se_aes_sboot

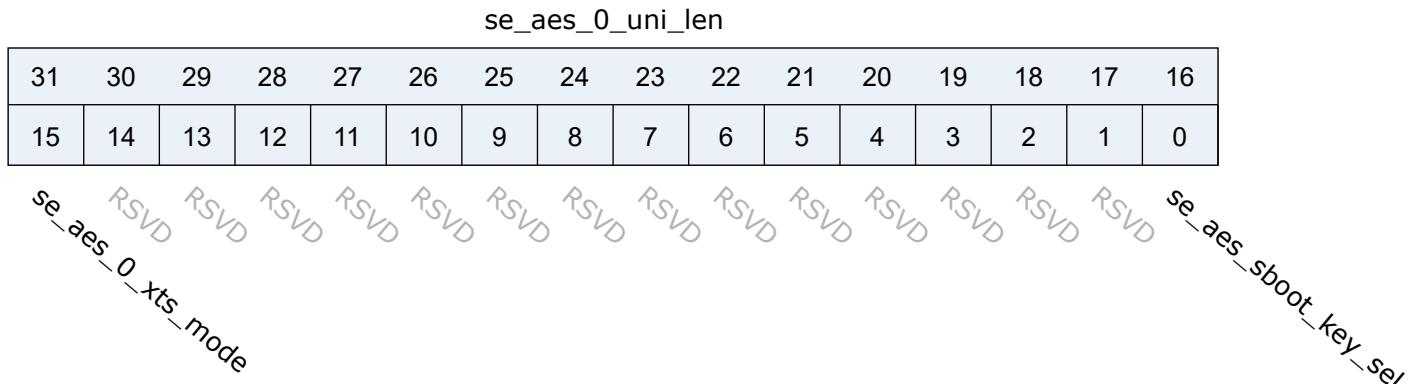Address: 0x2000414c



Bits	Name	Type	Reset	Description
31:16	se_aes_0_uni_len	r/w	16'd2	XTS data unit length: number of 128-bit blocks in a data unit, msg_len = N*uni_len
15	se_aes_0_xts_mode	r/w	0	0: normal XTS, 1: XTS with only one data unit
14:1	RSVD			
0	se_aes_sboot_key_sel	r/w	0	

34.5.43 se_aes_0_link

Address: 0x20004150

se_aes_0_lca

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_aes_0_lca

Bits	Name	Type	Reset	Description
31:0	se_aes_0_lca	r/w	0	aes link config address(word align)

34.5.44 se_aes_0_ctrl_prot

Address: 0x200041fc

RSVD															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0


se_aes_id1_en se_aes_id0_en RSVD

Bits	Name	Type	Reset	Description
31:3	RSVD			
2	se_aes_id1_en	r/w	1	id1 access right
1	se_aes_id0_en	r/w	1	id0 access right

Bits	Name	Type	Reset	Description
0	RSVD			

34.5.45 se_trng_0_ctrl_0

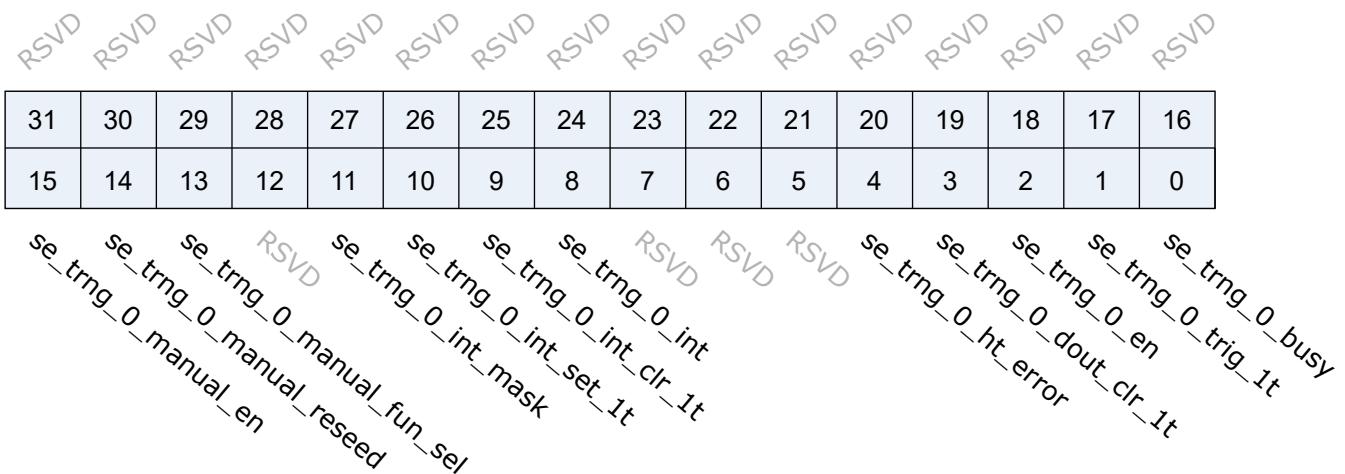Address: 0x20004200



Bits	Name	Type	Reset	Description
31:16	RSVD			
15	se_trng_0_manual_en	r/w	0	1:enable manual mode
14	se_trng_0_manual_reseed	r/w	0	1:clear reseed counter to zero and get new entropy
13	se_trng_0_manual_fun_sel	r/w	0	0:go to instantiate state 1:go to generate state
12	RSVD			
11	se_trng_0_int_mask	r/w	0	
10	se_trng_0_int_set_1t	w1p	0	1:set interrupt
9	se_trng_0_int_clr_1t	w1p	0	1:clear interrupt
8	se_trng_0_int	r	0	interrupt value
7:5	RSVD			
4	se_trng_0_ht_error	r	0	1:health test error
3	se_trng_0_dout_clr_1t	w1p	0	1:clear trng dout to zero
2	se_trng_0_en	r/w	0	0:disable 1:enable aes
1	se_trng_0_trig_1t	w1p	0	1:trigger trng engine
0	se_trng_0_busy	r	0	1:trng engine busy

34.5.46 se_trng_0_status

Address: 0x20004204

se_trng_0_status

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_trng_0_status

Bits	Name	Type	Reset	Description
31:0	se_trng_0_status	r	32'h100020	

34.5.47 se_trng_0_dout_0

Address: 0x20004208

se_trng_0_dout_0

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_trng_0_dout_0

Bits	Name	Type	Reset	Description
31:0	se_trng_0_dout_0	r	0	random value

34.5.48 se_trng_0_dout_1

Address: 0x2000420c

se_trng_0_dout_1

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_trng_0_dout_1

Bits	Name	Type	Reset	Description
31:0	se_trng_0_dout_1	r	0	random value

34.5.49 se_trng_0_dout_2

Address: 0x20004210

se_trng_0_dout_2

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_trng_0_dout_2

Bits	Name	Type	Reset	Description
31:0	se_trng_0_dout_2	r	0	random value

34.5.50 se_trng_0_dout_3

Address: 0x20004214

se_trng_0_dout_3

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_trng_0_dout_3

Bits	Name	Type	Reset	Description
31:0	se_trng_0_dout_3	r	0	random value

34.5.51 se_trng_0_dout_4

Address: 0x20004218

se_trng_0_dout_4

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_trng_0_dout_4

Bits	Name	Type	Reset	Description
31:0	se_trng_0_dout_4	r	0	random value

34.5.52 se_trng_0_dout_5

Address: 0x2000421c

se_trng_0_dout_5

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_trng_0_dout_5

Bits	Name	Type	Reset	Description
31:0	se_trng_0_dout_5	r	0	random value

34.5.53 se_trng_0_dout_6

Address: 0x20004220

se_trng_0_dout_6

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_trng_0_dout_6

Bits	Name	Type	Reset	Description
31:0	se_trng_0_dout_6	r	0	random value

34.5.54 se_trng_0_dout_7

Address: 0x20004224

se_trng_0_dout_7


31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_trng_0_dout_7

Bits	Name	Type	Reset	Description
31:0	se_trng_0_dout_7	r	0	random value

34.5.55 se_trng_0_test

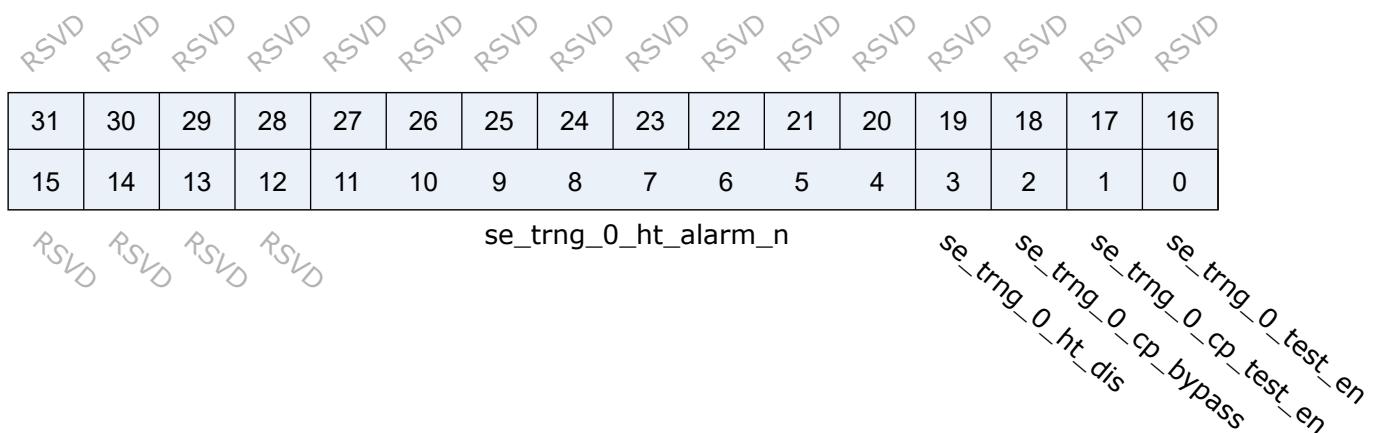
Address: 0x20004228



Bits	Name	Type	Reset	Description
31:12	RSVD			
11:4	se_trng_0_ht_alarm_n	r/w	8'd0	health test alarm number 0:alarm if health test error >= 1 1:alarm if health test error >= 2
3	se_trng_0_ht_dis	r/w	0	1:disable health test
2	se_trng_0_cp_bypass	r/w	0	1:bypass conditional component
1	se_trng_0_cp_test_en	r/w	0	1:enable trng conditional component test mode
0	se_trng_0_test_en	r/w	0	1:enable trng test mode

34.5.56 se_trng_0_ctrl_1

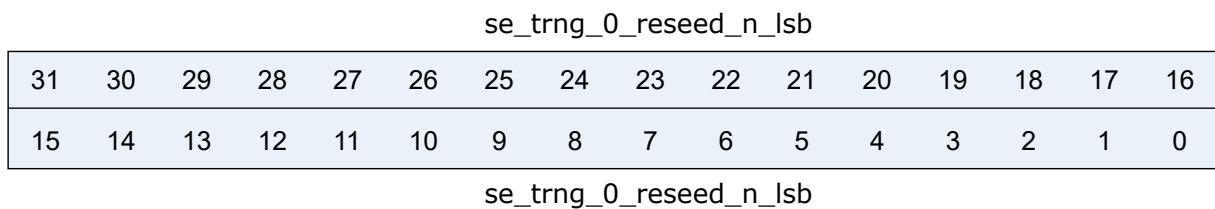Address: 0x2000422c



Bits	Name	Type	Reset	Description
31:0	se_trng_0_reseed_n_lsb	r/w	32'hffff	reload seed when number of used random value is larger than reseed_n

34.5.57 se_trng_0_ctrl_2

Address: 0x20004230

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |

se_trng_0_reseed_n_msb

Bits	Name	Type	Reset	Description
31:16	RSVD			
15:0	se_trng_0_reseed_n_msb	r/w	16'hff	reload seed when number of used random value is larger than reseed_n

34.5.58 se_trng_0_ctrl_3

Address: 0x20004234

RSVD	RSVD	RSVD	RSVD	se_trng_0_ht_od_en	se_trng_0_ht_apt_c										
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_trng_0_ht_rct_c

se_trng_0_cp_ratio

Bits	Name	Type	Reset	Description
31	se_trng_0_rosc_en	r/w	0	trng rosc enable
30:27	RSVD			
26	se_trng_0_ht_od_en	r/w	0	health test on demand test enable
25:16	se_trng_0_ht_apt_c	r/w	10'd890	health test adaptive proportion test cut off value
15:8	se_trng_0_ht_rct_c	r/w	8'd66	health test repetition count test cut off value
7:0	se_trng_0_cp_ratio	r/w	8'd3	conditional component compression ration

34.5.59 se_trng_0_test_out_0

Address: 0x20004240

se_trng_0_test_out_0

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_trng_0_test_out_0

Bits	Name	Type	Reset	Description
31:0	se_trng_0_test_out_0	r	0	

34.5.60 se_trng_0_test_out_1

Address: 0x20004244

se_trng_0_test_out_1

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_trng_0_test_out_1

Bits	Name	Type	Reset	Description
31:0	se_trng_0_test_out_1	r	0	

34.5.61 se_trng_0_test_out_2

Address: 0x20004248

se_trng_0_test_out_2

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_trng_0_test_out_2

Bits	Name	Type	Reset	Description
31:0	se_trng_0_test_out_2	r	0	

34.5.62 se_trng_0_test_out_3

Address: 0x2000424c

se_trng_0_test_out_3

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_trng_0_test_out_3

Bits	Name	Type	Reset	Description
31:0	se_trng_0_test_out_3	r	0	

34.5.63 se_trng_0_ctrl_prot

Address: 0x200042fc

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

RSVD RSVD

se_trng_id0_en

Bits	Name	Type	Reset	Description
31:3	RSVD			
2	se_trng_id1_en	r/w	1	id1 access right
1	se_trng_id0_en	r/w	1	id0 access right
0	RSVD			

34.5.64 se_pka_0_ctrl_0

Address: 0x20004300

se_pka_0_status																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
<i>RSVD</i>																

se_pka_0_status_clr_1t *se_pka_0_endian* *se_pka_0_int_mask* *se_pka_0_int_set* *se_pka_0_int_clr_1t* *se_pka_0_prot_md* *se_pka_0_en* *se_pka_0_busy* *se_pka_0_done* *se_pka_0_done_clr_1t*

Bits	Name	Type	Reset	Description
31:16	se_pka_0_status	r	0	[31]cmd_err, [30:26]cmd_err_idx[4:0] [25]opq_full, [24]last_opc, [23]err_cam_full, [22]err_div_by_0, [21]err_invalid_src0 [20]err_invalid_src1 [19]err_invalid_src2 [18]err_opq_overflow [17]err_unknown_opc [16]prime_fail
15	se_pka_0_status_clr_1t	w1p	0	
14	RSVD			
13	se_pka_0_ram_clr_md	r/w	0	
12	se_pka_0_endian	r/w	0	
11	se_pka_0_int_mask	r/w	0	
10	se_pka_0_int_set	r/w	0	1:set interrupt
9	se_pka_0_int_clr_1t	w1p	0	1:clear interrupt
8	se_pka_0_int	r	0	interrupt value
7:4	se_pka_0_prot_md	r/w	0	
3	se_pka_0_en	r/w	0	
2	se_pka_0_busy	r	0	
1	se_pka_0_done_clr_1t	w1p	0	
0	se_pka_0_done	r	0	

34.5.65 se_pka_0_seed

Address: 0x2000430c

se_pka_0_seed

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_pka_0_seed

Bits	Name	Type	Reset	Description
31:0	se_pka_0_seed	r/w	0	

34.5.66 se_pka_0_ctrl_1

Address: 0x20004310

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	

RSVD RSVD

se_pka_0_hbypass

Bits	Name	Type	Reset	Description
31:4	RSVD			
3	se_pka_0_hbypass	r/w	0	
2:0	se_pka_0_hburst	r/w	3'd5	3'b000:single 3'b001:incr (undefined length) 3'b010:4-beat wrap 3'b011:4-beat incr 3'b100:8-beat wrap 3'b101:8-beat incr(default)

34.5.67 se_pka_0_rw

Address: 0x20004340

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |

Bits	Name	Type	Reset	Description
31:0	se_pka_0_rw	r/w	0	0x340 0x35F single write for command

34.5.68 se_pka_0_rw_burst

Address: 0x20004360

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |

Bits	Name	Type	Reset	Description
31:0	se_pka_0_rw_burst	r/w	0	0x360 0x37F burst write for data

34.5.69 se_pka_0_ctrl_prot

Address: 0x200043fc

| RSVD |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | | | | |
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |

se_pka_id0_en
se_pka_id1_en

Bits	Name	Type	Reset	Description
31:3	RSVD			
2	se_pka_id1_en	r/w	1	id1 access right
1	se_pka_id0_en	r/w	1	id0 access right
0	RSVD			

34.5.70 se_cdet_0_ctrl_0

Address: 0x20004400

se_cdet_0_g_loop_min								se_cdet_0_g_loop_max							
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_cdet_0_status

se_cdet_0_en
se_cdet_0_error

Bits	Name	Type	Reset	Description
31:24	se_cdet_0_g_loop_min	r/w	8'd33	
23:16	se_cdet_0_g_loop_max	r/w	8'd100	
15:2	se_cdet_0_status	r	1	
1	se_cdet_0_error	r	0	
0	se_cdet_0_en	r/w	0	

34.5.71 se_cdet_0_ctrl_1

Address: 0x20004404

RSVD	se_cdet_0_g_slp_n														
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0


se_cdet_0_t_dly_n

se_cdet_0_t_loop_n

Bits	Name	Type	Reset	Description
31:24	RSVD			
23:16	se_cdet_0_g_slp_n	r/w	8'd255	
15:8	se_cdet_0_t_dly_n	r/w	8'd3	
7:0	se_cdet_0_t_loop_n	r/w	8'd50	

34.5.72 se_cdet_0_ctrl_prot

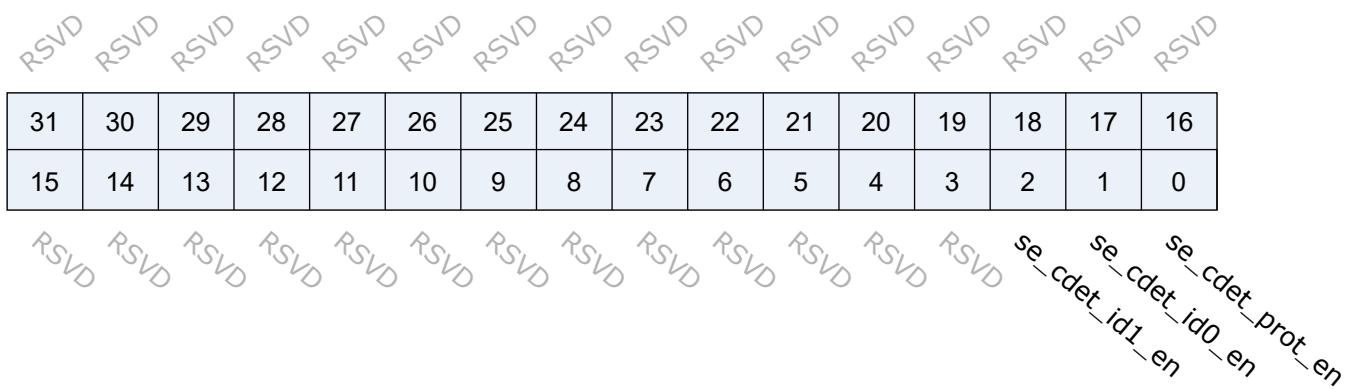
Address: 0x200044fc



Bits	Name	Type	Reset	Description
31:3	RSVD			
2	se_cdet_id1_en	r/w	1	id1 access right
1	se_cdet_id0_en	r/w	1	id0 access right
0	se_cdet_prot_en	r/w	1	1:control register protection enable

34.5.73 se_gmac_0_ctrl_0

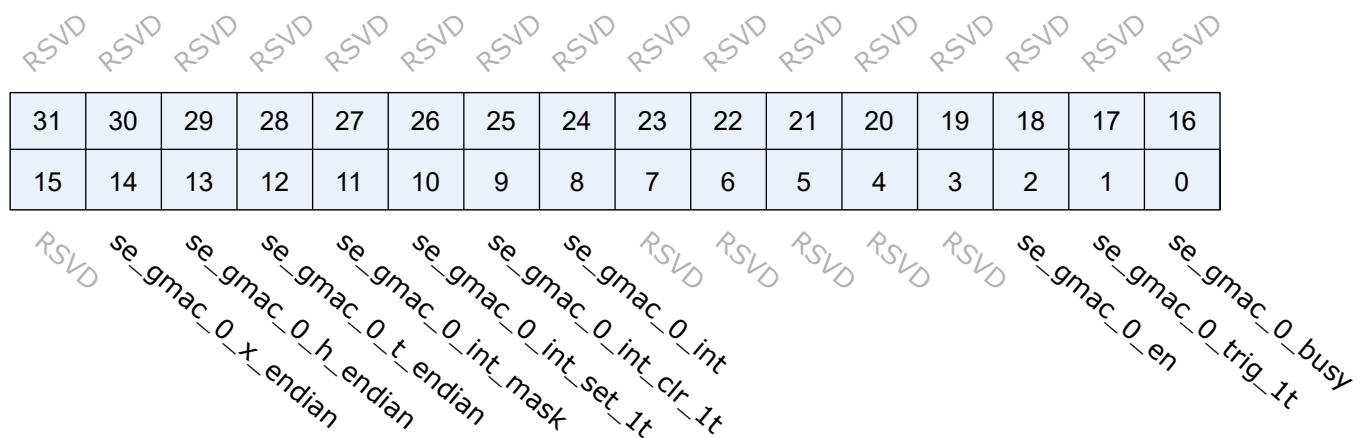Address: 0x20004500



Bits	Name	Type	Reset	Description
31:15	RSVD			
14	se_gmac_0_x_endian	r/w	1	0:little-endian 1:big-endian
13	se_gmac_0_h_endian	r/w	1	0:little-endian 1:big-endian
12	se_gmac_0_t_endian	r/w	1	0:little-endian 1:big-endian
11	se_gmac_0_int_mask	r/w	0	1:mask interrupt
10	se_gmac_0_int_set_1t	w1p	0	1:set interrupt
9	se_gmac_0_int_clr_1t	w1p	0	1:clear interrupt
8	se_gmac_0_int	r	0	interrupt value
7:3	RSVD			
2	se_gmac_0_en	r/w	0	0:disable 1:enable gmac
1	se_gmac_0_trig_1t	w1p	0	1:trigger gmac engine
0	se_gmac_0_busy	r	0	1:gmac engine busy

34.5.74 se_gmac_0_lca

Address: 0x20004504

se_gmac_0_lca

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_gmac_0_lca

Bits	Name	Type	Reset	Description
31:0	se_gmac_0_lca	r/w	0	gmac link config address(word align)

34.5.75 se_gmac_0_status

Address: 0x20004508

se_gmac_0_status

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

se_gmac_0_status

Bits	Name	Type	Reset	Description
31:0	se_gmac_0_status	r	32'hf100000	

34.5.76 se_gmac_0_ctrl_prot

Address: 0x200045fc

RSVD																
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	


RSVD RSVD

se_gmac_id0_en *se_gmac_id1_en*

Bits	Name	Type	Reset	Description
31:3	RSVD			
2	se_gmac_id1_en	r/w	1	id1 access right
1	se_gmac_id0_en	r/w	1	id0 access right
0	RSVD			

34.5.77 se_ctrl_prot_rd

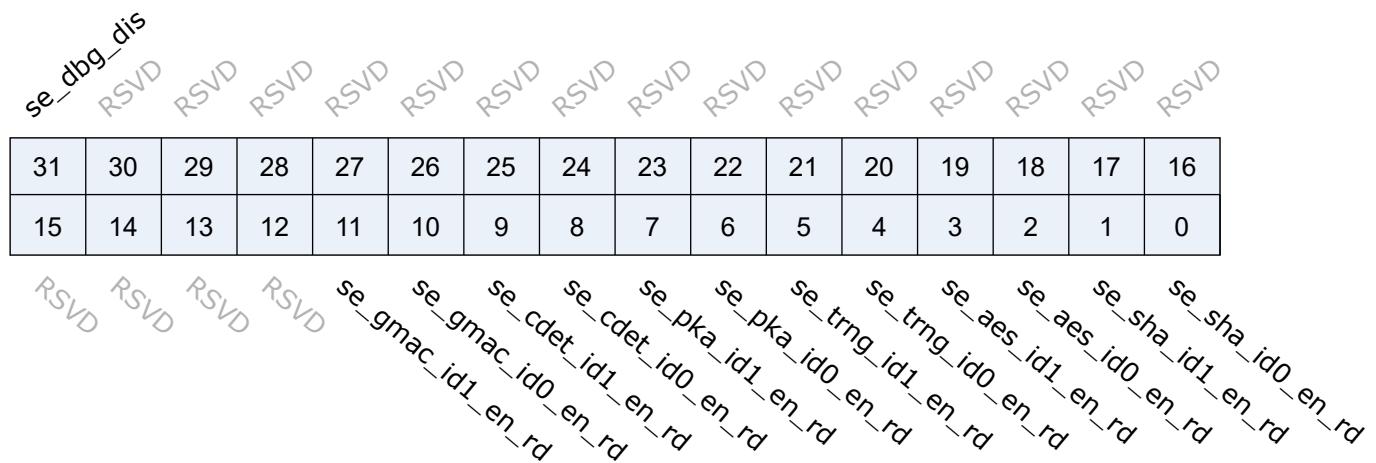Address: 0x20004f00



Bits	Name	Type	Reset	Description
31	se_dbg_dis	r	0	1:disable aes debug mode
30:12	RSVD			
11	se_gmac_id1_en_rd	r	1	read only status of id1 access right
10	se_gmac_id0_en_rd	r	1	read only status of id0 access right
9	se_cdet_id1_en_rd	r	1	read only status of id1 access right
8	se_cdet_id0_en_rd	r	1	read only status of id0 access right
7	se_pka_id1_en_rd	r	1	read only status of id1 access right
6	se_pka_id0_en_rd	r	1	read only status of id0 access right
5	se_trng_id1_en_rd	r	1	read only status of id1 access right
4	se_trng_id0_en_rd	r	1	read only status of id0 access right
3	se_aes_id1_en_rd	r	1	read only status of id1 access right
2	se_aes_id0_en_rd	r	1	read only status of id0 access right
1	se_sha_id1_en_rd	r	1	read only status of id1 access right
0	se_sha_id0_en_rd	r	1	read only status of id0 access right

Revision history

Table 35.1: Document revision history

Date	Revision	Changes
2021/2/8	0.9	Initial release
2022/9/13	1.0	Add register description
2022/11/5	1.1	Add SDH chapter
2022/11/28	1.2	Add the memory map address corresponding to Non-cache and cache
2023/4/7	1.3	Modify the number of Audio ADC and DAC