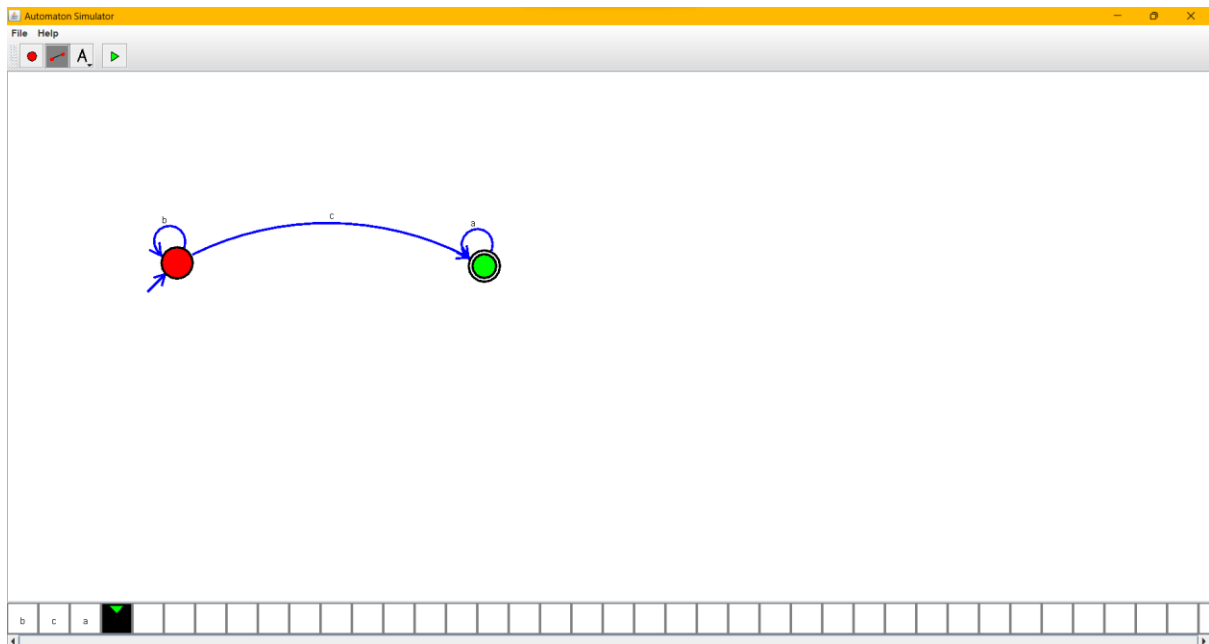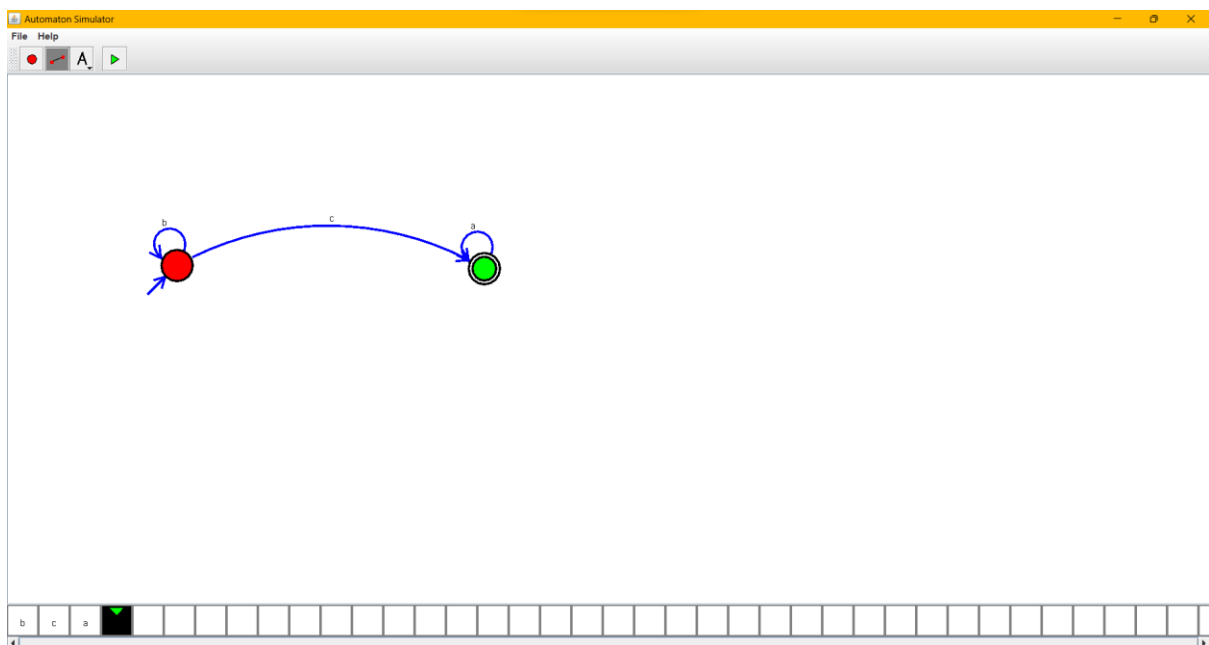1. Design NFA using simulator to accept the input string "bbc" ,"c",and "bcaaa".

AIM: To Design NFA using simulator to accept the input string "bbc" ,"c",and "bcaaa".

INPUT:

OUTPUT:

RESULT: Output is successfully obtained.