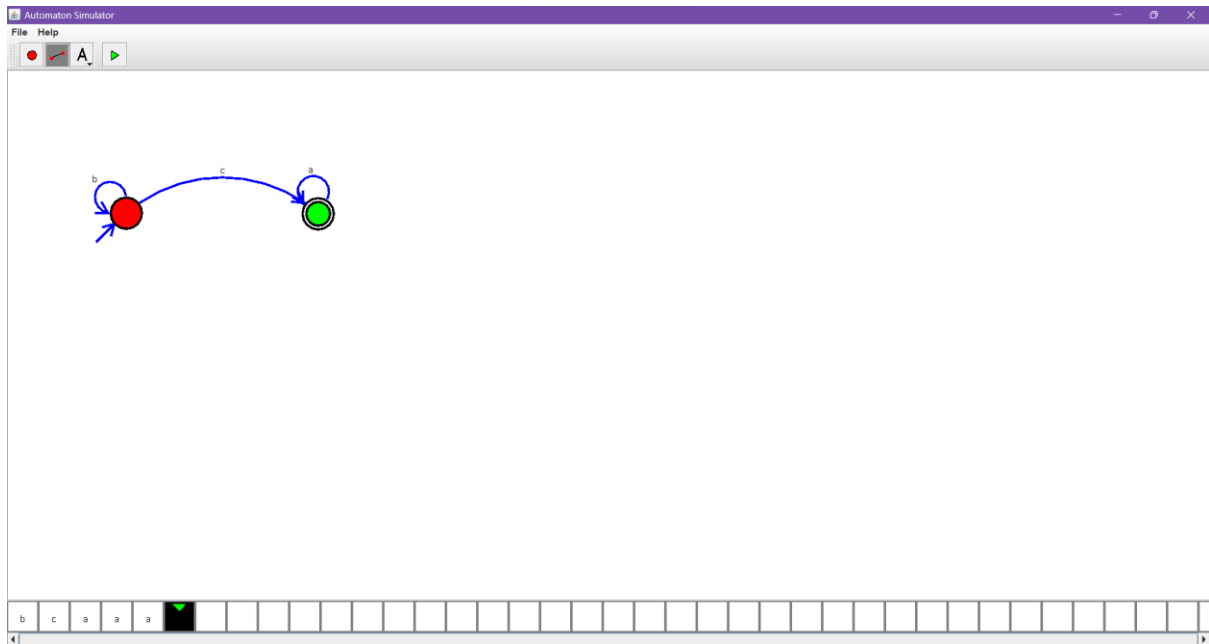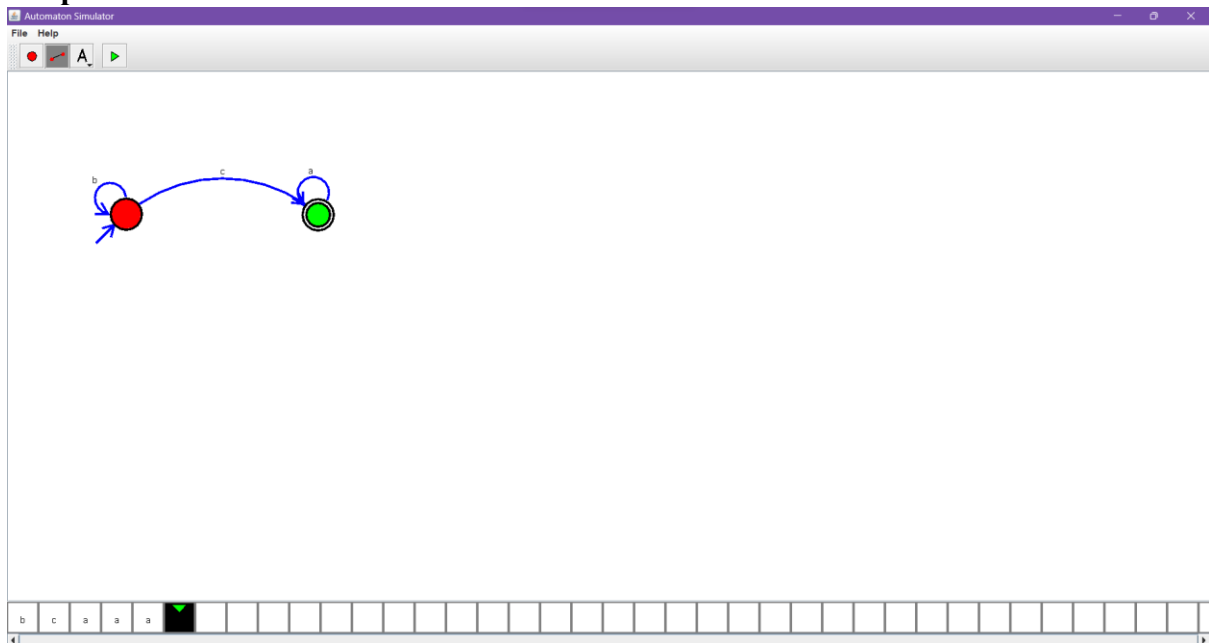1. Design DFA using simulator to accept the input string "bc" ,"c",and "bcaaa".
2. **AIM**: TO Design DFA using simulator to accept the input string "bc" ,"c",and "bcaaa".

1. INPUT:

Output:

RESULT: Output is successfully obtained.