
SS-3005

Toyota Rino Rear — supplier drawing

Supplier drawing reference. 75 mm overall; two M20 × 1.5 ends, central flange and Ø20.8 / 50-tooth knurl. Flange diameter and several transitions remain schematic; OEM fitment unconfirmed.


Type	Double-ended hub bolt
Supplied as	Stud only
Thread	M20 × 1.5 (hand unconfirmed), both ends
Finish	Not specified by supplier

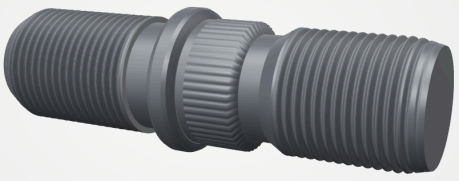

RENDER · VISUAL APPROXIMATION

Schematic geometry · not for manufacture or installation

Dimensions in mm · Not to scale · Evidence-linked profile; estimates are NOT certified dimensions

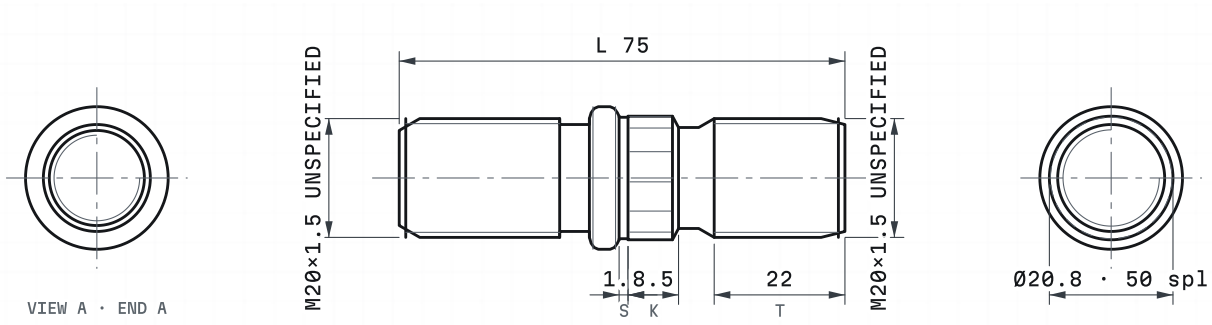

VIEW A · END A

SIDE VIEW

VIEW B · END B

SOURCE MEASUREMENTS (SUPPLIER-DECLARED)

Overall length	(75) mm nominal
Left tip to flange right face	37 ±0.5 mm
Flange right face to right tip	38 ±0.5 mm
Left threaded portion	minimum 27 mm
Neck span before flange	5 mm (0/−0.5)
Flange outside diameter	not dimensioned in supplied view
Knurl start to flange right face	1.5 mm nominal (10–8.5) · calculated interpretation
Knurl axial length	8.5 mm
Knurl major diameter	Ø20.8 ±0.05 mm
Knurl teeth	Z50 ±1; t 1.3
Diameter before rolling	Ø20.45 ±0.02 mm
Flange face to right shoulder	16 mm (0/−0.7)
Nominal right-hand threaded span	22 mm (38–16, subject to tolerances) · calculated interpretation
Both external threads	M20 × 1.5 – 6h; hand unconfirmed
Left end chamfer	30°; Ø16 mm (0/−0.5), axial length approximately 3.46 mm derived · calculated interpretation
Right shoulder	Ø17 to M20 at 30°, nominal ramp ≈2.60 mm · calculated interpretation
Right tip lead	4 mm marked; model's Ø18 tip is schematic

RENDERING

Model length	75 mm · not a manufacturing specification
Local profile	Estimated transitions and spline teeth are for display only

OUTSTANDING CHECKS

Issue 1

Flange outside diameter is not dimensioned in the supplied view; Ø24 is a schematic visualization estimate, not a supplier claim.

Issue 2

Left thread callout is min 27 mm, so nominal 27 mm rendering does not prove exact left thread/neck/flange boundaries.

Issue 3

Right terminal taper is drawn across 4 mm but no definite terminal diameter is provided; model uses schematic Ø18. Source Ø17 refers to the reduced shank near the right shoulder, not the terminal face.

Issue 4

Z50±1 indicates nominal 50 splines; their 3D tooth depth is illustrative. Ø20.45±0.02 is stated before rolling, not a finished knurl-root dimension.

Issue 5

Supplier vehicle name 'Toyota Rino', OEM reference, exact material/finish and right/left-hand variant are not independently verified.

Issue 6

Left 30° chamfer and right shoulder 30° ramp are nominal geometric inferences; thread runout, R3 and R0.6 fillets and exact end faces remain simplified.

CANDIDATE REFERENCES · INTERCHANGEABILITY UNPROVEN

LT-TOYO-02	Quanzhou Litai

IDENTIFICATION EVIDENCE

Status	Supplier-declared · fitment unverified
Assessment	75 reference overall, Z50±1; flange diameter unknown. Rino/2D identity and handedness unresolved.

MATERIAL & FINISH

Material	Not specified by supplier
Property class	10.9 (supplier stated)
Finish	Not specified by supplier

EXAMPLE APPLICATIONS · CONFIRM FITMENT

Toyota Rino (unconfirmed)	Rino Rear (name as printed)	Not specified Rear · Confirm

INCLUDED

1 × Supplier-referenced fastener (stud only) (SS-3005)

StudSport · [Street address], [Suburb], Harare
Tel +263 77 468 4534 · WhatsApp +263 77 468 4534 · [sales@studsport.example]
studsport.example/products/ss-3005

SOURCE-DECLARED / PARTIAL: schematic geometry and unverified OEM fitment. Do not use for manufacture or installation.