


1. Построил сеть и настроил роутер

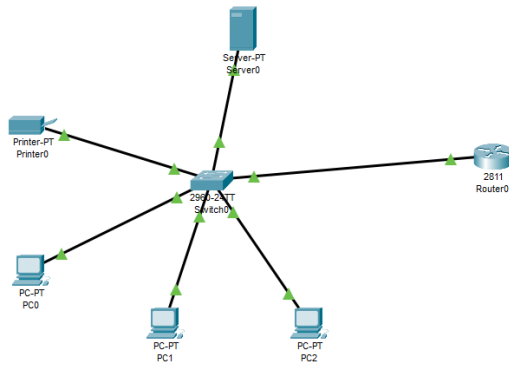


```
Router0
Physical Config CLI Attributes
IOS Command Line Interface

Press RETURN to get started!

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 192.168.0.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
Router(config-if)#exit
^
% Invalid input detected at '^' marker.
Router(config-if)#exit
Router(config)#ip dhcp excluded-address 192.168.0.1 192.168.0.5
^
% Invalid input detected at '^' marker.
Router(config)#ip dhcp excluded-address 192.168.0.1 192.168.0.5
Router(config)#ip dhcp pool companyname
Router(dhcp-config)#network 192.168.0.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.0.1
Router(dhcp-config)#domain-name companyname
Router(dhcp-config)#dns-server 192.168.0.2
Router(dhcp-config)#exit
Router(config)#
```

2. Настроил DNS-сервер и проверил его

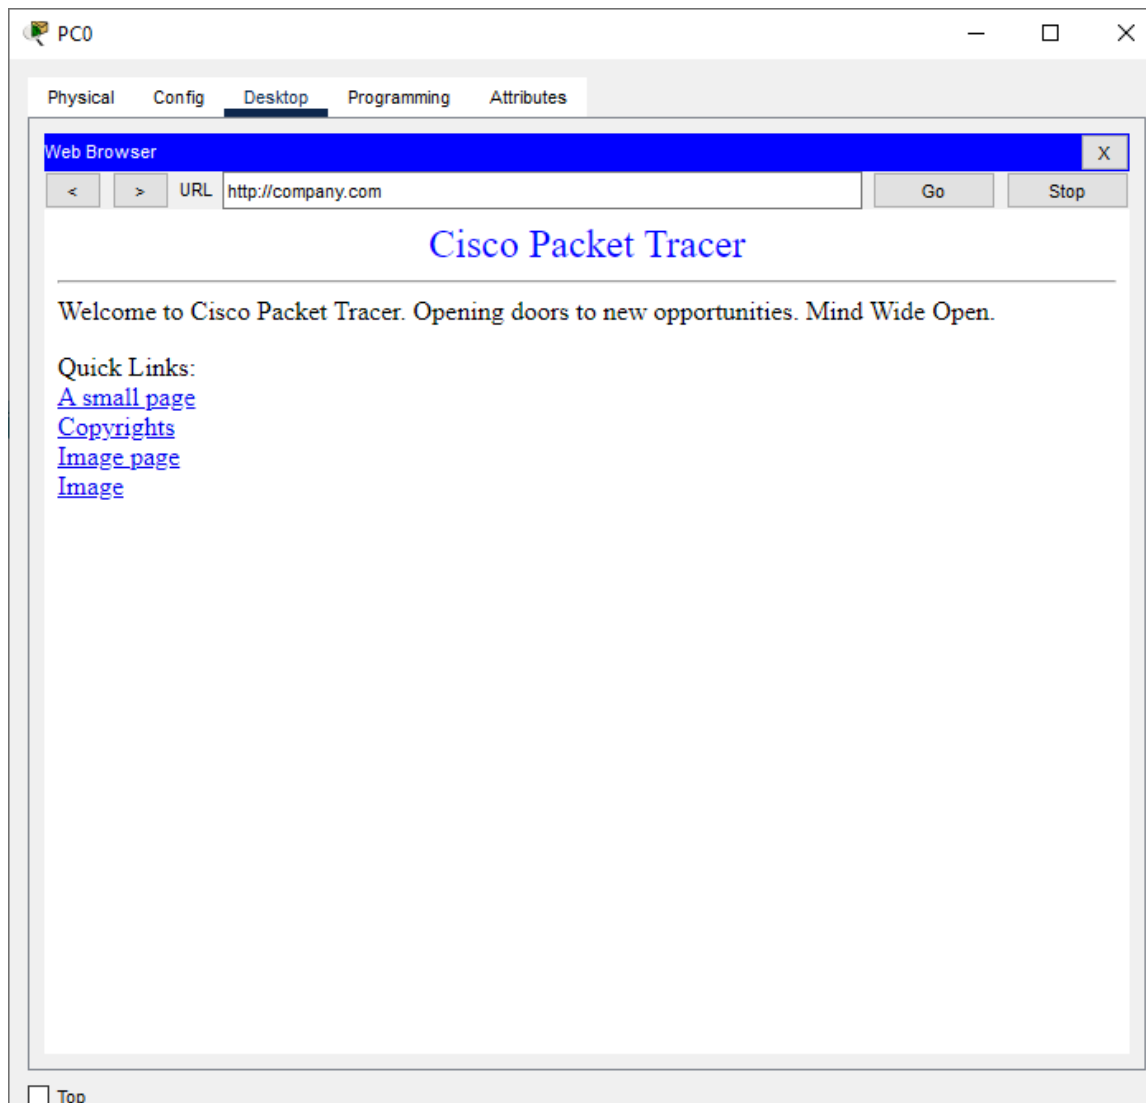

3. проверил принтер через ping

```
Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|
```