FOXCONN

Kylin2 Tank不開蓋外部監控系統

2017/10/18

CESBG

Foxconn Confidential

Tank 不開蓋外部控制系統佈署

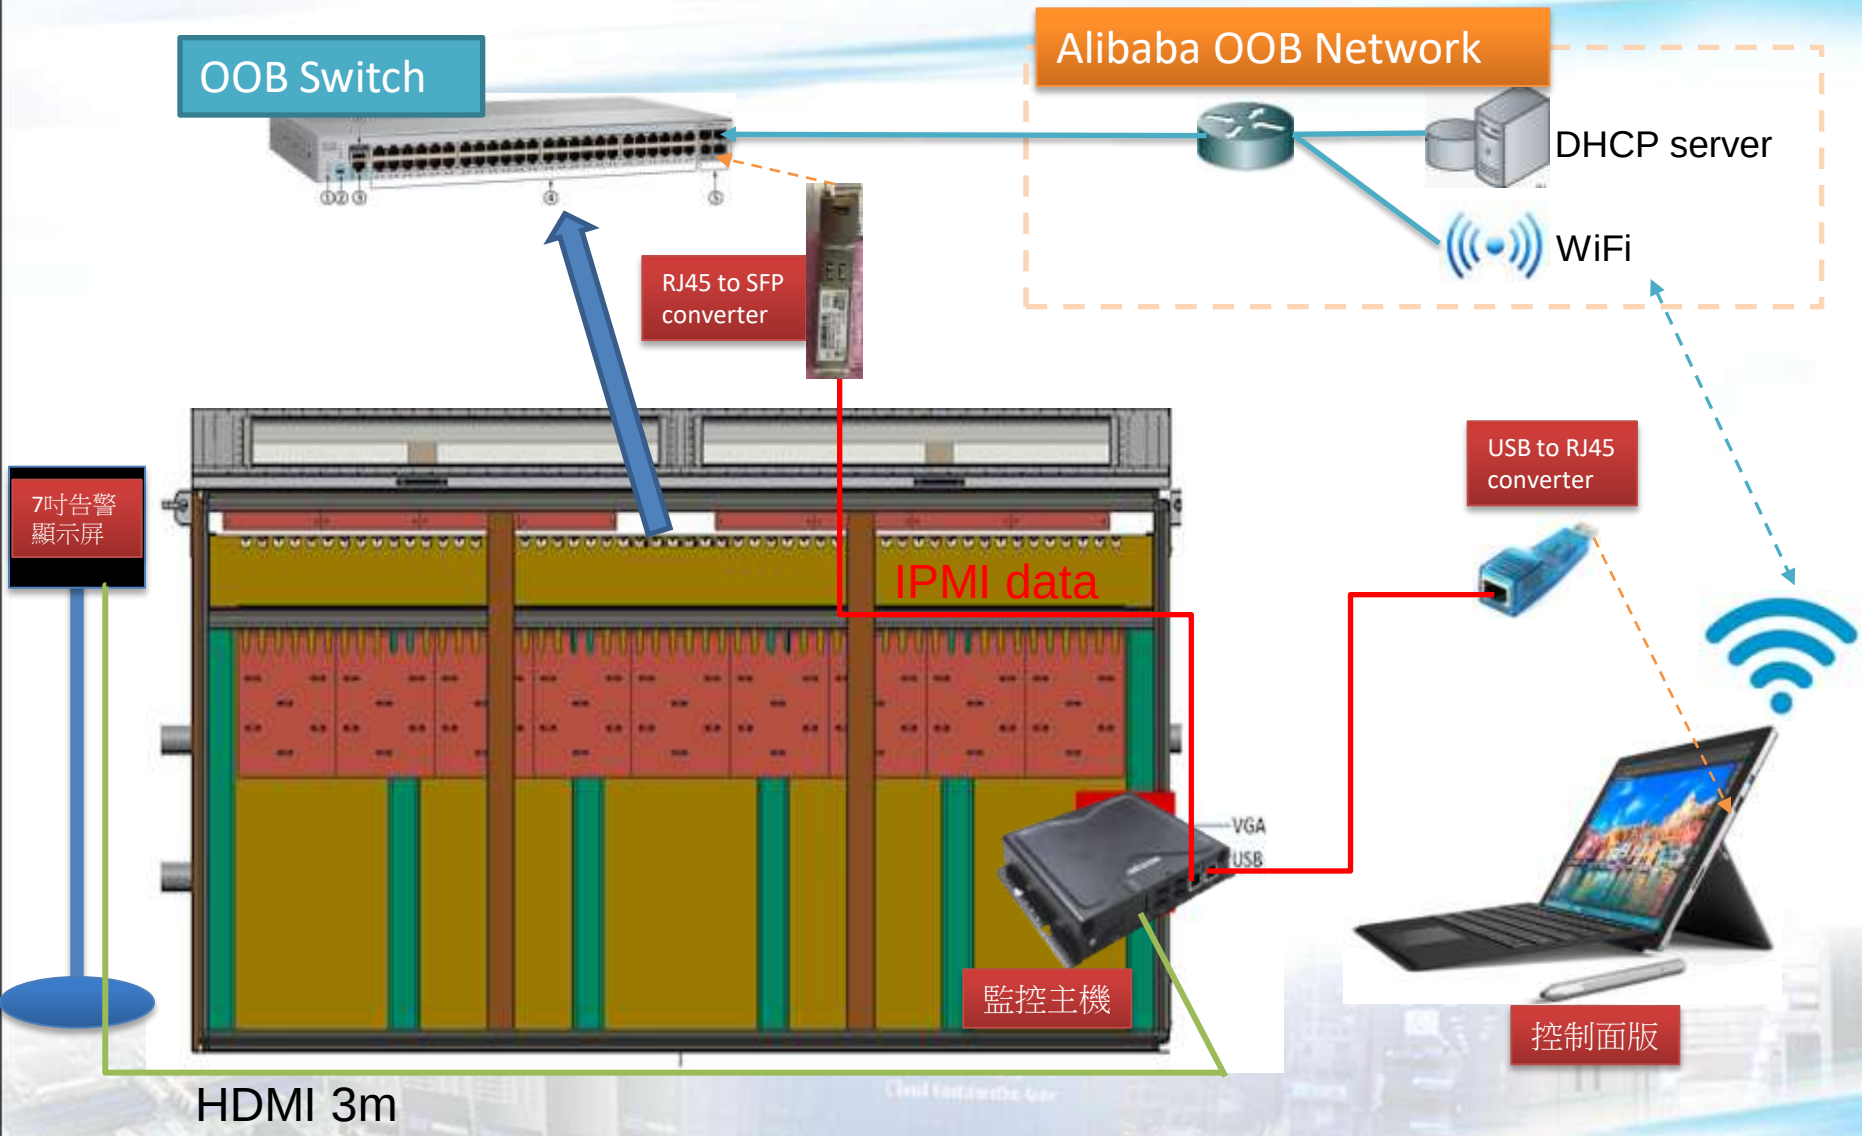

CESBG

網路與電力

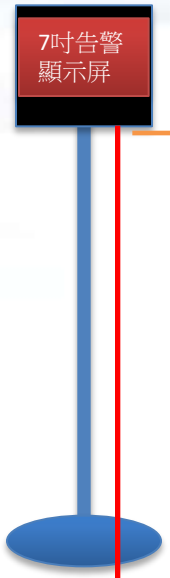

HDMI

CPU: Intel(R) Atom(TM) CPU E3826 @ 1.46GHz
Mem: 4GB
SSD: 128GB

NAT

由阿里提供固定IP
ip:
mask:
gateway:

ip: 192.168.4.11
mask:255.255.255.0

24V DC

OOB Switch

power??

目前未知，
有否規劃或
討論過？

方案(A)
1.由阿里方面直接提供24V DC
2.接頭與10m線材由主機提供

如何走線？

方案(B)
1.由Tank提供
2.接頭與變压器由主機提供

如何走線？

ip: 192.168.4.10
mask:255.255.255.0

CESBG

主要操控介面

CESBG

各資料頁面

概要 SDR Lan Fru

名稱	狀態	數值	事件
Inlet_Temp	Init	0.00 C	
Outlet_Temp	OK	40.00 C	
OCP Ambient_Temp	OK	41.00 C	
PCH_Temp	OK	54.00 C	
CPU0_Temp	OK	25.00 C	
CPU1_Temp	Init	0.00 C	
CPU0_Margin_Temp	OK	66.00 C	
CPU1_Margin_Temp	Init	0.00 C	
DIMMG0_Temp	OK	28.00 C	
DIMMG1_Temp	Init	0.00 C	
CPU0_VR_Temp	OK	29.00 C	
CPU1_VR_Temp	Init	0.00 C	

概要 SDR Lan Fru

名稱	數值
SDR[0021] IPMB	Fx_ADC_AST2500
Memory SPD Size	2048
Memory Type	DRAM
Module Density	32768 Mbits
Module Ranks	4 ranks
Module Capacity	32768 MB
DIMM Config Type	ECC
Manufacturer ID	(0xff)
Manufacturer Part#	
Manufacturer Rev	ff ff
Manufacturer Date	year=ff week=ff
Assembly Serial Num	ffffffff
SDR[0034] FRU	SYS_FRU
System Name	RMManager
Pri Operating System	SUSEServer1.0

概要 SDR Lan Fru

名稱	數值
PEF Control	PEFenable
Channel 1 IP address	10.32.4.134
Channel 1 IP addr src	DHCP
Channel 1 MAC addr	e4:1d:2d:ad:99:67
Channel 1 Subnet mask	255.255.248.0
Channel 1 Def gateway IP	10.32.1.1
Channel 1 Def gateway MAC	00:00:00:00:00:00
Channel 1 Community string	AMI
Channel 1 Dest address	IP=0.0.0.0 MAC=00:00:00:00:0...
Channel 1 SOL Enable	enabled
Channel 1 SOL Baud Rate	115.2k
Channel 1 SOL Payload Access(user1)	enabled
Channel 1 SOL Payload Access(user2)	enabled
Channel 1 SOL Payload Access(user3)	enabled
Channel 1 User 1 Access	IPMI, Admin ()

CESBG

對各服務器下達開關機指令

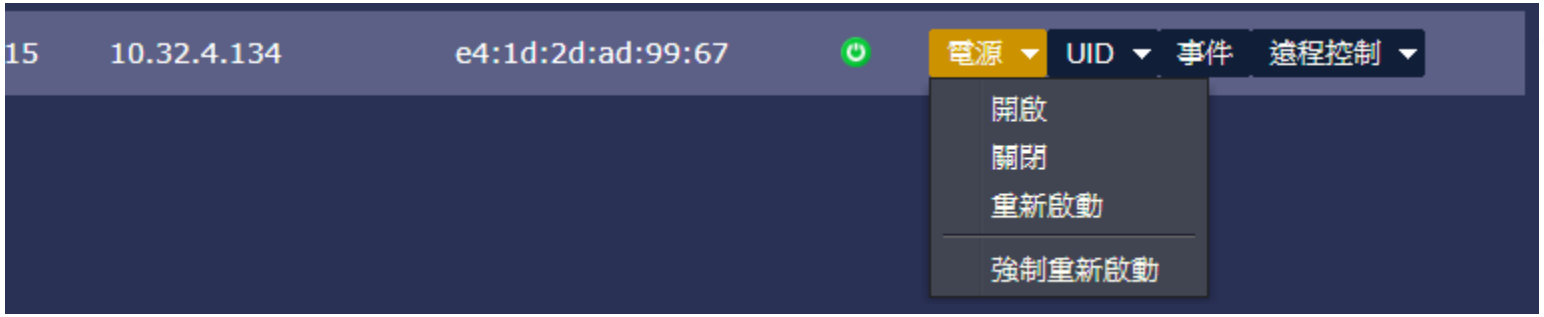

CESBG

對各服務器下達開關示別燈號

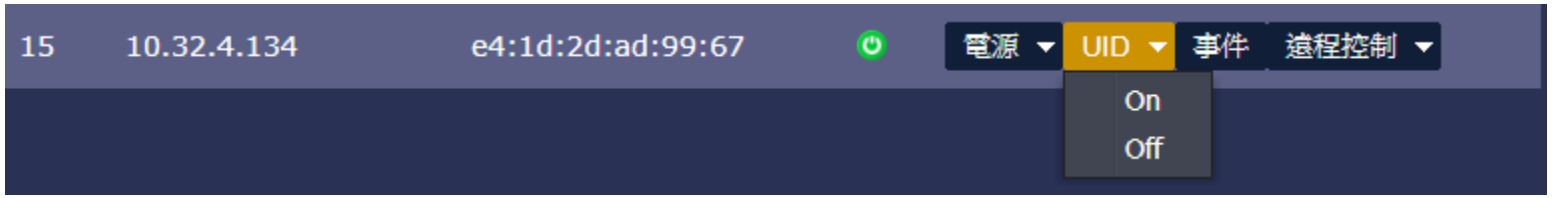

CESBG

BMC事件記錄：完整紀錄Server重啟時間

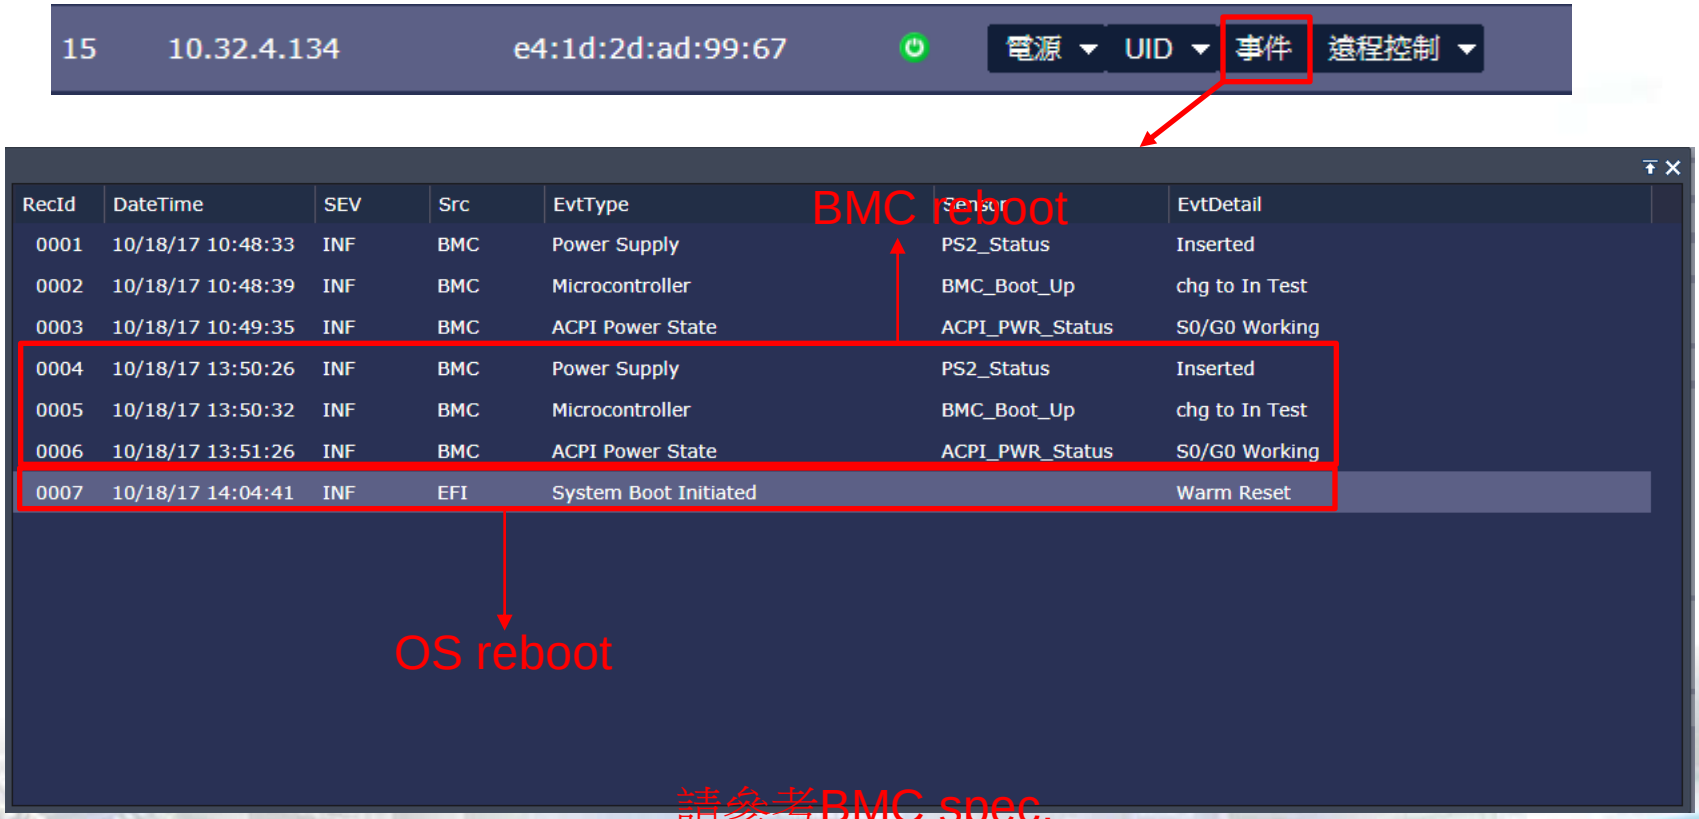

RecId	DateTime	SEV	Src	EvtType	Sensor	EvtDetail
0001	10/18/17 10:48:33	INF	BMC	Power Supply	PS2_Status	Inserted
0002	10/18/17 10:48:39	INF	BMC	Microcontroller	BMC_Boot_Up	chg to In Test
0003	10/18/17 10:49:35	INF	BMC	ACPI Power State	ACPI_PWR_Status	S0/G0 Working
0004	10/18/17 13:50:26	INF	BMC	Power Supply	PS2_Status	Inserted
0005	10/18/17 13:50:32	INF	BMC	Microcontroller	BMC_Boot_Up	chg to In Test
0006	10/18/17 13:51:26	INF	BMC	ACPI Power State	ACPI_PWR_Status	S0/G0 Working
0007	10/18/17 14:04:41	INF	EFI	System Boot Initiated		Warm Reset

請參考BMC spec.

CESBG

遠程服務器桌面操作

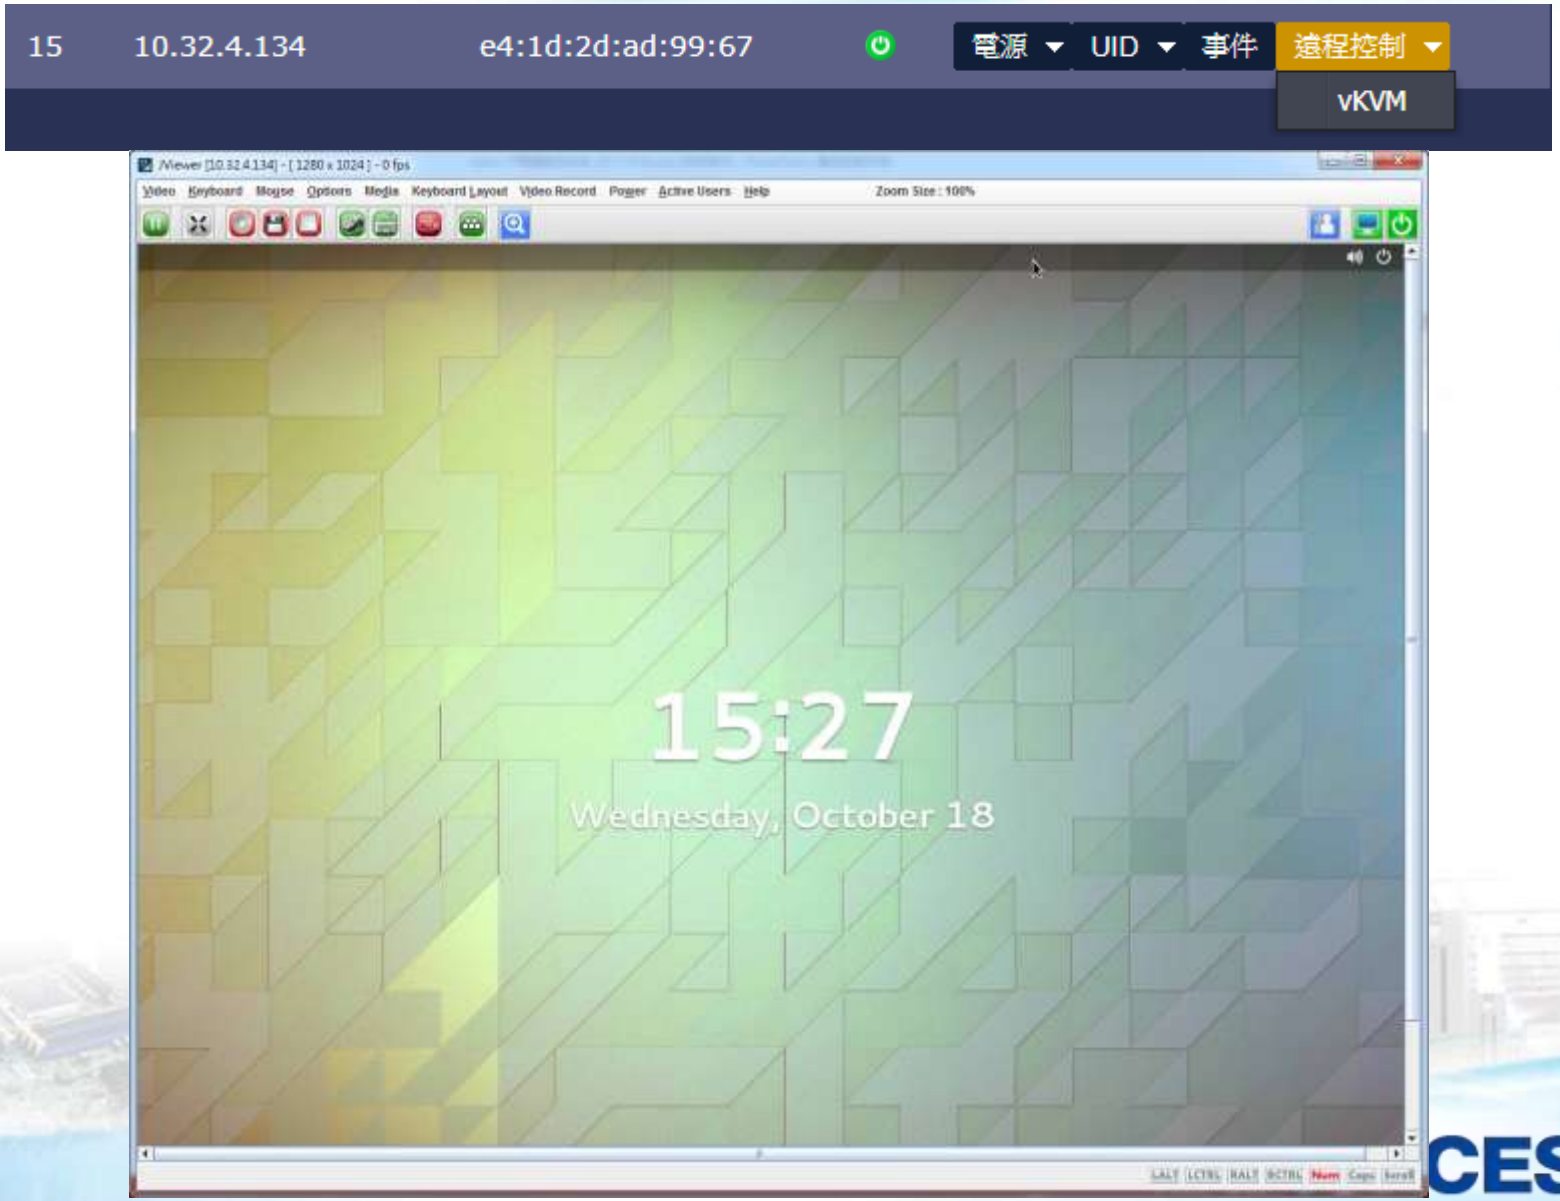

CESBG

服務器MAC匯入

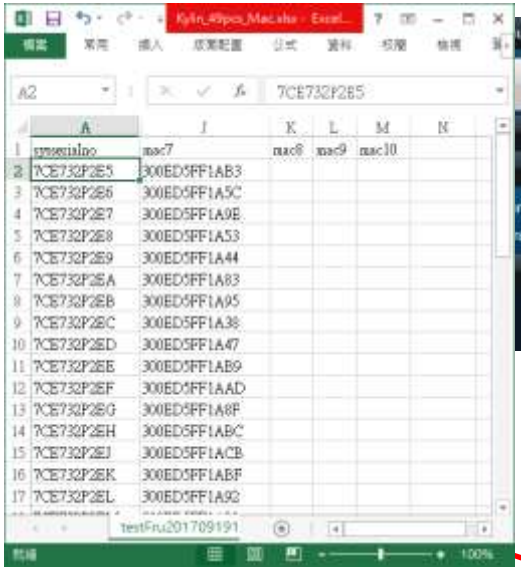

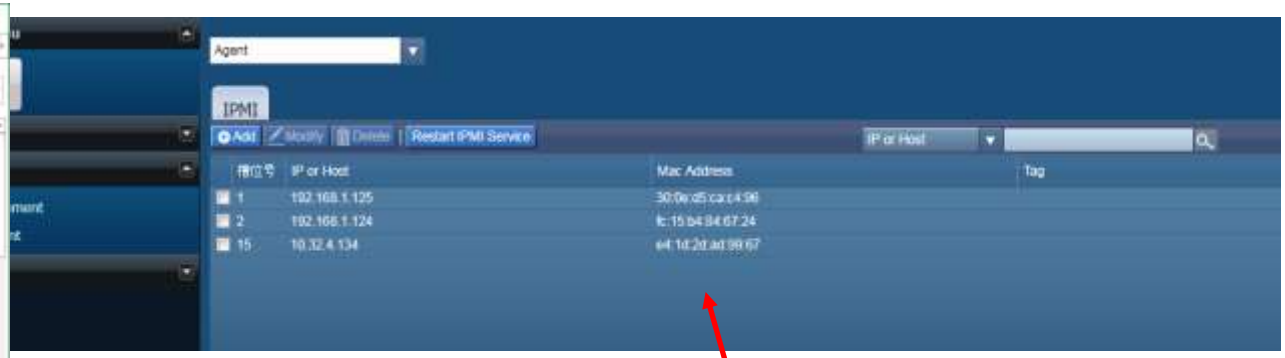

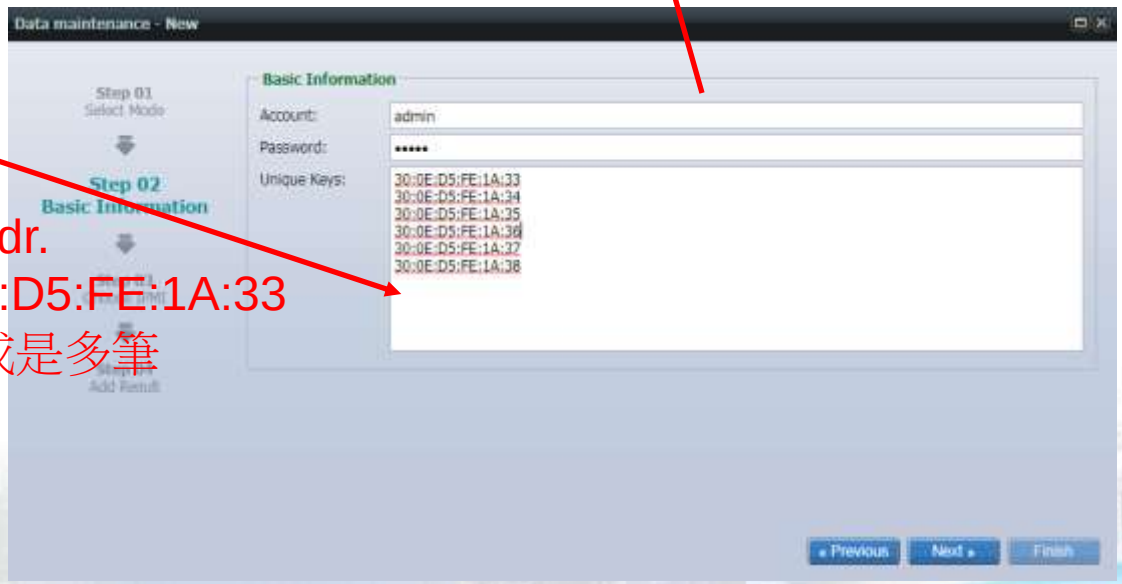

BMC MacAddr.
格式：30:0E:D5:FE:1A:33
可以是單筆或是多筆

CESBG

自動納管Server的運行原理

CESBG

已納管服務器資訊變更

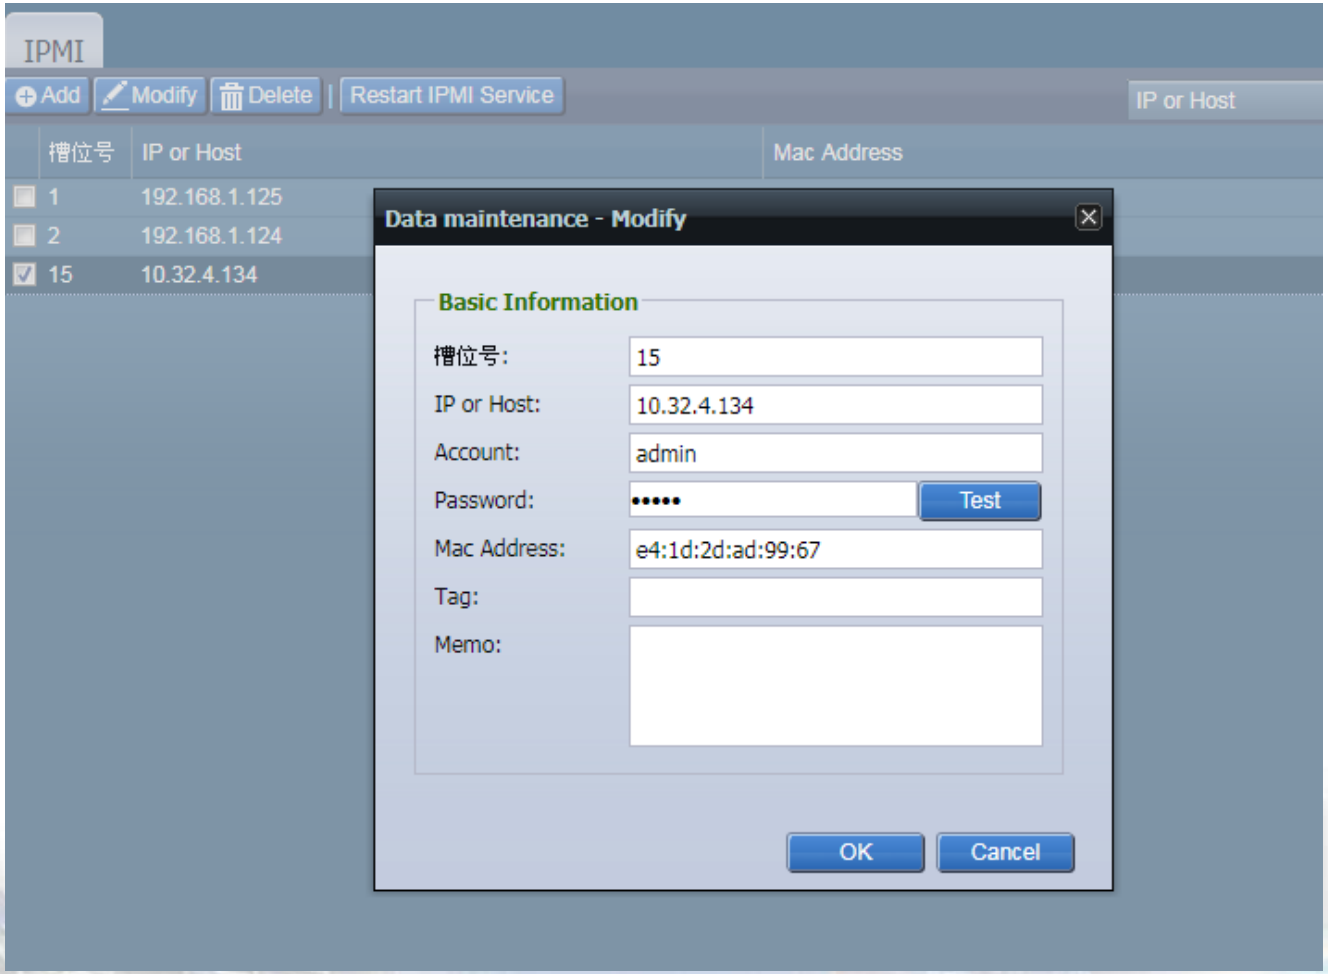

CESBG

告警事件查詢

CESBG

系統操作及人員登入記錄

Syster Advanced search

Account of op...	Log level	Operation description	Date of operation	Source address
kylin	ERROR	[槽位号:2] 192.168.1.124(fc:15:b4:84:67:24) Power on error.	2017-10-18 16:03:39	10.62.32.92
kylin	INFO	kylin login successfully.	2017-10-18 16:01:07	10.62.32.92
kylin	ERROR	kylin login fail. Wrong account or password!	2017-10-18 16:00:59	10.62.32.92
kylin	INFO	kylin logout successfully.	2017-10-18 14:39:00	10.62.32.92
kylin	INFO	kylin login successfully.	2017-10-18 13:37:49	10.62.32.92
yusheng	INFO	事件列表 view was unauthorized to Viewer role successfully.	2017-10-17 10:19:33	10.62.32.92
yusheng	INFO	事件列表 view was authorized to Viewer role successfully.	2017-10-17 10:19:31	10.62.32.92
yusheng	INFO	yusheng login successfully.	2017-10-17 09:10:16	10.62.32.92
kylin	INFO	kylin login successfully.	2017-10-17 09:02:59	10.62.32.92
edi	ERROR	[槽位号:2] 192.168.1.124(fc:15:b4:84:67:24) Power off error.	2017-10-16 08:55:17	10.62.32.92
edi	ERROR	[槽位号:2] 192.168.1.124(fc:15:b4:84:67:24) UID off error.	2017-10-16 08:55:13	10.62.32.92
edi	ERROR	[槽位号:2] 192.168.1.124(fc:15:b4:84:67:24) UID on error.	2017-10-16 08:55:08	10.62.32.92
edi	INFO	[槽位号:5] 10.32.4.134(e4:1d:2d:ad:99:67) UID on successfully.	2017-10-16 08:53:42	10.62.32.92
edi	INFO	[槽位号:5] 10.32.4.134(e4:1d:2d:ad:99:67) UID on error.	2017-10-16 08:53:34	10.62.32.92
edi	INFO	[槽位号:2] 192.168.1.124(fc:15:b4:84:67:24) Power off error.	2017-10-16 08:52:25	10.62.32.92

CESBG

7吋告警
顯示屏

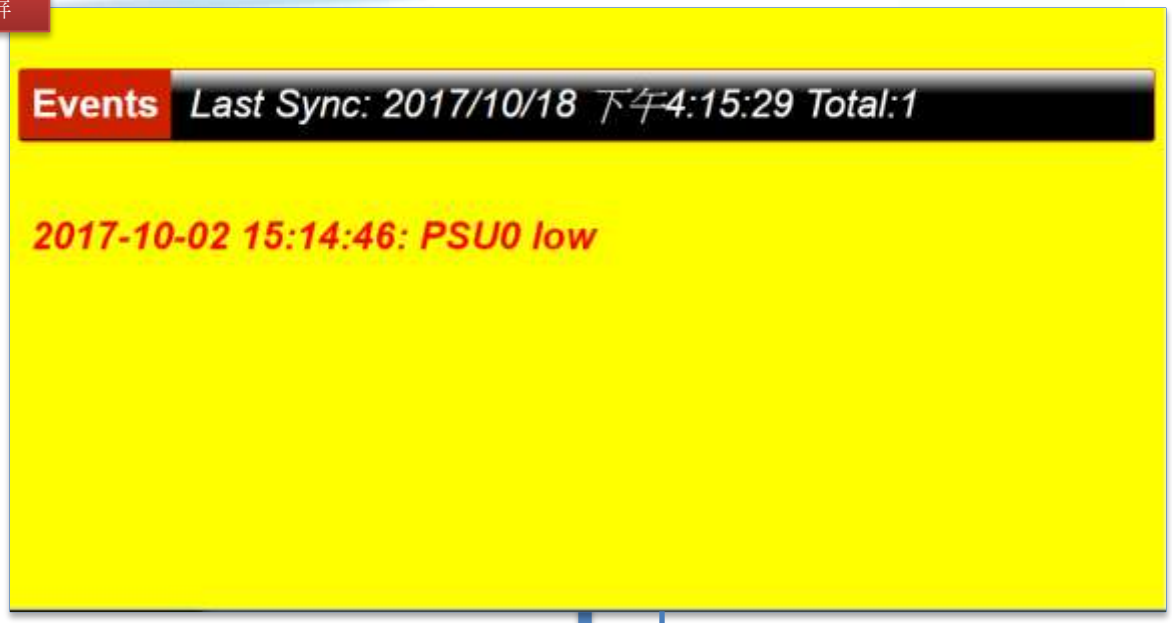

CentOS 7 + KDE + Chrome

CESBG

FOXCONN

Thank You

CESBG